NovoTech MACHINE TOOLS Inc.


PRODUCT CATALOGUE 2026


DENER MAKINA · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

NC SURFACE GRINDER

DENER TGH-B 450 · 17.7 × 35.4″ TABLE · 15.7 × 31.5″ MAGNETIC CHUCK · MITSUBISHI NC FEEDS IN 0.00004″ STEPS



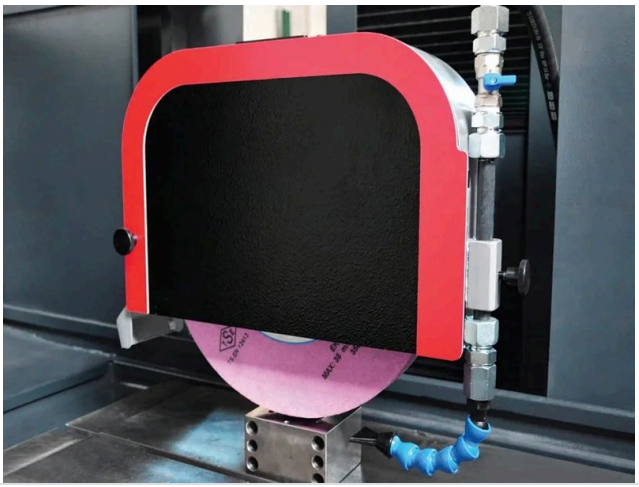

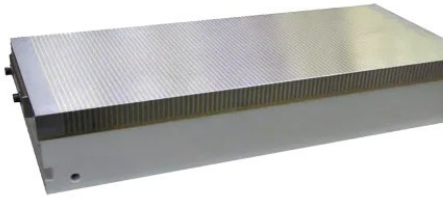

Turkey
MADE IN TURKEY

1
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

DENER SURFACE GRINDER

CONTENTS

NC SURFACE GRINDER

TGH-B 450 NC surface grinder, 17.7 × 35.4″ table TGH-B 450 · 1 model 04

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR DENER SURFACE GRINDER

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Dener Makina
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DENER MAKINA · KAYSERI, TURKEY

A PRECISION NC SURFACE GRINDER FROM DENER'S MACHINE-TOOL PLANT

The TGH-B 450 grinds flat, parallel and square faces on dies, moulds, plates and machine parts: a 17.7 × 35.4″ (450 × 900 mm) table on scraped, Turcite-B coated V and flat guideways, driven hydraulically at 16 – 82 ft/min, a Ø13.8″ (350 mm) wheel on a direct-drive spindle with 21.7″ (550 mm) under the wheel centre, and AC servo motors on ballscrews for the cross and vertical axes under a Mitsubishi NC with a 10″ touchscreen — the operator sets the stock to remove and the machine down-feeds in 0.00004″ (0.001 mm) steps and cross-feeds by itself.


Dener Makina has built machinery in Kayseri since 1974, and since 2016 CNC machine tools in the Taksan plant it took over. NovoTech sells, installs and supports the grinder in Canada from Mississauga, Ontario, Canada, with a CSA-approved panel and a 1-year warranty.

TGH-B 450 · 1 MODEL


TGH-B 450 NC SURFACE GRINDER, 17.7 × 35.4" TABLE



MODEL TGH-B · DENER TGH-B 450 NC SURFACE GRINDER — 17.7 × 35.4" TABLE, WHEEL HEAD ON THE COLUMN, 10" TOUCHSCREEN CONTROL



Dener TGH-B 450 surface grinder — three-quarter view with the control panel on the right

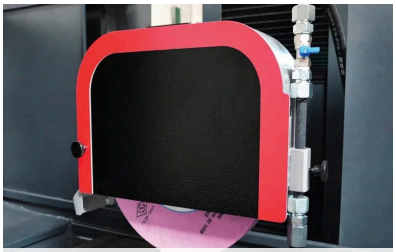

Grinding a block on the magnetic chuck — wheel guard and coolant nozzle of the Dener TGH-B 450

A precision surface grinder for flat, parallel and square faces on dies, moulds, plates, gauges and machine parts in hardened or soft steel and other materials. The table travels on scraped V and flat guideways with Turcite-B coating, driven hydraulically at 16 – 82 ft/min (5 – 25 m/min); the cross and vertical axes run on ballscrews and AC servo motors under a Mitsubishi NC with a 10" touchscreen, so the operator keys in the stock to remove and the down feed — in 0.00004" (0.001 mm) steps — and the cross feed are applied stroke by stroke. A 15.7 × 31.5" (400 × 800 mm) electromagnetic chuck on a 17.7 × 35.4" (450 × 900 mm) table, a Ø13.8" (350 mm) wheel on a direct-drive spindle and 21.7" (550 mm) under the wheel centre.

STANDARD FEATURES

- ✓ Grinds 35.4 × 17.7" (900 × 450 mm) faces; 3.0 – 21.7" (75 – 550 mm) from the wheel centre to the table
- ✓ Automatic down feed in 0.00004" (0.001 mm) steps; automatic cross feed 0.002 – 0.79" (0.05 – 20 mm) per stroke
- ✓ Mitsubishi NC on the cross and vertical axes, AC servo motors on ballscrews, 10" touchscreen, wired handwheel
- ✓ Electro-hydraulic table drive; direct-drive spindle on preloaded precision bearings
- ✓ Stress-relieved cast base; honeycomb-ribbed column; V and flat guideways, Turcite-B coated and hand-scraped
- ✓ Electromagnetic chuck 15.7 × 31.5" (400 × 800 mm) with demagnetizing unit
- ✓ Ø13.8" (350 mm) wheel with flange, puller, balancing stand and arbor; table-mounted diamond dresser
- ✓ Coolant system with paper filter; hydraulic unit; central lubrication; table guard and door interlock
- ✓ CSA-approved electrical panel; transformer for 600, 480, 240 or 208 V 3-phase

OPTIONAL EQUIPMENT


- + Additional wheel flange
- + Wheel-head-mounted diamond dresser
- + Magnetic sine plate (V-S 100M) and sine bar (VS-100)
- + Magnetic separator with paper filter for the coolant
- + Precision toolmaker's vise (VMV-40)
- + Workpiece demagnetizer (VDM-68)
- + Profile grinding and dressing attachment (V-PB-BS)

DETAILS, COMPONENTS AND OPTIONS

TGH-B 450 NC SURFACE GRINDER, 17.7 × 35.4" TABLE



Mitsubishi NC with a 10" touchscreen on the Dener TGH-B 450

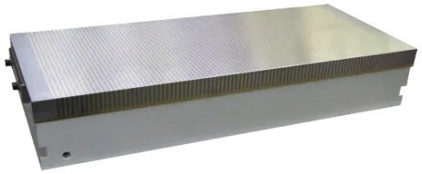

15.7 × 31.5" (400 × 800 mm) electromagnetic chuck of the Dener TGH-B 450



Hydraulic unit with a 100 L tank — drives the table of the Dener TGH-B 450

TECHNICAL SPECIFICATIONS

TGH-B 450 NC SURFACE GRINDER, 17.7 × 35.4″ TABLE

TGH-B 450 NC SURFACE GRINDER

1 model · 17.7 × 35.4″ table · Mitsubishi NC on the cross and vertical axes

Model	TGH-B 450
Table	**17.7 × 35.4″ (450 × 900 mm)**
Electromagnetic chuck	15.7 × 31.5″ (400 × 800 mm)
Grinding length × width	**35.4 × 17.7″ (900 × 450 mm)**
Spindle centre to table	3.0 – 21.7″ (75 – 550 mm)
Max. table load	882 lb (400 kg)
T-slot	1 × 14 mm H7
Grinding wheel	**Ø13.8 × Ø5.0 × 1.57″ (Ø350 × Ø127 × 40 mm)**
Spindle speed	**100 – 1,450 rpm, by inverter**
Spindle motor	5.4 HP (4 kW), direct drive
Table speed longitudinal, hydraulic	**16 – 82 ft/min (5 – 25 m/min)**
Cross feed automatic, per stroke	0.002 – 0.79″ (0.05 – 20 mm)
Down feed smallest increment	0.00004″ (0.001 mm)
Rapid traverse vertical / cross	236 in/min (6 m/min)
Ballscrews vertical / cross	Ø25 mm, C3 / Ø25 mm, C6
Guideways	V and flat, Turcite-B coated, hand-scraped
Servo motors vertical / cross	0.9 HP (0.7 kW) each
Hydraulic unit	5.4 HP (4 kW), 580 psi (40 bar), 26 US gal (100 L)
Coolant	26 US gal (100 L) tank with paper filter
Control	Mitsubishi FX5U NC, 10″ colour touchscreen
Power supply	22.3 kVA
Dimensions L × W × H	129 × 108 × 85″ (3,280 × 2,750 × 2,151 mm)
Weight	8,157 lb (3,700 kg)

Dimensions in inches with Dener's millimetres in brackets.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Dener Makina
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.