NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

ELECTRIC PRESS BRAKES

SERVO BALL-SCREW PRESS BRAKES 11 – 176 US TONS × 20" – 10.5 FT · COMPACT 3 – 13 TON BENCH MACHINES · ROBOT BENDING CELLS







China
MADE IN CHINA

2
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE ELECTRIC PRESS BRAKES

CONTENTS

ELECTRIC SERVO PRESS BRAKES

Electric servo press brakes, 11 – 176 US tons × 1.6 – 10.5 ft WADG-10T/500 – WADG-160T/3200 · 10 models 04

Compact electric servo press brakes, 3 – 13 US tons × 8 – 24" WADG-3T/200 · WADG-6T/400 · WADG-12T/600 07

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE ELECTRIC PRESS BRAKES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH VALUE LINE

A PRESS BRAKE WITHOUT HYDRAULICS

NovoTech's value line is our own brand: machines built in China to our specification with European and Japanese controls and hydraulics — Delem, Estun, Schneider, Siemens, NOK — inspected before they ship and sold under NovoTech's name with the same CSA-approved panel, 1-year warranty and parts and technical support from Mississauga, Ontario, Canada, as every machine we sell.

The electric press brakes drive the ram with servo motors through timing belts and dual lead ball screws: no oil, no pump idling between bends, no valves to drift — ± 0.01 mm repeatability from the first part, programmable bending speed to 30 mm/s and about 70 % less energy than a hydraulic brake. Ten models from 11 US tons × 20″ to 176 US tons × 10.5 ft with a Delem DA-53T control and X-R servo back gauge, three bench-size 3, 6 and 12 ton machines for small parts, and robot bending cells on the 40 and 50 ton machines.

WADG-10T/500 – WADG-160T/3200 · 10 MODELS


ELECTRIC SERVO PRESS BRAKES, 11 – 176 US TONS × 1.6 – 10.5 FT



MODEL ELECTRIC · NOVOTECH WADG 100T/3200 ELECTRIC SERVO PRESS BRAKE — 10 FT × 110 US TONS, DUAL BALL-SCREW DRIVE, NO HYDRAULICS



WADG 40T/1600 electric press brake in a robot bending cell with an Estun robot

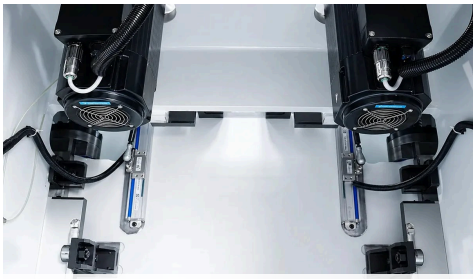

Y1 and Y2 servo motors on top of the electric press brake frame

A press brake without hydraulics: servo motors drive the ram through timing belts and dual lead ball screws, so there is no oil, no pump running between bends, no valves to drift and no warm-up — the ram repeats to ± 0.01 mm from the first part, bends at any speed from 0.15 to 30 mm/s and the machine draws power only while it moves (about 70 % less than a hydraulic brake). Ten models from 11 tons × 20" for small parts to 176 tons × 10.5 ft, all with a Delem DA-53Tx control and X-R servo back gauge; the 40 and 50 t machines are also sold in robot bending cells.

STANDARD FEATURES


- ✓ Servo motors driving the ram through timing belts (Maco, Italy) and dual lead ball screws — no hydraulic oil, no pump, no valves
- ✓ ± 0.01 mm ram repeatability from Givi / Fagor magnetic scales on both sides; 95 % transmission efficiency, about 70 % less energy
- ✓ Programmable bending speed 0.15 – 30 mm/s; 180 – 250 mm/s approach and return
- ✓ Delem DA-53Tx 15" touch CNC control; X and R back gauge axes on HIWIN linear guides and TBI ball screws, Inovance servo drives
- ✓ Manual top-tool clamps and 2-V die with segmented punch; Schneider electrics; NACHI bearings; automatic lubrication
- ✓ Light curtain, side and rear guards, foot pedal with emergency stop
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Delem DA-58Tx 2D graphic, DA-66S or DA-69S control; ESA S840 or S875 W; Cybelec CybTouch 12
- + Wila hydraulic clamping; DSP laser finger protection
- + Angle measurement; CNC crowning on 60 t and up
- + Robot bending cell with Estun robot
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


ELECTRIC SERVO PRESS BRAKES, 11 – 176 US TONS × 1.6 – 10.5 FT



Electric press brake — frame, dual lead screws and ram



CNC crowning drive of the WADG (60 t and up): a gear motor at the end of the table sets the deflection compensation for the bend length, so the angle is the same from end to end

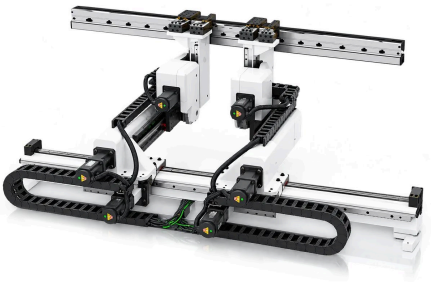

CNC back gauge on HIWIN linear guides with servo-driven finger carriages and drag chains — X and R as standard, more axes (Z1, Z2, X1, X2, R1, R2) by configuration



Front support arms on a linear guide along the table, moved to where the part needs support



Checking the bend angle of the first part with a protractor — the servo ram repeats to ± 0.01 mm, so the next parts follow it

TECHNICAL SPECIFICATIONS

ELECTRIC SERVO PRESS BRAKES, 11 – 176 US TONS × 1.6 – 10.5 FT

ELECTRIC SERVO PRESS BRAKES · WADG

10 models · 11 – 176 US tons · 1.6 – 10.5 ft

Model	WADG-10T/500	WADG-20T/800	WADG-30T/1250	WADG-40T/1300	WADG-40T/1600	WADG-50T/1600	WADG-60T/2000	WADG-80T/2500	WADG-100T/3200	WADG-160T/3200
Bending force	**11 US tons (10 t)**	**22 US tons (20 t)**	**33 US tons (30 t)**	**44 US tons (40 t)**	**44 US tons (40 t)**	**55 US tons (50 t)**	**66 US tons (60 t)**	**88 US tons (80 t)**	**110 US tons (100 t)**	**176 US tons (160 t)**
Bending length	**1.6 ft · 19.7″ (500 mm)**	**2.6 ft · 31.5″ (800 mm)**	**4.1 ft · 49.2″ (1,250 mm)**	**4.3 ft · 51.2″ (1,300 mm)**	**5.2 ft · 63.0″ (1,600 mm)**	**5.2 ft · 63.0″ (1,600 mm)**	**6.6 ft · 78.7″ (2,000 mm)**	**8.2 ft · 98.4″ (2,500 mm)**	**10.5 ft · 126.0″ (3,200 mm)**	**10.5 ft · 126.0″ (3,200 mm)**
Distance between columns	20.1″ (510 mm)	26.8″ (680 mm)	35.4″ (900 mm)	36.2″ (920 mm)	36.2″ (920 mm)	49.2″ (1,250 mm)	63.0″ (1,600 mm)	78.7″ (2,000 mm)	106.3″ (2,700 mm)	106.3″ (2,700 mm)
Throat depth	7.9″ (200 mm)	9.8″ (250 mm)	9.8″ (250 mm)	10.0″ (255 mm)	10.0″ (255 mm)	10.0″ (255 mm)	11.8″ (300 mm)	18.1″ (460 mm)	18.1″ (460 mm)	18.1″ (460 mm)
Stroke	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)	9.8″ (250 mm)
Daylight open height	16.5″ (420 mm)	16.5″ (420 mm)	16.5″ (420 mm)	16.5″ (420 mm)	16.5″ (420 mm)	16.5″ (420 mm)	18.5″ (470 mm)	18.5″ (470 mm)	18.5″ (470 mm)	20.5″ (520 mm)
Approach / return speed	7.09 in/s (180 mm/s)	9.84 in/s (250 mm/s)	9.84 in/s (250 mm/s)	9.84 in/s (250 mm/s)	9.84 in/s (250 mm/s)	9.84 in/s (250 mm/s)	9.84 in/s (250 mm/s)	7.87 in/s (200 mm/s)	7.87 in/s (200 mm/s)	7.87 in/s (200 mm/s)
Bending speed programmable	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)	0.006 – 1.18 in/s (0.15 – 30 mm/s)
Back gauge X stroke · speed	7.9″ (200 mm) · 15.75 in/s (400 mm/s)	15.7″ (400 mm) · 19.69 in/s (500 mm/s)	15.7″ (400 mm) · 19.69 in/s (500 mm/s)	15.7″ (400 mm) · 19.69 in/s (500 mm/s)	15.7″ (400 mm) · 19.69 in/s (500 mm/s)	15.7″ (400 mm) · 19.69 in/s (500 mm/s)	19.7″ (500 mm) · 19.69 in/s (500 mm/s)	19.7″ (500 mm) · 19.69 in/s (500 mm/s)	19.7″ (500 mm) · 19.69 in/s (500 mm/s)	19.7″ (500 mm) · 19.69 in/s (500 mm/s)
Back gauge R stroke · speed	3.1″ (80 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)	5.9″ (150 mm) · 7.87 in/s (200 mm/s)
Servo motors	7.4 HP (5.5 kW)	20.1 HP (15 kW)	26.8 HP (20 kW)	2 × 20.1 HP (15 kW)	2 × 20.1 HP (15 kW)	2 × 20.1 HP (15 kW)	2 × 26.8 HP (20 kW)	2 × 33.5 HP (25 kW)	2 × 33.5 HP (25 kW)	3 × 33.5 HP (25 kW)
Dimensions L × W × H	25 × 39 × 49″ (640 × 980 × 1,250 mm)	47 × 61 × 96″ (1,200 × 1,560 × 2,450 mm)	57 × 65 × 97″ (1,460 × 1,660 × 2,470 mm)	67 × 81 × 90″ (1,700 × 2,050 × 2,280 mm)	67 × 81 × 90″ (1,700 × 2,050 × 2,280 mm)	87 × 81 × 90″ (2,200 × 2,050 × 2,280 mm)	106 × 85 × 94″ (2,700 × 2,150 × 2,380 mm)	118 × 89 × 94″ (3,000 × 2,250 × 2,380 mm)	157 × 96 × 102″ (4,000 × 2,450 × 2,580 mm)	157 × 96 × 109″ (4,000 × 2,450 × 2,780 mm)
Weight	1,764 lb (800 kg)	6,834 lb (3,100 kg)	9,083 lb (4,120 kg)	9,921 lb (4,500 kg)	10,692 lb (4,850 kg)	10,803 lb (4,900 kg)	13,228 lb (6,000 kg)	19,621 lb (8,900 kg)	23,589 lb (10,700 kg)	26,015 lb (11,800 kg)

Bending force in US tons (metric tons in brackets); the model number is the supplier's — metric tonnage × metric bending length. Servo-electric drive through belts and dual lead ball screws: no hydraulic oil, 0.15 – 30 mm/s programmable bending speed, power drawn only while the ram moves.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WADG-3T/200 · WADG-6T/400 · WADG-12T/600

COMPACT ELECTRIC SERVO PRESS BRAKES, 3 – 13 US TONS × 8 – 24″



MODEL COMPACT · NOVOTECH COMPACT ELECTRIC SERVO PRESS BRAKE — BENCH-SIZE WADG FOR SMALL PARTS, WITH TOUCHSCREEN CONTROL, TWO-AXIS BACK GAUGE AND FOOT PEDAL

Bench-size electric brakes for electronics enclosures, brackets, small appliance and instrument parts: 3, 6 and 12 t over 8, 16 and 24″, a 2 – 5.5 kW servo motor, 4.7″ stroke and 16.5″ daylight in a 28 – 33″ footprint on 220 V. Two CNC axes (X and R back gauge) with a touchscreen control, a manual top-tool clamp and a 2-V die — the same ± 0.01 mm repeatability as the big machines, with 50 % less energy and 40 % less noise than a small hydraulic brake.

STANDARD FEATURES

- ✓ Single-phase or 3-phase supply; 20 % smaller footprint than a hydraulic brake of the same tonnage
- ✓ Servo motors driving the ram through timing belts (Maco, Italy) and dual lead ball screws — no hydraulic oil, no pump, no valves
- ✓ ± 0.01 mm ram repeatability from Givi / Fagor magnetic scales on both sides; 95 % transmission efficiency, about 70 % less energy
- ✓ Programmable bending speed 0.15 – 30 mm/s; 180 – 250 mm/s approach and return
- ✓ Touchscreen CNC with X and R back gauge axes on cylindrical guides
- ✓ Manual top-tool clamp and 2-V die; foot pedal with emergency stop

OPTIONAL EQUIPMENT

- + Single-V mechanical die clamping
- + Light curtain
- + Custom voltage

TECHNICAL SPECIFICATIONS

COMPACT ELECTRIC SERVO PRESS BRAKES, 3 – 13 US TONS × 8 – 24″

COMPACT ELECTRIC SERVO PRESS BRAKES

3 models · 3.3 – 13 US tons · 8 – 24″

Model	WADG-3T/200	WADG-6T/400	WADG-12T/600
Bending force	**3 US tons (3 t)**	**7 US tons (6 t)**	**13 US tons (12 t)**
Bending length	**7.9″ (200 mm)**	**15.7″ (400 mm)**	**23.6″ (600 mm)**
Distance between columns	11.8″ (300 mm)	14.6″ (370 mm)	17.7″ (450 mm)
Throat depth	—	6.3″ (160 mm)	7.9″ (200 mm)
Stroke	4.7″ (120 mm)	4.7″ (120 mm)	4.7″ (120 mm)
Daylight open height	16.5″ (420 mm)	16.5″ (420 mm)	16.5″ (420 mm)
Approach / return speed	7.87 in/s (200 mm/s)	7.87 in/s (200 mm/s)	7.87 in/s (200 mm/s)
Bending speed programmable	0.04 – 1.18 in/s (1 – 30 mm/s)	0.04 – 1.18 in/s (1 – 30 mm/s)	0.04 – 1.18 in/s (1 – 30 mm/s)
Servo motor	2.7 HP (2 kW)	4.0 HP (3 kW)	7.4 HP (5.5 kW)
Dimensions L × W × H	28 × 28 × 78″ (700 × 700 × 1,980 mm)	30 × 30 × 78″ (750 × 750 × 1,980 mm)	33 × 33 × 82″ (850 × 850 × 2,080 mm)
Weight	705 lb (320 kg)	1,235 lb (560 kg)	1,676 lb (760 kg)

Bending force in US tons (metric tons in brackets); the model number is the supplier's — metric tonnage × metric bending length. Servo-electric drive through belts and dual lead ball screws: no hydraulic oil, 0.15 – 30 mm/s programmable bending speed, power drawn only while the ram moves.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.