NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH PREMIUM LINE · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

GUILLOTINE SHEARS

DIRECT-GEAR MECHANICAL SHEARS · 1/8" AND 1/4" · 43" TO 13.8 FT · RETURN-TO-SENDER · CUT-TO-LENGTH LINES







Turkey
MADE IN TURKEY

6
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

GUILLOTINE SHEARS

CONTENTS

DIRECT-GEAR MECHANICAL GUILLOTINE SHEARS

SRGM-H light type mechanical guillotine shears, 1/8″ × 3.6 ft – 10 ft SRGM-H 1100 – SRGM-H 3060 · 6 models 04

SRGM mechanical guillotine shears, 1/4″ × 3.6 ft – 13.8 ft SRGM 1100 – SRGM 4200 · 8 models 06

GUILLOTINE SHEARS WITH RETURN-TO-SENDER

SRGM-HFR light type guillotine shears with return-to-sender, 1/8″ × 4.3 ft – 9.9 ft SRGM-HFR 1320 – SRGM-HFR 3020 · 5 models 08

SRGM-FR mechanical guillotine shears with return-to-sender, 1/4″ × 3.6 ft – 13.8 ft SRGM-FR 1100 – SRGM-FR 4200 · 8 models 09

SHEARS FOR CUT-TO-LENGTH LINES

SRGM-HCL light type shears for cut-to-length lines, 1/8″ × 3.6 ft – 6.8 ft SRGM-HCL 1100 – SRGM-HCL 2060 · 4 models 11

SRGM-CL mechanical shears for cut-to-length lines, 1/4″ × 3.6 ft – 6.8 ft SRGM-CL 1100 – SRGM-CL 2060 · 4 models 12

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR GUILLOTINE SHEARS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH PREMIUM LINE · MADE IN TURKEY

DIRECT-GEAR SHEARS: SPEED WITHOUT HYDRAULICS

The shears in this catalogue are NovoTech's premium line of direct-gear motorised guillotines, built in Turkey by a maker with more than 40 years of sheet-metal machinery behind it: a 4 to 15 HP motor drives the cutting beam through a gearbox and crank — no hydraulic power pack, no flywheel clutch — for 31 to 35 clean strokes a minute, on a welded steel frame with the beam running in teflon slideways and high-carbon, high-chrome blades with two and four cutting edges.

Six series cover the sheet-metal shop: the light-type SRGM-H for 1/8″ (3 mm) and the SRGM for 1/4″ (6 mm) from 43″ to 13.8 ft, the SRGM-HFR and SRGM-FR with a return-to-sender support that brings the cut piece back to the operator, and the SRGM-HCL and SRGM-CL built into cut-to-length coil lines. Every shear is delivered with a CSA-approved panel, a 1-year warranty and spare parts, blades and technical support from NovoTech in Mississauga, Ontario, Canada.

SRGM-H 1100 – SRGM-H 3060 · 6 MODELS


SRGM-H LIGHT TYPE MECHANICAL GUILLOTINE SHEARS, 1/8" × 3.6 FT – 10 FT



MODEL SRGM-H · SRGM-H LIGHT TYPE DIRECT-GEAR GUILLOTINE SHEAR, 1/8" CAPACITY – NOVOTECH PREMIUM LINE



SRGM-H shear – control panel with the back gauge position controller



SRGM-H shear – rear doors open: drive motor, gearbox and back gauge

The light-type direct-gear guillotine for sheet-metal shops, HVAC and signage: 1/8" (3 mm) mild steel over 43" to 10 ft in 35 strokes a minute from a 4 to 10 HP motor, with a manual back gauge, squaring arm, front holding arms and photocell rear guard as standard. The same welded frame, teflon slideways and four-edged blades as the SRGM, in a lighter machine from 2,425 lb. An NC back gauge, pneumatic sheet support and a touch-screen control are options.

STANDARD FEATURES

- ✓ 1/8" (3 mm) mild steel; 12 ga on the 2560; 35 strokes per minute
- ✓ Manual back gauge with 29.5" (750 mm) stroke
- ✓ Squaring arm with ruler; front sheet holding arms; finger protection guard
- ✓ Rear protection cages with photocell
- ✓ Cutting line illumination with shadow wire
- ✓ Foot pedal and cutting counter
- ✓ Mechanical sheet clamping; high-carbon, high-chrome two-edged top and four-edged bottom blades

OPTIONAL EQUIPMENT

- + NC-controlled back gauge with 29.5" or 39.4" (750 / 1,000 mm) stroke
- + Pneumatic sheet support with return-to-rear
- + Rear protection cages with light barrier
- + 0 – 180° angular cutting device
- + ELGO P40T or FUJI Monitouch touch-screen NC control
- + Longer squaring arm and front holding arms to 118" (3,000 mm)
- + Front-operated manual back gauge with ball screw
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

SRGM-H – TECHNICAL SPECIFICATIONS


Model	SRGM-H 1100	SRGM-H 1360	SRGM-H 1560	SRGM-H 2060	SRGM-H 2560	SRGM-H 3060
Shearing capacity, mild steel	**1/8" (3 mm)**	**1/8" (3 mm)**	**1/8" (3 mm)**	**1/8" (3 mm)**	**12 ga (2.5 mm)**	**1/8" (3 mm)**
Max shearing length	**43.3" (1,100 mm)**	**53.5" (1,360 mm)**	**61.4" (1,560 mm)**	**81.1" (2,060 mm)**	**100.8" (2,560 mm)**	**120.5" (3,060 mm)**
Strokes per minute	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**
Motor power	4 HP (3 kW)	4 HP (3 kW)	4 HP (3 kW)	5.5 HP (4 kW)	5.5 HP (4 kW)	10 HP (7.5 kW)
Table height	31.9" (810 mm)	31.9" (810 mm)	31.9" (810 mm)	31.9" (810 mm)	31.9" (810 mm)	31.9" (810 mm)
Table width	15.4" (390 mm)	15.4" (390 mm)	15.4" (390 mm)	15.4" (390 mm)	15.4" (390 mm)	17.9" (455 mm)
Dimensions L × W × H	68 × 83 × 50" (1,720 × 2,100 × 1,260 mm)	76 × 83 × 50" (1,920 × 2,100 × 1,260 mm)	83 × 83 × 50" (2,100 × 2,100 × 1,260 mm)	104 × 83 × 50" (2,650 × 2,100 × 1,260 mm)	124 × 83 × 50" (3,150 × 2,100 × 1,260 mm)	144 × 83 × 50" (3,650 × 2,100 × 1,260 mm)
Weight	2,425 lb (1,100 kg)	2,756 lb (1,250 kg)	3,307 lb (1,500 kg)	3,858 lb (1,750 kg)	4,299 lb (1,950 kg)	6,614 lb (3,000 kg)

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L (along the blade) × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

SRGM-H LIGHT TYPE MECHANICAL GUILLOTINE SHEARS, 1/8" × 3.6 FT – 10 FT

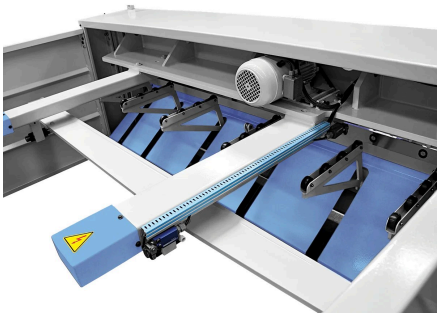


SRGM-H shear — back gauge and sheet supports behind the blade

SRGM 1100 – SRGM 4200 · 8 MODELS


SRGM MECHANICAL GUILLOTINE SHEARS, 1/4" × 3.6 FT – 13.8 FT



MODEL SRGM · SRGM DIRECT-GEAR MOTORIZED GUILLOTINE SHEAR, 1/4" CAPACITY — NOVOTECH PREMIUM LINE, WITH NC BACK GAUGE AND FRONT SHEET SUPPORT ARMS



SRGM shear — ball-transfer table, front sheet holding arms and finger guard



SRGM shear — rear view with the NC back gauge and the sheet supports

The standard direct-gear motorised guillotine: a 10 or 15 HP motor drives the cutting beam through a gearbox — no hydraulics, no flywheel clutch — for 31 clean strokes a minute in 1/4" (6 mm) mild steel over 43" to 1/8" over 13.8 ft. Welded steel frame, cutting beam in teflon slideways, blade gap set from the front, mechanical hold-downs and an NC back gauge with 29.5" stroke, squaring arm, ball-transfer table, shadow-line light and photocell rear guard as standard.

STANDARD FEATURES

- ✓ 1/4" (6 mm) mild steel on the 1100 and 1360, 3/16" to 5/32" on the 1560 – 3200, 1/8" on the 4200; 31 strokes per minute
- ✓ NC-controlled back gauge with 29.5" (750 mm) stroke
- ✓ Squaring arm with T-slot, stopper and ruler
- ✓ Front sheet holding arms; finger protection guard
- ✓ Rear protection cages with photocell
- ✓ Table with ball transfers; cutting line illumination with shadow wire
- ✓ Foot pedal and cutting counter
- ✓ Easy blade-gap adjustment from the front; mechanical sheet clamping
- ✓ High-carbon, high-chrome blades: two-edged top blade, four-edged bottom blade

OPTIONAL EQUIPMENT

- + NC back gauge with 39.4" (1,000 mm) stroke
- + Pneumatic sheet support with return-to-rear
- + Rear protection cages with light barrier
- + 0 – 180° angular cutting device
- + ELGO P40T or FUJI Monitouch touch-screen NC control
- + Longer squaring arm and front holding arms to 118" (3,000 mm)
- + Front-operated manual back gauge with ball screw
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

SRGM — TECHNICAL SPECIFICATIONS

Model	SRGM 1100	SRGM 1360	SRGM 1560	SRGM 2060	SRGM 2560	SRGM 3060	SRGM 3200	SRGM 4200
Shearing capacity, mild steel	**1/4" (6 mm)**	**1/4" (6 mm)**	**3/16" (5 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**1/8" (3 mm)**
Max shearing length	**43.3" (1,100 mm)**	**53.5" (1,360 mm)**	**61.4" (1,560 mm)**	**81.1" (2,060 mm)**	**100.8" (2,560 mm)**	**120.5" (3,060 mm)**	**126.0" (3,200 mm)**	**165.4" (4,200 mm)**
Strokes per minute	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**
Motor power	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	15 HP (11 kW)	15 HP (11 kW)	15 HP (11 kW)
Table height	31.5" (800 mm)	31.5" (800 mm)	31.5" (800 mm)	31.5" (800 mm)	31.5" (800 mm)	31.5" (800 mm)	31.5" (800 mm)	31.5" (800 mm)
Table width	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)
Dimensions L × W × H	69 × 89 × 55" (1,750 × 2,250 × 1,400 mm)	81 × 89 × 55" (2,050 × 2,250 × 1,400 mm)	89 × 89 × 55" (2,250 × 2,250 × 1,400 mm)	106 × 89 × 55" (2,700 × 2,250 × 1,400 mm)	126 × 89 × 55" (3,200 × 2,250 × 1,400 mm)	146 × 89 × 55" (3,700 × 2,250 × 1,400 mm)	169 × 89 × 55" (4,300 × 2,250 × 1,400 mm)	209 × 89 × 55" (5,300 × 2,250 × 1,400 mm)
Weight	4,409 lb (2,000 kg)	5,071 lb (2,300 kg)	5,512 lb (2,500 kg)	6,614 lb (3,000 kg)	7,716 lb (3,500 kg)	8,818 lb (4,000 kg)	9,700 lb (4,400 kg)	11,684 lb (5,300 kg)

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L (along the blade) × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

SRGM MECHANICAL GUILLOTINE SHEARS, 1/4" × 3.6 FT – 13.8 FT




ELGO P40T touch-screen NC control unit — optional on every SRGM shear

SRGM-HFR 1320 – SRGM-HFR 3020 · 5 MODELS


SRGM-HFR LIGHT TYPE GUILLOTINE SHEARS WITH RETURN-TO-SENDER, 1/8″ × 4.3 FT – 9.9 FT



MODEL SRGM-HFR · SRGM-HFR LIGHT TYPE GUILLOTINE SHEAR WITH RETURN-TO-SENDER, 1/8″ CAPACITY — NOVOTECH PREMIUM LINE



SRGM-HFR shear — top and bottom blades and the sheet clamps



SRGM-FR shear — return-to-sender sheet support behind the blade

The light-type shear with the return-to-sender sheet support: after the cut the strip is carried back to the front of the machine, so one operator cuts blanks and strips without walking round to the rear. 1/8″ (3 mm) mild steel over 4.3 to 9.9 ft, 35 strokes a minute, NC back gauge with 29.5″ stroke as standard; pneumatic return-to-sender and return-to-rear optional.

STANDARD FEATURES

- ✓ 1/8″ (3 mm) mild steel; 12 ga on the 2520; 35 strokes per minute
- ✓ NC-controlled back gauge with 29.5″ (750 mm) stroke
- ✓ Manual return-to-sender: the cut piece comes back to the operator
- ✓ Squaring arm with T-slot, stopper and ruler
- ✓ Front sheet holding arms; finger protection guard
- ✓ Rear protection cages with photocell
- ✓ Table with ball transfers; cutting line illumination with shadow wire
- ✓ Foot pedal and cutting counter
- ✓ Easy blade-gap adjustment from the front; mechanical sheet clamping

OPTIONAL EQUIPMENT

- + NC back gauge with 39.4″ (1,000 mm) stroke
- + Pneumatic sheet support with return-to-sender and return-to-rear
- + Rear protection cages with light barrier
- + 0 – 180° angular cutting device
- + ELGO P40T or FUJI Monitouch touch-screen NC control
- + Longer squaring arm and front holding arms to 118″ (3,000 mm)
- + Front-operated manual back gauge with ball screw
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

SRGM-HFR — TECHNICAL SPECIFICATIONS

Model	SRGM-HFR 1320	SRGM-HFR 1520	SRGM-HFR 2020	SRGM-HFR 2520	SRGM-HFR 3020
Shearing capacity, mild steel	**1/8″ (3 mm)**	**1/8″ (3 mm)**	**1/8″ (3 mm)**	**12 ga (2.5 mm)**	**1/8″ (3 mm)**
Max shearing length	**52.0″ (1,320 mm)**	**59.8″ (1,520 mm)**	**79.5″ (2,020 mm)**	**99.2″ (2,520 mm)**	**118.9″ (3,020 mm)**
Strokes per minute	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**
Motor power	4 HP (3 kW)	4 HP (3 kW)	5.5 HP (4 kW)	5.5 HP (4 kW)	10 HP (7.5 kW)
Table height	34.6″ (880 mm)	34.6″ (880 mm)	34.6″ (880 mm)	34.6″ (880 mm)	34.6″ (880 mm)
Table width	15.4″ (390 mm)	15.4″ (390 mm)	15.4″ (390 mm)	15.4″ (390 mm)	17.9″ (455 mm)
Dimensions L × W × H	76 × 83 × 52″ (1,920 × 2,100 × 1,330 mm)	83 × 83 × 52″ (2,100 × 2,100 × 1,330 mm)	104 × 83 × 52″ (2,650 × 2,100 × 1,330 mm)	124 × 83 × 52″ (3,150 × 2,100 × 1,330 mm)	144 × 83 × 52″ (3,650 × 2,100 × 1,330 mm)
Weight	3,086 lb (1,400 kg)	3,748 lb (1,700 kg)	4,409 lb (2,000 kg)	4,850 lb (2,200 kg)	6,834 lb (3,100 kg)

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L (along the blade) × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SRGM-FR 1100 – SRGM-FR 4200 · 8 MODELS


SRGM-FR MECHANICAL GUILLOTINE SHEARS WITH RETURN-TO-SENDER, 1/4" × 3.6 FT – 13.8 FT



MODEL SRGM-FR · SRGM-FR DIRECT-GEAR GUILLOTINE SHEAR WITH RETURN-TO-SENDER, 1/4" CAPACITY — NOVOTECH PREMIUM LINE



SRGM-FR shear — NC control panel and front holding arm



SRGM-FR shear — return-to-sender sheet support behind the blade

The SRGM with the return-to-sender sheet support behind the blade: the cut piece is returned to the operator at the front, the off-cut drops to the rear — blanking and strip cutting by one person. Same 1/4" (6 mm) capacity, 31 strokes a minute, NC back gauge, squaring arm and ball-transfer table as the SRGM, with the table 3" higher for the return conveyor.

STANDARD FEATURES

- ✓ 1/4" (6 mm) mild steel on the 1100 and 1360, 3/16" to 5/32" on the 1560 – 3200, 1/8" on the 4200; 31 strokes per minute
- ✓ NC-controlled back gauge with 29.5" (750 mm) stroke
- ✓ Manual return-to-sender: the cut piece comes back to the operator
- ✓ Squaring arm with T-slot, stopper and ruler
- ✓ Front sheet holding arms; finger protection guard
- ✓ Rear protection cages with photocell
- ✓ Table with ball transfers; cutting line illumination with shadow wire
- ✓ Foot pedal and cutting counter
- ✓ Easy blade-gap adjustment from the front; mechanical sheet clamping

OPTIONAL EQUIPMENT

- + NC back gauge with 39.4" (1,000 mm) stroke
- + Pneumatic sheet support with return-to-sender and return-to-rear
- + Rear protection cages with light barrier
- + 0 – 180° angular cutting device
- + ELGO P40T or FUJI Monitouch touch-screen NC control
- + Longer squaring arm and front holding arms to 118" (3,000 mm)
- + Front-operated manual back gauge with ball screw
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

SRGM-FR — TECHNICAL SPECIFICATIONS

Model	SRGM-FR 1100	SRGM-FR 1360	SRGM-FR 1560	SRGM-FR 2060	SRGM-FR 2560	SRGM-FR 3060	SRGM-FR 3200	SRGM-FR 4200
Shearing capacity, mild steel	**1/4" (6 mm)**	**1/4" (6 mm)**	**3/16" (5 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**1/8" (3 mm)**
Max shearing length	**43.3" (1,100 mm)**	**53.5" (1,360 mm)**	**61.4" (1,560 mm)**	**81.1" (2,060 mm)**	**100.8" (2,560 mm)**	**120.5" (3,060 mm)**	**126.0" (3,200 mm)**	**165.4" (4,200 mm)**
Strokes per minute	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**
Motor power	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	15 HP (11 kW)	15 HP (11 kW)	15 HP (11 kW)
Table height	34.6" (880 mm)	34.6" (880 mm)	34.6" (880 mm)	34.6" (880 mm)	34.6" (880 mm)	34.6" (880 mm)	34.6" (880 mm)	34.6" (880 mm)
Table width	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)
Dimensions L × W × H	69 × 89 × 55" (1,750 × 2,250 × 1,400 mm)	81 × 89 × 55" (2,050 × 2,250 × 1,400 mm)	89 × 89 × 55" (2,250 × 2,250 × 1,400 mm)	106 × 89 × 55" (2,700 × 2,250 × 1,400 mm)	126 × 89 × 55" (3,200 × 2,250 × 1,400 mm)	146 × 89 × 55" (3,700 × 2,250 × 1,400 mm)	169 × 89 × 55" (4,300 × 2,250 × 1,400 mm)	209 × 89 × 55" (5,300 × 2,250 × 1,400 mm)
Weight	4,519 lb (2,050 kg)	5,181 lb (2,350 kg)	5,622 lb (2,550 kg)	6,834 lb (3,100 kg)	7,937 lb (3,600 kg)	9,039 lb (4,100 kg)	9,921 lb (4,500 kg)	11,905 lb (5,400 kg)

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L (along the blade) × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

SRGM-FR MECHANICAL GUILLOTINE SHEARS WITH RETURN-TO-SENDER, 1/4" × 3.6 FT – 13.8 FT



SRGM-FR shear — rear doors open, back gauge and return-to-sender supports

SRGM-HCL 1100 – SRGM-HCL 2060 · 4 MODELS

SRGM-HCL LIGHT TYPE SHEARS FOR CUT-TO-LENGTH LINES, 1/8″ × 3.6 FT – 6.8 FT



MODEL SRGM-HCL · SRGM-HCL LIGHT TYPE GUILLOTINE SHEAR FOR CUT-TO-LENGTH LINES, 11 GA CAPACITY — NOVOTECH PREMIUM LINE



SRGM-HCL shear — rear view, open for the line's sheet feed

The light-type guillotine built into a decoiler, straightener and feeder line: open at the rear so the coil strip runs straight through, 1/8″ (3 mm) mild steel over 43″ to 6.8 ft at 35 strokes a minute, with the line's control or an optional electrical cabinet of its own. From 2,315 lb.

STANDARD FEATURES

- ✓ 1/8″ (3 mm) mild steel; 35 strokes per minute; 51″ (1,300 mm) deep
- ✓ Built to be integrated into a cut-to-length line: the sheet feeds straight through from the rear
- ✓ Squaring arm with T-slot, stopper and ruler
- ✓ Front sheet holding arms; finger protection guard
- ✓ Table with ball transfers; cutting line illumination with shadow wire
- ✓ Mechanical sheet clamping; high-carbon, high-chrome two-edged top and four-edged bottom blades

OPTIONAL EQUIPMENT

- \+ Electrical cabinet (when the shear is not run from the line control)
- \+ Rear protection cages with photocell or light barrier
- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

SRGM-HCL — TECHNICAL SPECIFICATIONS

Model	SRGM-HCL 1100	SRGM-HCL 1360	SRGM-HCL 1560	SRGM-HCL 2060
Shearing capacity, mild steel	**1/8″ (3 mm)**	**1/8″ (3 mm)**	**1/8″ (3 mm)**	**1/8″ (3 mm)**
Max shearing length	**43.3″ (1,100 mm)**	**53.5″ (1,360 mm)**	**61.4″ (1,560 mm)**	**81.1″ (2,060 mm)**
Strokes per minute	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**	**35 strokes/min**
Motor power	4 HP (3 kW)	4 HP (3 kW)	4 HP (3 kW)	5.5 HP (4 kW)
Table height	31.9″ (810 mm)	31.9″ (810 mm)	31.9″ (810 mm)	31.9″ (810 mm)
Table width	15.4″ (390 mm)	15.4″ (390 mm)	15.4″ (390 mm)	15.4″ (390 mm)
Dimensions L × W × H	68 × 51 × 50″ (1,720 × 1,300 × 1,260 mm)	76 × 51 × 50″ (1,920 × 1,300 × 1,260 mm)	83 × 51 × 50″ (2,100 × 1,300 × 1,260 mm)	104 × 51 × 50″ (2,650 × 1,300 × 1,260 mm)
Weight	2,315 lb (1,050 kg)	2,646 lb (1,200 kg)	3,197 lb (1,450 kg)	3,748 lb (1,700 kg)

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L (along the blade) × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

SRGM-CL 1100 – SRGM-CL 2060 · 4 MODELS

SRGM-CL MECHANICAL SHEARS FOR CUT-TO-LENGTH LINES, 1/4" × 3.6 FT – 6.8 FT



MODEL SRGM-CL · SRGM-CL DIRECT-GEAR GUILLOTINE SHEAR FOR CUT-TO-LENGTH LINES, 1/4" CAPACITY — NOVOTECH PREMIUM LINE

The SRGM for coil lines: the same 10 HP direct-gear drive, 1/4" (6 mm) capacity and 31 strokes a minute in a frame only 49" deep that the straightened strip feeds through from the rear, cut to length by the line control. Squaring arm, front holding arms, ball-transfer table and shadow-line light as standard; electrical cabinet and rear guards optional.

STANDARD FEATURES

- ✓ 1/4" (6 mm) mild steel on the 1100 and 1360, 3/16" on the 1560, 5/32" on the 2060; 31 strokes per minute; 49" (1,250 mm) deep
- ✓ Built to be integrated into a cut-to-length line: the sheet feeds straight through from the rear
- ✓ Squaring arm with T-slot, stopper and ruler
- ✓ Front sheet holding arms; finger protection guard
- ✓ Table with ball transfers; cutting line illumination with shadow wire
- ✓ Mechanical sheet clamping; high-carbon, high-chrome two-edged top and four-edged bottom blades

OPTIONAL EQUIPMENT

- + Electrical cabinet (when the shear is not run from the line control)
- + Rear protection cages with photocell or light barrier
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

SRGM-CL — TECHNICAL SPECIFICATIONS

Model	SRGM-CL 1100	SRGM-CL 1360	SRGM-CL 1560	SRGM-CL 2060
Shearing capacity, mild steel	**1/4" (6 mm)**	**1/4" (6 mm)**	**3/16" (5 mm)**	**5/32" (4 mm)**
Max shearing length	**43.3" (1,100 mm)**	**53.5" (1,360 mm)**	**61.4" (1,560 mm)**	**81.1" (2,060 mm)**
Strokes per minute	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**	**31 strokes/min**
Motor power	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)
Table height	31.5" (800 mm)	31.5" (800 mm)	31.5" (800 mm)	31.5" (800 mm)
Table width	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)	17.9" (455 mm)
Dimensions L × W × H	69 × 49 × 55" (1,750 × 1,250 × 1,400 mm)	81 × 49 × 55" (2,050 × 1,250 × 1,400 mm)	89 × 49 × 55" (2,250 × 1,250 × 1,400 mm)	106 × 49 × 55" (2,700 × 1,250 × 1,400 mm)
Weight	4,189 lb (1,900 kg)	4,850 lb (2,200 kg)	5,291 lb (2,400 kg)	6,393 lb (2,900 kg)

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L (along the blade) × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.