NovoTech MACHINE TOOLS Inc.


PRODUCT CATALOGUE 2026

NOVOTECH PREMIUM LINE · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

CORNER NOTCHERS, CIRCLE CUTTERS, PIPE POLISHERS AND PIPE BENDERS

HNM FIXED AND VARIABLE-ANGLE HYDRAULIC CORNER NOTCHERS · SDK 6 / SDK 8 CIRCULAR CUTTING AND FLANGING MACHINES · EFM 6 ELLIPTICAL CUTTER · BT 114-S PIPE POLISHER · SPB 60 / 76 NC PIPE DRAW BENDERS



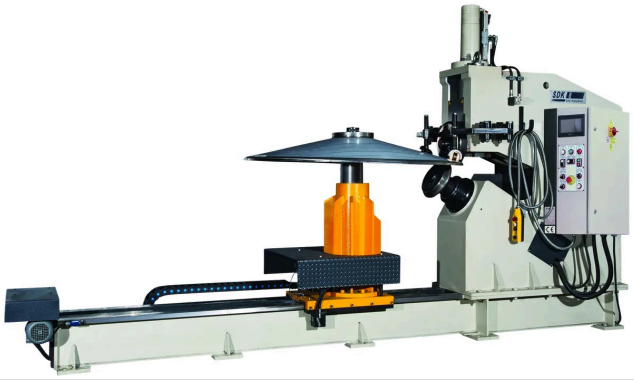



Turkey
MADE IN TURKEY

6
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

SHEET-METAL AND PIPE SHOP MACHINES

CONTENTS

HYDRAULIC CORNER NOTCHERS

HNM 4F · HNM 6F fixed-angle hydraulic corner notchers HNM 4F (3/16″) · HNM 6F (1/4″) · fixed 90° 04

HNM 6V variable-angle hydraulic corner notcher HNM 6V · 30° – 140° · 1/4″ 05

CIRCULAR AND ELLIPTICAL CUTTING AND FLANGING

SDK 6 · SDK 8 circular sheet cutting and flanging machines SDK 6 (Ø12.5 ft) · SDK 8 (Ø15 ft) 06

EFM 6 elliptical cutting and flanging machine EFM 6 · Ø29.5″ to Ø118″ 09

PIPE POLISHING AND PIPE BENDING

BT 114-S automatic pipe polishing and sanding machine BT 114-S · Ø3/8″ to Ø4-1/2″ · 6.4 HP 11

SPB 60 · SPB 76 NC pipe draw benders SPB 60 (Ø2-3/8″) · SPB 76 (Ø3″) 15

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR CORNER NOTCHERS, CIRCLE CUTTERS, PIPE POLISHERS AND PIPE BENDERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH PREMIUM LINE · MADE IN TURKEY

THE MACHINES AROUND THE SHEAR AND THE PRESS BRAKE

The machines in this catalogue are NovoTech's premium line: built in Turkey to NovoTech's specification by a CE-certified metal-forming plant with more than 40 years of machine building and exports to over 100 countries, with European hydraulic and electrical components, inspected before shipping, and sold under NovoTech's name with a CSA-approved panel, a 1-year warranty and spare parts and technical support from NovoTech in Mississauga, Ontario, Canada.

The HNM hydraulic corner notchers cut the 90° and variable-angle notches that let a sheet fold into a box; the SDK 6 and SDK 8 cut and flange circular blanks and tank heads to Ø15 ft in 5/16" plate and the EFM 6 does the same for elliptical heads; the BT 114-S polishes and sands round and square tube to a satin finish with a mobile pendant; and the SPB 60 and SPB 76 NC draw benders bend handrail and furniture tube around a die with a programmed sequence of bends. All with a CSA-approved panel, installed and supported from Mississauga, ON, Canada.

HNM 4F (3/16") · HNM 6F (1/4") · FIXED 90°

HNM 4F · HNM 6F FIXED-ANGLE HYDRAULIC CORNER NOTCHERS



MODEL HNM · HNM 6F FIXED 90° HYDRAULIC CORNER NOTCHER

3/16" and 1/4" mild steel · fixed 90° · 7.8" and 9.8" blades · 20 – 25 cuts/min

Compact hydraulic notchers that cut a 90° corner out of sheet in one stroke — the box, pan and enclosure corner before it goes to the press brake. Fixed 90° angle with high notching speed (20 – 25 cuts per minute), foot-pedal control and a small footprint: the HNM 4F cuts 3/16" mild steel or 14 ga stainless on a 7.8" blade, the HNM 6F 1/4" mild steel or 11 ga stainless on a 9.8" blade.

STANDARD FEATURES

- ✓ Fixed 90° notching angle with high notching speed — 20 / 25 cuts per minute
- ✓ Compact structure, small footprint and convenient operation
- ✓ Foot-pedal control
- ✓ HNM 4F: 3/16" mild steel · 7.8 × 7.8" blades; HNM 6F: 1/4" mild steel · 9.8 × 9.8" blades

OPTIONAL EQUIPMENT

- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HNM — TECHNICAL SPECIFICATIONS

Model	HNM 4F	HNM 6F	HNM 6V
Cutting capacity — mild steel	**3/16"**	**1/4"**	**1/4" – 8 ga**
Cutting capacity — stainless steel	**14 ga**	**11 ga**	**11 ga – 14 ga**
Cutting angle	**90° fixed**	**90° fixed**	**30° – 140° variable**
Table size	27.6 × 27.2" (700 × 690 mm)	31.9 × 29.5" (810 × 750 mm)	35.4 × 39.4" (900 × 1,000 mm)
Blade length	7.8 × 7.8" (200 × 200 mm)	9.8 × 9.8" (250 × 250 mm)	7.9 × 7.9" (200 × 200 mm)
Max. cuts per minute	20	25	30
Max. working pressure	1,740 psi (120 bar)	1,740 psi (120 bar)	2,900 psi (200 bar)
Oil tank	80 L (21 US gal)	80 L (21 US gal)	80 L (21 US gal)
Motor power	4 HP (3 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)
Dimensions L × W × H	35 × 37 × 44" (890 × 940 × 1,100 mm)	37 × 31 × 44" (940 × 790 × 1,100 mm)	35 × 45 × 49" (890 × 1,150 × 1,250 mm)
Weight	1,213 lb (550 kg)	1,290 lb (585 kg)	2,535 lb (1,150 kg)

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HNM 6V · 30° – 140° · 1/4"

HNM 6V VARIABLE-ANGLE HYDRAULIC CORNER NOTCHER



MODEL HNM · HNM 6V VARIABLE-ANGLE HYDRAULIC CORNER NOTCHER

1/4" mild steel · 30° – 140° variable angle · 4 hydraulic hold-downs · 30 cuts/min

A variable-angle notcher on a statically and dynamically rigid steel table and top beam: the blades swing from 30° to 140° for V-notches, hoppers, cones and ducting corners, and the blade gap adjusts automatically so no realignment is needed between sheet thicknesses. Four hydraulic hold-down cylinders give repeatable cuts up to 1/4" mild steel (11 ga stainless) at 30 cuts per minute, with a T-slot top table for precise, repeatable positioning and foot-pedal control.

STANDARD FEATURES


- ✓ Variable notching angle 30° – 140°
- ✓ Strong frame with statically and dynamically rigid steel table and top beam; T-slot top table for precise cuts
- ✓ Automatic blade-gap adjustment — no realignment for different sheet thicknesses
- ✓ 4 hydraulic hold-down cylinders for repeatable cutting; foot-pedal control; max. 1/4" cutting capacity

OPTIONAL EQUIPMENT

- + Punching attachment (HNM 6 VP: notching and punching on one machine)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

SDK 6 (Ø12.5 FT) · SDK 8 (Ø15 FT)

SDK 6 · SDK 8 CIRCULAR SHEET CUTTING AND FLANGING MACHINES

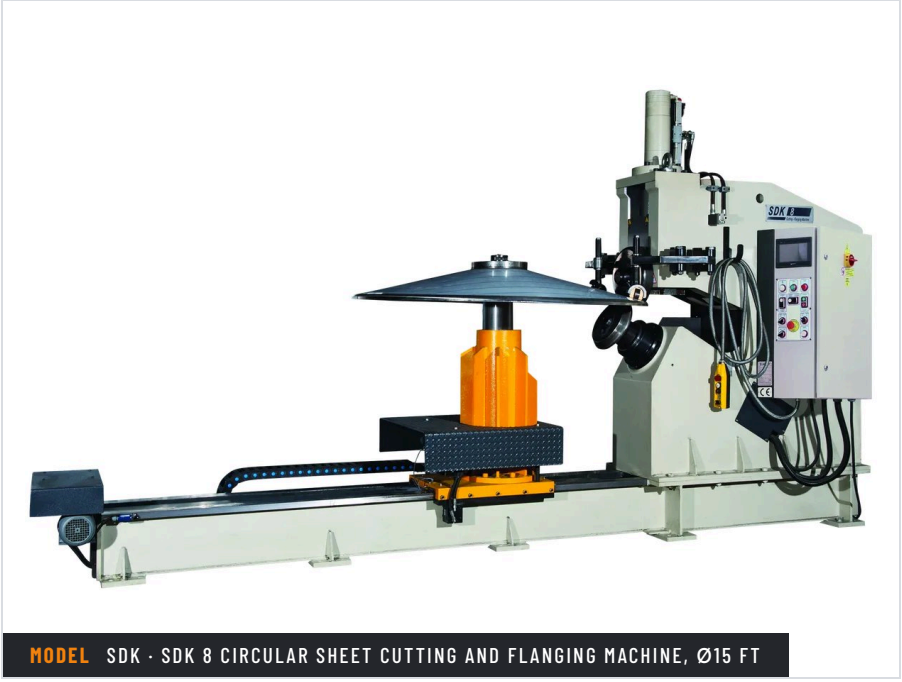

MODEL SDK · SDK 8 CIRCULAR SHEET CUTTING AND FLANGING MACHINE, Ø15 FT



SDK 6 circular sheet cutting and flanging machine, Ø12.5 ft



SDK 6 circular cutting and flanging machine — part carrier, flanging head and control box

Heads Ø21.7" to Ø15 ft (0.55 – 4.5 m) · plate to 5/16" (8 mm) · cut and flange on one head

Tank-head machines that cut a circle from plate and flange its edge on the same head: dished and flat heads from Ø21.7" up to Ø12.5 ft (SDK 6) or Ø15 ft (SDK 8) in mild steel to 1/4" – 5/16" and stainless to 8 ga – 3/16". The flanging rolls are driven through planetary gearboxes by electric motor (SDK 6) or hydromotor (SDK 8), the part carrier has two speeds and hydraulic up/down adjustment, hydraulic lateral supports hold the plate and an LCD touchscreen runs the cycle. One set of R1" flanging rolls and one set of cutting blades are included; a Japanese-hat (top-hat) attachment, small-diameter attachment and stainless blade set are optional.

STANDARD FEATURES

- ✓ Cut and flange dished and flat heads up to Ø15 ft on the same head
- ✓ Bottom and top flanging rolls driven by hydromotor (SDK 8) or electric motor (SDK 6) through planetary gearbox
- ✓ Two-speed part carrier, hydraulic up/down; hydraulic-cylinder lateral supports
- ✓ LCD touchscreen operator panel
- ✓ One set of flanging rolls (R1") and one set of cutting blades included

OPTIONAL EQUIPMENT

- + Flanging rolls in other radii
- + Japanese-hat (top-hat) attachment
- + Small-Ø cutting / flanging attachment (Ø15.7" – 17.7")
- + Blade set for cutting stainless steel
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS

SDK 6 · SDK 8 CIRCULAR SHEET CUTTING AND FLANGING MACHINES



SDK 8 circular sheet cutting and flanging machine



SDK 8 — flanging head, part carrier and control panel




SDK — top and bottom flanging rolls



SDK — control box with touchscreen and pendant



SDK — LCD touchscreen operator panel

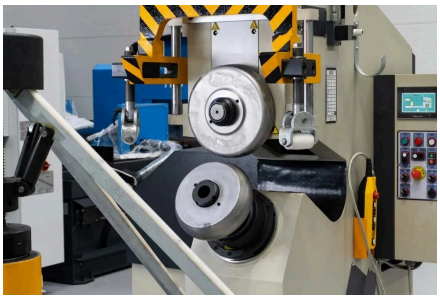

SDK 8 cutting and flanging rolls



Dished head flanged on the SDK 8



Flanged edge of a dished head made on the SDK 8



Dished head on the SDK 8

TECHNICAL SPECIFICATIONS

SDK 6 · SDK 8 CIRCULAR SHEET CUTTING AND FLANGING MACHINES

SDK 6 · SDK 8

circular sheet cutting & flanging machines

Model	SDK 6	SDK 8
Max. flanging plate Ø	**149.6" (3800 mm)**	**177.2" (4500 mm)**
Min. flanging plate Ø	21.7" (550 mm)	28.3" (720 mm)
Min. flanging Ø with small-Ø attachment optional	15.7" (400 mm)	17.7" (450 mm)
Max. cutting plate Ø	**151.6" (3850 mm)**	**179.1" (4550 mm)**
Min. cutting plate Ø	23.6" (600 mm)	31.1" (790 mm)
Min. cutting Ø with small-Ø attachment optional	15.7" (400 mm)	24.4" (620 mm)
Max. flanging height (optional rolls) height (flange radius)	3.3 " (R2.8") · 1.4 " (R1.0)")	3.7 " (R3.1") · 1.4 " (R1.0)")
Flanging radius min. – max.	R0.4" – R2.8"	R0.4" – R3.1"
Max. plate thickness — mild steel	**1/4" (6 mm)**	**5/16" (8 mm)**
Max. plate thickness — stainless 304 / 316	8 ga (4 mm)	3/16" (5 mm)
Motor power	12 HP (9 kW)	15 HP (11 kW)
Dimensions L × W × H	169 × 43 × 85" (4,300 × 1,100 × 2,150 mm)	193 × 67 × 106" (4,900 × 1,700 × 2,700 mm)
Weight	6,504 lb (2,950 kg)	10,031 lb (4,550 kg)

Mild-steel capacities are for 37,000 psi (26 kg/mm^2) yield strength. Dimensions are overall L × W × H; metric values in brackets are the manufacturer's nominal figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

EFM 6 · Ø29.5" TO Ø118"


EFM 6 ELLIPTICAL CUTTING AND FLANGING MACHINE



MODEL EFM · EFM 6 ELLIPTICAL CUTTING AND FLANGING MACHINE



EFM 6 — flanging head with the optional vacuum system



EFM 6 with a sheet held on the vacuum cups

Round and elliptical heads Ø29.5" to Ø118" (0.75 – 3 m) · plate 11 ga to 1/4"

For round and elliptical tank heads: the flanging head tilts 90° to both sides and follows a moving, changeable bottom template, so flat, crowned and elliptical bottoms are cut and flanged on the same head. Plate from 11 ga to 1/4" mild steel (14 ga to 8 ga stainless) up to Ø118"; one set of R3/8" flanging rolls, one set of cutting blades and one copy template are included, with a vacuum system optional for holding thin heads.

STANDARD FEATURES

- ✓ Flanging head tilts 90° to both sides for elliptical flanging
- ✓ Moving, changeable bottom template for flat and elliptical sheets; copy template (1 pc.)
- ✓ Round and elliptical flanging and cutting on the same head; flanges flat, crowned and elliptical bottoms
- ✓ Planetary gearbox and gear system drive
- ✓ One set of flanging rolls (R3/8") and one set of cutting blades included

OPTIONAL EQUIPMENT

- + Vacuum system
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

EFM 6 — TECHNICAL SPECIFICATIONS

Model	EFM 6
Max. plate cutting Ø	**118.1" (3000 mm)**
Min. plate cutting Ø	29.5" (750 mm)
Max. flanging height	1.6" (40 mm)
Max. flanging radius	11.8" (300 mm)
Plate thickness — mild steel	**11 ga – 1/4"**
Plate thickness — stainless 304 / 316	14 ga – 8 ga
Motor power	10 HP (7.5 kW)
Dimensions L × W × H	220 × 53 × 62" (5,600 × 1,350 × 1,550 mm)
Weight	4,453 lb (2,020 kg)

Mild-steel capacities are for 37,000 psi (26 kg/mm²) yield strength. Dimensions are overall L × W × H; metric values in brackets are the manufacturer's nominal figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

EFM 6 ELLIPTICAL CUTTING AND FLANGING MACHINE



EFM 6 flanging head



EFM 6 cutting head



Vacuum cups of the EFM 6 holding the sheet




Elliptical head cut and flanged on the EFM 6

BT 114-S · Ø3/8" TO Ø4-1/2" · 6.4 HP

BT 114-S AUTOMATIC PIPE POLISHING AND SANDING MACHINE



MODEL BT · BT 114-S PIPE POLISHING MACHINE WITH THE BELT HEAD, FEED UNIT AND THE MOBILE CONTROL PENDANT

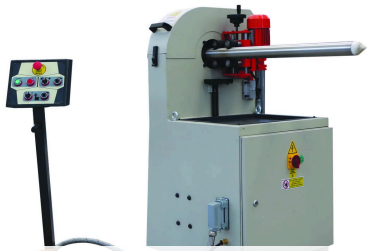

BT 114-S automatic pipe polishing and sanding machine with the mobile control pendant



BT 114-S pipe polishing machine in the NovoTech showroom with the control pendant and foot pedal

Pipe and tube Ø3/8" to Ø4-1/2" (10 – 114 mm) · automatic feeder · 2 belts 37 × 2"

A belt sander for round pipe and square tube that feeds the material itself: an automatic pipe feeder with its own motor pushes straight or bent tube (up to a 45° bend) through two 37 × 2" abrasive belts, so the operator does not turn or hold the material. Feeding speed and belt speed are both inverter-variable, the belt is changed through an opening cover and a holder is provided for manual feeding. Finishing, satin-brushing and rust removal on Ø3/8" to Ø4-1/2" — handrail, furniture and architectural stainless.

STANDARD FEATURES

- ✓ Automatic pipe feeder with separate motor — delivers material without operator intervention; no need to turn the material
- ✓ Pipe / tube Ø3/8" – Ø4-1/2" (10 – 114 mm); polishes bent pipe and tube up to a 45° bend
- ✓ Variable feeding speed and variable sanding-belt speed by inverter drive
- ✓ 2 abrasive belts 37 × 2" included; opening cover for belt changes and cleaning
- ✓ Manual pipe-clamping adjustment; fixing attachment for the motor; holder for manual feeding

OPTIONAL EQUIPMENT


- + Abrasive belts in other grits
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

DETAILS, COMPONENTS AND OPTIONS · 1 / 2


BT 114-S AUTOMATIC PIPE POLISHING AND SANDING MACHINE



BT 114-S — the polishing head: drive rolls, hand-wheel feed adjustment and the belt guard

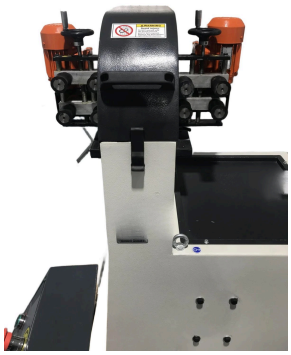

BT 114-S seen from the infeed side — two sets of drive rolls either side of the belt

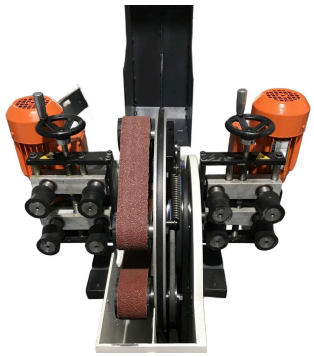


BT 114-S from above — belt, contact wheel and the two feed units



Abrasive belt on the contact wheel — the tube is fed between the drive rolls



Square stainless tube polished on the BT 114-S

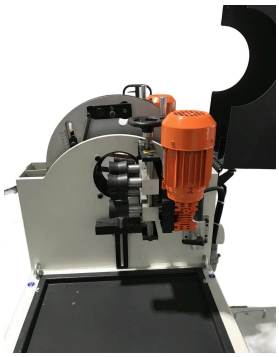

Geared motor and drive rolls of the feed unit with the angle scale



Belt tensioning spring, angle scale and the rubber drive rolls



Belt path over the contact wheel with the drive rolls in front



Mobile control pendant with start / stop, speed and feed controls, and the foot pedal

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

BT 114-S AUTOMATIC PIPE POLISHING AND SANDING MACHINE



Stainless handrail tube polished on the BT 114-S



BT 114-S — satin-finished stainless tube

TECHNICAL SPECIFICATIONS

BT 114-S AUTOMATIC PIPE POLISHING AND SANDING MACHINE

BT 114-S

automatic pipe polishing & sanding machine

Model	BT 114-S
Working capacity pipe / tube OD	**Ø3/8" – Ø4-1/2" (10 – 114 mm)**
Abrasive-belt motors	4 + 2 HP (3 + 1.5 kW)
Feed-wheel motor	0.3 HP (0.24 kW)
Total motor power	6.4 HP (4.75 kW)
Belt size 2 belts included	37 × 2" (940 × 50 mm)
Feeding speed variable, inverter drive	9.8 – 72 ft/min (3 – 22 m/min)
Sanding-belt speed	Variable, inverter drive
Automatic pipe feeder	Standard
Dimensions L × W × H	39 × 30 × 59" (990 × 760 × 1,500 mm)
Weight approx.	617 lb (280 kg)

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SPB 60 (Ø2-3/8") · SPB 76 (Ø3")


SPB 60 · SPB 76 NC PIPE DRAW BENDERS



MODEL SPB · SPB 76 NC PIPE DRAW BENDER WITH A BENT TUBE IN THE TOOLING



SPB 60 NC pipe draw bender



SPB — stainless handrail bent on the SPB 60

Pipe to Ø3" × 10 ga (76 × 3.5 mm) · NC control with 500 programs · 1 tooling set included

Rotary draw benders with an NC control screen and 500-program memory for handrail, furniture, fitness equipment and exhaust work. The SPB 60 bends pipe up to Ø2-3/8" × 8 ga, the SPB 76 up to Ø3" × 11 ga, at a minimum radius of 3× the tube diameter; a holder attachment supports the tube while it is clamped, free holes take special tooling and one set of pipe-bending tooling is included. Infinitely variable speed, thermal overload protection and emergency stop.

STANDARD FEATURES

- ✓ NC control screen with 500-program internal memory
- ✓ SPB 60: pipe to Ø2-3/8" × 8 ga; SPB 76: pipe to Ø3" × 11 ga; minimum bending radius 3 × tube Ø
- ✓ Holder attachment supports the tube while clamped; free holes for mounting special tools
- ✓ 1 set of pipe bending tooling included; infinitely variable speed
- ✓ Welded steel construction frame; thermal overload / power reset; emergency stop

OPTIONAL EQUIPMENT

- + Pipe, tube, section or bar tooling sets to required size
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

SPB 60 · SPB 76 — TECHNICAL SPECIFICATIONS

Model	SPB 60	SPB 76
Mild steel tube max. capacity	**Ø2-3/8" × 11 ga (60 × 3 mm)**	**Ø3" × 10 ga (76 × 3.5 mm)**
Boiler tube	Ø2-3/8" × 12 ga (60 × 2.5 mm)	Ø3" × 11 ga (76 × 3 mm)
Aluminum tube	Ø2-3/8" × 8 ga (60 × 4 mm)	Ø3" × 1/4" (76 × 6 mm)
Round bar, mild steel	Ø1-5/8" (40 mm)	Ø1-3/4" (45 mm)
Square tube, mild steel	□1-5/8" × 8 ga (40 × 4 mm)	□1-5/8" × 3/16" (40 × 5 mm)
Min. bending radius	R2.4" (Ø5/8" × 8 ga)	R3" (Ø5/8" × 11 ga)
Max. bending radius	R5.9" (Ø2-3/8" × 10 ga)	R8.7" (Ø3" × 10 ga)
Working speed	0 – 4.5 rpm	0 – 4 rpm
Motor power	3 HP (2.25 kW)	4 HP (3 kW)
Dimensions L × W × H	33 × 30 × 47" (840 × 760 × 1,200 mm)	37 × 33 × 49" (940 × 840 × 1,250 mm)
Weight	728 lb (330 kg)	1,102 lb (500 kg)

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.