NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

SHEET METAL SHEARS

PNEUMATIC SHEAR 16 GA × 52" · HYDRAULIC SHEARS 16 GA – 1/4" × 52 – 120" · ELECTRIC SHEARS 14 GA – 5/32" WITH MANUAL OR NC BACK GAUGE · MECHANICAL SHEARS 1/8" – 3/8"







China
MADE IN CHINA

7
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE SHEET METAL SHEARS

CONTENTS

PNEUMATIC AND LIGHT HYDRAULIC SHEARS

PS pneumatic shear, 16 ga × 52″ PS-1.5x1320 · 1 model 04

HQ01 light hydraulic shears, 16 – 14 ga × 52 – 98″ HQ01-2x1320B · HQ01-1.6x2500B · 2 models 06

HYDRAULIC SHEARS

THS hydraulic shears, 12 ga – 5/32″ × 52 – 120″ THS-1320X2.5 – THS-3050X4 · 6 models 08

HQ11 hydraulic shears, 5/32″ – 1/4″ × 51 – 120″ HQ11-6.5x1300 – HQ11-6.5x3050 · 4 models 09

ELECTRIC SHEARS

Q11 electric shears, 14 ga – 5/32″ × 49 – 81″ Q11-3x1250 – Q11-3x1250A · 5 models 11

Q11 NC electric shears with PLC control, 14 ga – 5/32″ × 51 – 100″ Q11-4x1300NC · Q11-2x2550NC · Q11-4x2550NC · 3 models 13

MECHANICAL SHEARS

Q11 mechanical shears, 1/8″ – 3/8″ × 39 – 98″ Q11-3x1300 – Q11-10x1500 · 10 models 15

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE SHEET METAL SHEARS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH VALUE LINE

THE SHEARS FOR THE SHEET-METAL SHOP — PNEUMATIC, HYDRAULIC, ELECTRIC AND MECHANICAL, 16 GA TO 3/8″

NovoTech's value line is our own brand: machines built in China to our specification, inspected before they ship and sold under NovoTech's name with the same CSA-approved panel, 1-year warranty and parts and technical support from Mississauga, Ontario, Canada, as every machine we sell.

These are the shears for HVAC, ductwork, signage, enclosures, roofing and the general repair shop, where a 10 ft × 1/4″ plate shear is more machine than the work needs: the PS pneumatic shear that cuts 16 ga over 52″ on shop air; the HQ01 light hydraulic shears for 14 ga over 52″ and 16 ga over 98″; the THS and HQ11 hydraulic shears from 12 ga to 1/4″ over 51″ to 120″ with front and back gauges, quick-set blade clearance and an electric or NC back gauge; the Q11 electric shears, 14 ga to 5/32″ over 49″ to 100″, with a manual back gauge and counter or a PLC with motorised back gauge; and the Q11 flywheel mechanical shears for medium and thick steel, 1/8″ to 3/8″ at 45 to 55 strokes a minute. Every machine ships with front and back gauges, a foot pedal and two-edged blades.

PS-1.5X1320 · 1 MODEL

PS PNEUMATIC SHEAR, 16 GA × 52″



MODEL PS · PS-1.5X1320 PNEUMATIC SHEAR, 52″ × 16 GA, WITH FRONT GAUGE ARMS AND THE MOBILE FOOT PEDAL



Back gauge with indicator on the pneumatic shear



Pneumatic control unit — filter, regulator and lubricator

The shear for a shop that already has compressed air: a pneumatic cylinder drives the cutting beam through 16 ga (1.5 mm) mild steel over 52″ at 40 strokes a minute, with no motor, no hydraulics and nothing to warm up. A low cutting angle cuts narrow strips without twisting; the bed and beam are aligned at the factory for accuracy; front and back gauges with fine adjustment, a mobile 24 V foot pedal and a complete pneumatic control set are standard. 1,257 lb, runs on 85 – 100 psi shop air.

STANDARD FEATURES

- ✓ 16 ga (1.5 mm) mild steel × 52″ (1,320 mm); 40 strokes per minute on 85 – 100 psi shop air
- ✓ Pneumatic cylinder drive with filter, regulator and lubricator
- ✓ Low cutting angle for narrow strips without twist; factory-aligned bed and beam
- ✓ Back gauge 29.5″ (750 mm) with indicator; front gauge 21″ (535 mm)
- ✓ Mobile 24 V foot pedal switch

OPTIONAL EQUIPMENT

- \+ Photoelectric rear protection
- \+ Sheet support arms

PS — TECHNICAL SPECIFICATIONS

Model	PS-1.5x1320
Shearing capacity, mild steel	**16 ga (1.5 mm)**
Max shearing width	**52.0″ (1,320 mm)**
Strokes per minute	**40 strokes/min**
Back gauge	29.5″ (750 mm)
Front gauge	21.1″ (535 mm)
Air pressure	**85 – 100 psi (0.6 – 0.7 MPa)**
Air consumption per stroke	1.4 CFM
Packing size L × W × H	69 × 30 × 48″ (175 × 75 × 123 cm)
Weight	1,257 lb (570 kg)

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel and the full thickness and more in aluminum. Metric values in brackets are the manufacturer's nominal figures; packing size is the shipping crate L × W × H, weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

PS PNEUMATIC SHEAR, 16 GA × 52″




Pneumatic cylinder driving the cutting beam

HQ01-2X1320B · HQ01-1.6X2500B · 2 MODELS


HQ01 LIGHT HYDRAULIC SHEARS, 16 – 14 GA × 52 – 98″



MODEL HQ01 · HQ01-2X1320B HYDRAULIC SHEAR, 52″ × 14 GA, WITH REAR GUARD AND THE FOOT PEDAL

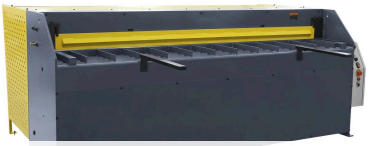

HQ01-1.6x2500B light hydraulic shear, 98″ × 16 ga, with front sheet supports and side guards



Adjustable back gauge with scale

The light hydraulic shear for HVAC, ductwork and signage: a 3 HP power pack and one cylinder cut 14 ga (2 mm) over 52″ or 16 ga over 98″ with hydraulic control, a roving foot pedal, an adjustable back gauge for repeatable widths and front sheet supports with a squaring guide. A fenced rear guard is standard; photoelectric protection is optional. From 1,213 lb — the lowest-priced powered shear in the range.

STANDARD FEATURES

- ✓ 14 ga (2 mm) × 52″ or 16 ga (1.6 mm) × 98″ mild steel; 3 HP hydraulic power pack
- ✓ Adjustable back gauge, 31.5″ (800 mm) travel, for precise repeatability
- ✓ Roving foot pedal control; automatic and single-stroke switching
- ✓ Front sheet supports and squaring guide; rear guard fence
- ✓ Work table height 34.6″ (880 mm)

OPTIONAL EQUIPMENT

- \+ Photoelectric rear protection
- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

HQ01 — TECHNICAL SPECIFICATIONS

Model	HQ01-2x1320B	HQ01-1.6x2500B
Shearing capacity, mild steel	**14 ga (2 mm)**	**16 ga (1.6 mm)**
Max shearing length	**52.0″ (1,320 mm)**	**98.4″ (2,500 mm)**
Motor power	**3 HP (2.2 kW)**	**3 HP (2.2 kW)**
Back gauge	31.5″ (800 mm)	31.5″ (800 mm)
Work table height	34.6″ (880 mm)	34.6″ (880 mm)
Packing size L × W × H	78 × 36 × 56″ (198 × 92 × 143 cm)	124 × 39 × 56″ (314 × 99 × 143 cm)
Weight	**1,213 lb (550 kg)**	**2,513 lb (1,140 kg)**

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel and the full thickness and more in aluminum. Metric values in brackets are the manufacturer's nominal figures; packing size is the shipping crate L × W × H, weight is the net weight of the machine.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

HQ01 LIGHT HYDRAULIC SHEARS, 16 – 14 GA × 52 – 98″



Control panel — automatic and single-stroke switching

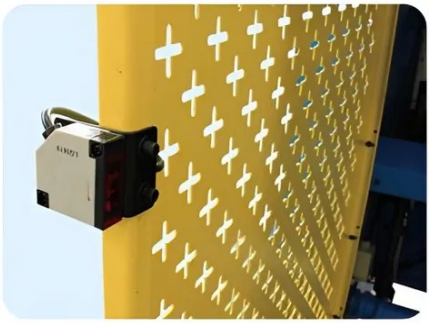

Optional photoelectric rear protection

THS-1320X2.5 – THS-3050X4 · 6 MODELS

THS HYDRAULIC SHEARS, 12 GA – 5/32" × 52 – 120"



MODEL THS · THS-1320X4 HYDRAULIC SHEAR, 52" × 8 GA, WITH FRONT GAUGE ARMS AND THE MOBILE FOOT PEDAL



Hand-wheel back gauge of the THS hydraulic shear

The steel-welded hydraulic shear for precision shearing of mild steel: 12 ga (2.5 mm) over 52" on the 1320X2.5, and 5/32" (4 mm) over 52" to 120" on the X4 models, 13 to 20 strokes a minute from a 3 to 7.5 HP power pack. Front gauge arms and a back gauge, both with fine adjustment, a mobile 24 V foot pedal and high-chromium two-edged blades that are turned for a second life are standard. From 1,411 to 6,393 lb.

STANDARD FEATURES

- ✓ 12 ga (2.5 mm) or 5/32" (4 mm) mild steel × 52 – 120" (1,320 – 3,048 mm); 13 – 20 strokes per minute
- ✓ Back gauge 25.6" (650 mm) and front gauge 23.6" (600 mm), both with fine adjustment
- ✓ Mobile 24 V foot pedal switch with emergency stop
- ✓ Front gauge arms with squaring guide and back gauge, both with fine adjustment
- ✓ High-chromium blades with two cutting edges — turn the blade for a second life
- ✓ Steel-welded frame; hydraulic hold-downs ahead of the blade
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Photoelectric rear protection
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

THS — TECHNICAL SPECIFICATIONS

Model	THS-1320X2.5	THS-1320X4	THS-1520X4	THS-2030X4	THS-2540X4	THS-3050X4
Shearing capacity, mild steel	**12 ga (2.5 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**
Max shearing width	**52.0" (1,320 mm)**	**52.0" (1,320 mm)**	**59.8" (1,520 mm)**	**80.0" (2,032 mm)**	**100.0" (2,540 mm)**	**120.0" (3,048 mm)**
Strokes per minute	**20 strokes/min**	**15 strokes/min**	**15 strokes/min**	**15 strokes/min**	**13 strokes/min**	**13 strokes/min**
Motor power	**3 HP (2.2 kW)**	**5.5 HP (4 kW)**	**5.5 HP (4 kW)**	**5.5 HP (4 kW)**	**7.5 HP (5.5 kW)**	**7.5 HP (5.5 kW)**
Back gauge	25.6" (650 mm)	25.6" (650 mm)	25.6" (650 mm)	25.6" (650 mm)	25.6" (650 mm)	25.6" (650 mm)
Front gauge	23.6" (600 mm)	23.6" (600 mm)	23.6" (600 mm)	23.6" (600 mm)	23.6" (600 mm)	23.6" (600 mm)
Packing size L × W × H	68 × 33 × 51" (173 × 83 × 130 cm)	79 × 41 × 62" (201 × 104 × 158 cm)	88 × 41 × 63" (223 × 104 × 160 cm)	107 × 41 × 63" (273 × 104 × 160 cm)	128 × 44 × 67" (326 × 113 × 170 cm)	148 × 44 × 67" (377 × 113 × 170 cm)
Weight	**1,411 lb (640 kg)**	**2,800 lb (1,270 kg)**	**3,197 lb (1,450 kg)**	**3,748 lb (1,700 kg)**	**5,710 lb (2,590 kg)**	**6,393 lb (2,900 kg)**

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel and the full thickness and more in aluminum. Metric values in brackets are the manufacturer's nominal figures; packing size is the shipping crate L × W × H, weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HQ11-6.5X1300 – HQ11-6.5X3050 · 4 MODELS


HQ11 HYDRAULIC SHEARS, 5/32″ – 1/4″ × 51 – 120″



MODEL HQ11 · HQ11-4.5X2000 HYDRAULIC SHEAR, 79″ × 3/16″, WITH HOLD-DOWNS AND THE MOBILE FOOT PEDAL



HQ11-6.5x1300 hydraulic shear, 51″ × 1/4″, with hold-downs, beam-mounted controls and the foot pedal



Ball-transfer table of the HQ11 shear

The hydraulic shear for sheet and non-ferrous sheet metal in a production shop: 1/4″ (6.5 mm) over 51″ and 120″, 3/16″ over 79″ and 5/32″ over 98″, 12 to 20 strokes a minute from 7.5 to 20 HP. Blade clearance is set by a quick-set device, the cutting angle can be adjusted, and the low cutting angle and shearing direction keep bowing and twist to a minimum. Ball-transfer table, hold-downs, lubrication pump and a mobile foot pedal are standard; the 1300 and 3050 come with an electric back gauge, the 2000 and 2500 with a manual one; an NC back gauge is optional. 5,445 to 13,437 lb.

STANDARD FEATURES

- ✓ 5/32″ to 1/4″ (4 – 6.5 mm) mild steel × 51 – 120″ (1,300 – 3,050 mm); 12 – 20 strokes per minute
- ✓ Quick-set blade clearance and adjustable cutting angle (1.7 – 2.5°)
- ✓ Ball-transfer table; hydraulic hold-downs; lubrication pump
- ✓ Back gauge 24.8″ (630 mm) manual or electric; 36.2″ (920 mm) electric on the 3050
- ✓ Mobile 24 V foot pedal switch with emergency stop
- ✓ High-chromium blades with two cutting edges — turn the blade for a second life
- ✓ Steel-welded frame; hydraulic hold-downs ahead of the blade
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- \+ Photoelectric rear protection
- \+ Electric back gauge (HQ11)
- \+ NC back gauge control (HQ11)
- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

HQ11 — TECHNICAL SPECIFICATIONS


Model	HQ11-6.5x1300	HQ11-4.5x2000	HQ11-4x2500	HQ11-6.5x3050
Shearing capacity, mild steel	**1/4″ (6.5 mm)**	**3/16″ (4.5 mm)**	**5/32″ (4 mm)**	**1/4″ (6.5 mm)**
Max shearing width	**51.2″ (1,300 mm)**	**78.7″ (2,000 mm)**	**98.4″ (2,500 mm)**	**120.1″ (3,050 mm)**
Shearing angle	2.5°	2°	1.7°	2°
Strokes per minute	**20 strokes/min**	**18 strokes/min**	**16 strokes/min**	**12 strokes/min**
Motor power	**7.5 HP (5.5 kW)**	**10 HP (7.5 kW)**	**10 HP (7.5 kW)**	**20 HP (15 kW)**
Back gauge	24.8″ (630 mm), electric	24.8″ (630 mm), manual	24.8″ (630 mm), manual	36.2″ (920 mm), electric
Packing size L × W × H	85 × 69 × 71″ (215 × 175 × 181 cm)	112 × 46 × 73″ (285 × 116 × 185 cm)	132 × 46 × 73″ (335 × 116 × 185 cm)	163 × 83 × 75″ (413 × 210 × 190 cm)
Weight	**5,445 lb (2,470 kg)**	**6,393 lb (2,900 kg)**	**7,341 lb (3,330 kg)**	**13,437 lb (6,095 kg)**

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel and the full thickness and more in aluminum. Metric values in brackets are the manufacturer's nominal figures; packing size is the shipping crate L × W × H, weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS


HQ11 HYDRAULIC SHEARS, 5/32" – 1/4" × 51 – 120"

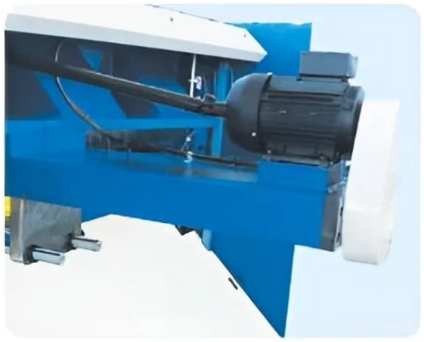

Electric back gauge drive



Manual back gauge with hand wheel

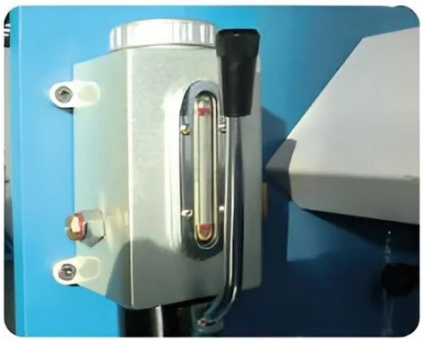

Lubrication pump

Q11-3X1250 – Q11-3X1250A · 5 MODELS

Q11 ELECTRIC SHEARS, 14 GA – 5/32" × 49 – 81"



MODEL Q11 · Q11-3X1250A ELECTRIC SHEAR, 49" × 1/8", WITH FRONT SUPPORT ARMS, SIDE CONTROL BOX AND THE MOBILE FOOT PEDAL



Q11-3x2050 electric shear, 81" × 1/8", with front gauge arms and the foot pedal



Q11-3x1250A from the rear — light curtain and sheet catcher

The electric shear for the sheet-metal shop: a 4 or 5.5 HP motor drives the beam through a gearbox for 28 to 30 strokes a minute in 1/8" (3 mm) mild steel over 49" or 81", 14 ga over 81" and 5/32" over 49" — no hydraulics, nothing to warm up. A manual back gauge with millimetre counter, a bench angle stop, cutting line lighting, an automatic rubber-coated hold-down and a mobile foot switch are standard; the Q11-3x1250A adds a light-curtain rear guard and a pneumatic sheet catcher. From 1,874 lb.

STANDARD FEATURES

- ✓ 14 ga to 5/32" (2 – 4 mm) mild steel × 49 – 81" (1,250 – 2,050 mm); 28 – 30 strokes per minute
- ✓ Q11-3x1250A: light-curtain back safety system, pneumatic sheet catcher, front sheet pallet for stacking
- ✓ Manual back gauge with millimetre counter, 24.8" (630 mm) travel
- ✓ Mobile 24 V foot switch; bench angle stop; cutting line lighting
- ✓ Automatic rubber-coated sheet hold-down
- ✓ Two-sided shear blades
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Electric back gauge (except Q11-2x2050 and Q11-3x1250A)
- + Light curtain rear guard and pneumatic sheet catcher (standard on the A model)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

Q11 — TECHNICAL SPECIFICATIONS

Model	Q11-3x1250	Q11-2x2050	Q11-3x2050	Q11-4x1250	Q11-3x1250A
Shearing capacity, mild steel	**1/8" (3 mm)**	**14 ga (2 mm)**	**1/8" (3 mm)**	**5/32" (4 mm)**	**1/8" (3 mm)**
Max shearing width	**49.2" (1,250 mm)**	**80.7" (2,050 mm)**	**80.7" (2,050 mm)**	**49.2" (1,250 mm)**	**49.2" (1,250 mm)**
Shearing angle	2°	2°	2°	2.4°	2°
Strokes per minute	**30 strokes/min**	**30 strokes/min**	**30 strokes/min**	**30 strokes/min**	**28 strokes/min**
Motor power	**4 HP (3 kW)**	**4 HP (3 kW)**	**5.5 HP (4 kW)**	**5.5 HP (4 kW)**	**5.5 HP (4 kW)**
Back gauge	24.8" (630 mm)	24.8" (630 mm)	24.8" (630 mm)	24.8" (630 mm)	25.0" (635 mm)
Packing size L × W × H	72 × 41 × 52" (184 × 103 × 131 cm)	105 × 46 × 58" (266 × 116 × 147 cm)	105 × 46 × 58" (266 × 116 × 147 cm)	74 × 45 × 57" (187 × 115 × 145 cm)	72 × 46 × 52" (184 × 117 × 133 cm)
Weight	**1,874 lb (850 kg)**	**2,998 lb (1,360 kg)**	**3,351 lb (1,520 kg)**	**2,612 lb (1,185 kg)**	**2,161 lb (980 kg)**

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel and the full thickness and more in aluminum. Metric values in brackets are the manufacturer's nominal figures; packing size is the shipping crate L × W × H, weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

Q11 ELECTRIC SHEARS, 14 GA – 5/32" × 49 – 81"



Manual back gauge with millimetre counter



Bench angle stop on the shear table

Q11-4X1300NC · Q11-2X2550NC · Q11-4X2550NC · 3 MODELS

Q11 NC ELECTRIC SHEARS WITH PLC CONTROL, 14 GA – 5/32″ × 51 – 100″



MODEL Q11 · Q11-2X2550NC ELECTRIC SHEAR WITH PLC CONTROL AND MOTORISED BACK GAUGE, 100″ × 14 GA



Q11-4x1300NC electric shear with PLC control and motorised back gauge, 51″ × 5/32″



Q11-2x2550NC from the rear — interlocked rear guard and pneumatic sheet catcher

The electric shear with a PLC: a graphical touch-screen control, a motorised back gauge with manual fine adjustment, cutting line lighting, sheet hold-downs with rolling balls, an interlocked rear guard and a pneumatic sheet catcher — 5/32″ (4 mm) over 51″ or 100″, 14 ga over 100″, 30 strokes a minute from 5.5 or 10 HP. The two-sided blades are turned for a second edge. 2,987 to 5,512 lb.

STANDARD FEATURES

- ✓ 14 ga to 5/32″ (2 – 4 mm) mild steel × 51 – 100″ (1,300 – 2,550 mm); 30 strokes per minute; cutting angle 1.6 – 2.4°
- ✓ PLC control with graphical touch-screen; motorised back gauge with manual fine adjustment
- ✓ Cutting line lighting; mobile 24 V foot switch
- ✓ Rear guarding with interlock; sheet hold-downs with rolling balls
- ✓ Pneumatic sheet catcher
- ✓ Two-sided shear blades
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- \+ Front sheet pallet for stacking
- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

Q11 NC — TECHNICAL SPECIFICATIONS

Model	Q11-4x1300NC	Q11-2x2550NC	Q11-4x2550NC
Shearing capacity, mild steel	**5/32″ (4 mm)**	**14 ga (2 mm)**	**5/32″ (4 mm)**
Max shearing width	**51.2″ (1,300 mm)**	**100.4″ (2,550 mm)**	**100.4″ (2,550 mm)**
Shearing angle	2.4°	1.6°	1.8°
Strokes per minute	**30 strokes/min**	**30 strokes/min**	**30 strokes/min**
Motor power	**5.5 HP (4 kW)**	**5.5 HP (4 kW)**	**10 HP (7.5 kW)**
Back gauge	24.8″ (630 mm)	24.8″ (630 mm)	24.8″ (630 mm)
Packing size L × W × H	75 × 46 × 57″ (191 × 116 × 145 cm)	126 × 46 × 58″ (320 × 116 × 148 cm)	128 × 46 × 61″ (325 × 116 × 155 cm)
Weight	**2,987 lb (1,355 kg)**	**4,189 lb (1,900 kg)**	**5,512 lb (2,500 kg)**

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel and the full thickness and more in aluminum. Metric values in brackets are the manufacturer's nominal figures; packing size is the shipping crate L × W × H, weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

Q11 NC ELECTRIC SHEARS WITH PLC CONTROL, 14 GA – 5/32" × 51 – 100"



Touch-screen PLC control of the NC shear



Motorised back gauge with manual fine adjustment



Sheet hold-downs with rolling balls



Cutting line lighting over the blade

Q11-3X1300 – Q11-10X1500 · 10 MODELS


Q11 MECHANICAL SHEARS, 1/8" – 3/8" × 39 – 98"



MODEL Q11 · Q11-6X2000 MECHANICAL SHEAR, 79" × 1/4", WITH HOLD-DOWN CYLINDERS



Q11-4x2000 mechanical shear, 79" × 5/32", with the foot pedal

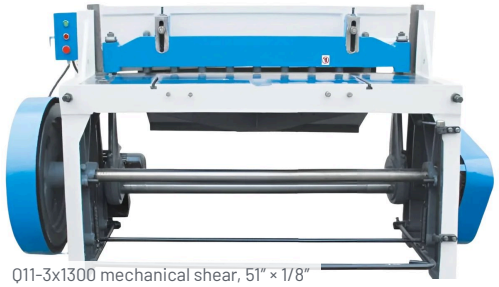

Q11-3x1300 mechanical shear, 51" × 1/8"

The classic flywheel shear for medium and thick steel: a 4 to 20 HP motor spins a flywheel and the clutch makes one stroke per pedal press, 45 to 55 strokes a minute — the fastest shears in the range. Ten models from 1/8" (3 mm) over 51" to 1/4" over 98" and 3/8" (10 mm) over 39" and 59", with a back gauge with fine adjustment, mechanical hold-downs and long-life blades, on a simple welded construction with low energy consumption. 2,976 to 14,991 lb.

STANDARD FEATURES

- ✓ 1/8" to 3/8" (3 – 10 mm) mild steel × 39 – 98" (1,000 – 2,500 mm); 45 – 55 strokes per minute
- ✓ Flywheel and clutch drive — one stroke per pedal press, 45 to 55 strokes a minute
- ✓ Back gauge with fine adjustment, 13.8" or 19.7" (350 / 500 mm) travel
- ✓ Mechanical hold-downs; long-life high-quality blades
- ✓ Simple, rugged construction for medium and thick steel
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Rear guard with photocell
- + Front sheet support arms
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

Q11 MECHANICAL SHEARS, 1/8" – 3/8" × 39 – 98"

Q11 MECHANICAL

Flywheel shears for medium and thick steel

Model	Q11-3x1300	Q11-3x1500	Q11-4x2000	Q11-4x2500	Q11-6x2000	Q11-6x2500	Q11-8x2000	Q11-8x2500	Q11-10x1000	Q11-10x1500
Shearing capacity, mild steel	1/8" (3 mm)	1/8" (3 mm)	5/32" (4 mm)	5/32" (4 mm)	1/4" (6 mm)	1/4" (6 mm)	5/16" (8 mm)	5/16" (8 mm)	3/8" (10 mm)	3/8" (10 mm)
Max shearing width	51.2" (1,300 mm)	59.1" (1,500 mm)	78.7" (2,000 mm)	98.4" (2,500 mm)	78.7" (2,000 mm)	98.4" (2,500 mm)	78.7" (2,000 mm)	98.4" (2,500 mm)	39.4" (1,000 mm)	59.1" (1,500 mm)
Shearing angle	2°	2°	2°	2°	2°	2°	2°	2°	3°	3°
Strokes per minute	55 strokes/min	55 strokes/min	45 strokes/min	45 strokes/min	50 strokes/min	50 strokes/min	50 strokes/min	50 strokes/min	50 strokes/min	50 strokes/min
Motor power	4 HP (3 kW)	4 HP (3 kW)	7.5 HP (5.5 kW)	7.5 HP (5.5 kW)	10 HP (7.5 kW)	15 HP (11 kW)	15 HP (11 kW)	15 HP (11 kW)	15 HP (11 kW)	20 HP (15 kW)
Back gauge	13.8" (350 mm)	13.8" (350 mm)	19.7" (500 mm)	19.7" (500 mm)	19.7" (500 mm)	19.7" (500 mm)	19.7" (500 mm)	19.7" (500 mm)	19.7" (500 mm)	19.7" (500 mm)
Packing size L × W × H	87 × 52 × 57" (220 × 132 × 145 cm)	94 × 51 × 57" (240 × 130 × 144 cm)	125 × 59 × 59" (318 × 151 × 149 cm)	146 × 59 × 59" (370 × 151 × 149 cm)	129 × 67 × 72" (328 × 170 × 182 cm)	149 × 67 × 72" (378 × 170 × 182 cm)	132 × 69 × 72" (335 × 175 × 182 cm)	154 × 89 × 96" (390 × 227 × 244 cm)	94 × 69 × 72" (240 × 175 × 182 cm)	114 × 69 × 72" (290 × 175 × 182 cm)
Weight	2,976 lb (1,350 kg)	3,307 lb (1,500 kg)	6,614 lb (3,000 kg)	7,937 lb (3,600 kg)	8,664 lb (3,930 kg)	11,464 lb (5,200 kg)	9,921 lb (4,500 kg)	14,991 lb (6,800 kg)	7,716 lb (3,500 kg)	8,818 lb (4,000 kg)

Capacities are the manufacturer's ratings for mild steel over the full blade length; count on about 60 % of the thickness in stainless steel and the full thickness and more in aluminum. Metric values in brackets are the manufacturer's nominal figures; packing size is the shipping crate L × W × H, weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.