NovoTech MACHINE TOOLS Inc.


PRODUCT CATALOGUE 2026

SENFENG LASER · MADE IN CHINA · SOLD & SERVICED IN CANADA BY NOVOTECH

FIBER LASER CUTTING MACHINES

SENFENG SHEET LASERS · COMPACT, NP OPEN-TYPE, H SERIES WITH PALLET CHANGER, SHEET + TUBE, LARGE-FORMAT PLATE, 3D AND COIL-FED · 1.5 – 80 KW



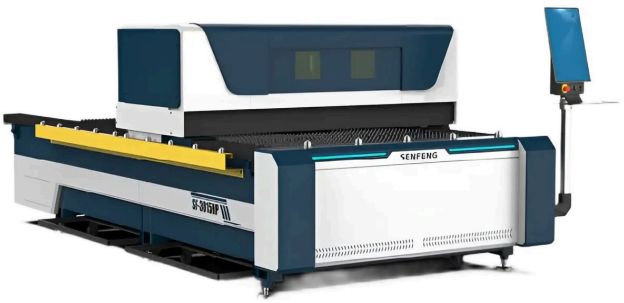



China
MADE IN CHINA

8
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

SENFENG FIBER LASERS

CONTENTS

SHEET LASERS

Compact single-table sheet lasers G, N and NP, 5 × 10 ft, 1.5 – 12 kW SF1530G · SF1530N · SF1530NP 04

NP single-table sheet lasers with gantry cover, 5 × 10 to 6.6 × 20 ft, 3 – 12 kW SF3015NP – SF6020NP · 5 models 06

SF1313G compact fiber laser, 4 × 4 ft, 1.5 – 3 kW SF1313G 08

H series sheet lasers with pallet changer, 5 × 10 to 8.3 × 40 ft, 1.5 – 80 kW SF3015H – SF12025H · HC, H4 and H5 · 14 models 10

HM sheet and tube combination lasers, 5 × 10 to 8.3 × 20 ft sheet plus Ø8.6″ × 20 ft tube, 6 – 30 kW SF3015HM – SF6025HM · 4 models 13

PLATE, 3D AND COIL-FED LASERS

R / TX ultra-large plate lasers, 10 × 20 to 10 × 164 ft, 6 – 60 kW, ±45° bevel SF6030R – SF50030R · SF6030TX – SF50030TX · SF12030TXP · 16 models 15

3D laser cutting — five-axis SF3015TD and RC robot cells, 1.5 – 20 kW SF3015TD · SF1500RC – SF6000RC 18

Coil-fed laser cutting lines, coil to 9/16″ plate, 3 – 80 kW SF1503CH · SF2012CH · TOP line 20

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR SENFENG FIBER LASERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SENFENG LASER · JINAN, CHINA


A FIBER LASER FOR EVERY SHOP, FROM THE FIRST 4 × 4 FT MACHINE TO 60 KW PLATE GANTRIES

A fiber laser cutting machine cuts sheet and plate from a DXF file with a focused beam — mild steel to 2″ and beyond with the high-power sources — at speeds no plasma or punch can match, with a clean edge and no tooling. Senfeng's range starts with single-table enclosed machines that ship in one container and plug in the day they arrive, and the NP open-type laser that is the lowest-priced 12 kW machine in the catalogue; the H series adds a full enclosure and a 20-second pallet changer for production, in 1.5 to 80 kW; the HM cuts sheet and tube on one machine; the R and TX gantries take plate to 10 × 164 ft with ±45° bevels; the TD five-axis machine and RC robot cells trim formed parts; and the coil-fed lines cut straight from the coil with no sheet handling.

Senfeng Laser has built fiber laser machines in Jinan, Shandong, since 2004: a 1.8 million ft² campus, its own laser sources, cutting heads and welding guns, around 15,000 machines a year, 20 overseas branches and Senfeng Laser USA with a warehouse and service team. CE, FDA and ETL certified and CSA approved. NovoTech sells, installs and supports the machines in Canada from Mississauga, ON, Canada — layout for your building, installation, operator training, a CSA-approved panel, a 1-year warranty and parts and technical support in Canada.

SF1530G · SF1530N · SF1530NP

COMPACT SINGLE-TABLE SHEET LASERS G, N AND NP, 5 × 10 FT, 1.5 – 12 KW

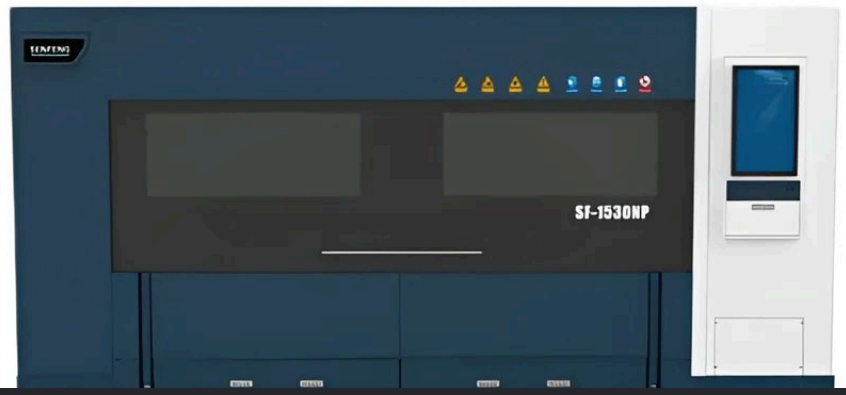

MODEL G · N · NP · SENFENG SF1530NP COMPACT FIBER LASER WITH ELECTRIC LIFTING DOOR — 5 × 10 FT, 1.5 – 6 KW



SF1530NP in Senfeng's showroom — CE and FDA certified



Senfeng SF1530N fiber laser with full cover and pull-out single table — 5 × 10 ft, 1.5 – 12 kW

The entry into production laser cutting: fully enclosed 5 × 10 ft single-table machines that ship in one 20 ft container without disassembly, plug in and cut the day they arrive. The SF1530G takes 1.5 to 4 kW, the SF1530N with its pull-out platform 1.5 to 12 kW — enough for 3/4" mild steel at 6 kW — and the new-generation SF1530NP 1.5 to 6 kW, with the source and a thermostatic electrical cabinet built in, an electric lifting door, integrated leg supports and a pick-up trolley with an inner hopper. Smoke-free extraction through a double air duct with three zones and follow-up air valves, an anti-burning platform, safety light curtains at the front and rear of the beam and smart cameras with a safety-lock alarm; 328 ft/min, 1 G and 2,425 lb on the table (N and NP).

STANDARD FEATURES

- ✓ 1.5 – 12 kW; 5 × 10 ft single table; 262 – 328 ft/min, 1 G; 1,543 – 2,425 lb table load
- ✓ SF1530NP: electric lifting door with CE protective acrylic laser shields and safety locks on both sides; source and thermostatic electrical cabinet built in
- ✓ Pull-out platform (N) or push-pull platform with integrated leg supports and a pick-up trolley with an inner hopper (NP)
- ✓ Smoke-free extraction: double air duct, three zones and follow-up air valves; anti-burning platform protects the dust cover
- ✓ Safety light curtains at the front and rear of the beam; smart cameras with a safety-lock alarm
- ✓ Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- ✓ Bus-based CNC with a 21.5" touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- ✓ Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- ✓ Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- ✓ Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8"
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Loading / unloading unit, servo swing-arm loader or storage tower
- + Automatic pallet changer (NP) and bevel head (R / TX)
- + Dust collector and compressor sized to the machine
- + Higher laser power at order; nitrogen generator
- + Custom voltage transformer

TECHNICAL SPECIFICATIONS

COMPACT SINGLE-TABLE SHEET LASERS G, N AND NP, 5 × 10 FT, 1.5 – 12 KW

COMPACT SINGLE-TABLE SHEET LASERS G · N · NP

3 models · 5 × 10 ft · 1.5 – 12 kW

Model	SF1530G	SF1530N	SF1530NP
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**10 × 5 ft (3,000 × 1,500 mm)**	**10 × 5 ft (3,000 × 1,500 mm)**
Laser power	1.5 – 4 kW	1.5 – 12 kW	1.5 – 6 kW
Type	full cover, single table	full cover, pull-out single table	full cover, electric lifting door, integrated source
Max. no-load speed	262 ft/min (80 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)
Max. acceleration	1 G	1 G	1 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	1,543 lb (700 kg)	2,425 lb (1,100 kg)	2,425 lb (1,100 kg)
Z travel	—	—	5.1″ (130 mm)
Machine weight by source power	—	—	10,381 lb (4,709 kg) at 3 kW · 11,530 lb (5,230 kg) at 6 kW with fire bricks
Laser source · cutting head	—	—	Maxphotonics · Raytools
CNC	FSCUT2000E	FSCUT2000	FSCUT
Power supply protection	—	—	IP54
Dimensions L × W × H	191 × 159 × 82″ (4,850 × 4,040 × 2,080 mm)	197 × 91 × 81″ (5,000 × 2,310 × 2,060 mm)	194 × 88 × 91″ (4,920 × 2,220 × 2,320 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF3015NP – SF6020NP · 5 MODELS

NP SINGLE-TABLE SHEET LASERS WITH GANTRY COVER, 5 × 10 TO 6.6 × 20 FT, 3 – 12 KW

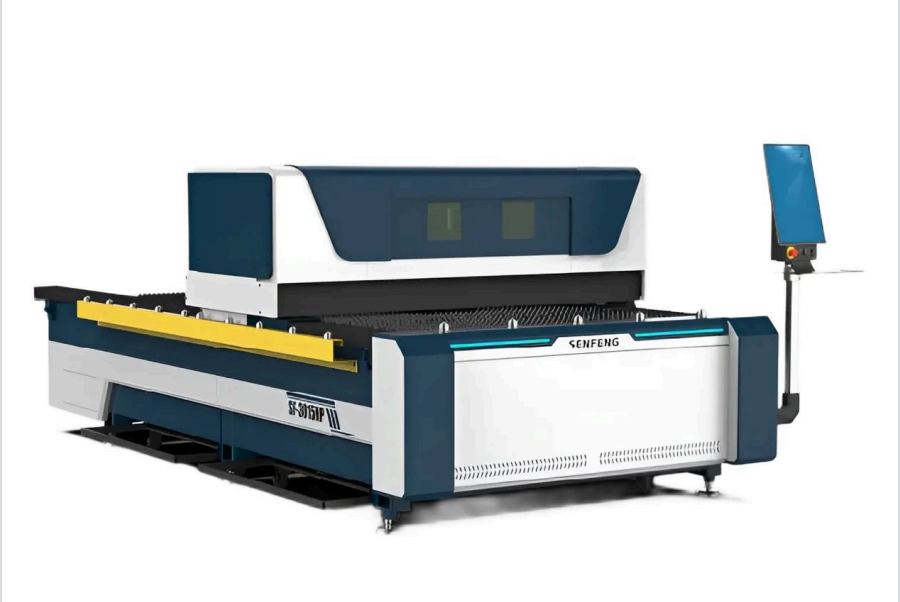

MODEL NP · SENFENG SF3015NP FIBER LASER WITH THE LASER COVER ON THE GANTRY — 5 × 10 FT, 3 – 12 KW

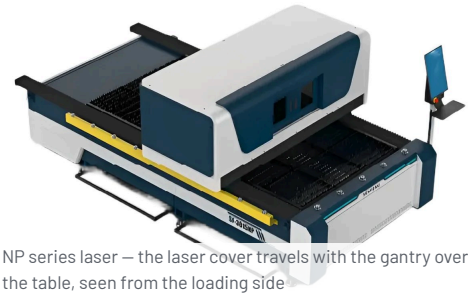

NP series laser — the laser cover travels with the gantry over the table, seen from the loading side



NP series laser from the rear — the gantry cover over the table and the control console

A single-table laser with a laser cover on the gantry that travels with the head over the cut: the table stays open for loading from three sides over ball-transfer units, the cover keeps the beam and the spatter in, and a built-in source and cabinet and double ventilation ducts keep the machine clean. Five table sizes from 5 × 10 to 6.6 × 20 ft, 3 to 12 kW, 394 ft/min and 1.2 G; six 3015NP machines fit in one 40 ft container, which is why it is the lowest-priced 12 kW laser in Senfeng's range. The intelligent air-cutting package cuts sheet to 3/8" on compressed air.

STANDARD FEATURES

- ✓ 3 – 12 kW; 5 × 10 to 6.6 × 20 ft; 394 ft/min, 1.2 G; 2,400 – 6,200 lb table load
- ✓ Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- ✓ Bus-based CNC with a 21.5" touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- ✓ Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- ✓ Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- ✓ Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8"
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Loading / unloading unit, servo swing-arm loader or storage tower
- + Automatic pallet changer (NP) and bevel head (R / TX)
- + Dust collector and compressor sized to the machine
- + Higher laser power at order; nitrogen generator
- + Custom voltage transformer

TECHNICAL SPECIFICATIONS

NP SINGLE-TABLE SHEET LASERS WITH GANTRY COVER, 5 × 10 TO 6.6 × 20 FT, 3 – 12 KW

NP SINGLE-TABLE SHEET LASERS WITH GANTRY COVER

5 models · 5 × 10 to 6.6 × 20 ft · 3 – 12 kW

Model	SF3015NP	SF4015NP	SF4020NP	SF6015NP	SF6020NP
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**13 × 5 ft (4,000 × 1,500 mm)**	**13 × 6.6 ft (4,000 × 2,000 mm)**	**20 × 5 ft (6,000 × 1,500 mm)**	**20 × 6.6 ft (6,000 × 2,000 mm)**
Laser power	3 – 12 kW	3 – 12 kW	3 – 12 kW	3 – 12 kW	3 – 12 kW
Max. no-load speed	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)
Max. acceleration	1.2 G	1.2 G	1.2 G	1.2 G	1.2 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	2,425 lb (1,100 kg)	3,086 lb (1,400 kg)	4,189 lb (1,900 kg)	4,630 lb (2,100 kg)	6,173 lb (2,800 kg)
Dimensions L × W × H	177 × 114 × 83″ (4,500 × 2,900 × 2,100 mm)	216 × 114 × 83″ (5,500 × 2,900 × 2,100 mm)	216 × 134 × 75″ (5,500 × 3,400 × 1,900 mm)	319 × 114 × 75″ (8,100 × 2,900 × 1,900 mm)	319 × 134 × 75″ (8,100 × 3,400 × 1,900 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF1313G


SF1313G COMPACT FIBER LASER, 4 × 4 FT, 1.5 – 3 KW



MODEL G · SF1313G — TOP COVER, LIFTING DOOR AND THE CONSOLE ON ITS ARM



Senfeng SF1313G in a workshop — 4 × 4 ft, fully enclosed, 1.5 – 3 kW

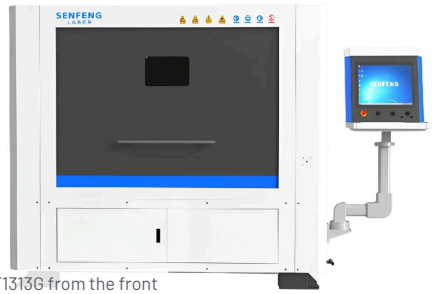

SF1313G from the front

The smallest Senfeng laser, for the small shop: a fully enclosed single-table machine with a 4 × 4 ft working area and a 1.5 to 3 kW source that cuts small, thin and light parts at high precision. Laser energy is controlled to the sheet thickness, so thin sheet comes out free of overburning and burr, and the compact custom source with anti-back-reflection modules cuts aluminum, stainless, copper and brass with an electro-optical efficiency above 40 %. The sidewise push-pull table saves floor space and makes loading easy, the zoned smoke exhaust follows the cut, and the whole machine — 118 × 85 × 79″ — ships in one 20 ft container without disassembly.

STANDARD FEATURES

- ✓ 1.5 – 3 kW; 4 × 4 ft (1,300 × 1,300 mm) single table; 262 ft/min; 485 lb table load; cuts sheet to 0.787″ (20 mm)
- ✓ Fully enclosed with a top cover — no laser radiation outside the machine
- ✓ Sidewise push-pull table: small footprint, easy loading and unloading
- ✓ Zoned smoke exhaust synchronized with the cut keeps the shop clean
- ✓ Compact custom source with anti-back-reflection modules for aluminum, stainless, copper and brass; electro-optical efficiency above 40 %
- ✓ FSCUT2000 CNC with a cutting-process database for each thickness and material
- ✓ Water chiller, transformer, voltage stabilizer and fan supplied
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- \+ Dust collector and compressor sized to the machine
- \+ Custom voltage transformer

TECHNICAL SPECIFICATIONS

SF1313G COMPACT FIBER LASER, 4 × 4 FT, 1.5 – 3 KW

SF1313G COMPACT SHEET LASER

4 × 4 ft · 1.5 – 3 kW · single table

Model	SF1313G
Working area	**4 × 4 ft (1,300 × 1,300 mm)**
Laser power	1.5 – 3 kW
X / Y travel	4 × 4 ft
Z travel	4″ (100 mm)
Max. no-load speed	262 ft/min (80 m/min)
Max. acceleration	1 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	485 lb (220 kg)
Max. cutting thickness	0.787″ (20 mm)
CNC	FSCUT2000
Dimensions L × W × H	118 × 85 × 79″ (2,985 × 2,160 × 2,000 mm)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF3015H – SF12025H · HC, H4 AND H5 · 14 MODELS

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW



MODEL H · SENFENG SF3015H4 FIBER LASER CUTTING MACHINE WITH PALLET CHANGER — 5 × 10 FT, 6 – 30 KW



Senfeng SF3015H space-saver fiber laser — 5 × 10 ft, 1.5 – 12 kW



Heavy-duty, thermally isolated hollow bed of the high-power H — no internal joints, stress-relieved and aged

Senfeng's production laser: a full-cover cabin, a double pallet changer that swaps tables in 20 seconds and a thermally isolated hollow bed with graphite protection for high-power cutting. Three builds on the same platform — the HC space saver with 1.5 to 12 kW in a 19 m^2 footprint, the fourth-generation H4 with 6 to 30 kW, 656 ft/min and up to 2.8 G on tables to 8.3 × 40 ft, and the H5 heavy-load machine with hydraulic table lifts to 30 t for 40 to 80 kW sources and 2" plate. CE / FDA / ETL certified and CSA approved, with loading towers, sheet storage and loading arms as options.

STANDARD FEATURES

- ✓ Pallet changer, 20 s table exchange; 1.5 – 80 kW; 5 × 10 to 8.3 × 40 ft; to 656 ft/min and 2.8 G
- ✓ Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- ✓ Bus-based CNC with a 21.5" touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- ✓ Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- ✓ Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- ✓ Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8"
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Loading / unloading unit, servo swing-arm loader or storage tower
- + Automatic pallet changer (NP) and bevel head (R / TX)
- + Dust collector and compressor sized to the machine
- + Higher laser power at order; nitrogen generator
- + Custom voltage transformer

TECHNICAL SPECIFICATIONS · 1 / 2

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW

H SERIES SPACE-SAVER LASERS · 1.5 – 12 KW

5 models · 5 × 10 to 6.6 × 20 ft · pallet changer

Model	SF3015H	SF4015H	SF4020H	SF6015H	SF6020H
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**13 × 5 ft (4,000 × 1,500 mm)**	**13 × 6.6 ft (4,000 × 2,000 mm)**	**20 × 5 ft (6,000 × 1,500 mm)**	**20 × 6.6 ft (6,000 × 2,000 mm)**
Laser power	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW	1.5 – 12 kW
Max. no-load speed	426 ft/min (130 m/min)	426 ft/min (130 m/min)	426 ft/min (130 m/min)	426 ft/min (130 m/min)	426 ft/min (130 m/min)
Max. acceleration	1.2 G	1.2 G	1.2 G	1.2 G	1.2 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Max. table load	2,425 lb (1,100 kg)	3,307 lb (1,500 kg)	4,189 lb (1,900 kg)	4,850 lb (2,200 kg)	6,393 lb (2,900 kg)
Z travel	8.7″ (220 mm)	—	—	—	—
Machine weight by source power	11,552 – 11,729 lb (5,240 – 5,320 kg)	—	—	—	—
Power supply protection	IP54	—	—	—	—
Dimensions L × W × H	27.9 × 7.4 × 7.1 ft (8.5 × 2.3 × 2.2 m)	35.8 × 7.4 × 7.2 ft (10.9 × 2.3 × 2.2 m)	36.2 × 10.6 × 7.4 ft (11.0 × 3.2 × 2.3 m)	48.3 × 7.4 × 7.2 ft (14.7 × 2.3 × 2.2 m)	48.8 × 10.6 × 7.4 ft (14.9 × 3.2 × 2.3 m)

H4 SERIES HIGH-POWER LASERS · 6 – 30 KW

6 models · 5 × 10 to 8.3 × 40 ft · pallet changer, 2 G

Model	SF3015H	SF4020H	SF6020H	SF6025H	SF8025H	SF12025H
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**13 × 6.6 ft (4,000 × 2,000 mm)**	**20 × 6.6 ft (6,000 × 2,000 mm)**	**20 × 8.2 ft (6,000 × 2,500 mm)**	**26 × 8.2 ft (8,000 × 2,500 mm)**	**39 × 8.2 ft (12,000 × 2,500 mm)**
Laser power	6 – 30 kW	6 – 30 kW	6 – 30 kW	6 – 30 kW	6 – 30 kW	6 – 30 kW
Max. no-load speed	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)
Max. acceleration	2.8 G	2 G	2 G	2 G	2 G	2 G
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)	±0.004″ per 33 ft (±0.1 mm / 10 m) · repeat ±0.001″ (±0.02 mm)
Max. table load	6,614 lb (3,000 kg)	11,023 lb (5,000 kg)	16,645 lb (7,550 kg)	19,842 lb (9,000 kg)	26,455 lb (12,000 kg)	41,579 lb (18,860 kg)
Z travel	15.4″ (390 mm)	—	—	—	—	—
Machine weight by source power	13,735 – 15,763 lb (6,230 – 7,150 kg)	—	—	—	—	—
Power supply protection	IP54	—	—	—	—	—
Dimensions L × W × H	332 × 89 × 92″ (8,440 × 2,270 × 2,340 mm)	425 × 125 × 95″ (10,790 × 3,180 × 2,410 mm)	590 × 125 × 95″ (14,980 × 3,180 × 2,410 mm)	580 × 149 × 95″ (14,730 × 3,780 × 2,410 mm)	743 × 149 × 95″ (18,870 × 3,780 × 2,410 mm)	1093 × 149 × 95″ (27,770 × 3,780 × 2,410 mm)

TECHNICAL SPECIFICATIONS · 2 / 2

H SERIES SHEET LASERS WITH PALLET CHANGER, 5 × 10 TO 8.3 × 40 FT, 1.5 – 80 KW

H5 HEAVY-LOAD LASERS · 12 – 80 KW

3 models · hydraulic table lift to 30 t · 2″ plate

Model	SF3015H5	SF4020H5	SF6025H5
Working area	**10 × 5 ft (3,000 × 1,500 mm)**	**13 × 6.6 ft (4,000 × 2,000 mm)**	**20 × 8.2 ft (6,000 × 2,500 mm)**
Laser power	12 – 30 kW	40 – 80 kW	12 – 30 kW
Max. no-load speed	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)
Positioning accuracy	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)	±0.002″ (±0.05 mm) · repeat ±0.0008″ (±0.02 mm)
Hydraulic table lift	44,092 lb (20,000 kg)	66,139 lb (30,000 kg)	66,139 lb (30,000 kg)
Dimensions L × W × H	28.1 × 9.4 × 7.8 ft (8.6 × 2.9 × 2.4 m)	35.2 × 11.1 × 7.8 ft (10.7 × 3.4 × 2.4 m)	49.5 × 12.7 × 7.8 ft (15.1 × 3.9 × 2.4 m)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF3015HM – SF6025HM · 4 MODELS

HM SHEET AND TUBE COMBINATION LASERS, 5 × 10 TO 8.3 × 20 FT SHEET PLUS Ø8.6" × 20 FT TUBE, 6 – 30 KW



MODEL HM · SENFENG SF3015HM SHEET AND TUBE FIBER LASER — 5 × 10 FT TABLE PLUS Ø8.6" × 20 FT TUBE ATTACHMENT



SF3015HM — the tube attachment on the side of the cabin



SF3015HM — rear view with the tube support

One machine for sheet and tube: the H series laser with pallet changer and, on the side, a rotary chuck and tube supports for round, square and rectangular tube from Ø0.7 to 8.6" and up to 20 ft long. The same 6 to 30 kW source and cutting head serve both; switching takes the time to load the tube. Four sheet sizes from 5 × 10 to 8.3 × 20 ft.

STANDARD FEATURES

- ✓ Sheet 5 × 10 to 8.3 × 20 ft with pallet changer; tube Ø0.7 – 8.6" × 20 ft; 6 – 30 kW; 656 ft/min
- ✓ Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- ✓ Bus-based CNC with a 21.5" touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- ✓ Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- ✓ Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- ✓ Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8"
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Loading / unloading unit, servo swing-arm loader or storage tower
- + Automatic pallet changer (NP) and bevel head (R / TX)
- + Dust collector and compressor sized to the machine
- + Higher laser power at order; nitrogen generator
- + Custom voltage transformer
- + Tube bundle loader

TECHNICAL SPECIFICATIONS

HM SHEET AND TUBE COMBINATION LASERS, 5 × 10 TO 8.3 × 20 FT SHEET PLUS Ø8.6" × 20 FT TUBE, 6 – 30 KW

HM SHEET AND TUBE COMBINATION LASERS

4 models · 5 × 10 to 8.3 × 20 ft sheet · Ø0.7 – 8.6" × 20 ft tube · 6 – 30 kW

Model	SF3015HM	SF4020HM	SF6020HM	SF6025HM
Sheet working area	10 × 5 ft (3,000 × 1,500 mm)	13 × 6.6 ft (4,000 × 2,000 mm)	20 × 6.6 ft (6,000 × 2,000 mm)	20 × 8.2 ft (6,000 × 2,500 mm)
Tube diameter	**Ø0.7 – 8.6" (Ø18 – 218 mm)**	**Ø0.7 – 8.6" (Ø18 – 218 mm)**	**Ø0.7 – 8.6" (Ø18 – 218 mm)**	**Ø0.7 – 8.6" (Ø18 – 218 mm)**
Max. tube length	19.7 ft (6,000 mm)	19.7 ft (6,000 mm)	19.7 ft (6,000 mm)	19.7 ft (6,000 mm)
Laser power	6 – 30 kW	6 – 30 kW	6 – 30 kW	6 – 30 kW
Max. no-load speed	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)	656 ft/min (200 m/min)
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.0008" (±0.02 mm)	±0.002" (±0.05 mm) · repeat ±0.0008" (±0.02 mm)	±0.002" (±0.05 mm) · repeat ±0.0008" (±0.02 mm)	±0.002" (±0.05 mm) · repeat ±0.0008" (±0.02 mm)
Max. table load	6,614 lb (3,000 kg)	11,023 lb (5,000 kg)	16,645 lb (7,550 kg)	19,842 lb (9,000 kg)
Dimensions L × W × H	30.3 × 11.4 × 7.7 ft (9.2 × 3.5 × 2.3 m)	35.3 × 14.1 × 7.9 ft (10.8 × 4.3 × 2.4 m)	49.1 × 14.1 × 7.9 ft (15.0 × 4.3 × 2.4 m)	48.6 × 16 × 7.9 ft (14.8 × 4.9 × 2.4 m)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF6030R – SF50030R · SF6030TX – SF50030TX · SF12030TXP · 16 MODELS

R / TX ULTRA-LARGE PLATE LASERS, 10 × 20 TO 10 × 164 FT, 6 – 60 KW, ±45° BEVEL



MODEL R · TX · TXP · SENFENG R SERIES ULTRA-LARGE PLATE LASER — 10 FT WIDE TABLE TO 164 FT LONG, 6 – 60 KW



Senfeng TX series plate laser with ±45° bevel head — 10 × 20 ft to 10 × 164 ft



R series plate laser — gantry over the long table

For shipyards, structural steel, heavy equipment and bridge fabrication: gantry lasers with 10 and 13 ft wide tables from 20 to 164 ft long that replace plasma and flame cutting of plate to 2" and beyond with 6 to 60 kW sources. The R series cuts straight; the TX adds a ±45° bevel head for weld preparation in one pass; the TXP combines a 20 kW laser with an oxy-fuel torch for plate to 4" on the same table. Protective curtains, blow-suction dust collection under the slats and a beam with a protective chamber are standard.

STANDARD FEATURES

- ✓ 10 × 20 to 10 × 164 ft tables; 6 – 60 kW; ±45° bevel (TX); laser + flame (TXP); 328 – 394 ft/min
- ✓ Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- ✓ Bus-based CNC with a 21.5" touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- ✓ Stress-relieved welded bed, aerospace-grade aluminum beam, Schneider servo drives, HIWIN / rack-and-pinion drives
- ✓ Zoned negative-pressure dust extraction under the table; double air ducts; water chiller included
- ✓ Intelligent air-cutting option: compressed air instead of nitrogen on sheet to about 3/8"
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Loading / unloading unit, servo swing-arm loader or storage tower
- + Automatic pallet changer (NP) and bevel head (R / TX)
- + Dust collector and compressor sized to the machine
- + Higher laser power at order; nitrogen generator
- + Custom voltage transformer

TECHNICAL SPECIFICATIONS · 1 / 2

R / TX ULTRA-LARGE PLATE LASERS, 10 × 20 TO 10 × 164 FT, 6 – 60 KW, ±45° BEVEL

R SERIES ULTRA-LARGE PLATE LASERS

8 models · 10 × 20 to 10 × 164 ft · 6 – 60 kW

Model	SF6030R	SF8030R	SF12030R	SF14030R	SF24040R	SF30040R	SF36030R	SF50030R
Working area	**20 × 10 ft (6,000 × 3,000 mm)**	**26 × 10 ft (8,000 × 3,000 mm)**	**39 × 10 ft (12,000 × 3,000 mm)**	**46 × 10 ft (14,000 × 3,000 mm)**	**79 × 13 ft (24,000 × 4,000 mm)**	**98 × 13 ft (30,000 × 4,000 mm)**	**118 × 10 ft (36,000 × 3,000 mm)**	**164 × 10 ft (50,000 × 3,000 mm)**
Laser power	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW	6 – 60 kW	12 – 60 kW	12 – 60 kW
Max. no-load speed	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)	394 ft/min (120 m/min)
Positioning accuracy	±0.004" per 33 ft (±0.1 mm / 10 m) · repeat ±0.002" (±0.05 mm)	±0.004" per 33 ft (±0.1 mm / 10 m) · repeat ±0.002" (±0.05 mm)	±0.004" per 33 ft (±0.1 mm / 10 m) · repeat ±0.002" (±0.05 mm)	±0.004" per 33 ft (±0.1 mm / 10 m) · repeat ±0.002" (±0.05 mm)	±0.004" per 33 ft (±0.1 mm / 10 m) · repeat ±0.002" (±0.05 mm)	±0.004" per 33 ft (±0.1 mm / 10 m) · repeat ±0.002" (±0.05 mm)	±0.004" per 33 ft (±0.1 mm / 10 m) · repeat ±0.002" (±0.05 mm)	±0.004" per 33 ft (±0.1 mm / 10 m) · repeat ±0.002" (±0.05 mm)
Max. table load	31,184 lb (14,140 kg)	41,570 lb (18,860 kg)	62,355 lb (28,280 kg)	72,741 lb (32,990 kg)	166,156 lb (75,370 kg)	103,620 lb (47,000 kg)	186,982 lb (84,810 kg)	259,036 lb (117,500 kg)
Dimensions L × W × H	27.4 × 15.6 × 6.4 ft (8.4 × 4.8 × 2.0 m)	35 × 15.6 × 6.4 ft (10.7 × 4.8 × 2.0 m)	51.3 × 15.6 × 6.4 ft (15.6 × 4.8 × 2.0 m)	58.5 × 15.6 × 6.4 ft (17.8 × 4.8 × 2.0 m)	98 × 15.6 × 6.4 ft (29.9 × 4.8 × 2.0 m)	121.3 × 15.6 × 6.4 ft (37.0 × 4.8 × 2.0 m)	149.3 × 15.6 × 6.4 ft (45.5 × 4.8 × 2.0 m)	206.7 × 15.6 × 6.4 ft (63.0 × 4.8 × 2.0 m)

TX SERIES BEVEL PLATE LASERS · ±45°

7 models · 10 × 20 to 10 × 164 ft · 12 – 60 kW

Model	SF6030TX	SF8040TX	SF12030TX	SF14030TX	SF30040TX	SF36030TX	SF50030TX
Working area, straight cut	**20 × 10 ft (6,000 × 3,000 mm)**	**26 × 13 ft (8,000 × 4,000 mm)**	**39 × 10 ft (12,000 × 3,000 mm)**	**46 × 10 ft (14,000 × 3,000 mm)**	**98 × 13 ft (30,000 × 4,000 mm)**	**118 × 10 ft (36,000 × 3,000 mm)**	**164 × 10 ft (50,000 × 3,000 mm)**
Working area, bevel cut	**20 × 10 ft (6,000 × 3,000 mm)**	**26 × 13 ft (8,000 × 4,000 mm)**	**39 × 10 ft (12,000 × 3,000 mm)**	**46 × 10 ft (14,000 × 3,000 mm)**	**98 × 13 ft (30,000 × 4,000 mm)**	**118 × 10 ft (36,000 × 3,000 mm)**	**164 × 10 ft (50,000 × 3,000 mm)**
Laser power	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW	12 – 60 kW
Bevel angle	±45°	±45°	±45°	±45°	±45°	±45°	±45°
Max. no-load speed	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)
Max. table load	31,184 lb (14,140 kg)	55,334 lb (25,100 kg)	62,355 lb (28,280 kg)	72,741 lb (32,990 kg)	207,235 lb (94,000 kg)	186,982 lb (84,810 kg)	259,036 lb (117,500 kg)
Dimensions L × W × H	27.4 × 15.6 × 6.4 ft (8.4 × 4.8 × 2.0 m)	35 × 18.8 × 6.4 ft (10.7 × 5.7 × 2.0 m)	51.3 × 15.6 × 6.4 ft (15.6 × 4.8 × 2.0 m)	58.5 × 15.6 × 6.4 ft (17.8 × 4.8 × 2.0 m)	121.1 × 18.8 × 6.4 ft (36.9 × 5.7 × 2.0 m)	149.3 × 15.6 × 6.4 ft (45.5 × 4.8 × 2.0 m)	206.7 × 15.6 × 6.4 ft (63.0 × 4.8 × 2.0 m)

TECHNICAL SPECIFICATIONS · 2 / 2

R / TX ULTRA-LARGE PLATE LASERS, 10 × 20 TO 10 × 164 FT, 6 – 60 KW, ±45° BEVEL

TXP LASER AND FLAME HYBRID PLATE CUTTER

1 model · 10 × 39 ft · 20 kW laser + oxy-fuel bevel torch

Model	SF12030TXP
Working area, straight cut	**39 × 10 ft (12,000 × 3,000 mm)**
Working area, bevel cut	**37 × 6.6 ft (11,400 × 2,000 mm)**
Laser power	20 kW
Flame cutting	oxy-fuel torch for plate to 4″ (100 mm) with bevels
Max. no-load speed	328 ft/min (100 m/min)
Max. acceleration	0.8 G
Max. table load	62,355 lb (28,280 kg)
Dimensions L × W × H	51.3 × 15.6 × 6.4 ft (15.6 × 4.8 × 2.0 m)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF3015TD · SF1500RC – SF6000RC

3D LASER CUTTING — FIVE-AXIS SF3015TD AND RC ROBOT CELLS, 1.5 – 20 KW

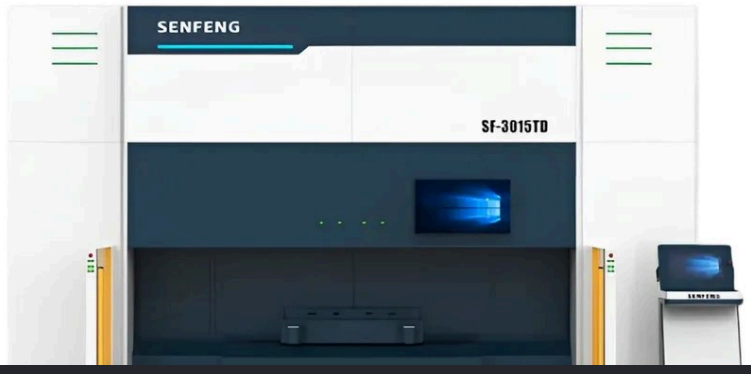

MODEL TD · RC · SENFENG SF3015TD FIVE-AXIS 3D FIBER LASER — 5 × 10 FT TRAVEL, 3 – 20 KW



SF3015TD — the five-axis cell in its safety cabin



Senfeng RC series robot fiber laser cutting cell — 6-axis robot with a 1.5 – 6 kW source

Trimming and piercing formed parts: the SF3015TD five-axis machine moves a 3 to 20 kW head over a 5 × 10 ft envelope with ±135° A and endless C rotation at 328 ft/min for automotive, hot-stamping and pressing work; the RC series puts a 1.5 to 6 kW fiber head on a 6-axis robot with 72″ reach for parts to 0.2″ thick — the economical 3D cell for brackets, covers and tube assemblies.

STANDARD FEATURES

- ✓ Five-axis gantry 5 × 10 ft envelope, 3 – 20 kW, air-cooled head; robot cells 1.5 – 6 kW with 72″ reach
- ✓ Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- ✓ Bus-based CNC with a 21.5″ touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- ✓ CE, FDA and ETL certified and CSA approved

OPTIONAL EQUIPMENT

- \+ Rotary tables and fixtures
- \+ Second robot station
- \+ Safety enclosure with light curtains

SF3015TD FIVE-AXIS 3D LASER — TECHNICAL SPECIFICATIONS

Model	SF3015TD
Travel X × Y	10 × 5 ft (3,000 × 1,500 mm)
Laser power	3 – 20 kW
A axis · C axis	±135° · n × 361°
Positioning accuracy	±0.004″ (±0.1 mm) · repeat ±0.002″ (±0.05 mm)
Max. no-load speed	328 ft/min (100 m/min)
Max. acceleration	1 G
Cooling	air-cooled head
Dimensions L × W × H	19.6 × 9.1 × 9 ft (6.0 × 2.8 × 2.7 m)

TECHNICAL SPECIFICATIONS

3D LASER CUTTING — FIVE-AXIS SF3015TD AND RC ROBOT CELLS, 1.5 – 20 KW

RC SERIES ROBOT LASER CUTTING CELLS

4 models · 6-axis robot · 1.5 – 6 kW

Model	SF1500RC	SF2000RC	SF3000RC	SF6000RC
Laser power	1.5 kW	2 kW	3 kW	6 kW
Cutting thickness	to 0.1″ (3 mm)	to 0.1″ (3 mm)	to 0.2″ (5 mm)	to 0.2″ (5 mm)
Robot	6 axes · 72.9″ (1,850 mm) reach · repeat ±0.0008″	6 axes · 72.9″ (1,850 mm) reach · repeat ±0.0008″	6 axes · 72.9″ (1,850 mm) reach · repeat ±0.0008″	6 axes · 72.9″ (1,850 mm) reach · repeat ±0.0008″
Fiber length	32.8 ft (10 m)	32.8 ft (10 m)	65.6 ft (20 m)	65.6 ft (20 m)
Robot weight	463 lb (210 kg)	463 lb (210 kg)	463 lb (210 kg)	463 lb (210 kg)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

SF1503CH · SF2012CH · TOP LINE

COIL-FED LASER CUTTING LINES, COIL TO 9/16" PLATE, 3 – 80 KW



MODEL C · CH · SENFENG SF1503CH COIL-FED FIBER LASER CUTTING LINE — DECOILER, LEVELLER AND 5 × 10 FT LASER, 3 – 6 KW

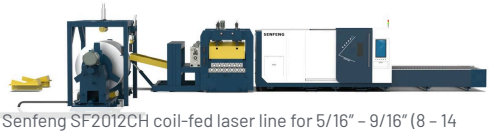

Senfeng SF2012CH coil-fed laser line for 5/16" – 9/16" (8 – 14 mm) coil, 12 – 80 kW



Senfeng TOP series automated line — coil, laser cutting, robot sorting, panel bending and welding

Cut straight from the coil: a decoiler, straightener and leveller feed the sheet onto the laser table so there is no sheet handling, no offcuts and no limit on part length. The SF1503CH takes coil to 1/8" and 16.5 tons on a 5 × 10 ft machine; the SF2012CH levels and cuts 5/16" to 9/16" plate from 22-ton coils with 12 to 80 kW. The TOP line adds robot sorting, panel bending and welding for a complete coil-to-part cell.

STANDARD FEATURES

- ✓ Decoiler, leveller and laser on one control; coil to 22 US tons; feeding to 49 ft/min; 3 – 80 kW
- ✓ Fiber laser source 1.5 – 80 kW (IPG, Raycus or Max) with the autofocus cutting head (Raytools / BOCI) and capacitive height sensing
- ✓ Bus-based CNC with a 21.5" touchscreen (Cypcut / BOCHU), nesting software and a cutting-parameter database; one-click centring, collision avoidance
- ✓ CE, FDA and ETL certified and CSA approved

OPTIONAL EQUIPMENT

- + Robot sorting and stacking
- + Panel bender and welding stations (TOP line)
- + Stereo pallet racks

COIL-FED LASER CUTTING LINES — TECHNICAL SPECIFICATIONS

Model	SF1503CH	SF2012CH
Coil thickness	to 1/8" (3 mm)	5/16" – 9/16" (8 – 14 mm)
Sheet width	to 59" (1,500 mm)	to 78.7" (2,000 mm)
Cutting area	10 × 5 ft (3,000 × 1,500 mm)	13 × 6.6 ft (4,000 × 2,000 mm)
Laser power	3 – 6 kW	12 – 80 kW
Coil inside Ø · max. outside Ø	20" · 55"	24 / 30" · 71"
Max. coil weight	16.5 US tons (15 t)	22 US tons (20 t)
Max. feeding speed	49 ft/min (15 m/min)	33 ft/min (10 m/min)
Levelling accuracy	±0.00007 in/ft²	±0.0002 in/ft²
Positioning accuracy	±0.00006 in/ft · repeat ±0.0008"	±0.002" · repeat ±0.0008"

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.