NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026


NOVOTECH PREMIUM LINE · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

PRODUCTION HYDRAULIC PRESSES

H-FRAME, COLUMN AND C-FRAME PRESSES TO 3,307 US TONS · DEEP DRAWING · SMC HOT PLATE · STRAIGHTENING





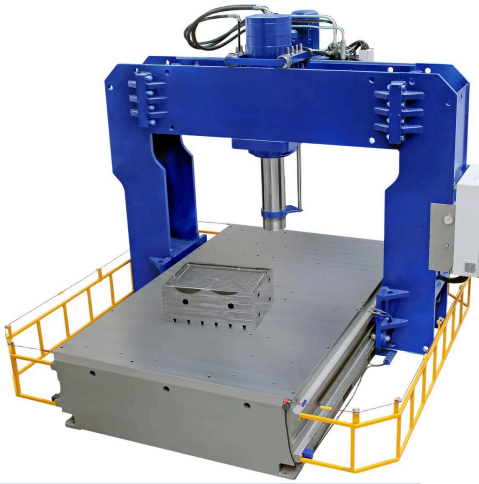

Turkey
MADE IN TURKEY

9
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

PRODUCTION HYDRAULIC PRESSES

CONTENTS

H-FRAME AND COLUMN PRESSES

HDD H-frame double action deep drawing presses, 110 – 661 US tons HDD 100 – HDD 600 · to HDD 3000 built to order 04

HSA H-frame single action presses, 110 – 661 US tons HSA 100 – HSA 600 · to HSA 3000 built to order 06

HCFP column frame single / double action presses, 110 – 1,102 US tons HCFP 100 – HCFP 600 · HCFP 1000 built to order 08

C-FRAME PRESSES

CFSS enclosed C-frame single action presses, 33 – 276 US tons CFSS 30 · 60 · 100 · 150 · 200 · 250 10

CFS C-frame single action presses, 33 – 276 US tons CFS 30 · 60 · 100 · 150 · 200 · 250 12

CFDD C-frame deep drawing presses, 33 – 276 US tons CFDD 30 · 60 · 100 · 150 · 200 · 250 14

HOT PLATE, STRAIGHTENING AND ECO PRESSES

SMC / HHRP composite moulding and hot plate presses, 110 – 661 US tons HHRP 100 – HHRP 600 · to HHRP 3000 built to order 16

HSPS hydraulic portal straightening presses, 110 – 441 US tons HSPS 100 · 200 · 300 · 400 18

HDT H-frame hydraulic presses — Eco model, 110 – 276 US tons HDT 100 · 150 · 200 · 250 19

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR PRODUCTION HYDRAULIC PRESSES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH PREMIUM LINE · MADE IN TURKEY

PRODUCTION PRESSES BUILT TO YOUR DIE

The presses in this catalogue are NovoTech's premium line of production hydraulic presses: built in Turkey by a press maker with five decades of hydraulic press manufacturing, on welded and machined monoblock frames with chrome-plated hardened cylinders, European hydraulics and Siemens S7 controls, and CE-certified.

Every series is made in standard sizes and to the customer's requirement — table size, stroke, daylight, tonnage, die cushion, heated platens, quick die change and die loading — from a 33 US ton C-frame to 3,307 US ton H-frame presses. Each press is delivered with a CSA-approved panel, a 1-year warranty and spare parts and technical support from NovoTech in Mississauga, Ontario.

HDD 100 – HDD 600 · TO HDD 3000 BUILT TO ORDER

HDD H-FRAME DOUBLE ACTION DEEP DRAWING PRESSES, 110 – 661 US TONS



MODEL HDD · H-FRAME DOUBLE ACTION DEEP DRAWING PRESS, HDD SERIES — NOVOTECH PREMIUM LINE, WITH DIE CUSHION AND PENDANT CONTROL



HDD double action deep drawing press – side view with the control pendant



HDD deep drawing press with the enclosed work area and side control panel

110 – 661 US tons standard (to 3,307 to order) · 39.4" stroke · die cushion to 331 US tons

Double action deep drawing presses on a welded, machined monoblock H-frame: a main cylinder and a die cushion in the lower table draw cups, pans, housings and tank ends in one stroke, and the ejector in the table lifts the finished part out. Standard sizes from 110 to 661 US tons with 39.4" stroke and daylight; larger presses to 3,307 US tons and custom table sizes are built to order, with the die supplied by the press maker if required. Siemens S7 PLC with HMI touchscreen, remote access, light barriers and two-hand control are standard.

STANDARD FEATURES

- ✓ Double action: main cylinder plus die cushion (44 – 276 US tons) with 11.8" cushion stroke
- ✓ Welded and machined monoblock steel frame; precision-machined frame and T-slotted working table
- ✓ Chrome-plated and hardened cylinder; automatic lubrication for the guides
- ✓ Hydraulic block to EN standards; adjustable speed and pressure; load check valve
- ✓ Siemens S7 PLC with HMI touchscreen and remote access via internet
- ✓ Front and rear light barriers, two-hand control, reset and emergency-stop buttons; CE certificate
- ✓ Air cooling or heat exchanger for the hydraulic oil

OPTIONAL EQUIPMENT

- + Quick die change system
- + Die, built and supplied with the press
- + Ejector cylinder in the lower table
- + Die loading system or other die installation solutions
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

HDD H-FRAME DOUBLE ACTION DEEP DRAWING PRESSES, 110 – 661 US TONS

HDD

H-frame double action deep drawing presses

Model	HDD 100	HDD 200	HDD 300	HDD 400	HDD 500	HDD 600
Press force	**110 US tons (100 t)**	**220 US tons (200 t)**	**331 US tons (300 t)**	**441 US tons (400 t)**	**551 US tons (500 t)**	**661 US tons (600 t)**
Table size	**39.4 × 31.5″ (1,000 × 800 mm)**	**39.4 × 31.5″ (1,000 × 800 mm)**	**47.2 × 39.4″ (1,200 × 1,000 mm)**	**59.1 × 47.2″ (1,500 × 1,200 mm)**	**59.1 × 47.2″ (1,500 × 1,200 mm)**	**66.9 × 59.1″ (1,700 × 1,500 mm)**
Stroke	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**
Daylight	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)
Die cushion force	44 US tons (40 t)	on request	143 US tons (130 t)	165 US tons (150 t)	220 US tons (200 t)	276 US tons (250 t)
Die cushion stroke	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)
Pump displacement	28 cc/rev	45 cc/rev	71 cc/rev	100 cc/rev	100 cc/rev	140 cc/rev
Motor power	15 HP (11 kW)	25 HP (18.5 kW)	40 HP (30 kW)	50 HP (37 kW)	50 HP (37 kW)	74 HP (55 kW)
Advance speed	4.33 in/s (110 mm/s)	5.51 in/s (140 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)
Pressing speed	0.12 – 0.63 in/s (3 – 16 mm/s)	0.12 – 0.47 in/s (3 – 12 mm/s)	0.12 – 0.59 in/s (3 – 15 mm/s)	0.12 – 0.59 in/s (3 – 15 mm/s)	0.12 – 0.47 in/s (3 – 12 mm/s)	0.2 – 0.59 in/s (5 – 15 mm/s)
Return speed	7.09 in/s (180 mm/s)	7.87 in/s (200 mm/s)	8.66 in/s (220 mm/s)	7.87 in/s (200 mm/s)	7.87 in/s (200 mm/s)	9.84 in/s (250 mm/s)
Dimensions L × W × H	102 × 130 × 181″ (2,600 × 3,300 × 4,600 mm)	106 × 130 × 197″ (2,700 × 3,300 × 5,000 mm)	110 × 138 × 213″ (2,800 × 3,500 × 5,400 mm)	110 × 142 × 244″ (2,800 × 3,600 × 6,200 mm)	122 × 146 × 256″ (3,100 × 3,700 × 6,500 mm)	130 × 165 × 264″ (3,300 × 4,200 × 6,700 mm)
Weight	19,842 lb (9,000 kg)	24,251 lb (11,000 kg)	35,274 lb (16,000 kg)	50,706 lb (23,000 kg)	61,729 lb (28,000 kg)	88,185 lb (40,000 kg)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HSA 100 – HSA 600 · TO HSA 3000 BUILT TO ORDER

HSA H-FRAME SINGLE ACTION PRESSES, 110 – 661 US TONS



MODEL HSA · H-FRAME SINGLE ACTION HYDRAULIC PRESS, HSA SERIES – NOVOTECH PREMIUM LINE, WITH DIE SUPPORT ARMS



HSA single action press – front view with light barriers



HSA single action press with separate electrical cabinet

110 – 661 US tons standard (to 3,307 to order) · 39.4" stroke and daylight · T-slotted tables

The general-purpose production press: a single-action H-frame for bending, forming, hole punching, cutting and straightening with whatever die is bolted to its T-slotted tables. Standard sizes from 110 to 661 US tons with 39.4" stroke and daylight, built to 3,307 US tons and to the customer's table size on request. Chrome-plated hardened cylinder, automatic guide lubrication, adjustable speed and pressure, safety PLC with light barriers and a Siemens HMI with remote access.

STANDARD FEATURES

- ✓ Single action press for bending, forming, punching, cutting and straightening dies
- ✓ Safety PLC
- ✓ Welded and machined monoblock steel frame; precision-machined frame and T-slotted working table
- ✓ Chrome-plated and hardened cylinder; automatic lubrication for the guides
- ✓ Hydraulic block to EN standards; adjustable speed and pressure; load check valve
- ✓ Siemens S7 PLC with HMI touchscreen and remote access via internet
- ✓ Front and rear light barriers, two-hand control, reset and emergency-stop buttons; CE certificate
- ✓ Air cooling or heat exchanger for the hydraulic oil

OPTIONAL EQUIPMENT

- + Quick die change system
- + Die, built and supplied with the press
- + Ejector cylinder in the lower table
- + Die loading devices or other die installation solutions
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

HSA H-FRAME SINGLE ACTION PRESSES, 110 – 661 US TONS

HSA

H-frame single action presses

Model	HSA 100	HSA 200	HSA 300	HSA 400	HSA 500	HSA 600
Press force	**110 US tons (100 t)**	**220 US tons (200 t)**	**331 US tons (300 t)**	**441 US tons (400 t)**	**551 US tons (500 t)**	**661 US tons (600 t)**
Table size	**39.4 × 31.5″ (1,000 × 800 mm)**	**39.4 × 31.5″ (1,000 × 800 mm)**	**47.2 × 39.4″ (1,200 × 1,000 mm)**	**59.1 × 47.2″ (1,500 × 1,200 mm)**	**59.1 × 47.2″ (1,500 × 1,200 mm)**	**66.9 × 59.1″ (1,700 × 1,500 mm)**
Stroke	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**	**39.4″ (1,000 mm)**
Daylight	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)
Pump displacement	28 cc/rev	45 cc/rev	71 cc/rev	100 cc/rev	100 cc/rev	140 cc/rev
Motor power	15 HP (11 kW)	25 HP (18.5 kW)	40 HP (30 kW)	50 HP (37 kW)	50 HP (37 kW)	74 HP (55 kW)
Advance speed	4.33 in/s (110 mm/s)	5.51 in/s (140 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)
Pressing speed	0.12 – 0.63 in/s (3 – 16 mm/s)	0.12 – 0.47 in/s (3 – 12 mm/s)	0.12 – 0.59 in/s (3 – 15 mm/s)	0.12 – 0.59 in/s (3 – 15 mm/s)	0.12 – 0.47 in/s (3 – 12 mm/s)	0.2 – 0.59 in/s (5 – 15 mm/s)
Return speed	7.09 in/s (180 mm/s)	7.87 in/s (200 mm/s)	8.66 in/s (220 mm/s)	7.87 in/s (200 mm/s)	7.87 in/s (200 mm/s)	9.84 in/s (250 mm/s)
Dimensions L × W × H	102 × 130 × 181″ (2,600 × 3,300 × 4,600 mm)	106 × 130 × 197″ (2,700 × 3,300 × 5,000 mm)	110 × 138 × 213″ (2,800 × 3,500 × 5,400 mm)	110 × 142 × 244″ (2,800 × 3,600 × 6,200 mm)	122 × 146 × 256″ (3,100 × 3,700 × 6,500 mm)	130 × 165 × 264″ (3,300 × 4,200 × 6,700 mm)
Weight	16,535 lb (7,500 kg)	19,842 lb (9,000 kg)	27,558 lb (12,500 kg)	42,990 lb (19,500 kg)	52,911 lb (24,000 kg)	66,139 lb (30,000 kg)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HCFP 100 – HCFP 600 · HCFP 1000 BUILT TO ORDER

HCFP COLUMN FRAME SINGLE / DOUBLE ACTION PRESSES, 110 – 1,102 US TONS



MODEL HCFP · COLUMN FRAME SINGLE / DOUBLE ACTION PRESS, HCFP SERIES — NOVOTECH PREMIUM LINE, ENCLOSED COLUMN FRAME



HCFP four-column press with die support arms

110 – 661 US tons standard (1,102 to order) · four-column frame · die cushion optional

Four-column presses with the same hydraulics, Siemens control and safety equipment as the H-frame range, for shops that need access to the die from all four sides or a die-cushion option on a column frame. Standard sizes from 110 to 661 US tons with 39.4″ stroke; the 1,102 US ton HCFP 1000 and custom table sizes are built to order, and die support arms or a die loading system are available for heavy tooling.

STANDARD FEATURES

- ✓ Column (four-post) frame, open on all sides; single or double action
- ✓ Central lubrication for the guides; safety PLC
- ✓ Welded and machined monoblock steel frame; precision-machined frame and T-slotted working table
- ✓ Hydraulic block to EN standards; adjustable speed and pressure; load check valve
- ✓ Siemens S7 PLC with HMI touchscreen and remote access via internet
- ✓ Front and rear light barriers, two-hand control, reset and emergency-stop buttons; CE certificate
- ✓ Air cooling or heat exchanger for the hydraulic oil

OPTIONAL EQUIPMENT

- + Quick die change system
- + Die, built and supplied with the press
- + Ejector cylinder in the lower table
- + Die cushion on all models
- + Die support arms; die loading system
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

HCFP COLUMN FRAME SINGLE / DOUBLE ACTION PRESSES, 110 – 1,102 US TONS

HCFP

column frame single / double action presses

Model	HCFP 100	HCFP 200	HCFP 300	HCFP 400	HCFP 500	HCFP 600
Press force	110 US tons (100 t)	220 US tons (200 t)	331 US tons (300 t)	441 US tons (400 t)	551 US tons (500 t)	661 US tons (600 t)
Table size	39.4 × 31.5″ (1,000 × 800 mm)	39.4 × 31.5″ (1,000 × 800 mm)	47.2 × 39.4″ (1,200 × 1,000 mm)	59.1 × 47.2″ (1,500 × 1,200 mm)	59.1 × 47.2″ (1,500 × 1,200 mm)	66.9 × 59.1″ (1,700 × 1,500 mm)
Stroke	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)
Daylight	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)
Pump displacement	28 cc/rev	45 cc/rev	71 cc/rev	100 cc/rev	100 cc/rev	140 cc/rev
Motor power	15 HP (11 kW)	25 HP (18.5 kW)	40 HP (30 kW)	50 HP (37 kW)	50 HP (37 kW)	74 HP (55 kW)
Advance speed	4.33 in/s (110 mm/s)	5.51 in/s (140 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)
Pressing speed	0.12 – 0.63 in/s (3 – 16 mm/s)	0.12 – 0.47 in/s (3 – 12 mm/s)	0.12 – 0.59 in/s (3 – 15 mm/s)	0.12 – 0.59 in/s (3 – 15 mm/s)	0.12 – 0.47 in/s (3 – 12 mm/s)	0.2 – 0.59 in/s (5 – 15 mm/s)
Return speed	7.09 in/s (180 mm/s)	7.87 in/s (200 mm/s)	8.66 in/s (220 mm/s)	7.87 in/s (200 mm/s)	7.87 in/s (200 mm/s)	9.84 in/s (250 mm/s)
Dimensions L × W × H	102 × 138 × 181″ (2,600 × 3,500 × 4,600 mm)	106 × 130 × 197″ (2,700 × 3,300 × 5,000 mm)	110 × 138 × 213″ (2,800 × 3,500 × 5,400 mm)	110 × 142 × 244″ (2,800 × 3,600 × 6,200 mm)	122 × 146 × 256″ (3,100 × 3,700 × 6,500 mm)	130 × 165 × 264″ (3,300 × 4,200 × 6,700 mm)
Weight	17,637 lb (8,000 kg)	22,046 lb (10,000 kg)	29,762 lb (13,500 kg)	46,297 lb (21,000 kg)	57,320 lb (26,000 kg)	70,548 lb (32,000 kg)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CFSS 30 · 60 · 100 · 150 · 200 · 250

CFSS ENCLOSED C-FRAME SINGLE ACTION PRESSES, 33 – 276 US TONS



MODEL CFSS · ENCLOSED C-FRAME SINGLE ACTION PRESS, CFSS SERIES — NOVOTECH PREMIUM LINE, WITH TWO-HAND CONTROL STATION



CFSS enclosed C-frame press with HMI touchscreen panel



CFSS enclosed C-frame press – light barriers and two-hand control

33 – 276 US tons · 15.7" stroke · throat 11" – 14.6" · enclosed work area

C-frame presses with the work area enclosed by guards and a light barrier, for bending, punching, cutting and straightening with smaller dies: the frame is open on three sides so dies are mounted and removed easily, and the press takes up less floor space than an H-frame. From 33 to 276 US tons with 15.7" stroke, 11" – 14.6" throat, Siemens S7 PLC with HMI touchscreen and remote access; an ejector cylinder and speed adjustment are optional.

STANDARD FEATURES

- ✓ Enclosed work area with light barrier and safety PLC; frame open on three sides for quick die changes
- ✓ Throat depth 11" to 14.6"; 15.7" stroke
- ✓ Welded and machined monoblock steel frame; precision-machined frame and T-slotted working table
- ✓ Hydraulic block to EN standards; adjustable speed and pressure; load check valve
- ✓ Siemens S7 PLC with HMI touchscreen and remote access via internet
- ✓ Air cooling or heat exchanger for the hydraulic oil

OPTIONAL EQUIPMENT

- \+ Ejector cylinder
- \+ Speed adjustment
- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

CFSS ENCLOSED C-FRAME SINGLE ACTION PRESSES, 33 – 276 US TONS

CFSS

enclosed C-frame single action presses

Model	CFSS 30	CFSS 60	CFSS 100	CFSS 150	CFSS 200	CFSS 250
Press force	**33 US tons (30 t)**	**66 US tons (60 t)**	**110 US tons (100 t)**	**165 US tons (150 t)**	**220 US tons (200 t)**	**276 US tons (250 t)**
Table size	**19.7 × 19.7″ (500 × 500 mm)**	**23.6 × 19.7″ (600 × 500 mm)**	**31.5 × 19.7″ (800 × 500 mm)**	**39.4 × 23.6″ (1,000 × 600 mm)**	**39.4 × 23.6″ (1,000 × 600 mm)**	**43.3 × 23.6″ (1,100 × 600 mm)**
Stroke	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**
Daylight	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)
Throat depth	11″ (280 mm)	12.2″ (310 mm)	12.2″ (310 mm)	14.2″ (360 mm)	14.6″ (370 mm)	14.6″ (370 mm)
Pump displacement	16 cc/rev	19 cc/rev	19 cc/rev	45 cc/rev	45 cc/rev	45 cc/rev
Motor power	10 HP (7.5 kW)	15 HP (11 kW)	15 HP (11 kW)	25 HP (18.5 kW)	25 HP (18.5 kW)	25 HP (18.5 kW)
Advance speed	5.91 in/s (150 mm/s)	3.94 in/s (100 mm/s)	4.33 in/s (110 mm/s)	5.12 in/s (130 mm/s)	5.12 in/s (130 mm/s)	5.12 in/s (130 mm/s)
Pressing speed	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.2 – 0.59 in/s (5 – 15 mm/s)	0.2 – 0.47 in/s (5 – 12 mm/s)	0.2 – 0.39 in/s (5 – 10 mm/s)
Return speed	7.09 in/s (180 mm/s)	5.91 in/s (150 mm/s)	6.3 in/s (160 mm/s)	7.09 in/s (180 mm/s)	7.09 in/s (180 mm/s)	7.09 in/s (180 mm/s)
Dimensions L × W × H	71 × 55 × 102″ (1,800 × 1,400 × 2,600 mm)	75 × 55 × 102″ (1,900 × 1,400 × 2,600 mm)	75 × 67 × 115″ (1,900 × 1,700 × 2,900 mm)	94 × 75 × 138″ (2,400 × 1,900 × 3,500 mm)	94 × 75 × 146″ (2,400 × 1,900 × 3,700 mm)	94 × 79 × 154″ (2,400 × 2,000 × 3,900 mm)
Weight	6,614 lb (3,000 kg)	7,716 lb (3,500 kg)	12,125 lb (5,500 kg)	26,455 lb (12,000 kg)	31,967 lb (14,500 kg)	34,172 lb (15,500 kg)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CFS 30 · 60 · 100 · 150 · 200 · 250

CFS C-FRAME SINGLE ACTION PRESSES, 33 – 276 US TONS



MODEL CFS · C-FRAME SINGLE ACTION PRESS, CFS SERIES — NOVOTECH PREMIUM LINE, GUARDED WORK AREA

33 – 276 US tons · 15.7″ stroke · 19.7″ daylight · two-hand control

The simpler C-frame press: the same welded monoblock frame, chrome-plated cylinder and T-slotted table as the CFSS with a pressure transmitter, light barrier, two-hand control and emergency stop, and the HMI touchscreen as an option. A manual production press for bending, punching and straightening with small dies, from 33 to 276 US tons.

STANDARD FEATURES

- ✓ C-frame open on three sides; T-slotted working table
- ✓ Pressure transmitter; light barrier; two-hand button control; emergency stop; CE certificate
- ✓ Welded and machined monoblock steel frame; chrome-plated and hardened cylinder; hydraulic block to EN standards

OPTIONAL EQUIPMENT

- + HMI touchscreen control panel
- + Air cooling for the hydraulic oil
- + Quick die change system; die; ejector
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

CFS C-FRAME SINGLE ACTION PRESSES, 33 – 276 US TONS

CFS

C-frame single action presses

Model	CFS 30	CFS 60	CFS 100	CFS 150	CFS 200	CFS 250
Press force	**33 US tons (30 t)**	**66 US tons (60 t)**	**110 US tons (100 t)**	**165 US tons (150 t)**	**220 US tons (200 t)**	**276 US tons (250 t)**
Table size	**19.7 × 19.7″ (500 × 500 mm)**	**23.6 × 19.7″ (600 × 500 mm)**	**31.5 × 19.7″ (800 × 500 mm)**	**31.5 × 23.6″ (800 × 600 mm)**	**35.4 × 23.6″ (900 × 600 mm)**	**39.4 × 23.6″ (1,000 × 600 mm)**
Stroke	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**
Daylight	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)	19.7″ (500 mm)
Pump displacement	9 cc/rev	12+6 cc/rev	20+9 cc/rev	33+9 cc/rev	32+16 cc/rev	44+16 cc/rev
Motor power	5.4 HP (4 kW)	4 HP (3 kW)	5.4 HP (4 kW)	7.4 HP (5.5 kW)	15 HP (11 kW)	15 HP (11 kW)
Advance speed	0.39 in/s (10 mm/s)	0.47 in/s (12 mm/s)	0.47 in/s (12 mm/s)	0.47 in/s (12 mm/s)	0.35 in/s (9 mm/s)	0.35 in/s (9 mm/s)
Pressing speed	0.39 in/s (10 mm/s)	0.16 in/s (4 mm/s)	0.16 in/s (4 mm/s)	0.12 in/s (3 mm/s)	0.12 in/s (3 mm/s)	0.12 in/s (3 mm/s)
Return speed	0.67 in/s (17 mm/s)	0.83 in/s (21 mm/s)	0.71 in/s (18 mm/s)	0.83 in/s (21 mm/s)	0.71 in/s (18 mm/s)	0.71 in/s (18 mm/s)
Dimensions L × W × H	59 × 55 × 91″ (1,500 × 1,400 × 2,300 mm)	59 × 55 × 91″ (1,500 × 1,400 × 2,300 mm)	67 × 59 × 106″ (1,700 × 1,500 × 2,700 mm)	67 × 63 × 114″ (1,700 × 1,600 × 2,900 mm)	75 × 67 × 114″ (1,900 × 1,700 × 2,900 mm)	79 × 63 × 114″ (2,000 × 1,600 × 2,900 mm)
Weight	5,512 lb (2,500 kg)	7,716 lb (3,500 kg)	11,023 lb (5,000 kg)	22,046 lb (10,000 kg)	28,660 lb (13,000 kg)	30,865 lb (14,000 kg)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CFDD 30 · 60 · 100 · 150 · 200 · 250

CFDD C-FRAME DEEP DRAWING PRESSES, 33 – 276 US TONS



MODEL CFDD · C-FRAME DEEP DRAWING PRESS, CFDD SERIES — NOVOTECH PREMIUM LINE, WITH DIE CUSHION AND TWO-HAND CONTROL



CFDD 100 C-frame deep drawing press

33 – 276 US tons · die cushion 11 – 110 US tons · 15.7" stroke · 23.6" daylight

Deep drawing on a C-frame: a die cushion of 11 to 110 US tons with 5.9" stroke in the lower table and an ejector that lifts the drawn part out, for small dies where a C-frame saves floor space. Table sizes are limited by the C-shaped frame — beyond them the HDD H-frame press takes over. 33 to 276 US tons, 15.7" stroke, 23.6" daylight, Siemens S7 PLC with HMI touchscreen and remote access.

STANDARD FEATURES

- ✓ Die cushion 11 – 110 US tons with 5.9" stroke; ejector in the lower table
- ✓ C-frame open on three sides; throat 11" – 14.6"
- ✓ Pressure transmitter; light barrier; safety PLC
- ✓ Welded and machined monoblock steel frame; precision-machined frame and T-slotted working table
- ✓ Hydraulic block to EN standards; adjustable speed and pressure; load check valve
- ✓ Siemens S7 PLC with HMI touchscreen and remote access via internet
- ✓ Air cooling or heat exchanger for the hydraulic oil

OPTIONAL EQUIPMENT

- + Quick die change system
- + Die, built and supplied with the press
- + Ejector cylinder in the lower table
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

CFDD C-FRAME DEEP DRAWING PRESSES, 33 – 276 US TONS

CFDD

C-frame deep drawing presses

Model	CFDD 30	CFDD 60	CFDD 100	CFDD 150	CFDD 200	CFDD 250
Press force	33 US tons (30 t)	66 US tons (60 t)	110 US tons (100 t)	165 US tons (150 t)	220 US tons (200 t)	276 US tons (250 t)
Table size	19.7 × 19.7″ (500 × 500 mm)	23.6 × 19.7″ (600 × 500 mm)	31.5 × 19.7″ (800 × 500 mm)	39.4 × 23.6″ (1,000 × 600 mm)	39.4 × 23.6″ (1,000 × 600 mm)	43.3 × 23.6″ (1,100 × 600 mm)
Stroke	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)
Daylight	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)
Throat depth	11″ (280 mm)	12.2″ (310 mm)	12.2″ (310 mm)	14.2″ (360 mm)	14.6″ (370 mm)	14.6″ (370 mm)
Die cushion force	11 US tons (10 t)	22 US tons (20 t)	44 US tons (40 t)	55 US tons (50 t)	88 US tons (80 t)	110 US tons (100 t)
Die cushion stroke	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)	5.9″ (150 mm)
Pump displacement	16 cc/rev	19 cc/rev	19 cc/rev	45 cc/rev	45 cc/rev	45 cc/rev
Motor power	10 HP (7.5 kW)	15 HP (11 kW)	15 HP (11 kW)	25 HP (18.5 kW)	25 HP (18.5 kW)	25 HP (18.5 kW)
Advance speed	5.91 in/s (150 mm/s)	3.94 in/s (100 mm/s)	4.33 in/s (110 mm/s)	5.12 in/s (130 mm/s)	5.12 in/s (130 mm/s)	5.12 in/s (130 mm/s)
Pressing speed	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.2 – 0.59 in/s (5 – 15 mm/s)	0.2 – 0.47 in/s (5 – 12 mm/s)	0.2 – 0.39 in/s (5 – 10 mm/s)
Return speed	7.09 in/s (180 mm/s)	5.91 in/s (150 mm/s)	6.3 in/s (160 mm/s)	7.09 in/s (180 mm/s)	7.09 in/s (180 mm/s)	7.09 in/s (180 mm/s)
Dimensions L × W × H	71 × 55 × 102″ (1,800 × 1,400 × 2,600 mm)	75 × 55 × 102″ (1,900 × 1,400 × 2,600 mm)	75 × 67 × 115″ (1,900 × 1,700 × 2,900 mm)	94 × 75 × 138″ (2,400 × 1,900 × 3,500 mm)	94 × 75 × 146″ (2,400 × 1,900 × 3,700 mm)	94 × 79 × 154″ (2,400 × 2,000 × 3,900 mm)
Weight	6,614 lb (3,000 kg)	9,921 lb (4,500 kg)	14,330 lb (6,500 kg)	28,660 lb (13,000 kg)	34,172 lb (15,500 kg)	36,376 lb (16,500 kg)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HHRP 100 – HHRP 600 · TO HHRP 3000 BUILT TO ORDER

SMC / HHRP COMPOSITE MOULDING AND HOT PLATE PRESSES, 110 – 661 US TONS



MODEL SMC · SMC COMPOSITE MOULDING PRESS WITH HEATED PLATENS, HHRP SERIES — NOVOTECH PREMIUM LINE



SMC / HHRP hot plate press — front view with safety fencing



SMC 2500 hot plate hydraulic press

110 – 661 US tons standard (to 3,307 to order) · heated platens · composite, rubber and laminate moulding

H-frame presses with heated (or cold) platens for SMC / BMC composite moulding, rubber, laminates and every part that needs heat and pressure together. Insulation between the heated platens and the frame is standard, the press software is written for the customer's moulding cycle and the press is built in the size and capacity required — standard sizes from 110 to 661 US tons, to 3,307 US tons on request. Safety light curtains, T-slotted platens, Siemens S7 PLC and HMI with remote access.

STANDARD FEATURES

- ✓ Hot or cold T-slotted platens with insulation between plates and frame
- ✓ Press software written for the customer's moulding process
- ✓ Safety light curtains and safety PLC
- ✓ Welded and machined monoblock steel frame; precision-machined frame and T-slotted working table
- ✓ Chrome-plated and hardened cylinder; automatic lubrication for the guides
- ✓ Hydraulic block to EN standards; adjustable speed and pressure; load check valve
- ✓ Siemens S7 PLC with HMI touchscreen and remote access via internet
- ✓ Front and rear light barriers, two-hand control, reset and emergency-stop buttons; CE certificate
- ✓ Air cooling or heat exchanger for the hydraulic oil

OPTIONAL EQUIPMENT

- + Quick die change system
- + Die, built and supplied with the press
- + Ejector cylinder in the lower table
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

SMC / HHRP COMPOSITE MOULDING AND HOT PLATE PRESSES, 110 – 661 US TONS

HHRP

SMC & hot plate hydraulic presses

Model	HHRP 100	HHRP 200	HHRP 300	HHRP 400	HHRP 500	HHRP 600
Press force	110 US tons (100 t)	220 US tons (200 t)	331 US tons (300 t)	441 US tons (400 t)	551 US tons (500 t)	661 US tons (600 t)
Table size	39.4 × 31.5″ (1,000 × 800 mm)	39.4 × 31.5″ (1,000 × 800 mm)	47.2 × 39.4″ (1,200 × 1,000 mm)	59.1 × 47.2″ (1,500 × 1,200 mm)	59.1 × 47.2″ (1,500 × 1,200 mm)	66.9 × 59.1″ (1,700 × 1,500 mm)
Stroke	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)
Daylight	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)	39.4″ (1,000 mm)
Pump displacement	28 cc/rev	45 cc/rev	71 cc/rev	100 cc/rev	100 cc/rev	140 cc/rev
Motor power	15 HP (11 kW)	25 HP (18.5 kW)	40 HP (30 kW)	50 HP (37 kW)	50 HP (37 kW)	74 HP (55 kW)
Advance speed	4.33 in/s (110 mm/s)	5.51 in/s (140 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)	5.91 in/s (150 mm/s)
Pressing speed	0.12 – 0.63 in/s (3 – 16 mm/s)	0.12 – 0.47 in/s (3 – 12 mm/s)	0.12 – 0.59 in/s (3 – 15 mm/s)	0.12 – 0.59 in/s (3 – 15 mm/s)	0.12 – 0.47 in/s (3 – 12 mm/s)	0.2 – 0.59 in/s (5 – 15 mm/s)
Return speed	7.09 in/s (180 mm/s)	7.87 in/s (200 mm/s)	8.66 in/s (220 mm/s)	7.87 in/s (200 mm/s)	7.87 in/s (200 mm/s)	9.84 in/s (250 mm/s)
Dimensions L × W × H	102 × 130 × 181″ (2,600 × 3,300 × 4,600 mm)	106 × 130 × 197″ (2,700 × 3,300 × 5,000 mm)	110 × 138 × 213″ (2,800 × 3,500 × 5,400 mm)	110 × 142 × 244″ (2,800 × 3,600 × 6,200 mm)	122 × 146 × 256″ (3,100 × 3,700 × 6,500 mm)	130 × 165 × 264″ (3,300 × 4,200 × 6,700 mm)
Weight	16,535 lb (7,500 kg)	19,842 lb (9,000 kg)	27,558 lb (12,500 kg)	42,990 lb (19,500 kg)	52,911 lb (24,000 kg)	66,139 lb (30,000 kg)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HSPS 100 · 200 · 300 · 400

HSPS HYDRAULIC PORTAL STRAIGHTENING PRESSES, 110 – 441 US TONS



MODEL HSPS · HYDRAULIC PORTAL STRAIGHTENING PRESS, HSPS SERIES — NOVOTECH PREMIUM LINE, GANTRY WITH SAFETY RAILS



HSPS 300 portal straightening press with side control cabinet



HSPS 100 compact portal straightening press

110 – 441 US tons · beds to 59.1 × 137.8" · cylinder moves on 3 axes

Gantry (portal) presses for straightening long beams, plates, pipes and shafts: the cylinder travels along the gantry on a rack drive and the gantry along the bed, so the press works in three axes from a pendant and the workpiece stays on the threaded-hole table. Built in the size and tonnage requested — standard beds from 39.4 × 78.7" to 59.1 × 137.8" — with a safety rope, pressure transmitter and optional radio remote control.

STANDARD FEATURES

- ✓ X, Y, Z axes by pendant control; rack drive for the gantry travel
- ✓ Working table with threaded holes; chrome-plated and hardened cylinder
- ✓ Pressure transmitter; safety rope; reset and emergency-stop buttons; CE certificate
- ✓ Welded and machined monoblock steel frame; hydraulic block to EN standards

OPTIONAL EQUIPMENT

- + Radio remote control
- + Safety rails and fencing
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

HSPS — TECHNICAL SPECIFICATIONS

Model	HSPS 100	HSPS 200	HSPS 300	HSPS 400
Press force	110 US tons (100 t)	220 US tons (200 t)	331 US tons (300 t)	441 US tons (400 t)
Table size	39.4 × 78.7" (1,000 × 2,000 mm)	39.4 × 98.4" (1,000 × 2,500 mm)	59.1 × 118.1" (1,500 × 3,000 mm)	59.1 × 137.8" (1,500 × 3,500 mm)
Stroke	15.7" (400 mm)	15.7" (400 mm)	19.7" (500 mm)	23.6" (600 mm)
Daylight	15.7" (400 mm)	15.7" (400 mm)	19.7" (500 mm)	23.6" (600 mm)
Pump displacement	15 cc/rev	17 cc/rev	40 cc/rev	66 cc/rev
Motor power	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)	15 HP (11 kW)	25 HP (18.5 kW)
Advance speed	0.24 in/s (6 mm/s)	0.28 in/s (7 mm/s)	0.24 in/s (6 mm/s)	0.28 in/s (7 mm/s)
Return speed	0.47 in/s (12 mm/s)	0.55 in/s (14 mm/s)	0.47 in/s (12 mm/s)	0.55 in/s (14 mm/s)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HDT 100 · 150 · 200 · 250

HDT H-FRAME HYDRAULIC PRESSES — ECO MODEL, 110 – 276 US TONS



MODEL HDT · H-FRAME HYDRAULIC PRESS, ECO MODEL HDT SERIES — NOVOTECH PREMIUM LINE, WITH T-SLOTTED TABLE

110 – 276 US tons · 15.7″ stroke · 23.6″ daylight · T-slotted table

A workshop-type H-frame press built to production standards: welded, machined monoblock frame, T-slotted table, chrome-plated hardened cylinder, pressure transmitter and two-hand control, at a lower price than the HSA. 110 to 276 US tons with 15.7″ stroke and 23.6″ daylight, for the repair, maintenance and small fabrication shop; quick die change, ejector, radio remote and oil cooling are optional.

STANDARD FEATURES

- ✓ T-slotted working table; 15.7″ stroke, 23.6″ daylight
- ✓ Pressure transmitter; two-hand button control; emergency stop; CE certificate
- ✓ Welded and machined monoblock steel frame; chrome-plated and hardened cylinder; hydraulic block to EN standards

OPTIONAL EQUIPMENT

- + Quick die change system; die; ejector
- + Radio remote control
- + Air cooling or heat exchanger for the hydraulic oil
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

HDT H-FRAME HYDRAULIC PRESSES — ECO MODEL, 110 - 276 US TONS

HDT

H-frame hydraulic presses — Eco model

Model	HDT 100	HDT 150	HDT 200	HDT 250
Press force	110 US tons (100 t)	165 US tons (150 t)	220 US tons (200 t)	276 US tons (250 t)
Table size	31.5 × 23.6″ (800 × 600 mm)	39.4 × 23.6″ (1,000 × 600 mm)	39.4 × 23.6″ (1,000 × 600 mm)	59.1 × 23.6″ (1,500 × 600 mm)
Stroke	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)	15.7″ (400 mm)
Daylight	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)
Cylinder Ø	8.7″ (220 mm)	10.6″ (270 mm)	12.6″ (320 mm)	14.2″ (360 mm)
Pump displacement	15 cc/rev	22 cc/rev	34 cc/rev	45 cc/rev
Motor power	7.4 HP (5.5 kW)	10 HP (7.5 kW)	20 HP (15 kW)	25 HP (18.5 kW)
Advance speed	0.24 in/s (6 mm/s)	0.24 in/s (6 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)
Pressing speed	0.24 in/s (6 mm/s)	0.24 in/s (6 mm/s)	0.28 in/s (7 mm/s)	0.28 in/s (7 mm/s)
Return speed	0.47 in/s (12 mm/s)	0.47 in/s (12 mm/s)	0.55 in/s (14 mm/s)	0.55 in/s (14 mm/s)
Dimensions L × W × H	59 × 94 × 106″ (1,500 × 2,400 × 2,700 mm)	59 × 102 × 106″ (1,500 × 2,600 × 2,700 mm)	59 × 102 × 110″ (1,500 × 2,600 × 2,800 mm)	67 × 106 × 110″ (1,700 × 2,700 × 2,800 mm)
Weight	6,614 lb (3,000 kg)	9,921 lb (4,500 kg)	14,330 lb (6,500 kg)	17,637 lb (8,000 kg)

Standard sizes shown; every series is also built to the customer's table size, stroke, daylight and tonnage. Larger models to 3,000 metric tons (3,307 US tons) are built to order. Metric values in brackets are the manufacturer's nominal figures; dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.