NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

BEKAMAK · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

BEKAMAK SAWS — CATALOGUE SUPPLEMENT 2026

BMSO 320S SERVO-FEED AUTOMATIC BAND SAW · BMSO CS NC DOUBLE COLUMN BAND SAWS · TERRA 6 HIGH-SPEED BAND SAW · BMH 170 POWER HACKSAW · OPUS 300 CARBIDE CIRCULAR SAW









Turkey
MADE IN TURKEY

5
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

BEKAMAK SAWS · SUPPLEMENT

CONTENTS

AUTOMATIC BAND SAWS

BMSO 320S fully automatic servo-feed band saw, 12-5/8" BMSO 320S 04

DOUBLE COLUMN BAND SAWS

BMSO CS NC fully automatic servo-feed double-column band saws — BMSO 330CS · BMSO 420CS · BMSO 460CS · BMSO 560CS · BMSO 570CS · BMSO 820CS · BMSO 1110CS · BMSO 1313CS 06

TERRA 6 high-speed fully automatic band saw, 26" TERRA 6 11

POWER HACKSAWS

BMH 170 hydraulic power hacksaw, 6-3/4" BMH 170 13

CARBIDE CIRCULAR SAWS

OPUS 300 — automatic TCT carbide circular saw, Ø11-3/4" OPUS 300 15

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR BEKAMAK SAWS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Bekamak with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

BEKAMAK · MADE IN TURKEY

THE BEKAMAK MODELS THE 2025/2026 CATALOGUE DOES NOT SHOW

Bekamak has built band saws in Turkey since 1990 with European components — NovoTech's premium line of band saws and circular saws, sold, installed and supported in Canada by NovoTech Machine Tools from Mississauga, Ontario.


This supplement carries the Bekamak machines that are not in the Bekamak catalogue 2025/2026: the BMSO 320S servo-feed automatic band saw, the full BMSO CS NC double column range with the BMSO 460CS and the BMSO 1313CS for 51" blocks, the TERRA 6 that runs its blade at up to 1,970 ft/min (600 m/min), the BMH 170 hydraulic power hacksaw and the OPUS 300 carbide circular saw for solid bar to Ø11-3/4".

BMSO 320S

BMSO 320S FULLY AUTOMATIC SERVO-FEED BAND SAW, 12-5/8″



MODEL BMSO · BEKAMAK BMSO 320S FULLY AUTOMATIC SERVO-FEED BAND SAW, Ø12-5/8″ (320 MM), WITH THE OMRON TOUCH-SCREEN CONTROL

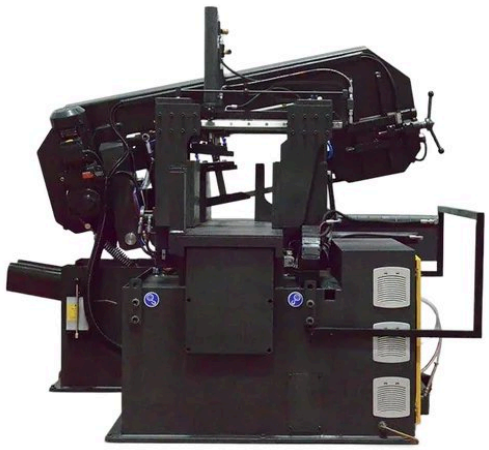

BMSO 320S — rear view: blade wheels, electrical cabinet and the servo shuttle vise

Ø12-5/8″ (320 mm) round · 14-5/8″ × 12-5/8″ rectangular · servo feed, 50 programs

A pivot-type automatic saw with servo shuttle-vise feeding for straight cuts in bar, tube and profiles up to Ø12-5/8″ (320 mm): the Omron touch-screen control stores 50 programs of up to 30 length-and-quantity steps, the ball-screw servo feed positions the material in a 27-1/2″ (700 mm) stroke — or in several strokes for lengths up to 394″ (9999 mm) — and the saw clamps, cuts and counts until the job is done. Linear-way bow guidance, hydro-mechanical blade tension, a chip conveyor and an inverter for stepless blade speed are standard.

STANDARD FEATURES

- ✓ Ø12-5/8″ (320 mm) round, 14-5/8″ × 12-5/8″ (370 × 320 mm) rectangular and 12-5/8″ square at 0°
- ✓ Servo shuttle-vise feed on a ball screw: 27-1/2″ (700 mm) stroke, multiple strokes for lengths to 394″ (9999 mm)
- ✓ Omron touch-screen control: 50 programs × 30 length-and-quantity steps, piece counter
- ✓ 1-1/4″ × .042″ (34 × 1.1 mm) band at 50 – 395 ft/min (15 – 120 m/min) on an inverter; 3 HP (2.2 kW) main motor, heavy-duty gearbox
- ✓ Linear-way guidance, hydro-mechanical blade tension, blade-slippage sensor, cutting-pressure control, optical height adjustment, blade brush, chip conveyor, coolant pump
- ✓ Options: hydraulic blade tension, hydraulic top clamp, multi-segment (bundle) vise jaws, micro-spray lubrication, 10 ft (3 m) roller table

OPTIONAL EQUIPMENT

- + Hydraulic blade tension
- + Hydraulic top clamp
- + Multi-segment vise jaws
- + Micro-spray lubrication
- + 10 ft (3 m) material roller table

TECHNICAL SPECIFICATIONS

BMSO 320S FULLY AUTOMATIC SERVO-FEED BAND SAW, 12-5/8″

BMSO 320S SERVO

Model	BMSO 320S
Capacity 0° (straight) — round	Ø12-5/8″ (320 mm)
Capacity 0° (straight) — rectangular W × H	14-5/8″ × 12-5/8″ (370 × 320 mm)
Capacity 0° (straight) — square	12-5/8″ (320 mm)
Blade speed	49–394 ft/min (15–120 m/min)
Band blade L × W × T	164 × 1-1/4 × .042 in (4160 × 34 × 1.1 mm)
Main motor	3 HP (2.2 kW)
Hydraulic motor	2 HP (1.5 kW)
Coolant pump	0.2 HP (0.12 kW)
Feeder servo motor	1.3 HP (1 kW)
Feed stroke	27-1/2″ (700 mm)
Multiple-stroke feed length	393-5/8″ (9999 mm)
Control	Omron touch screen, 50 programs × 30 length steps
Working height	33-1/2″ (850 mm)
Weight	4,189 lb (1,900 kg)
Dimensions L × W × H	77 × 85 × 71 in (1950 × 2150 × 1800 mm)
Voltage	600 V 3-phase (208/240/480 V on request)

Capacities are the largest stock the saw passes at the stated angle, converted from the manufacturer's metric data and rounded to the nearest 1/8″. Blade size is length × width × thickness.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Bekamak with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

BMSO 330CS · BMSO 420CS · BMSO 460CS · BMSO 560CS · BMSO 570CS · BMSO 820CS · BMSO 1110CS · BMSO 1313CS

BMSO CS NC FULLY AUTOMATIC SERVO-FEED DOUBLE-COLUMN BAND SAWS



MODEL BMSO · BEKAMAK BMSO 820CS BAND SAW



Bekamak BMSO 1110CS band saw — photo 2 of 3



Bekamak BMSO 1110CS band saw — photo 3 of 3

Production saws with ball-screw servo shuttle-vise feeding and PLC touch-screen control: job lists of length and quantity run unattended with ±0.1 mm repeatability. Ø13″ (330 mm) to Ø51-1/8″ (1300 mm) — the BMSO 1313CS cuts blocks and billets up to 51-1/8″ × 51-1/8″ with a 118″ (3 m) feed stroke and a pallet-type chip conveyor.

STANDARD FEATURES

- ✓ Servo shuttle-vise feed on ball screw; multi-program PLC touch screen
- ✓ Twin-column guidance; hydraulic vise on feed and cutting side
- ✓ Inverter blade speed; blade-slippage sensor; hydro-mechanical blade tension (hydraulic blade tension standard on the 570CS / 820CS, optional below)
- ✓ Chip conveyor on most sizes, blade brush, coolant pump
- ✓ Options: hydraulic top clamp, multi-segment (bundle) vise jaws, hexagonal vise jaws, micro-spray lubrication, 15 kW (20 HP) main motor, roller tables

OPTIONAL EQUIPMENT

- + Hydraulic blade tension
- + Multi-segment vise jaws
- + Micro-spray lubrication
- + 10 ft (3 m) material roller table
- + Hydraulic top clamp
- + Blade deflection control
- + Pallet-type chip conveyor
- + Blade speed display
- + 15 kW (20 HP) main drive motor
- + Hexagonal vise jaws

DETAILS, COMPONENTS AND OPTIONS · 1 / 3

BMSO CS NC FULLY AUTOMATIC SERVO-FEED DOUBLE-COLUMN BAND SAWS



Bekamak BMSO 820CS band saw — photo 2 of 7



Bekamak BMSO 820CS band saw — photo 3 of 7




Bekamak BMSO 820CS band saw — photo 4 of 7



Bekamak BMSO 820CS band saw — photo 6 of 7



Bekamak BMSO 820CS band saw — photo 7 of 7

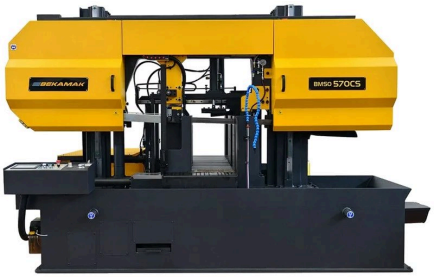

Bekamak BMSO 570CS band saw



Bekamak BMSO 570CS band saw — photo 2 of 4



Bekamak BMSO 570CS band saw — photo 3 of 4



Bekamak BMSO 570CS band saw — photo 4 of 4

DETAILS, COMPONENTS AND OPTIONS · 2 / 3

BMSO CS NC FULLY AUTOMATIC SERVO-FEED DOUBLE-COLUMN BAND SAWS



Bekamak BMSO 1110CS band saw




Bekamak BMSO 820CS band saw — photo 5 of 7



Bekamak BMSO 460CS NC fully automatic servo-feed double-column band saw, Ø18-1/8″ (460 mm)



BMSO 460CS — left side with the servo shuttle vise and roller table

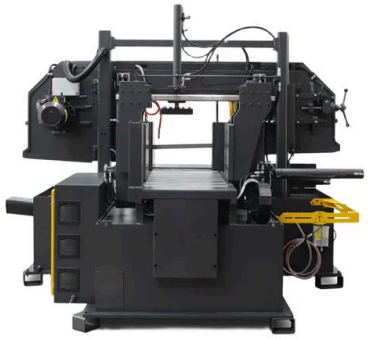


BMSO 460CS — rear view: columns, blade wheels and electrical cabinet



BMSO 460CS — front view



Bekamak BMSO 1313CS fully automatic double-column band saw for blocks and billets, 51-1/8″ × 51-1/8″ (1300 × 1300 mm)

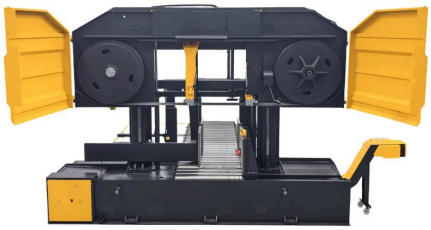

BMSO 1313CS — bow and column covers open: blade wheels, 2-5/8″ / 3-1/8″ band and hydraulic blade tension



BMSO 1313CS — rear view with the 10 ft (3 m) roller table and servo feed

DETAILS, COMPONENTS AND OPTIONS · 3 / 3


BMSO CS NC FULLY AUTOMATIC SERVO-FEED DOUBLE-COLUMN BAND SAWS



BMSO 1313CS — front quarter view




Bekamak BMSO 420CS from the rear, with the electrical cabinet and the mesh guards

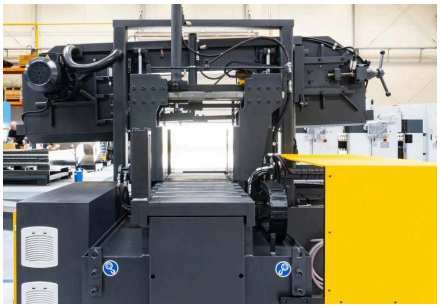


Bekamak BMSO 330CS from the rear: the band wheel housing, the drive and the roller table



Hydraulic vise and the cutting area of the Bekamak BMSO 820CS

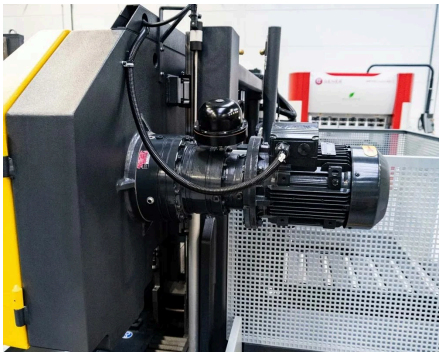

Drive motor and gearbox of the Bekamak BMSO 420CS

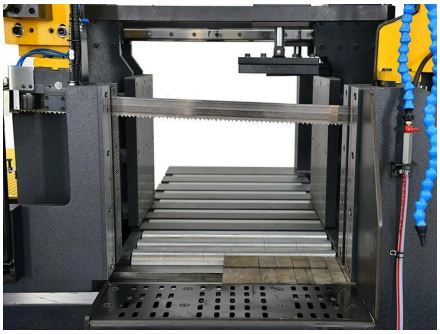

Bekamak BMSO 570CS: the blade between its guide arms, over the infeed rollers

TECHNICAL SPECIFICATIONS

BMSO CS NC FULLY AUTOMATIC SERVO-FEED DOUBLE-COLUMN BAND SAWS

BMSO CS NC SERVO

Model	BMSO 330CS	BMSO 420CS	BMSO 460CS	BMSO 560CS	BMSO 570CS	BMSO 820CS	BMSO 1110CS	BMSO 1313CS
Capacity 0° (straight) — round	Ø13" (330 mm)	Ø16-1/2" (420 mm)	Ø18-1/8" (460 mm)	Ø22" (560 mm)	Ø22-1/2" (570 mm)	Ø32-1/4" (820 mm)	Ø43-3/4" (1110 mm)	Ø51-1/8" (1300 mm)
Capacity 0° (straight) — rectangular W × H	14-1/8" × 13" (360 × 330 mm)	16-1/2" × 16-1/2" (420 × 420 mm)	21-1/4" × 18-1/8" (540 × 460 mm)	23-5/8" × 22" (600 × 560 mm)	23-5/8" × 22-1/2" (600 × 570 mm)	33-1/2" × 32-1/4" (850 × 820 mm)	—	51-1/8" × 51-1/8" (1300 × 1300 mm)
Capacity 0° (straight) — square	13" (330 mm)	16-1/2" (420 mm)	18-1/8" (460 mm)	22" (560 mm)	22-1/2" (570 mm)	32-1/4" (820 mm)	43-3/4" (1110 mm)	51-1/8" (1300 mm)
Blade speed	49–394 ft/min (15–120 m/min)	49–394 ft/min (15–120 m/min)	49–394 ft/min (15–120 m/min)	49–394 ft/min (15–120 m/min)	49–394 ft/min (15–120 m/min)	49–394 ft/min (15–120 m/min)	49–394 ft/min (15–120 m/min)	49–394 ft/min (15–120 m/min)
Band blade L × W × T	197 × 1-1/4 × .042 in (5000 × 34 × 1.1 mm)	226-1/2 × 1-1/2 × .050 in (5750 × 41 × 1.3 mm)	226-1/2 × 1-1/2 × .050 in (5750 × 41 × 1.3 mm)	236 × 1-1/2 × .050 in (6000 × 41 × 1.3 mm)	291-1/2 × 2 × .063 in (7400 × 54 × 1.6 mm)	374 × 2 × .063 / 2-5/8 × .063 in (9500 × 54/67 × 1.6 mm)	429 × 2-5/8 × .063 in (10900 × 67 × 1.6 mm)	476-1/2 × 2-5/8 × .063 / 3-1/8 × .063 in (12100 × 67/80 × 1.6 mm)
Main motor	4 HP (3 kW)	7.4 HP (5.5 kW)	5.4 HP (4 kW)	7.4 HP (5.5 kW)	10 HP (7.5 kW)	10 HP (7.5 kW)	14.8 HP (11 kW)	14.8–20.1 HP (11–15 kW)
Hydraulic motor	2 HP (1.5 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	3 HP (2.2 kW)	5.4 HP (4 kW)	5.4 HP (4 kW)
Coolant pump	0.2 HP (0.12 kW)	0.2 HP (0.12 kW)	0.2 HP (0.12 kW)	0.2 HP (0.12 kW)	0.2 HP (0.12 kW)	0.2 HP (0.12 kW)	0.2 HP (0.12 kW)	0.2 HP (0.12 kW)
Feeder Servo Motor	1.3 HP (1 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)	2.7 HP (2 kW)	—	2.7 HP (2 kW)
Chip Conveyor Motor	0.3 HP (0.25 kW)	0.3 HP (0.25 kW)	0.3 HP (0.25 kW)	0.3 HP (0.25 kW)	0.3 HP (0.25 kW)	0.3 HP (0.25 kW)	0.3 HP (0.25 kW)	0.3 HP (0.25 kW)
500 mm Pull Table	—	—	—	—	—	—	6,173 lb (2,800 kg)	—
Feed stroke	—	—	—	—	—	—	—	118-1/8" (3000 mm)
Minimum cutting diameter	—	—	—	—	—	—	—	11-3/4" (300 mm)
Working height	33-1/2" (845 mm)	31-1/2" (805 mm)	32-1/2" (826.5 mm)	32" (810 mm)	31-1/2" (805 mm)	34" (859 mm)	21-1/2" (542 mm)	36" (914 mm)
Weight	5,886 lb (2,670 kg)	7,275 lb (3,300 kg)	7,165 lb (3,250 kg)	9,921 lb (4,500 kg)	13,007 lb (5,900 kg)	21,275 lb (9,650 kg)	33,400 lb (15,150 kg)	52,911 lb (24,000 kg)
3M Stand Weight (Piece)	—	—	—	—	—	—	2,315 lb (1,050 kg)	—
1M Stand Weight	—	—	—	—	—	—	1,728 lb (784 kg)	—
Dimensions L × W × H	111 × 76 × 73 in (2815 × 1935 × 1855 mm)	113 × 78 × 83 in (2860 × 1980 × 2100 mm)	118 × 85 × 83 in (3000 × 2150 × 2100 mm)	128 × 87 × 93 in (3250 × 2200 × 2350 mm)	138 × 79 × 106 in (3500 × 2000 × 2700 mm)	177 × 104 × 122 in (4500 × 2650 × 3100 mm)	236 × 150 × 137 in (6000 × 3800 × 3480 mm)	236 × 205 × 169 in (6000 × 5200 × 4300 mm)
Voltage	600 V 3-phase (208/240/480 V on request)	600 V 3-phase (208/240/480 V on request)	600 V 3-phase (208/240/480 V on request)	600 V 3-phase (208/240/480 V on request)	600 V 3-phase (208/240/480 V on request)	600 V 3-phase (208/240/480 V on request)	600 V 3-phase (208/240/480 V on request)	600 V 3-phase (208/240/480 V on request)

Capacities are the largest stock the saw passes at the stated angle, converted from the manufacturer's metric data and rounded to the nearest 1/8". Blade size is length × width × thickness.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Bekamak with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TERRA 6

TERRA 6 HIGH-SPEED FULLY AUTOMATIC BAND SAW, 26″



MODEL TERRA · BEKAMAK TERRA 6 HIGH-SPEED FULLY AUTOMATIC BAND SAW, Ø26″ (660 MM): ENCLOSED CABIN AND PC-BASED CONTROL



TERRA 6 — front quarter view of the cabin; blade speed to 1,970 ft/min (600 m/min)



TERRA 6 — left side of the enclosure

Ø26″ (660 mm) round · blade speed to 1,970 ft/min (600 m/min) · carbide and bi-metal blades

Bekamak's fastest saw: a fully enclosed double-column production machine whose 40 HP (30 kW) drive runs the 2-5/8″ (67 mm) band at up to 1,970 ft/min (600 m/min), so a Ø16-3/8″ (415 mm) solid bar that takes around 22 minutes on a conventional band saw is cut in about 2 minutes with the right carbide blade. Servo bow feed and servo material feed, a PC-based control that measures the load on the blade through a load cell and corrects the cutting parameters in real time, deflection control, a camera in the cabin and a zero-remnant unloading cycle — for steel service centres, forges, machine builders and the automotive industry, with carbide or bi-metal blades, up to Ø26″ (660 mm) round.

STANDARD FEATURES

- ✓ Ø26″ (660 mm) round and 26″ × 26″ (660 × 660 mm) rectangular capacity; minimum cut 5/8″ (15 mm)
- ✓ Blade speed 50 – 1,970 ft/min (15 – 600 m/min) on a 40 HP (30 kW) main motor; 2-5/8″ × .063″ (67 × 1.6 mm) carbide or bi-metal band
- ✓ Servo bow feed (2.7 HP / 2 kW) and servo material feed (2 HP / 1.5 kW): 27-1/2″ (700 mm) feed stroke, multiple strokes to 394″ (9999 mm), zero remnant in automatic mode
- ✓ PC-based control with load cell and deflection control: cutting parameters corrected in real time for longer blade life and a better surface finish
- ✓ Fully enclosed cabin with camera, hydraulic vises, hydraulic blade tension, hydraulic bow lock, inclined bow, motorized chip brush, chip conveyor, coolant filtration unit
- ✓ Options: micro-spray lubrication, 10 ft (3 m) material roller table

OPTIONAL EQUIPMENT

- \+ Micro-spray lubrication
- \+ 10 ft (3 m) material roller table

TECHNICAL SPECIFICATIONS

TERRA 6 HIGH-SPEED FULLY AUTOMATIC BAND SAW, 26″

TERRA 6 HIGH-SPEED

Model	TERRA 6
Capacity 0° (straight) — round	Ø26″ (660 mm)
Capacity 0° (straight) — rectangular W × H	26″ × 26″ (660 × 660 mm)
Capacity 0° (straight) — square	26″ (660 mm)
Blade speed	49–1,968 ft/min (15–600 m/min)
Band blade L × W × T	441-1/2 × 2-5/8 × .063 in (11220 × 67 × 1.6 mm)
Main motor	40.2 HP (30 kW)
Hydraulic motor	3 HP (2.2 kW)
Bow servo motor	2.7 HP (2 kW)
Feeder servo motor	2 HP (1.5 kW)
Coolant filtration unit	1 HP (0.75 kW)
Feed stroke	27-1/2″ (700 mm)
Unloading stroke	11-3/4″ (300 mm)
Multiple-stroke feed length	393-5/8″ (9999 mm)
Minimum cutting length	5/8″ (15 mm)
Minimum remnant in automatic mode	0″ (0 mm)
Depth with chip conveyor	117-1/8″ (2975 mm)
Working height	32-1/2″ (820 mm)
Weight	26,015 lb (11,800 kg)
Dimensions L × W × H	207 × 89 × 111 in (5250 × 2250 × 2820 mm)
Voltage	600 V 3-phase (208/240/480 V on request)

Capacities are the largest stock the saw passes at the stated angle, converted from the manufacturer's metric data and rounded to the nearest 1/8″. Blade size is length × width × thickness.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Turkey by Bekamak with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

BMH 170

BMH 170 HYDRAULIC POWER HACKSAW, 6-3/4"



MODEL BMH · BEKAMAK BMH 170 HYDRAULIC POWER HACKSAW, Ø6-3/4" (170 MM), WITH THE VISE AND ROLLER TABLE

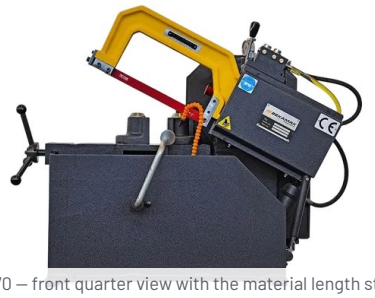

BMH 170 — front quarter view with the material length stop



BMH 170 — right side: reciprocating frame and hydraulic feed cylinder

Ø6-3/4" (170 mm) round · 7-7/8" × 4-3/4" rectangular · hydraulic feed

Not a band saw but the simplest Bekamak saw of all: a hydraulic power hacksaw whose flat 13-3/4" (350 mm) blade reciprocates while hydraulic pressure feeds it through the material. The operator clamps the bar in the vise, sets the cutting speed and the length stop and starts the cut; the frame lifts when the piece drops. Ø6-3/4" (170 mm) round at 0° and Ø4-3/8" (110 mm) at 45°, a 1 HP motor and a footprint of 43" × 24" — for the small shop, the maintenance department and anyone who cuts a few pieces a day.

STANDARD FEATURES

- ✓ Ø6-3/4" (170 mm) round, 7-7/8" × 4-3/4" (200 × 120 mm) rectangular at 0°; Ø4-3/8" (110 mm) round at 45°
- ✓ Hydraulic down-feed of the reciprocating 13-3/4" × 1-3/16" (350 × 30 mm) hacksaw blade; cutting-speed control
- ✓ 1 HP (0.75 kW) motor; vise, adjustable material length stop and height adjustment
- ✓ Coolant pump, roller table, electrical panel and control panel standard; 584 lb (265 kg)

OPTIONAL EQUIPMENT

TECHNICAL SPECIFICATIONS

BMH 170 HYDRAULIC POWER HACKSAW, 6-3/4"

BMH 170 HACKSAW

Model	BMH 170
Capacity 0° (straight) — round	Ø6-3/4" (170 mm)
Capacity 0° (straight) — rectangular W × H	7-7/8" × 4-3/4" (200 × 120 mm)
Capacity 0° (straight) — square	5-3/4" (145 mm)
Capacity +45° right — round	Ø4-3/8" (110 mm)
Capacity +45° right — rectangular W × H	4-3/8" × 4-3/8" (110 × 110 mm)
Capacity +45° right — square	4-3/4" (120 mm)
Blade speed	394 ft/min (120 m/min)
Main motor	1 HP (0.75 kW)
Hacksaw blade L × W × T	13-3/4" × 1-3/16" × .059" (350 × 30 × 1.5 mm)
Working height	17" (430 mm)
Weight	584 lb (265 kg)
Dimensions L × W × H	43 × 24 × 32 in (1100 × 600 × 810 mm)
Voltage	600 V 3-phase (208/240/480 V on request)

Capacities are the largest stock the saw passes at the stated angle, converted from the manufacturer's metric data and rounded to the nearest 1/8". Blade size is length × width × thickness.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Turkey by Bekamak with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

OPUS 300

OPUS 300 — AUTOMATIC TCT CARBIDE CIRCULAR SAW, Ø11-3/4"



MODEL OPUS · BEKAMAK OPUS 300 AUTOMATIC TCT CARBIDE CIRCULAR SAW, SOLID BAR TO Ø11-3/4": ENCLOSED CABIN, CHIP CONVEYOR AND CONTROL PANEL

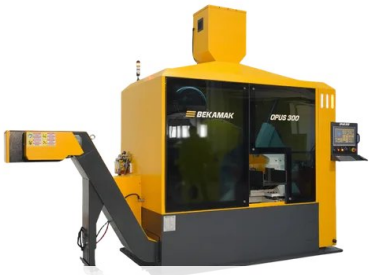

OPUS 300 — rear quarter view with the chip conveyor



OPUS 300 — cabin open: Ø35-7/16" (900 mm) TCT blade, servo saw head and hydraulic clamping

Solid bar Ø2-3/4" to Ø11-3/4" (70 – 300 mm) · Ø35-7/16" TCT blade · servo feed · 20 ft loader

The largest of Bekamak's carbide cold saws: a Ø35-7/16" (900 mm) TCT blade on a 50 HP (37 kW) spindle and a servo-driven saw head cut solid steel and non-ferrous bar from Ø2-3/4" to Ø11-3/4" (70 – 300 mm) in continuous production. The AC-servo ball-screw material feed positions the bar in a 27-1/2" (700 mm) stroke to lengths from 3/8" to 394", the 20 ft (6 m) automatic loader holds five Ø11-3/4" bars, and the enclosed cabin, hydraulic clamping, oil-mist lubrication and chip conveyor let the saw run unattended, down to a 3-3/8" (85 mm) remnant.

STANDARD FEATURES

- ✓ Solid bar Ø2-3/4" – 11-3/4" (70 – 300 mm) round and square to 9-1/2" (240 mm), with a Ø35-7/16" (900 mm) TCT carbide blade
- ✓ 50 HP (37 kW) main motor, blade speed 165 – 785 ft/min (50 – 240 m/min); 5.4 HP (4 kW) servo saw-head feed
- ✓ AC-servo ball-screw material feed: 27-1/2" (700 mm) stroke, lengths 3/8" – 394" (10 – 9999 mm) at up to 30 in/s; 3/8" end trim, 3-3/8" remnant
- ✓ 20 ft (6 m) automatic magazine loader for five Ø11-3/4" bars; hydraulic clamping; enclosed cabin with chip conveyor and oil-mist lubrication
- ✓ Options: air filter, 20 ft (6 m) automatic material stand

OPTIONAL EQUIPMENT

- + Air filter
- + 20 ft (6 m) automatic material stand
- + 208 / 240 / 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

OPUS 300 — AUTOMATIC TCT CARBIDE CIRCULAR SAW, Ø11-3/4"



OPUS 300 — touch-screen control panel

TECHNICAL SPECIFICATIONS

OPUS 300 — AUTOMATIC TCT CARBIDE CIRCULAR SAW, Ø11-3/4"

OPUS 300 — AUTOMATIC TCT CIRCULAR SAW

Ø35-7/16" (900 mm) carbide blade for solid bar to Ø11-3/4" · servo feeding · magazine loader

Model	OPUS 300
Cutting capacity — round solid bar	**Ø2-3/4" – 11-3/4" (70 – 300 mm)**
Cutting capacity — square	**to 9-1/2" × 9-1/2" (240 × 240 mm)**
Blade Ø × T TCT carbide	**Ø35-7/16" × .142" body / .165" kerf (900 × 3.6 / 4.2 mm)**
Blade bore / pin holes	80 mm / 4-27-120, 2-12-64, 2-15-80
Blade speed stepless	165 – 785 ft/min (50 – 240 m/min)
Main motor	50 HP (37 kW)
Saw-head feed / material feed servo	5.4 HP (4 kW) / 2.7 HP (2 kW)
Hydraulic motor	3 HP (2.2 kW)
Coolant pump / chip conveyor	0.27 HP / 0.33 HP (0.2 / 0.25 kW)
Installed power	63 HP (47.15 kW)
Material feed AC servo and ball screw	27-1/2" (700 mm) stroke · 3/8" – 394" (10 – 9999 mm) lengths · 0 – 30 in/s (750 mm/s)
End-trim / remnant length	3/8" / 3-3/8" (10 / 85 mm)
Magazine loader bundle of 20 ft bars	5 × Ø11-3/4" (300 mm) bars, 20 ft (6 m) long
Loader dimensions L × W × H	242 × 102 × 75" (6150 × 2600 × 1900 mm)
Compressed air	73 psi (5 bar), 8.7 cfm (245 l/min)
Hydraulic tank / oil-mist tank	18.5 gal / 0.4 gal (70 / 1.5 l)
Table height	37" (940 mm)
Dimensions W × L × H	163 × 98 × 126" (4150 × 2500 × 3200 mm)
Weight	24,251 lb (11,000 kg)

Capacities are for solid steel bar with a TCT blade. Supplied for 600 V 3-phase with a CSA-approved panel (208 / 240 / 480 V on request).

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey by Bekamak with European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.