
SF3015H · THIRD GENERATION · 1.5 – 6 KW

SF3015H FIBER LASER TECHNICAL SPECIFICATION

MEDIUM AND HIGH POWER FIBER LASER CUTTING MACHINE





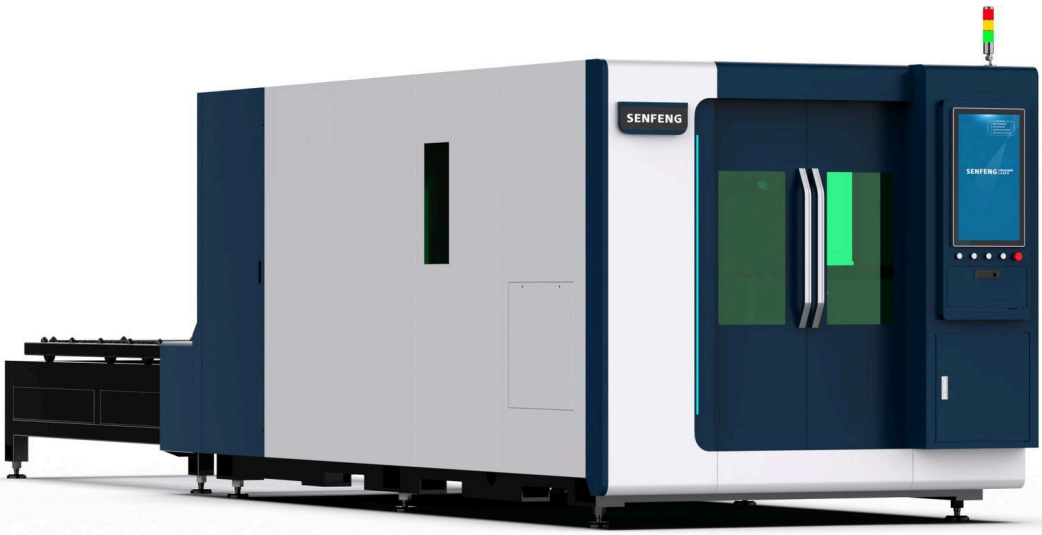





10 × 5 ft	1.5 – 6 kW	427 ft/min	1.2 G
WORK AREA	MAX FIBER LASER	MAXIMUM SPEED	MAXIMUM ACCELERATION

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

FULL TECHNICAL SPECIFICATION · SF3015H · 1.5 – 6 KW

CONTENTS

Fiber laser cutting machine · Senfeng technical solutions 03
01 · Model 04
02 · Technical parameters 05
03 · Cutting parameters — stainless steel 06
03 · Cutting parameters — carbon steel 07
04 · Cutting parameters — brass, aluminum 08
05 · Cost-benefit analysis 09
06 · Configuration list 10
07 · Laser source, laser head 11
08 – 09 · Machine bed system 12
10 · Auto gas distribution system 14
11 · CNC system 15
12 – 14 · Optional configuration: swing arm loading, loading robot, warehouse 16
15 · Shipping 19
16 · Automated metal fabrication solutions 20
17 · Personnel training, packaging and transportation, installation 21
18 · Customization 22
19 · Five-star fast service 23
20 · Customer testimonials 24

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SOLD & SERVICED IN CANADA

by NovoTech Machine Tools — Mississauga, ON

FIBER LASER CUTTING MACHINE · CONTENTS

SENFENG TECHNICAL SOLUTIONS

Contents of Senfeng's SF3015H technical solution: the model and its technical and cutting parameters, a cost-benefit analysis and the configuration list; the core components and systems — laser source and head, machine bed, automatic gas distribution, CNC system and the optional loading automation; and Senfeng's after-sales service — automated metal fabrication solutions, personnel training, packaging and transportation, installation and customization, five-star fast service and customer testimonials.

- Fiber laser cutting machine: model, technical parameters, cutting parameters, cost-benefit analysis, configuration list
- Core components and systems: laser source and laser head, machine bed system, auto gas distribution system, CNC system, optional configuration
- After-sales service: automated metal fabrication solutions, training, packaging and transportation, installation and customization, five-star fast service, customer testimonials




Senfeng's campus in Jinan, China

01 · MODEL · THE THIRD GENERATION

SF3015H

Medium and high power fiber laser cutting machine.

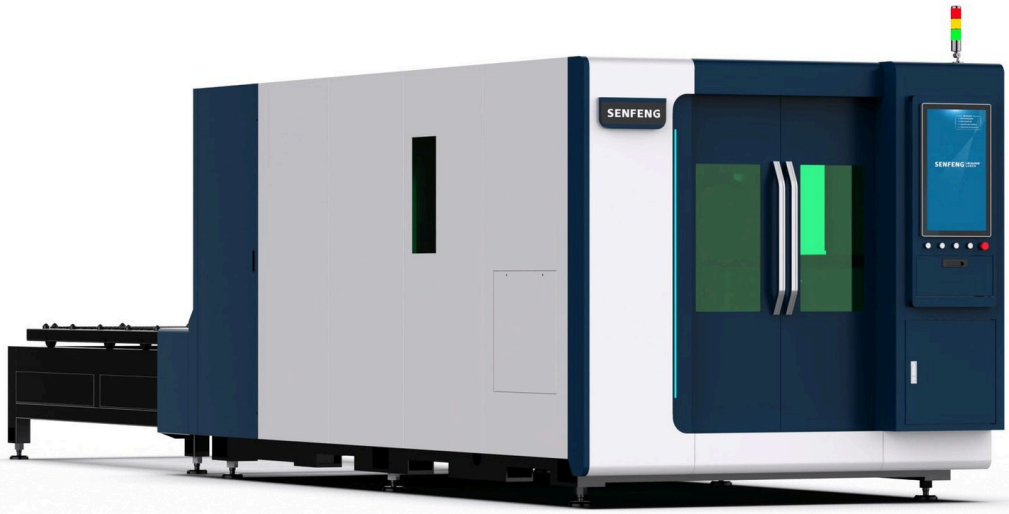

1 HIGH STRENGTH MACHINE BED

2 INTELLIGENT SPIRAL NEGATIVE PRESSURE DUST REMOVAL

3 VISUAL MONITORING FOR SAFETY PROTECTION

4 INTEGRATED TEMPERATURE AND HUMIDITY CONTROL

**The image is for reference only; the appearance and dimensions are subject to the actual product from the factory.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

02 · TECHNICAL PARAMETERS

TECHNICAL PARAMETERS · SF3015H

ITEM	1.5 KW	2 KW	3 KW	4 KW	6 KW
Work area (L × W)	10 × 5 ft (3,050 × 1,530 mm)				
X-axis travel	60.2″ (1,530 mm)				
Y-axis travel	120.1″ (3,050 mm)				
Z-axis travel	8.7″ (220 mm)				
X / Y axis positioning accuracy	±0.002″ (±0.05 mm)				
X / Y axis repeated positioning accuracy	±0.0008″ (±0.02 mm)				
Maximum speed	427 ft/min (130 m/min)				
Maximum acceleration	1.2 G				
Dimensions (L × W × H)	28.0 × 7.4 × 7.2 ft (8,520 × 2,270 × 2,180 mm)				
Maximum load	2,425 lb (1,100 kg)				
Weight	11,552 lb (5,240 kg)	11,552 lb (5,240 kg)	11,596 lb (5,260 kg)	11,729 lb (5,320 kg)	11,729 lb (5,320 kg)
Phase	Three-phase				
Power supply rated voltage	380 V — in Canada: 208 / 240 / 480 / 600 V 3-phase 60 Hz through the transformer NovoTech supplies				
Frequency	60 Hz				
Overall power supply protection level	IP54				

1. Workpiece accuracy depends on factors like type, pre-treatment, sheet size and position.

2. Technical parameters are subject to change without notice. Final parameters are based on the order agreement.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CUTTING PARAMETERS · 1 OF 3

STAINLESS STEEL

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "O_2" marks a value cut with oxygen where the row's gas is N_2 / air.

Material	Thickness	1.5 kW	2 kW	3 kW	4 kW	6 kW	Gas
STAINLESS STEEL	**0.039"** 1 mm	906 – 1,181 23 – 30	1,181 – 1,378 30 – 35	1,181 – 1,772 30 – 45	1,575 – 1,969 40 – 50	1,772 – 2,165 45 – 55	N_2 / air
	0.079" 2 mm	276 – 472 7.0 – 12	394 – 591 10 – 15	787 – 984 20 – 25	984 – 1,181 25 – 30	1,181 – 1,378 30 – 35	N_2 / air
	0.118" 3 mm	177 – 217 4.5 – 5.5	197 – 256 5.0 – 6.5	315 – 394 8.0 – 10	354 – 512 9.0 – 13	709 – 866 18 – 22	N_2 / air
	0.157" 4 mm	79 – 98 2.0 – 2.5	157 – 197 4.0 – 5.0	197 – 236 5.0 – 6.0	276 – 366 7.0 – 9.3	394 – 551 10 – 14	N_2 / air
	0.197" 5 mm	55 – 79 1.4 – 2.0	79 – 91 2.0 – 2.3	118 – 142 3.0 – 3.6	157 – 177 4 – 4.5	315 – 394 8.0 – 10	N_2 / air
	0.236" 6 mm	39 – 47 1.0 – 1.2	59 – 79 1.5 – 2.0	79 – 118 2.0 – 3.0	138 – 177 3.5 – 4.5	169 – 197 4.3 – 5.0	N_2 / air
	0.315" 8 mm		31 – 47 0.8 – 1.2	39 – 59 1.0 – 1.5	79 – 118 2.0 – 3.0	118 – 157 3.0 – 4.0	N_2 / air
	0.394" 10 mm			20 – 39 0.5 – 1.0	47 – 63 1.2 – 1.6	71 – 98 1.8 – 2.5	N_2 / air
	0.472" 12 mm			16 – 24 0.4 – 0.6	31 – 47 0.8 – 1.2	39 – 59 1.0 – 1.5	N_2 / air
	0.551" 14 mm					31 – 47 0.8 – 1.2	N_2 / air
	0.630" 16 mm					24 – 39 0.6 – 1.0	N_2 / air
	0.787" 20 mm					16 – 28 0.4 – 0.7	air

Sample cutting only — full sheets cannot be processed at this power

1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.

2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CUTTING PARAMETERS · 2 OF 3

CARBON STEEL

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "O_2" marks a value cut with oxygen where the row's gas is N_2 / air.

Material	Thickness	1.5 kW	2 kW	3 kW	4 kW	6 kW	Gas
CARBON STEEL	**0.039"** 1 mm	906 – 1,024 23 – 26	984 – 1,378 25 – 35	1,181 – 1,575 30 – 40	1,378 – 1,772 35 – 45	1,575 – 1,772 40 – 45	N_2 / air
	0.079" 2 mm	165 – 256 4.2 – 6.5	394 – 591 10 – 15	591 – 787 15 – 20	591 – 787 15 – 20	787 – 1,102 20 – 28	N_2 / air
	0.118" 3 mm	118 – 177 3.0 – 4.5	138 – 217 3.5 – 5.5	138 – 177 3.5 – 4.5	276 – 354 7.0 – 9.0	472 – 669 12 – 17	N_2 / air
	0.157" 4 mm	91 – 118 2.3 – 3.0	118 – 126 3.0 – 3.2	118 – 138 3.0 – 3.5	118 – 157 3.0 – 4.0	315 – 394 8.0 – 10	N_2 / air
	0.236" 6 mm	67 – 98 1.7 – 2.5	79 – 106 2.0 – 2.7	98 – 138 2.5 – 3.5	79 – 118 2.0 – 3.0	98 – 130 2.5 – 3.3	O_2
	0.315" 8 mm	47 – 63 1.2 – 1.6	51 – 67 1.3 – 1.7	71 – 91 1.8 – 2.3	79 – 118 2.0 – 3.0	91 – 118 2.3 – 3.0	O_2
	0.394" 10 mm	39 – 47 1.0 – 1.2	39 – 63 1.0 – 1.6	55 – 71 1.4 – 1.8	79 – 98 2.0 – 2.5	79 – 98 2.0 – 2.5	O_2
	0.472" 12 mm	31 – 39 0.8 – 1.0	31 – 47 0.8 – 1.2	39 – 55 1.0 – 1.4	59 – 79 1.5 – 2.0	71 – 87 1.8 – 2.2	O_2
	0.551" 14 mm	24 – 28 0.6 – 0.7	31 – 39 0.8 – 1.0	31 – 39 0.8 – 1.0	39 – 59 1.0 – 1.5	55 – 67 1.4 – 1.7	O_2
	0.630" 16 mm	20 – 24 0.5 – 0.6	28 – 39 0.7 – 1.0	28 – 43 0.7 – 1.1	28 – 47 0.7 – 1.2	39 – 63 1.0 – 1.6	O_2
	0.787" 20 mm			20 – 28 0.5 – 0.7	24 – 31 0.6 – 0.8	24 – 47 0.6 – 1.2	O_2
	0.984" 25 mm				16 – 24 0.4 – 0.6	20 – 28 0.5 – 0.7	O_2
	1.181" 30 mm					16 – 24 0.4 – 0.6	O_2

Sample cutting only — full sheets cannot be processed at this power

1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.

2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CUTTING PARAMETERS · 3 OF 3

BRASS · ALUMINUM

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "O_2" marks a value cut with oxygen where the row's gas is N_2 / air.

Material	Thickness	1.5 kW	2 kW	3 kW	4 kW	6 kW	Gas
BRASS	0.039″ 1 mm	591 – 787 15 – 20	591 – 984 15 – 25	984 – 1,181 25 – 30	1,181 – 1,378 30 – 35	1,575 – 1,772 40 – 45	N_2 / air
	0.079″ 2 mm	189 – 236 4.8 – 6.0	315 – 433 8.0 – 11	472 – 669 12 – 17	591 – 709 15 – 18	787 – 984 20 – 25	N_2 / air
	0.118″ 3 mm	59 – 79 1.5 – 2.0	118 – 177 3.0 – 4.5	197 – 236 5.0 – 6.0	315 – 394 8.0 – 10	472 – 591 12 – 15	N_2 / air
	0.197″ 5 mm	20 – 28 0.5 – 0.7	51 – 67 1.3 – 1.7	71 – 98 1.8 – 2.5	118 – 157 3.0 – 4.0	197 – 236 5.0 – 6.0	N_2 / air
	0.236″ 6 mm		24 – 31 0.6 – 0.8	31 – 39 0.8 – 1.0	79 – 98 2.0 – 2.5	118 – 157 3.0 – 4.0	N_2 / air
	0.315″ 8 mm				31 – 47 0.8 – 1.2	59 – 98 1.5 – 2.5	N_2 / air
	0.394″ 10 mm					39 – 59 1.0 – 1.5	N_2 / air
	0.472″ 12 mm					31 – 39 0.8 – 1	N_2 / air
ALUMINUM	0.039″ 1 mm	591 – 906 15 – 23	787 – 984 20 – 25	1,181 – 1,378 30 – 35	1,378 – 1,575 35 – 40	1,969 – 2,165 50 – 55	N_2 / air
	0.079″ 2 mm	236 – 315 6.0 – 8.0	394 – 591 10 – 15	551 – 787 14 – 20	669 – 984 17 – 25	984 – 1,181 25 – 30	N_2 / air
	0.118″ 3 mm	79 – 118 2.0 – 3.0	157 – 197 4.0 – 5.0	315 – 394 8.0 – 10	394 – 512 10 – 13	512 – 630 13 – 16	N_2 / air
	0.157″ 4 mm	39 – 67 1.0 – 1.7	79 – 98 2.0 – 2.5	197 – 256 5.0 – 6.5	236 – 295 6.0 – 7.5	394 – 512 10 – 13	N_2 / air
	0.197″ 5 mm	20 – 31 0.5 – 0.8	39 – 79 1.0 – 2.0	98 – 138 2.5 – 3.5	157 – 197 4.0 – 5.0	197 – 236 5.0 – 6.0	N_2 / air
	0.236″ 6 mm		24 – 39 0.6 – 1.0	47 – 59 1.2 – 1.5	98 – 138 2.5 – 3.5	118 – 157 3.0 – 4.0	N_2 / air
	0.315″ 8 mm			28 – 51 0.7 – 1.3	39 – 79 1.0 – 2.0	79 – 118 2.0 – 3.0	N_2 / air
	0.394″ 10 mm				31 – 47 0.8 – 1.2	39 – 79 1.0 – 2.0	N_2 / air
	0.472″ 12 mm				16 – 24 0.4 – 0.6	28 – 47 0.7 – 1.2	N_2 / air
	0.551″ 14 mm					20 – 39 0.5 – 1.0	N_2 / air
	0.630″ 16 mm					16 – 24 0.4 – 0.6	N_2 / air

Sample cutting only — full sheets cannot be processed at this power

1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.

2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.

05 · COST-BENEFIT ANALYSIS

COST-BENEFIT ANALYSIS · SF3015H

If the cutting auxiliary gas is dried compressed air, the cost includes the air compressor's electricity, the machine's power consumption and the consumables (protective lenses, cutting nozzles).

Item		1.5 kW			2 kW			3 kW			4 kW			6 kW		
		Air	O_2	N_2	Air	O_2	N_2	Air	O_2	N_2	Air	O_2	N_2	Air	O_2	N_2
PEAK POWER CONSUMPTION	Laser source (kW)	5			6			10			16			16		
	Chiller (kW)	3			3			3			6			6		
	Air compressor (kW)	15	/	/	15	/	/	15	/	/	15	/	/	15	/	/
	Machine tool host (kW)	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
	Dust removal (kW)	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Consumables and gas consumption (CNY/h)		0.5	4.5	60.5	0.5	4.5	60.5	0.5	4.5	60.5	0.5	4.5	60.5	0.5	4.5	60.5
Total power (kW)		36	21	21	37	22	22	41	26	26	50	35	35	50	35	35
Total power consumption (kWh per hour)		21.6	12.6	12.6	22.2	13.2	13.2	24.6	15.6	15.6	30	21	21	30	21	21
Total operating cost (RMB per hour, at 1 RMB/kWh)		22.1	17.1	73.1	22.7	17.7	73.7	25.1	20.1	76.1	30.5	25.5	81.5	30.5	25.5	81.5

1. The electricity and gas prices are Senfeng's reference values in China (RMB) and vary by region.

2. Auxiliary gas consumption varies with plate thickness; the values are based on 0.630" (16 mm) carbon steel for oxygen and 0.039" (1 mm) stainless steel for nitrogen, for reference.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

06 · CONFIGURATION LIST

CONFIGURATION LIST · SF3015H

NO.	ITEM	QTY	BRAND
	LASER SOURCE		
1	Laser source	1	Max
	LASER CUTTING HEAD		
1	Laser cutting head	1	Raytools
	MACHINE TOOL & HOST		
1	Transmission system	4	SENFENG
2	Machine tool and accessory	1	SENFENG
3	Reducer	3	SHIMPO, Japan
4	Electrical and pneumatic systems	1	SCHNEIDER, France · AVENTICS, Germany
5	AC servo motor and driver	4	Fuji, Japan
6	Water chiller	1	Hanli
	CNC CUTTING SYSTEM		
1	CNC laser cutting system	1	FSCUT

1. This is Senfeng's optimized configuration. Changes in brand or configuration may cause irreversible effects.

2. Warranty: NovoTech's 1-year warranty on the entire machine (excluding consumables, force majeure natural disasters, war, improper operation and human damage).

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

07 · CORE COMPONENTS

LASER SOURCE · LASER CUTTING HEAD

SF3015H LASER SOURCE 1.5 – 6 KW OPTIONAL POWER





1. High-power and high-quality laser output
2. Uniformly distributed beam energy
3. Excellent performance and strong processing ability
4. Compact structure and maintenance-free
5. Wide range of applications

SF3015H LASER CUTTING HEAD



3 kW and below



4 – 6 kW

1. **Efficient cooling:** the collimating and focusing lenses have cooling structures, and the nozzle has cooling airflow, protecting the nozzle and ceramic body and extending operation time.
2. **Fast focusing:** collimated focusing allows faster movement and a larger adjustment range than traditional focusing.
3. **Multiple protective lenses:** four protective lenses reduce contamination when the fiber and lower protective lenses are replaced, extending the life of the collimating and focusing lenses.
4. **Optimized structure:** the integrated body design ensures sealing; improved QBH, QD and G5 fiber interfaces improve compatibility with the laser source and prevent jamming caused by rust or water leakage.

08 · MACHINE BED SYSTEM

SF3015H MACHINE BED SYSTEM





1 · High strength machine bed

- Welded with precision welding techniques; after stress-relief annealing it undergoes secondary vibration aging treatment and finishing.
- Finite element analysis gives the optimal stress points and support structure, greatly reducing resonance during movement and ensuring long-term stable operation.

2 · Aerospace-grade high-strength aluminum beam

- The beam is aerospace-grade high-strength aluminum alloy, extruded, heat-treated and precision-machined for excellent rigidity and surface quality. Its corrosion resistance, light weight, high rigidity and toughness are ideal for high-speed laser cutting.
- The optimized internal structure ensures excellent dynamic performance, enabling high-speed cutting with accuracy.





3 · Intelligent spiral negative pressure dust removal

- The dust extraction system controls the exhaust vents according to the current cutting position, with timed, zoned and sectional exhaust.
- Combined with the base's bottom return-seal design, it ensures smoke-free cutting.

4 · Visual monitoring for safety protection

- The all-around monitoring system minimizes blind spots, ensuring safe and stable cutting operations.

09 · MACHINE BED SYSTEM

SF3015H MACHINE BED SYSTEM



5 · Temperature-controlled electrical cabinet

- The H series has a newly added temperature-controlled electrical cabinet, so no additional air-conditioned room is needed.
- The internal environment is temperature and humidity controlled, for excellent environmental adaptability.
- Significantly extends the life of the control system's electronic components, ensuring more stable laser cutting performance.



6 · Fully enclosed lift door

- The fully enclosed lift door improves the machine's sealing, improving dust extraction and reducing smoke.



7 · Modular Z axis

- The modular Z axis seals well, reducing contamination and lowering the failure rate.
- Modular installation and replacement greatly reduce maintenance time and difficulty.

10 · AUTO GAS DISTRIBUTION SYSTEM

PRECISE CONTROL OF EACH GAS FLOW



The CNC laser cutting machine has two separate gas lines: nitrogen (air) and oxygen. Each gas line can be independently controlled for flow rate and pressure.

- The equipment software terminal has an automatic auxiliary gas selection feature.
- The type and pressure of the auxiliary gases are set and selected automatically through the CNC program — no manual operation.
- The actual gas pressure at the cutting head outlet is read and displayed on the panel in real time.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

11 · CNC SYSTEM

BUS CUTTING SYSTEM



Quick operation & efficient cutting

This intelligent bus system is designed specifically for fiber laser cutting. It integrates motion control, laser source control and cutting gas control, offering stability, reliability, easy deployment, simple debugging, production safety and a rich set of features with excellent performance. It offers modular, customizable, automated and informational solutions. The system has memory buffering and a comprehensive cutting process database with optimized parameters for various materials and thicknesses, for fast operation and efficient cutting — ideal for sheet metal, kitchenware and lighting.

- Supported file formats: direct processing of DXF files and high-speed reading and writing of LXDS and NRP files generated by CypNest.
- A cutting database allows real-time adjustments during cutting for optimal processing quality.
- Multi-stage piercing, sharp-corner entry and centering significantly improve high-power cutting efficiency and stability.
- Optimized rapid travel modes, including the “LeapFrog” function.


INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

12 · OPTIONAL CONFIGURATION

SERVO SWING ARM LOADING SYSTEM

1 · COMPOSITION

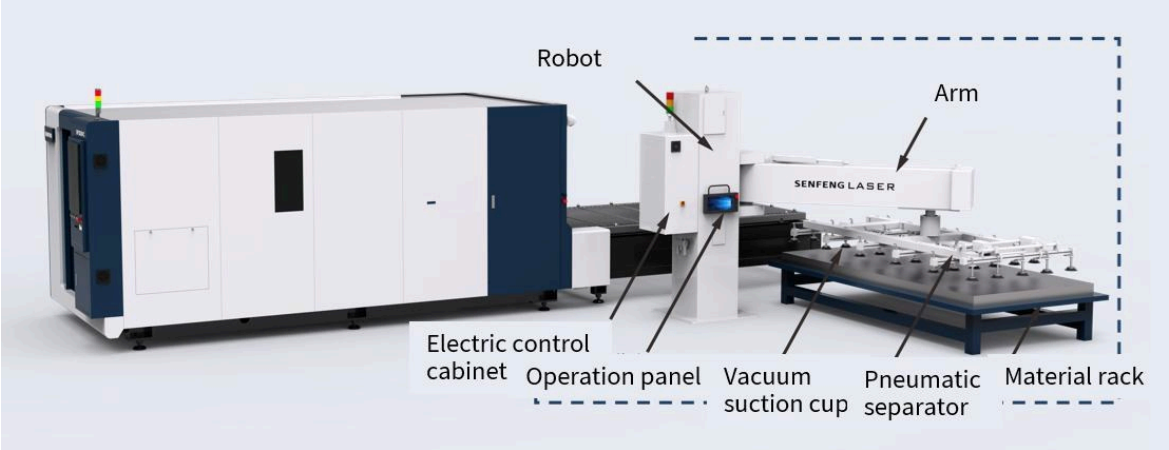

The system consists of a 1,102 lb (500 kg) swing arm manipulator, a 1,102 lb (500 kg) loading vacuum suction cup, a 6,614 lb (3,000 kg) fixed raw material rack, a vacuum system, a safety protection system, a CNC control system, etc.

2 · CORE TECHNICAL PARAMETERS


NO.	ITEM	PARAMETER
1	**Maximum sheet size**	10 × 5 ft (3,000 × 1,500 mm)
2	**Minimum sheet size**	31.5 × 31.5″ (800 × 800 mm)
3	**Sheet thickness**	0.04 – 0.55″ (1 – 14 mm)
4	**Maximum sheet weight**	1,102 lb (500 kg)
5	**Arm swing angle**	120°
6	**Repeated positioning accuracy**	±0.04″ (±1 mm)
7	**Single load cycle**	< 45 s
8	**Gas supply pressure**	73 – 87 psi (0.5 – 0.6 MPa)
9	**Gas consumption**	7.1 cfm (0.2 m^3/min)
10	**Material rack load**	6,614 lb (3,000 kg)
11	**Power supply voltage**	220 / 380 V
12	**Operating current**	12 A

13 · OPTIONAL CONFIGURATION

3015 AUTOMATIC LOADING AND UNLOADING ROBOT

1 · COMPOSITION

This system consists of composite truss manipulators for loading and unloading, a double-layer electric material cart, a CNC control system and a vacuum control system, working with the laser cutter as an automated sheet metal production unit. It automates the loading and unloading of plates, improving efficiency and reducing costs.

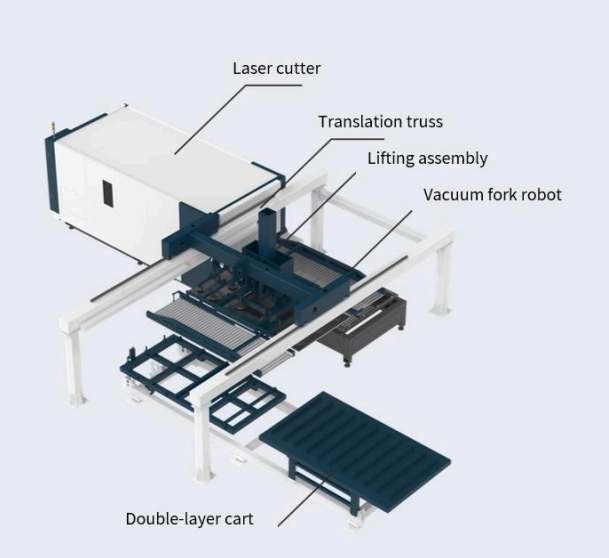

2 · CORE TECHNICAL PARAMETERS


NO.	ITEM	PARAMETER
1	**Maximum sheet size**	10 × 5 ft (3,000 × 1,500 mm)
2	**Minimum sheet size**	31.5 × 31.5″ (800 × 800 mm)
3	**Maximum sheet thickness**	0.55″ (14 mm)
4	**Minimum sheet thickness**	0.031″ (0.8 mm)
5	**Maximum sheet weight**	1,102 lb (500 kg)
6	**Single-layer loading weight of the exchange material cart**	6,614 lb (3 t)
7	**Single-layer loading height of the exchange material cart**	9.4″ (240 mm), including the material tray
8	**Manipulator translation speed**	33 – 98 ft/min (10 – 30 m/min)
9	**Manipulator lifting speed**	16 – 33 ft/min (5 – 10 m/min)
10	**Cart exchange speed**	33 ft/min (10 m/min)
11	**Intake pipe**	0.47″ (12 mm)
12	**Gas source**	87 – 102 psi (0.6 – 0.7 MPa)
13	**Power supply**	3-phase 5-wire 380 V

14 · OPTIONAL CONFIGURATION

3015 WAREHOUSE + AUTOMATIC LOADING AND UNLOADING ROBOT

1 · COMPOSITION

This system consists of a 3015 vertical warehouse, a vacuum suction cup composite fork loading and unloading truss robot, the robot's track frame, a CNC control system, a vacuum control system, etc., which together with the laser cutting machine form an automated sheet metal production unit.

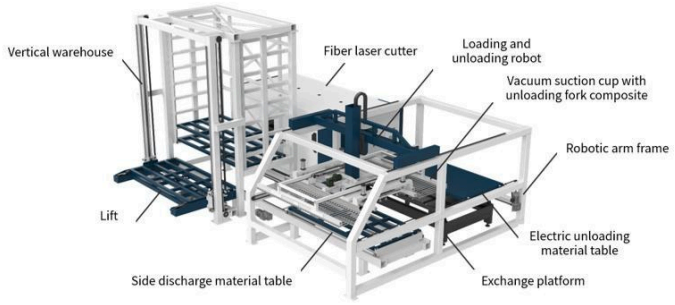

2 · CORE TECHNICAL PARAMETERS

NO.	ITEM	PARAMETER
1	**Layers of warehouse**	10
2	**Sheet size**	10 × 5 ft (3,000 × 1,500 mm)
3	**Warehouse layer load capacity**	6,614 lb (3,000 kg)
4	**Lifting speed**	33 ft/min (10 m/min)
5	**Warehouse in-and-out speed**	33 ft/min (10 m/min)
6	**Maximum sheet size**	10 × 5 ft (3,000 × 1,500 mm)
7	**Minimum sheet size**	31.5 × 31.5″ (800 × 800 mm)
8	**Sheet thickness**	0.04 – 0.55″ (1 – 14 mm)
9	**Maximum sheet weight**	1,102 lb (500 kg)
10	**Translation speed**	33 – 98 ft/min (10 – 30 m/min)
11	**Lifting speed of the loading and unloading manipulator**	16 – 39 ft/min (5 – 12 m/min)
12	**Single loading and unloading cycle**	< 180 s
13	**Air supply pressure**	87 – 102 psi (0.6 – 0.7 MPa)
14	**Load of the electric material cart**	6,614 lb (3,000 kg)
15	**Operation speed of the electric material cart**	33 ft/min (10 m/min)
16	**Power supply voltage**	380 V
17	**Working current**	80 A

15 · SHIPPING

SHIPPING · SF3015H

1 · PACKING

Standard packaging is fixed with high-strength bolts. A 20 ft (20 GP) container is used for shipment, ensuring the safety of the equipment.



2 · SHIPPING


One SF3015H standard machine needs one 20 ft (20 GP) container, making sea transportation cheaper and safer.



16 · AFTER-SALES SERVICE

PROVIDING GLOBAL USERS WITH AUTOMATED METAL FABRICATION SOLUTIONS

Senfeng provides automated metal fabrication solutions globally, integrating cutting, bending, welding, cladding, automation and new energy. With core technologies in laser cutting, welding and cladding, the company also offers intelligent manufacturing systems such as flexible laser processing lines and sheet metal bending centers. These solutions serve industries including automotive, construction, energy and petrochemicals, and are used in over 100 countries.

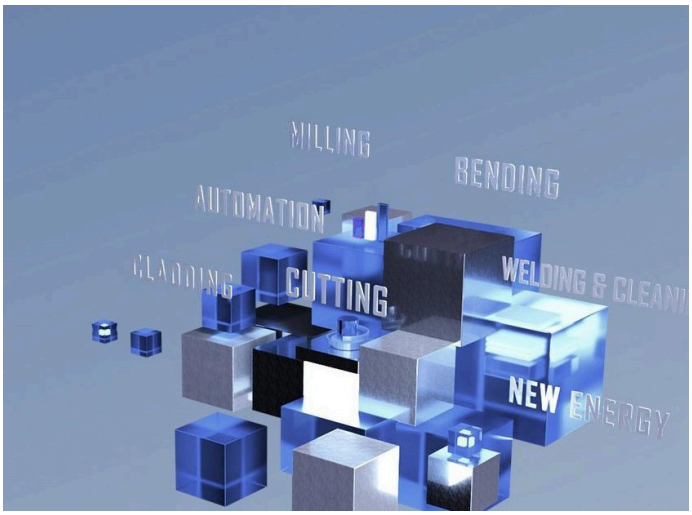

03
INTERNATIONAL PCT PATENTS

577
CHINESE TECHNOLOGY PATENTS

Senfeng has developed key components such as laser generators, processing heads, the Feng Cloud system and CNC systems, used in cutting, welding, cladding and automation. The company offers a complete industry chain, including laser cutting, welding, cladding and cleaning machines, bending centers and flexible production lines. These solutions are used in sectors such as power towers, construction machinery, shipbuilding, bridges and aerospace, helping businesses accelerate production and reduce costs for greater economic benefit.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

17 · AFTER-SALES SERVICE

TRAINING · PACKAGING · INSTALLATION

TECHNICAL TRAINING TO ENHANCE CUSTOMER PRODUCTION EFFICIENCY

01 BEFORE EQUIPMENT DELIVERY

The buyer can arrange for 1 – 2 operators to attend a one-week training at the Senfeng factory. The dates are confirmed with Senfeng's customer service department.

02 DURING THE WARRANTY PERIOD

The buyer can apply for one more session of free training for 1 – 2 operators at Senfeng.

03 TRAINING

Laser principles, equipment structure, process explanation, equipment maintenance, laser safety protection, operating procedures and basic troubleshooting.

04 REQUIREMENT

Trainees must be mechanical, electrical or optical engineers and pass assessments on equipment operation, laser principles, safety and maintenance before starting work.

PACKAGING & TRANSPORTATION TO ENSURE EQUIPMENT QUALITY







01 PACKAGING

Standard packaging, suitable for long-distance transportation, moisture-proof, rust-proof and shock-resistant. Designed for full lifting, with marked lifting points and center of gravity.

02 TRANSPORTATION

Domestic transportation within China is fully handled by Senfeng, including freight and insurance.

03 PACKING LIST & CERTIFICATE

Each package includes a packing list and a certificate of conformity. The user manual and other documents are inside the box; the packing list is on the outside.

INSTALLATION PROFESSIONAL AND HIGH-QUALITY

01 INSTALLATION

NovoTech engineers, with Senfeng, install the equipment at the customer's site.

02 EQUIPMENT DEBUGGING

After installation, the equipment is debugged for the customer's use.

03 DOOR-TO-DOOR TRAINING

On-site training on equipment maintenance, safety, operating procedures and basic troubleshooting, with 7 days of guaranteed usage.

04 ON-SITE ACCEPTANCE

After the steps above, the engineer leaves the site only after the customer's acceptance (the customer can veto).

18 · AFTER-SALES SERVICE

PREMIUM CUSTOMIZATION


In the digital era, intelligent transformation in metal processing is essential. Building unmanned factories is key to upgrading, with customized automation solutions a top priority.



01 · Senfeng understands the client's industry status and specific production processes, identifies issues and assesses their needs.



02 · Through in-depth on-site communication, metal fabrication automation solutions are customized to the client's pain points and needs.

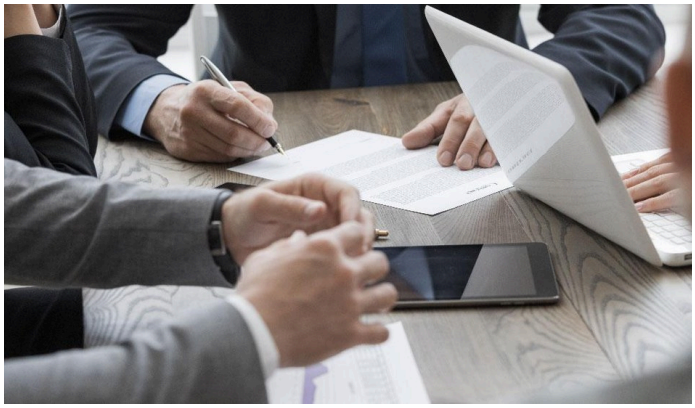

03 · A tailored solution, different from competitors' standardized models.



04 · A one-stop R&D and production service from design to final machine, with thorough quality checks until customer satisfaction and acceptance.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**


19 · AFTER-SALES SERVICE

FIVE-STAR FAST SERVICE



EFFICIENT

- Senfeng's repair hotline is available 24/7.
- A professional engineer responds to customer inquiries within 10 minutes and provides a repair plan within 1 hour.

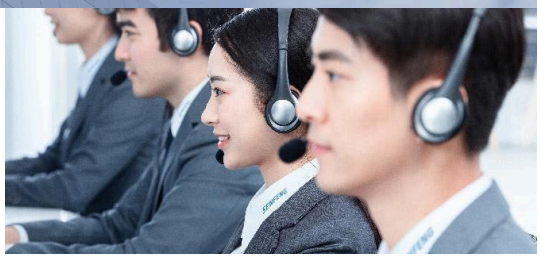

PROFESSIONAL

- **Custom service:** service plans tailored to the customer's specific needs.
- **Service engineer certification:** each service engineer is rigorously trained and assessed before being certified to work.
- **Common issues training:** a manual of common issues for each equipment model, with certified engineers training customers.
- **Online guidance:** experienced senior engineers support customers by phone or video call.
- **Professional technical support:** the equipment is properly calibrated at the first installation, and similar issues are resolved in one go.





COMPREHENSIVE


- **Pre-service:** theoretical and hands-on operation training, common fault self-diagnosis training, quick repair guidance and usage reminders.
- **Regular service:** regular maintenance reminders, on-site services and periodic promotional activities.
- **Value-added service:** equipment software and hardware upgrades, financing lease services and extended warranty services.




20 · AFTER-SALES SERVICE

CUSTOMER TESTIMONIALS

Senfeng machines and customers around the world.

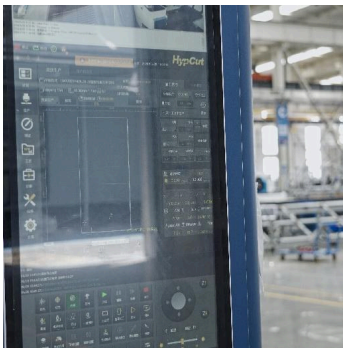



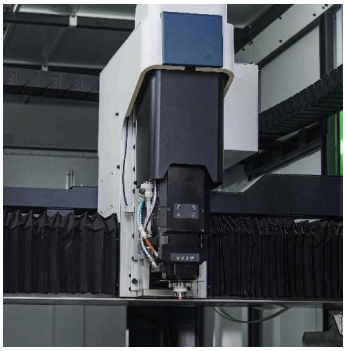










NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT FIBER LASER FOR YOUR SHOP.

Call or visit us for quotes, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON location.

PHONE

+1 647 526 5510

WEB & EMAIL


NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS


1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

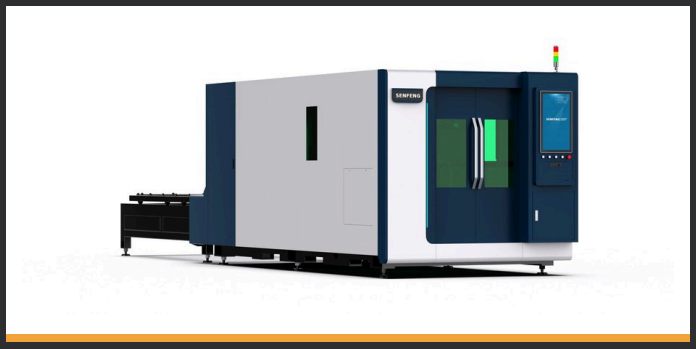



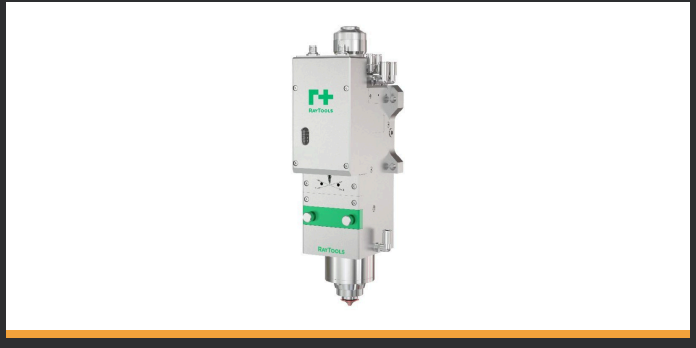



Specifications subject to change without notice. Imperial values are converted from Senfeng's metric data and rounded: sheet thicknesses in decimal inches, cutting speeds in inches per minute. Model numbers are manufacturer designations. Photos may show optional equipment.