
NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

SENFENG LASER · MADE IN CHINA · SOLD & SERVICED IN CANADA BY NOVOTECH

# TUBE LASER CUTTING MACHINES

## SENFENG T, PLUS, GPLUS / GT, NT AND ST TUBE AND PROFILE FIBER LASERS · Ø0.4″ TO 25″ · 20 TO 40 FT · 1.5 TO 20 KW

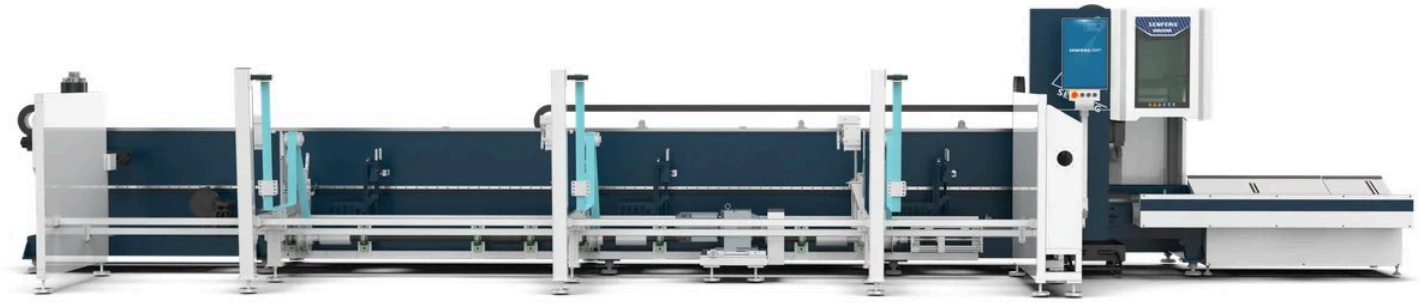






**China**
MADE IN CHINA

**5**
MACHINE FAMILIES

**1-year**
WARRANTY

**Canada**
PARTS & TECHNICAL SUPPORT

SENFENG TUBE LASERS

# CONTENTS

## OVERVIEW

Which Senfeng tube laser? The five series side by side ..... 04

Loading the tube: by hand, semi-automatic or fully automatic ..... 05

## TWO-CHUCK TUBE LASERS

T series two-chuck tube lasers, Ø0.5 – 14", 20 – 40 ft, 1.5 – 6 kW SF6012T – SF12035T · SF7012T – SF7524T · 15 models ..... 06

PLUS series high-speed tube lasers, Ø0.4 – 9.4", 20 – 23 ft, 3 – 6 kW SF6012PLUS · SF6016PLUS · SF6024PLUS · SF7012PLUS ..... 11

GPLUS and GT bevel-cutting tube lasers, ±45°, Ø0.6 – 14.1", 20 ft, 1.5 – 6 kW SF6012GPLUS · SF6024GT · SF6035GT ..... 14

## THREE-CHUCK TUBE LASERS

NT series three-chuck zero-tail tube lasers, Ø0.7 – 14.1", 20 – 40 ft, 3 – 12 kW SF6024NT · SF6035NT · SF9024NT · SF9035NT · SF12035NT ..... 17

ST series three-chuck heavy-duty tube lasers, Ø1.9 – 25.1", 30 – 40 ft, 6 – 20 kW SF9035ST – SF12065ST · 7 models ..... 20

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

# YOUR CANADIAN SOURCE FOR SENFENG TUBE LASERS

Sales, installation, parts and technical support across Canada.

**NovoTech Machine Tools Inc.** supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SENFENG LASER · JINAN, CHINA

# ROUND, SQUARE AND PROFILE TUBE CUT TO LENGTH WITH EVERY HOLE, COPE AND NOTCH IN ONE PASS

A tube laser cuts round, square, rectangular and open profiles to length and cuts the holes, copes, slots and notches in them in one pass, straight from the 3D model — no saw, no drill, no notcher, no layout. The T series two-chuck machines cover Ø0.5 to 14″ and 20 to 40 ft with 1.5 to 6 kW; the PLUS series runs to 492 ft/min and 240 rpm on small tube; the GPLUS / GT cut ±45° bevels for weld preparation; the NT three-chuck machines cut the last part without a tail; and the ST three-chuck machines carry tube to Ø25″ and 6,614 lb over 30 to 40 ft with 6 to 20 kW sources, for structural steel, towers and trailers. Every machine can be loaded by hand, or with a semi-automatic or a fully automatic loader.

Senfeng Laser has built fiber laser machines in Jinan, Shandong, since 2004: a 1.8 million ft² campus, its own laser sources, cutting heads and welding guns, around 15,000 machines a year, 20 overseas branches and Senfeng Laser USA with a warehouse and service team. CE, FDA and ETL certified and CSA approved. NovoTech sells, installs and supports the machines in Canada from Mississauga, ON, Canada — layout for your building, installation, operator training, a CSA-approved panel, a 1-year warranty and parts and technical support in Canada.

SENFENG TUBE LASERS · FIVE SERIES

# WHICH SENFENG TUBE LASER? THE FIVE SERIES SIDE BY SIDE

The number of chucks decides what is left of each bar and how heavy a tube the machine carries; the chuck size decides the largest tube; the loader decides how much of the operator's time each bar takes. Each series has its own pages further on, with the full specification table of every model.

| Series | Chucks | Tube | Bar length · max. tube weight | Speed | Loading | Best for |
|---|---|---|---|---|---|---|
| **T series** | 2 pneumatic chucks; short tail | Ø0.5 – 14.1″ | 20 – 40 ft · to 1,102 lb | to 492 ft/min, 1.5 G | By hand; semi-automatic or fully automatic loader optional | The first tube laser of a job shop |
| **PLUS** | 2 pneumatic chucks; very short to zero tail | Ø0.4 – 9.4″ | 20 – 23 ft · to 661 lb | 492 ft/min, 240 rpm, 1.5 G | By hand; semi-automatic or fully automatic loader optional | Small tube in volume — furniture, fitness, racking, automotive |
| **GPLUS / GT** | 2 chucks and a ±45° 3D head | Ø0.6 – 14.1″ | 20 ft · to 1,102 lb | to 492 ft/min | By hand; the GT usually with an automatic loader | Weld preparations, mitres and bevelled ends |
| **NT** | 3 pneumatic chucks; zero tail | Ø0.7 – 14.1″ | 20 – 40 ft · to 1,543 lb | 246 ft/min, 0.8 G | By hand or crane; semi-automatic or fully automatic loader optional | Long bars and costly material — no remnant |
| **ST** | 3 heavy chucks | Ø1.9 – 25.1″ | 30 – 40 ft · to 6,614 lb | to 197 ft/min | Semi-automatic loading and unloading included; fully automatic optional | Pipe, large tube and structural sections |

**T series** The all-round two-chuck machine and the first tube laser of most shops: 1.5 to 6 kW, Ø0.5 to 14″, 20 to 40 ft bars, fifteen models on 20, 23, 24.6, 30 and 40 ft beds.

**PLUS** Tuned for speed on small and medium tube — 492 ft/min and 240 rpm chucks, 3 to 6 kW — for furniture, fitness equipment, racking and automotive parts cut by the thousand, with a very short to zero tail.

**GPLUS / GT** Two chucks and a 3D head that tilts ±45°, so mitres, chamfers and weld preparations are cut in the same pass as the holes: the GPLUS for Ø0.6 to 4.7″, the GT for Ø2.3 to 14.1″.

**NT** A third chuck takes over the bar as it shortens, so the last part is cut with zero tail — several percent of material saved on every bundle of 20 to 40 ft stock, Ø0.7 to 14.1″, 3 to 12 kW.

**ST** Three heavy chucks carry pipe, large tube and structural sections to Ø25.1″ and 6,614 lb over 30 to 40 ft without sag, with 6 to 20 kW sources; semi-automatic loading and unloading are included.

Ranges are for the series; each model's chuck size, bar length and weight are in its specification table. Tail: the piece of each bar that a two-chuck machine cannot cut because the rear chuck holds it.

LOADING OPTIONS

# LOADING THE TUBE: BY HAND, SEMI-AUTOMATIC OR FULLY AUTOMATIC

Every tube laser in this catalogue can be loaded three ways. The loader does not change what the machine can cut — it decides how much of the operator's time each bar takes, and whether the machine keeps cutting while nobody stands at it.



STANDARD

## By hand or crane — no loader

The operator lifts each tube onto the infeed supports — by hand for light tube, with a hoist or crane for heavy bars. The rear chuck pulls it in, the chucks centre and clamp it, the following supports carry it and the machine cuts the whole bar on its own; the finished parts drop onto the unloading rack.

- Standard on the T, PLUS, GPLUS / GT and NT
- The lowest price and the shortest machine
- Any profile the chucks hold — angle, channel and special shapes too
- Right for short runs, mixed jobs and light tube




OPTION

## Semi-automatic loader

The operator lays a row of tubes on the loader's sloped rack or chains and keeps it filled; the loader separates one tube at a time, lifts it to the chuck centre and feeds it in. A tube outside the loader's size or weight is still loaded by hand.

- Sloped loader: 17 – 20 ft (5.2 – 6.2 m) tubes up to 265 lb (120 kg) — round, square, rectangular and channel
- Dual-arm chain loader: 13 – 20 ft (4 – 6.1 m) tubes up to 529 lb (240 kg) — also angle, channel and I-beam
- Chain loader: 13 – 40 ft (4 – 12 m) tubes and profiles up to 1,543 lb (700 kg)
- Takes special shapes and open profiles that a bundle loader cannot; included on the ST

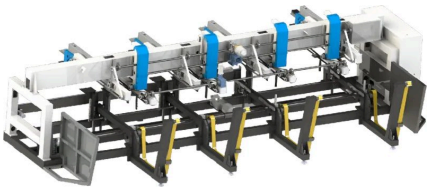

OPTION

## Fully automatic bundle loader

The crane sets a whole bundle — up to 3 t (6,600 lb) — into the loader; it separates the tubes, aligns each one and feeds it to the chuck with no operator, while the unloading system sorts the parts from the scrap. One person runs the machine and prepares the next bundle while it cuts, and the machine keeps cutting through breaks.

- Fully automatic loader: 11.5 – 20 ft (3.5 – 6.1 m) tubes, 15 – 30 ft (4.5 – 9 m) on the 9 m machines
- Simplified fully automatic loader: the same 3 t bundle on a lighter frame, also for 20 – 40 ft (6 – 12 m) tubes
- Round, square and rectangular tube of standard section, 265 – 573 lb (120 – 260 kg) per tube
- The choice for production runs and two-shift work



Semi-automatic sloped loader for 17 – 20 ft tubes up to 265 lb each (optional)



Semi-automatic chain loader for 13 – 40 ft tubes and profiles up to 1,543 lb each (optional)



Simplified fully automatic loader: a bundle of up to 3 t is set in it and the tubes are separated and fed automatically (optional)



Semi-automatic loader for special shapes — round, square, rectangular and U profiles — and fully automatic loader for standard round, square and rectangular tube (optional)

Unloading: a 6.6 ft (2 m) unloading rack that sorts scrap from parts is standard on the T and PLUS (10 or 13 ft optional) and a 10 ft (3 m) unloading system on the NT (20 ft optional); the ST comes with semi-automatic loading and unloading. The loader for each model is listed in its specification table.

SF6012T – SF12035T · SF7012T – SF7524T · 15 MODELS


# T SERIES TWO-CHUCK TUBE LASERS, Ø0.5 – 14", 20 – 40 FT, 1.5 – 6 KW




**MODEL** T · SENFENG SF6024T TWO-CHUCK TUBE FIBER LASER — Ø0.7 – 9" TUBE, 20 FT, 1.5 – 6 KW



Senfeng SF6024T two-chuck tube laser — side view along the 20 ft bed



Senfeng SF7524T two-chuck tube laser — the 24.6 ft (7.5 m) bed for long stock

The tube laser most shops start with, and the simplest of the Senfeng range: two pneumatic self-centring chucks hold the tube at both ends, servo following supports carry it, and a 1.5 to 6 kW source cuts round, square, rectangular and open profiles from Ø0.5" to 14". Fifteen models: chucks for Ø4.7, 6.6, 9 and 14" on 20, 30 and 40 ft beds, and 23 and 24.6 ft (7 / 7.5 m) beds for long stock. The tube is loaded by hand or crane as standard; a semi-automatic or fully automatic loader can be added. Two chucks leave a short tail on every bar — the NT cuts with zero tail, the PLUS is faster on small tube and the GT cuts bevels.

## STANDARD FEATURES

- ✓ Two pneumatic self-centring chucks and servo following supports; Ø0.5 – 14.1" round, □0.5 – 14.1" square; 20 – 40 ft; 1.5 – 6 kW; to 492 ft/min, 180 rpm and 1.5 G on the SF6012T
- ✓ Loading by hand or crane as standard — a semi-automatic or fully automatic loader can be added (see the loading options)
- ✓ Unloading rack 6.6 ft (2 m) with automatic sorting of scrap and parts; 10 or 13 ft (3 / 4 m) optional
- ✓ Pneumatic self-centring chucks; following supports along the bed; automatic tube length measuring
- ✓ Fiber laser source 1.5 – 20 kW with autofocus head; bus-based CNC with tube nesting software and 3D import
- ✓ Safety fencing and light curtains; chip and part collection
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

## OPTIONAL EQUIPMENT

- + Semi-automatic or fully automatic loader; longer unloading system
- + ±45° bevel head (PLUS, NT, ST)
- + Higher laser power; nitrogen generator; dust collector
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS · 1 / 2


# T SERIES TWO-CHUCK TUBE LASERS, Ø0.5 – 14", 20 – 40 FT, 1.5 – 6 KW




T series tube laser with the optional automatic bundle loader



T series tube laser — loader and unloading conveyor

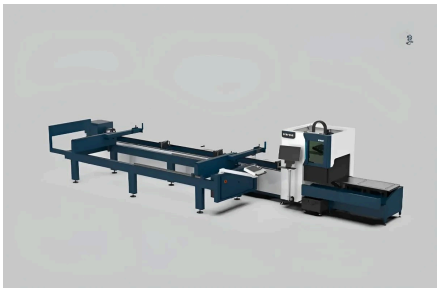


SF6024T with the semi-automatic chain loader beside the bed (optional)

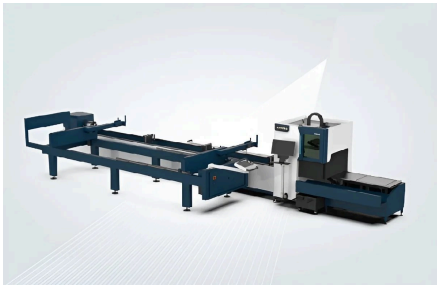

T series with the semi-automatic loading device (optional)





T series tube laser in a factory: the automatic loader, the fenced cell and the unloading tables (optional)

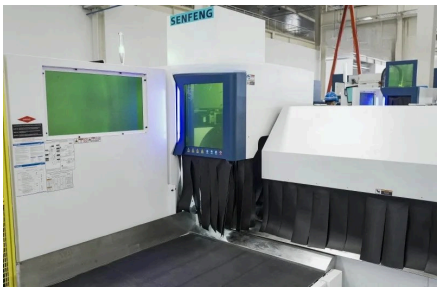



The cutting cell with its laser-safe window and curtains



Unloading tables collecting the finished parts (optional)

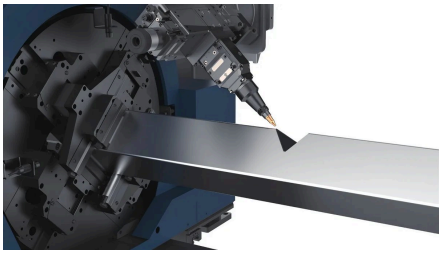


Tube laser cutting head with the following support

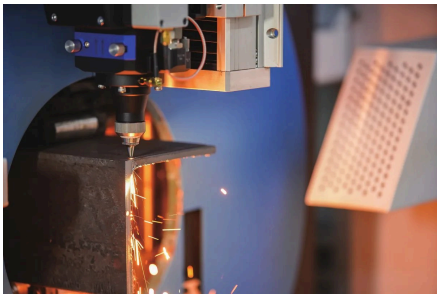


Pneumatic chuck and cutting head on a round tube

DETAILS, COMPONENTS AND OPTIONS · 2 / 2


# T SERIES TWO-CHUCK TUBE LASERS, Ø0.5 – 14", 20 – 40 FT, 1.5 – 6 KW

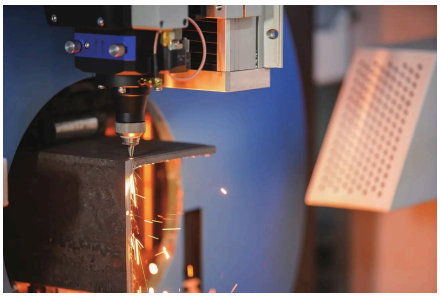

Tube laser cutting a perforated square tube

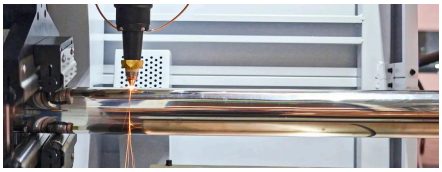


Cutting holes in a round tube

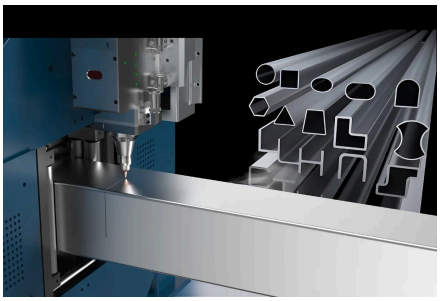

Round, square, rectangular, angle and channel profiles cut on the tube laser



Tube nesting software: the part drawn in 3D before it is nested along the tube

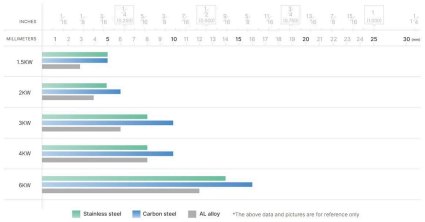


Tube wall thickness capacity by laser power — stainless, carbon steel, aluminum

TECHNICAL SPECIFICATIONS · 1 / 2

# T SERIES TWO-CHUCK TUBE LASERS, Ø0.5 – 14", 20 – 40 FT, 1.5 – 6 KW

## T SERIES TWO-CHUCK TUBE LASERS · 20 – 40 FT

7 models · Ø0.5 – 14.1" · 1.5 – 6 kW

| Model | SF6012T | SF6016T | SF6024T | SF6035T | SF9024T | SF9035T | SF12035T |
|---|---|---|---|---|---|---|---|
| **Tube length** | **3.3 – 21.3 ft (1 – 6.5 m)** | **3.3 – 21.3 ft (1 – 6.5 m)** | **6.6 – 21.3 ft (2 – 6.5 m)** | **6.6 – 20.3 ft (2 – 6.2 m)** | **6.6 – 30 ft (2 – 9.1 m)** | **6.6 – 30 ft (2 – 9.1 m)** | **6.6 – 40 ft (2 – 12.2 m)** |
| **Round tube** | Ø0.6 – 4.7" (Ø15 – 119 mm) | Ø0.5 – 6.6" (Ø13 – 168 mm) | Ø0.8 – 9.1" (Ø20 – 231 mm) | Ø0.7 – 14.1" (Ø18 – 358 mm) | Ø0.7 – 9" (Ø18 – 229 mm) | Ø0.7 – 14.1" (Ø18 – 358 mm) | Ø1.9 – 13.7" (Ø48 – 348 mm) |
| **Square tube** | □0.6 – 4.7" (□15 – 119 mm) | □0.5 – 6.6" (□13 – 168 mm) | □0.8 – 9.1" (□20 – 231 mm) | □0.7 – 14.1" (□18 – 358 mm) | □0.7 – 9" (□18 – 229 mm) | □0.7 – 14.1" (□18 – 358 mm) | □1.9 – 13.7" (□48 – 348 mm) |
| **Laser power** | 1.5 – 3 kW | 1.5 – 3 kW | 1.5 – 6 kW | 1.5 – 6 kW | 1.5 – 6 kW | 1.5 – 6 kW | 1.5 – 6 kW |
| **Max. tube weight** | 265 lb (120 kg) | 353 lb (160 kg) | 573 lb (260 kg) | 1,102 lb (500 kg) | 573 lb (260 kg) | 1,102 lb (500 kg) | 1,102 lb (500 kg) |
| **Max. no-load speed** | 492 ft/min (150 m/min) | 361 ft/min (110 m/min) | 328 ft/min (100 m/min) | 197 ft/min (60 m/min) | 328 ft/min (100 m/min) | 197 ft/min (60 m/min) | 197 ft/min (60 m/min) |
| **Max. chuck speed** | 180 rpm | 140 rpm | 100 rpm | 60 rpm | 100 rpm | 60 rpm | 60 rpm |
| **Positioning accuracy** | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) |
| **Dimensions L × W × H** | 358 × 71 × 83" (9,100 × 1,800 × 2,100 mm) | 358 × 71 × 83" (9,100 × 1,800 × 2,100 mm) | 375 × 77 × 87" (9,530 × 1,950 × 2,200 mm) | 374 × 81 × 100" (9,500 × 2,050 × 2,550 mm) | 493 × 77 × 87" (12,530 × 1,950 × 2,200 mm) | 485 × 81 × 100" (12,320 × 2,050 × 2,550 mm) | 604 × 81 × 100" (15,330 × 2,050 × 2,550 mm) |

TECHNICAL SPECIFICATIONS · 2 / 2

# T SERIES TWO-CHUCK TUBE LASERS, Ø0.5 – 14", 20 – 40 FT, 1.5 – 6 KW

## T SERIES TWO-CHUCK TUBE LASERS · 23 – 24.6 FT

8 models · Ø0.6 – 9.1" · 1.5 – 6 kW

| Model | SF7012T | SF7016T | SF7020T | SF7024T | SF7512T | SF7516T | SF7520T | SF7524T |
|---|---|---|---|---|---|---|---|---|
| **Tube length** | **3.3 – 23 ft (1 – 7 m)** | **3.3 – 23 ft (1 – 7 m)** | **6.6 – 23 ft (2 – 7 m)** | **6.6 – 23 ft (2 – 7 m)** | **3.3 – 24.6 ft (1 – 7.5 m)** | **3.3 – 24.6 ft (1 – 7.5 m)** | **6.6 – 24.6 ft (2 – 7.5 m)** | **6.6 – 24.6 ft (2 – 7.5 m)** |
| **Round tube** | Ø0.59 – 4.72" (Ø15 – 120 mm) | Ø0.59 – 6.69" (Ø15 – 170 mm) | Ø0.79 – 8.66" (Ø20 – 220 mm) | Ø0.79 – 9.06" (Ø20 – 230 mm) | Ø0.59 – 4.72" (Ø15 – 120 mm) | Ø0.59 – 6.69" (Ø15 – 170 mm) | Ø0.79 – 8.66" (Ø20 – 220 mm) | Ø0.79 – 9.06" (Ø20 – 230 mm) |
| **Square tube** | □0.59 – 4.72" (□15 – 120 mm) | □0.59 – 6.69" (□15 – 170 mm) | □0.79 – 5.91" (□20 – 150 mm) | □0.79 – 9.06" (□20 – 230 mm) | □0.59 – 4.72" (□15 – 120 mm) | □0.59 – 6.69" (□15 – 170 mm) | □0.79 – 5.91" (□20 – 150 mm) | □0.79 – 9.06" (□20 – 230 mm) |
| **Laser power** | 1.5 – 3 kW | 1.5 – 3 kW | 1.5 – 6 kW | 1.5 – 6 kW | 1.5 – 3 kW | 1.5 – 3 kW | 1.5 – 6 kW | 1.5 – 6 kW |
| **Max. tube weight** | 265 lb (120 kg) | 353 lb (160 kg) | 441 lb (200 kg) | 573 lb (260 kg) | 265 lb (120 kg) | 353 lb (160 kg) | 441 lb (200 kg) | 573 lb (260 kg) |
| **Max. no-load speed** | 492 ft/min (150 m/min) | 361 ft/min (110 m/min) | 328 ft/min (100 m/min) | 328 ft/min (100 m/min) | 492 ft/min (150 m/min) | 361 ft/min (110 m/min) | 328 ft/min (100 m/min) | 328 ft/min (100 m/min) |
| **Max. chuck speed** | 180 rpm | 140 rpm | 100 rpm | 100 rpm | 180 rpm | 140 rpm | 100 rpm | 100 rpm |
| **Positioning accuracy** | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) |
| **Dimensions L × W × H** | 33.1 × 5.9 × 6.9 ft (10.1 × 1.8 × 2.1 m) | 33.1 × 5.9 × 6.9 ft (10.1 × 1.8 × 2.1 m) | 34.5 × 6.4 × 7.2 ft (10.5 × 2.0 × 2.2 m) | 34.5 × 6.4 × 7.2 ft (10.5 × 2.0 × 2.2 m) | 34.8 × 5.9 × 6.9 ft (10.6 × 1.8 × 2.1 m) | 34.8 × 5.9 × 6.9 ft (10.6 × 1.8 × 2.1 m) | 36.2 × 6.4 × 7.2 ft (11.0 × 2.0 × 2.2 m) | 36.2 × 6.4 × 7.2 ft (11.0 × 2.0 × 2.2 m) |

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF6012PLUS · SF6016PLUS · SF6024PLUS · SF7012PLUS

# PLUS SERIES HIGH-SPEED TUBE LASERS, Ø0.4 – 9.4", 20 – 23 FT, 3 – 6 KW

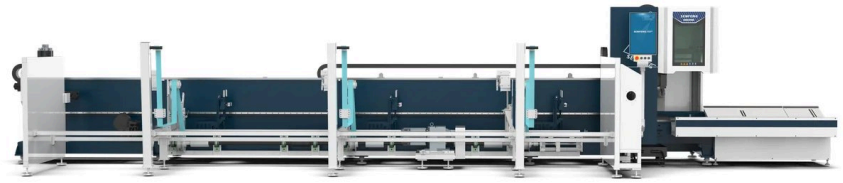

**MODEL** PLUS · SENFENG SF6024PLUS HIGH-SPEED TUBE LASER — Ø0.7 – 9.4", 20 FT, 3 – 6 KW

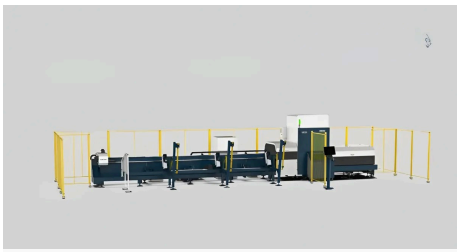

PLUS series with the loading and unloading equipment inside the safety fence (optional)



PLUS series: the cutting head on its gantry over the chucks

The fast machine for small and medium tube in volume — furniture, fitness equipment, racking, automotive and medical tube: chucks that turn at up to 240 rpm, 492 ft/min (150 m/min) and 1.5 G, so short parts come off every few seconds. The head cuts past the front chuck's jaws, which leaves a very short tail, down to zero. Ø0.4 – 9.4" tube 10 – 21 ft (3 – 6.5 m) long, 23 ft on the SF7012PLUS, 3 to 6 kW; a 45° bevel head is optional. Loaded by hand as standard, with a semi-automatic or fully automatic loader as an option.

## STANDARD FEATURES

- ✓ Ø0.4 – 9.4" round and square; to 240 rpm chucks, 492 ft/min (150 m/min), 1.5 G; ±0.002" (±0.05 mm) positioning
- ✓ Over-position cutting past the front chuck — very short tail, down to zero; 45° bevel head optional
- ✓ Loading by hand or crane as standard — a semi-automatic or fully automatic loader can be added (see the loading options)
- ✓ Unloading rack 6.6 ft (2 m) standard; 10 or 13 ft (3 / 4 m) optional
- ✓ Pneumatic self-centring chucks; following supports along the bed; automatic tube length measuring
- ✓ Fiber laser source 1.5 – 20 kW with autofocus head; bus-based CNC with tube nesting software and 3D import
- ✓ Safety fencing and light curtains; chip and part collection
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

## OPTIONAL EQUIPMENT

- + Semi-automatic or fully automatic loader; longer unloading system
- + ±45° bevel head (PLUS, NT, ST)
- + Higher laser power; nitrogen generator; dust collector
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS

# PLUS SERIES HIGH-SPEED TUBE LASERS, Ø0.4 – 9.4", 20 – 23 FT, 3 – 6 KW




PLUS pneumatic chuck



PLUS series welded bed



PLUS head cutting open profiles — round, square, rectangular, oval, L, H, U, C and T sections

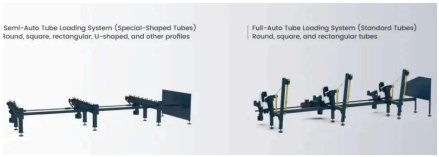


Semi-automatic loader for special shapes — round, square, rectangular and U profiles — and fully automatic loader for standard round, square and rectangular tube (optional)

TECHNICAL SPECIFICATIONS

# PLUS SERIES HIGH-SPEED TUBE LASERS, Ø0.4 – 9.4", 20 – 23 FT, 3 – 6 KW

## PLUS SERIES HIGH-SPEED TUBE LASERS

4 models · Ø0.4 – 9.4" · 20 – 23 ft · 3 – 6 kW

| Model | SF6012PLUS | SF6016PLUS | SF6024PLUS | SF7012PLUS |
|---|---|---|---|---|
| **Tube length** | **3.3 – 21.3 ft (1 – 6.5 m)** | **3.3 – 21.3 ft (1 – 6.5 m)** | **3.3 – 21.3 ft (1 – 6.5 m)** | **3.3 – 23 ft (1 – 7 m)** |
| **Round tube** | Ø0.4 – 4.7" (Ø10 – 119 mm) | Ø0.5 – 6.6" (Ø13 – 168 mm) | Ø0.7 – 9.4" (Ø18 – 239 mm) | Ø0.5 – 4.7" (Ø13 – 119 mm) |
| **Square tube** | □0.4 – 4.7" (□10 – 119 mm) | □0.5 – 6.6" (□13 – 168 mm) | □0.7 – 9.4" (□18 – 239 mm) | □0.5 – 4.7" (□13 – 119 mm) |
| **Laser power** | 3 – 6 kW | 3 – 6 kW | 3 – 6 kW | 3 – 6 kW |
| **Max. tube weight** | 265 lb (120 kg) | 331 lb (150 kg) | 661 lb (300 kg) | 265 lb (120 kg) |
| **Max. no-load speed** | 492 ft/min (150 m/min) | 394 ft/min (120 m/min) | 492 ft/min (150 m/min) | 394 ft/min (120 m/min) |
| **Max. chuck speed** | 240 rpm | 180 rpm | 90 rpm | 180 rpm |
| **Positioning accuracy** | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) |
| **Dimensions L × W × H** | 29.8 × 7.3 × 7.5 ft (9.1 × 2.2 × 2.3 m) | 29.8 × 7.3 × 7.5 ft (9.1 × 2.2 × 2.3 m) | 30.5 × 10.1 × 8.2 ft (9.3 × 3.1 × 2.5 m) | 31.4 × 7.3 × 7.5 ft (9.6 × 2.2 × 2.3 m) |

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF6012GPLUS · SF6024GT · SF6035GT

# GPLUS AND GT BEVEL-CUTTING TUBE LASERS, ±45°, Ø0.6 – 14.1", 20 FT, 1.5 – 6 KW

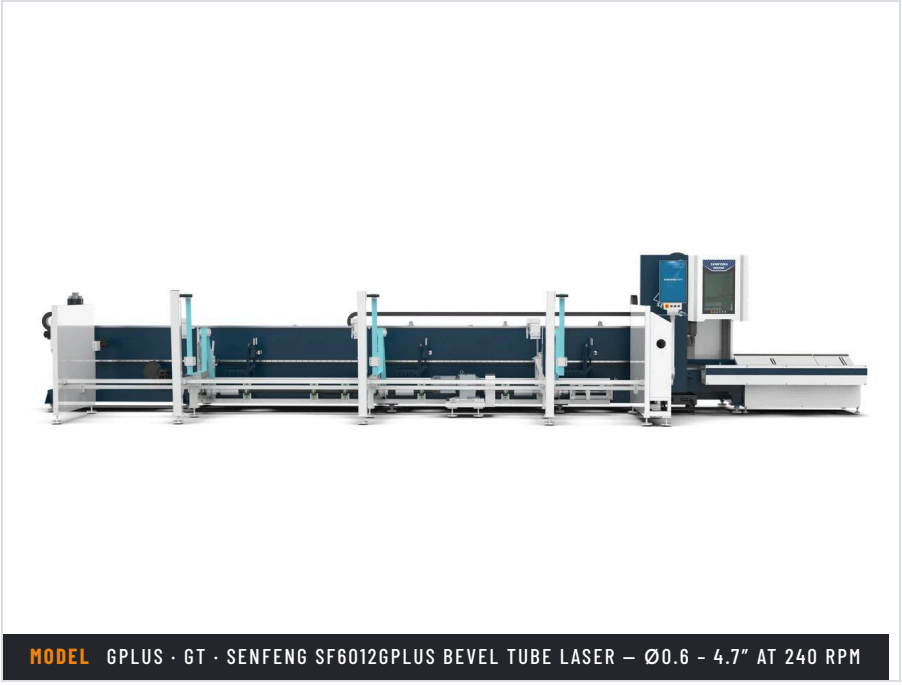

**MODEL** GPLUS · GT · SENFENG SF6012GPLUS BEVEL TUBE LASER — Ø0.6 - 4.7" AT 240 RPM



Senfeng SF6024GT bevel tube laser with loader — Ø2.3 – 9", 45° bevels



Senfeng SF6035GT bevel tube laser — Ø3.1 – 14.1"

Tube lasers with a 3D head that tilts to ±45°, so weld preparations, mitred corners and bevelled ends are cut in the same pass as the part, on all four sides of a square tube — no grinding or sawing before welding. The GPLUS is the fast two-chuck machine for small tube, Ø0.6 – 4.7" at 240 rpm; the GT takes tube from Ø2.3 to 14.1" for pipe, structural frames, trailers and equipment that is welded after cutting. Loaded by hand as standard; the GT is usually ordered with an automatic loader and unloading tables.

## STANDARD FEATURES


- ✓ ±45° bevel cutting on all four sides of the tube; GPLUS Ø0.6 – 4.7" at 240 rpm, GT Ø2.3 – 14.1"; 20 ft; 1.5 – 6 kW
- ✓ Loading by hand or crane as standard — a semi-automatic or fully automatic loader can be added (see the loading options)
- ✓ Pneumatic self-centring chucks; following supports along the bed; automatic tube length measuring
- ✓ Fiber laser source 1.5 – 20 kW with autofocus head; bus-based CNC with tube nesting software and 3D import
- ✓ Safety fencing and light curtains; chip and part collection
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

## OPTIONAL EQUIPMENT


- + Semi-automatic or fully automatic loader; longer unloading system
- + ±45° bevel head (PLUS, NT, ST)
- + Higher laser power; nitrogen generator; dust collector
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS


# GPLUS AND GT BEVEL-CUTTING TUBE LASERS, ±45°, Ø0.6 – 14.1", 20 FT, 1.5 – 6 KW

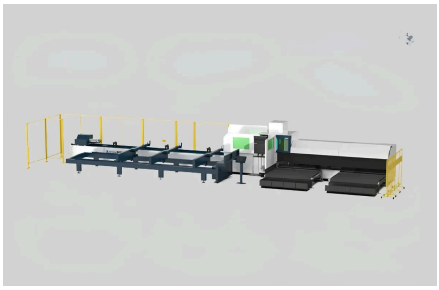

SF6024GT with the automatic loader and unloading tables (optional)

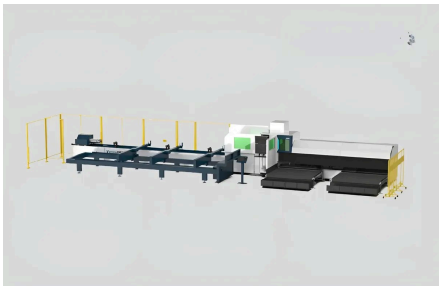

SF6035GT with the loading and unloading equipment (optional)

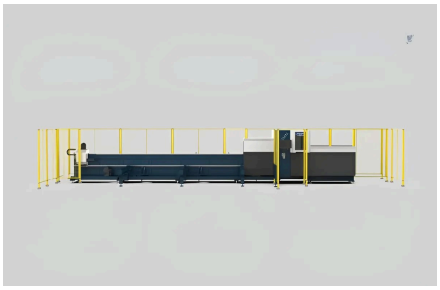

GPLUS bevel tube laser in its safety fence with the loader (optional)



Bevel-cut square tubes joined without a gap



Rectangular tube with laser-cut holes and bevelled ends



Round tube with a 45° bevel cut

TECHNICAL SPECIFICATIONS

# GPLUS AND GT BEVEL-CUTTING TUBE LASERS, ±45°, Ø0.6 – 14.1", 20 FT, 1.5 – 6 KW

## GPLUS / GT BEVEL-CUTTING TUBE LASERS · 45°

3 models · Ø0.6 – 14.1" · 20 ft · 1.5 – 6 kW

| Model | SF6012GPLUS | SF6024GT | SF6035GT |
|---|---|---|---|
| **Tube length** | **3.3 – 21.3 ft (1 – 6.5 m)** | **6.6 – 21.3 ft (2 – 6.5 m)** | **6.6 – 21 ft (2 – 6.4 m)** |
| **Round tube** | Ø0.6 – 4.7" (Ø15 – 119 mm) | Ø2.3 – 9" (Ø58 – 229 mm) | Ø3.1 – 14.1" (Ø79 – 358 mm) |
| **Square tube** | □0.6 – 4.7" (□15 – 119 mm) | □2.3 – 9" (□58 – 229 mm) | □3.1 – 14.1" (□79 – 358 mm) |
| **Laser power** | 1.5 – 3 kW | 3 – 6 kW | 3 – 6 kW |
| **Max. tube weight** | 265 lb (120 kg) | 573 lb (260 kg) | 1,102 lb (500 kg) |
| **Max. no-load speed** | 492 ft/min (150 m/min) | 328 ft/min (100 m/min) | 197 ft/min (60 m/min) |
| **Max. chuck speed** | 240 rpm | 100 rpm | 60 rpm |
| **Positioning accuracy** | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) |
| **Dimensions L × W × H** | 358 × 88 × 91" (9,100 × 2,230 × 2,300 mm) | 402 × 90 × 100" (10,200 × 2,280 × 2,530 mm) | 401 × 89 × 100" (10,180 × 2,260 × 2,530 mm) |
| **Bevel cutting** | ±45° on all four sides | ±45° on all four sides | ±45° on all four sides |

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF6024NT · SF6035NT · SF9024NT · SF9035NT · SF12035NT

# NT SERIES THREE-CHUCK ZERO-TAIL TUBE LASERS, Ø0.7 – 14.1", 20 – 40 FT, 3 – 12 KW

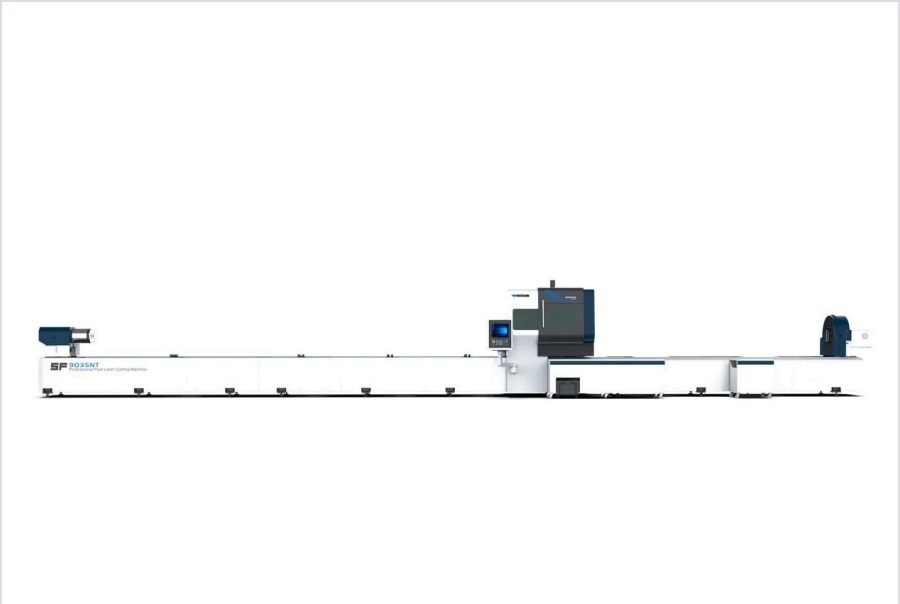

**MODEL** NT · SENFENG SF6035NT THREE-CHUCK ZERO-TAILING TUBE LASER — Ø0.7 - 14", 20 FT, 3 - 12 KW

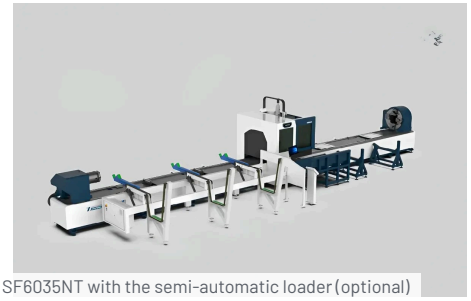

SF6035NT with the semi-automatic loader (optional)



SF6035NT with the chain loader (optional)

Three chucks instead of two: the middle chuck takes over the tube as it gets shorter, so the last part is cut and almost nothing is left — zero tail. On 20 to 40 ft bars of stainless, aluminum or heavy-wall tube that saves material on every bar, and the third chuck also supports long tube so it is cut straight. Ø0.7 – 14.1" round and square, bars to 40 ft and 1,543 lb, 3 to 12 kW; a ±45° bevel head is optional. Loaded by hand or crane as standard — semi-automatic and fully automatic loaders are options — with a 10 ft (3 m) unloading system (20 ft optional).

## STANDARD FEATURES


- ✓ Three pneumatic chucks — the last part cut with zero tail; Ø0.7 – 14.1"; bars 20 – 40 ft to 1,543 lb; 3 – 12 kW; bevel Ø2 – 9.1" with the optional ±45° head
- ✓ Loading by hand or crane as standard — a semi-automatic or fully automatic loader can be added (see the loading options)
- ✓ Unloading system 10 ft (3 m) with automatic sorting of scrap and parts; 20 ft (6 m) optional
- ✓ Pneumatic self-centring chucks; following supports along the bed; automatic tube length measuring
- ✓ Fiber laser source 1.5 – 20 kW with autofocus head; bus-based CNC with tube nesting software and 3D import
- ✓ Safety fencing and light curtains; chip and part collection
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

## OPTIONAL EQUIPMENT

- + Semi-automatic or fully automatic loader; longer unloading system
- + ±45° bevel head (PLUS, NT, ST)
- + Higher laser power; nitrogen generator; dust collector
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS

# NT SERIES THREE-CHUCK ZERO-TAIL TUBE LASERS, Ø0.7 – 14.1", 20 – 40 FT, 3 – 12 KW

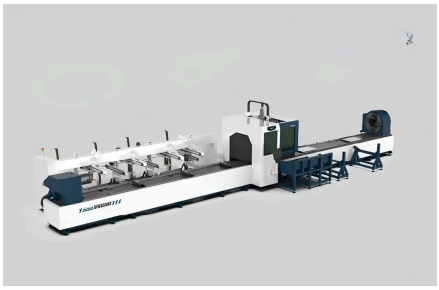

SF6035NT with the fully automatic bundle loader (optional)




Semi-automatic dual-arm chain loader: the tubes are laid on the arms and fed to the chuck one at a time (optional)



Simplified fully automatic loader: a bundle of up to 3 t is set in it and the tubes are separated and fed automatically (optional)



Fully automatic bundle loader: separates, aligns and feeds every tube of a bundle of up to 3 t (optional)

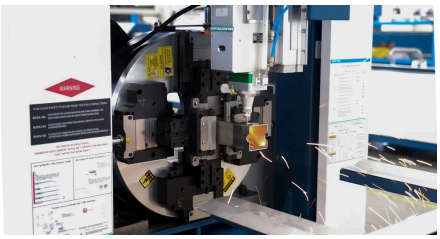

Cutting a square tube in the chuck — sparks at the cut

TECHNICAL SPECIFICATIONS

# NT SERIES THREE-CHUCK ZERO-TAIL TUBE LASERS, Ø0.7 – 14.1", 20 – 40 FT, 3 – 12 KW

## NT SERIES THREE-CHUCK ZERO-TAILING TUBE LASERS

5 models · Ø0.7 – 14.1" · 20 – 40 ft · 3 – 12 kW

| Model | SF6024NT | SF6035NT | SF9024NT | SF9035NT | SF12035NT |
|---|---|---|---|---|---|
| **Tube length** | **9.8 – 21.3 ft (3 – 6.5 m)** | **9.8 – 20.3 ft (3 – 6.2 m)** | **9.8 – 30 ft (3 – 9.1 m)** | **9.8 – 30 ft (3 – 9.1 m)** | **9.8 – 40 ft (3 – 12.2 m)** |
| **Round tube** | Ø0.8 – 9.1" (Ø20 – 231 mm) | Ø0.7 – 14.1" (Ø18 – 358 mm) | Ø0.7 – 9" (Ø18 – 229 mm) | Ø0.7 – 14.1" (Ø18 – 358 mm) | Ø1.9 – 14.1" (Ø48 – 358 mm) |
| **Square tube** | □0.8 – 9.1" (□20 – 231 mm) | □0.7 – 14.1" (□18 – 358 mm) | □0.7 – 9" (□18 – 229 mm) | □0.7 – 14.1" (□18 – 358 mm) | □1.9 – 14.1" (□48 – 358 mm) |
| **Laser power** | 3 – 12 kW | 3 – 6 kW | 3 – 6 kW | 3 – 6 kW | 3 – 6 kW |
| **Max. tube weight** | 573 lb (260 kg) | 1,543 lb (700 kg) | 573 lb (260 kg) | 1,543 lb (700 kg) | 1,543 lb (700 kg) |
| **Max. no-load speed** | 246 ft/min (75 m/min) | 197 ft/min (60 m/min) | 246 ft/min (75 m/min) | 197 ft/min (60 m/min) | 197 ft/min (60 m/min) |
| **Max. chuck speed** | 100 rpm | 60 rpm | 100 rpm | 60 rpm | 60 rpm |
| **Positioning accuracy** | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) |
| **Dimensions L × W × H** | 543 × 108 × 124" (13,800 × 2,750 × 3,150 mm) | 543 × 108 × 132" (13,800 × 2,750 × 3,350 mm) | 663 × 108 × 124" (16,850 × 2,750 × 3,150 mm) | 663 × 108 × 132" (16,850 × 2,750 × 3,350 mm) | 780 × 108 × 132" (19,800 × 2,750 × 3,350 mm) |

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF9035ST – SF12065ST · 7 MODELS


# ST SERIES THREE-CHUCK HEAVY-DUTY TUBE LASERS, Ø1.9 – 25.1", 30 – 40 FT, 6 – 20 KW



**MODEL** ST · SENFENG ST SERIES THREE-CHUCK HEAVY-DUTY TUBE LASER — Ø1.9 – 25", 29 – 39 FT, 6 – 20 KW

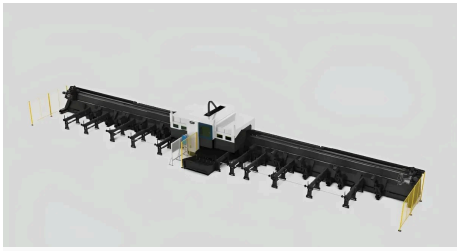

ST series heavy-duty tube laser — the 40 ft bed with its side supports

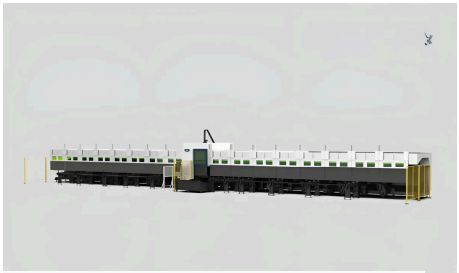

ST series with the loading and unloading line (optional)

The heavy machine of the Senfeng range, for pipe, large tube and structural sections: three chucks carry tube up to Ø25" and 6,614 lb over 30 to 40 ft without sag and cut it straight and square, with 6 to 20 kW sources for thick walls and a ±45° bevel head as an option. The ST comes with semi-automatic loading and an unloading system; a fully automatic bundle loader is optional. For steel construction, towers, cranes, trailers and heavy equipment.

## STANDARD FEATURES


- ✓ Three chucks; Ø1.9 – 25.1" round and square; 30 – 40 ft tube to 6,614 lb; 6 – 20 kW; ±45° bevel head optional
- ✓ Semi-automatic loading and an unloading system included; fully automatic bundle loader optional
- ✓ Pneumatic self-centring chucks; following supports along the bed; automatic tube length measuring
- ✓ Fiber laser source 1.5 – 20 kW with autofocus head; bus-based CNC with tube nesting software and 3D import
- ✓ Safety fencing and light curtains; chip and part collection
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

## OPTIONAL EQUIPMENT

- + Semi-automatic or fully automatic loader; longer unloading system
- + ±45° bevel head (PLUS, NT, ST)
- + Higher laser power; nitrogen generator; dust collector
- + Custom voltage transformer

DETAILS, COMPONENTS AND OPTIONS

# ST SERIES THREE-CHUCK HEAVY-DUTY TUBE LASERS, Ø1.9 – 25.1", 30 – 40 FT, 6 – 20 KW

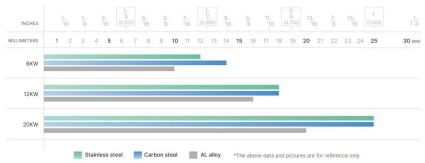


ST series: tube wall thickness by laser power — stainless, carbon steel, aluminum

TECHNICAL SPECIFICATIONS

# ST SERIES THREE-CHUCK HEAVY-DUTY TUBE LASERS, Ø1.9 – 25.1", 30 – 40 FT, 6 – 20 KW

## ST SERIES THREE-CHUCK HEAVY-DUTY TUBE LASERS

7 models · Ø1.9 – 25.1" · 30 – 40 ft · 6 – 20 kW

| Model | SF9035ST | SF9050ST | SF9056ST | SF12035ST | SF12050ST | SF12056ST | SF12065ST |
|---|---|---|---|---|---|---|---|
| **Tube length** | **20 – 30 ft (6.1 – 9.1 m)** | **20 – 30 ft (6.1 – 9.1 m)** | **20 – 30 ft (6.1 – 9.1 m)** | **20 – 40 ft (6.1 – 12.2 m)** | **20 – 40 ft (6.1 – 12.2 m)** | **20 – 40 ft (6.1 – 12.2 m)** | **20 – 40 ft (6.1 – 12.2 m)** |
| **Round tube** | Ø1.9 – 14.1" (Ø48 – 358 mm) | Ø1.9 – 19.6" (Ø48 – 498 mm) | Ø1.9 – 22" (Ø48 – 559 mm) | Ø1.9 – 14.1" (Ø48 – 358 mm) | Ø1.9 – 19.6" (Ø48 – 498 mm) | Ø1.9 – 22" (Ø48 – 559 mm) | Ø1.9 – 25.1" (Ø48 – 638 mm) |
| **Square tube** | □1.9 – 14.1" (□48 – 358 mm) | □1.9 – 19.6" (□48 – 498 mm) | □1.9 – 15.7" (□48 – 399 mm) | □1.9 – 14.1" (□48 – 358 mm) | □1.9 – 19.6" (□48 – 498 mm) | □1.9 – 15.7" (□48 – 399 mm) | □1.9 – 25.1" (□48 – 638 mm) |
| **Laser power** | 6 – 20 kW | 6 – 20 kW | 6 – 20 kW | 6 – 20 kW | 6 – 20 kW | 6 – 20 kW | 6 – 20 kW |
| **Max. tube weight** | 2,205 lb (1,000 kg) | 4,409 lb (2,000 kg) | 3,968 lb (1,800 kg) | 2,205 lb (1,000 kg) | 4,409 lb (2,000 kg) | 3,968 lb (1,800 kg) | 6,614 lb (3,000 kg) |
| **Max. no-load speed** | 197 ft/min (60 m/min) | 131 ft/min (40 m/min) | 98 ft/min (30 m/min) | 197 ft/min (60 m/min) | 131 ft/min (40 m/min) | 98 ft/min (30 m/min) | 98 ft/min (30 m/min) |
| **Max. chuck speed** | 60 rpm | 40 rpm | 30 rpm | 60 rpm | 40 rpm | 30 rpm | 30 rpm |
| **Positioning accuracy** | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) | ±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm) |
| **Dimensions L × W × H** | 60.7 × 21.3 × 14.7 ft (18.5 × 6.5 × 4.5 m) | 62.3 × 23.6 × 13.7 ft (19.0 × 7.2 × 4.2 m) | 62.3 × 23.6 × 13.7 ft (19.0 × 7.2 × 4.2 m) | 70.5 × 21.3 × 14.7 ft (21.5 × 6.5 × 4.5 m) | 72.1 × 23.6 × 13.7 ft (22.0 × 7.2 × 4.2 m) | 72.1 × 23.6 × 13.7 ft (22.0 × 7.2 × 4.2 m) | 72.1 × 23.6 × 13.7 ft (22.0 × 7.2 × 4.2 m) |

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

# LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.


**PHONE**

+1 647 526 5510

**WEB & EMAIL**

NovoTechMachineTools.com
info@NovoTechMachineTools.com

**ADDRESS**

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5


NT NovoTech MACHINE TOOLS Inc.


Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.