NOVOTECH VALUE LINE · 25 MODELS · 15 SERIES

METAL CUTTING BAND SAWS

CATALOGUE 2026

Value line · Sold, installed and supported in Canada by NovoTech Machine Tools









CANADA
SALES, INSTALLATION & SERVICE

1-YEAR
WARRANTY · CSA-APPROVED PANEL

10% DOWN
0% DOWN FINANCING AVAILABLE

PARTS
& TECHNICAL SUPPORT IN CANADA

25 MODELS · 15 SERIES · PAGES 3-17

THE NOVOTECH VALUE LINE BAND SAW RANGE

The value line is NovoTech Machine Tools' own range: metal cutting band saws from the 10-inch full-hydraulic BS-315GF to CNC automatic and gantry-type double column machines, every one delivered with a CSA-approved electrical panel, a 1-year warranty, and parts and technical support from our Mississauga, Ontario, Canada shop. Capacities below are for straight (0°) cuts; the series pages give miter capacities, blade data, motors, weights and dimensions in imperial units with metric in brackets.

IN THIS CATALOGUE

Cover	1
Model range	2
Semi-automatic band saws	3–7
Automatic band saws	8–11
Double column band saws	12–16
Vertical band saws	17
NovoTech services & contact	18

Model	Type	Round capacity at 0°	Rectangular at 0°	Main motor	Page
SEMI-AUTOMATIC BAND SAWS					PAGES 3–7
BS-315GF	Semi-automatic	Ø10" (250 mm)	12-3/8" × 7-1/2" (315 × 190 mm)	1.5 HP (1.1 kW)	3
BS-460G	Semi-automatic	Ø13" (330 mm)	18-1/8" × 9-7/8" (460 × 250 mm)	3 HP (2.2 kW)	4
BS-460G-JC	Semi-automatic	Ø13" (330 mm)	18-1/8" × 9-7/8" (460 × 250 mm)	3 HP (2.2 kW)	4
BS-2114TH	Semi-automatic	Ø15-3/4" (400 mm)	21-5/8" × 14-1/8" (550 × 360 mm)	3.8 HP (2.8 kW)	5
BS-650GA	Semi-automatic	Ø18-1/8" (460 mm)	25-5/8" × 13-3/4" (650 × 350 mm)	7.4 HP (5.5 kW)	6
BS-5030	Semi-automatic	Ø11-3/4" (300 mm)	19-5/8" × 11-3/4" (500 × 300 mm)	4 HP (3 kW)	7
AUTOMATIC BAND SAWS					PAGES 8–11
BS300x370	Automatic	Ø11-3/4" (300 mm)	14-5/8" × 11" (370 × 280 mm)	3 HP (2.2 kW)	8
BS300x370H	Automatic	Ø11-3/4" (300 mm)	14-5/8" × 11" (370 × 280 mm)	3 HP (2.2 kW)	8
BS-460GB	Automatic	Ø13" (330 mm)	18-1/8" × 9-7/8" (460 × 250 mm)	3 HP (2.2 kW)	9
BS-650G	Automatic	Ø18-1/8" (460 mm)	25-5/8" × 13-3/4" (650 × 350 mm)	7.4 HP (5.5 kW)	10
BS-5040	Automatic	Ø11-3/4" (300 mm)	19-5/8" × 11-3/4" (500 × 300 mm)	4 HP (3 kW)	11
DOUBLE COLUMN BAND SAWS					PAGES 12–16
TBK-4228B	Double column	Ø11" (280 mm)	11" × 11" (280 × 280 mm)	4 HP (3 kW)	12
BS-500G	Double column	Ø13-3/4" (350 mm)	19-5/8" × 13-3/4" (500 × 350 mm)	5 HP (3.7 kW)	13
BS-500GT	Double column	Ø16-3/8" (415 mm)	19-5/8" × 16-3/8" (500 × 415 mm)	5 HP (3.7 kW)	13
BS-850G	Double column	Ø23-5/8" (600 mm)	33-1/2" × 23-5/8" (850 × 600 mm)	7.4 HP (5.5 kW)	13
TBK-4228	Double column	Ø11" (280 mm)	11" × 11" (280 × 280 mm)	4 HP (3 kW)	14
TBK-4228A	Double column	Ø11" (280 mm)	11" × 11" (280 × 280 mm)	4 HP (3 kW)	14
TGK-4235	Double column	Ø13-3/4" (350 mm)	13-3/4" × 13-3/4" (350 × 350 mm)	3.8 HP (2.8 kW)	15
TGK-4240	Double column	Ø15-3/4" (400 mm)	15-3/4" × 15-3/4" (400 × 400 mm)	5.4 HP (4 kW)	15
GZ4250/70	Double column	Ø19-5/8" (500 mm)	27-1/2" × 19-5/8" (700 × 500 mm)	7.4 HP (5.5 kW)	16
GZ4260/120	Double column	Ø23-5/8" (600 mm)	47-1/4" × 23-5/8" (1200 × 600 mm)	14.8 HP (11 kW)	16
VERTICAL BAND SAWS					PAGES 17
VS-300	Vertical	—	12-1/4" × 7-1/4" (310 × 185 mm)	0.7 HP (0.55 kW)	17
VS-400	Vertical	—	15-3/4" × 11-1/4" (400 × 285 mm)	2 HP (1.5 kW)	17
VS-500	Vertical	—	19-5/8" × 12-1/4" (500 × 310 mm)	2 HP (1.5 kW)	17
VS-585	Vertical	—	23" × 13-1/4" (585 × 336 mm)	2 HP (1.5 kW)	17

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. All capacities are maximum workpiece sizes at a 0° (straight) cut.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario, Canada
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available across Canada
- ✓ Shipping across Canada and the US from Ontario
- ✓ Remote troubleshooting and technical support by video call

01 SEMI-AUTOMATIC BAND SAWS

6 MODELS · PAGES 3-7

BS-315GF

BS-315GF FULL-HYDRAULIC DOUBLE-MITER BAND SAW, 10”

Our most popular value-line saw: a 10-inch gear-driven semi-automatic with everything hydraulic — the vise clamps hydraulically, the bow descends on a hydraulic cylinder at a dialled-in feed rate and lifts itself hydraulically at the end of the cut. The bow swivels to both sides for 30°, 45° and 60° miters with fast angle stops, the gear-driven motor runs the band at a variable blade speed set on the VFD inverter drive. One operator loads, clamps and starts; the saw does the rest.

- Ø10” (250 mm) round / 12-1/2” × 7-1/2” at 0°; Ø9” at 45° both sides, Ø5-7/8” at 60°
- Hydraulic clamping vise, hydraulic down-feed with variable feed rate and hydraulic bow up-lift
- Swivels left and right with fast angle stops at 30°, 45° and 60°
- Gear-driven 1.5 HP (1.1 kW) blade motor with variable blade speed by VFD inverter drive, up to 262 ft/min (80 m/min), and a separate 1 HP (0.75 kW) motor for the hydraulic pump
- Bow pivots on adjustable tapered bearings — no backlash; electro-mechanical blade tensioner with microswitch
- Safety guards on the flywheel casing and blade; electric coolant system; 1” × .035” × 111” (27 × 0.9 × 2825 mm) blade

OPTIONAL Roller stand with length stop · Extra blades











Model	BS-315GF
CUTTING CAPACITY	
Round at 0° (straight)	Ø10” (250 mm)
Rectangular W × H at 0°	12-3/8” × 7-1/2” (315 × 190 mm)
Round at 45° right	Ø9” (230 mm)
Rectangular W × H at 45° right	8-1/4” × 7-1/2” (210 × 190 mm)
Round at 60° right	Ø5-7/8” (150 mm)
Rectangular W × H at 60° right	5-1/8” × 5-7/8” (130 × 150 mm)
Round at 45° left	Ø9” (230 mm)
Rectangular W × H at 45° left	8-1/4” × 7-1/2” (210 × 190 mm)
Blade speed	Variable, VFD inverter drive — up to 262 ft/min (80 m/min)
Band blade L × W × T	111 × 1 × .035 in (2825 × 27 × 0.9 mm)
Main motor	1.5 HP (1.1 kW)
Hydraulic motor	1 HP (0.75 kW)
Vise	Hydraulic
Bow lift	Hydraulic
Miter cutting	Swivel bow, 45° left / 30°, 45° and 60° right
Drive	Gear, variable blade speed by VFD inverter drive
Weight	882 lb (400 kg)
Packing size	64 × 35 × 61 in (1630 × 900 × 1550 mm)
Gross weight	1,135 lb (515 kg)
Voltage	240 V single-phase

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

BS-460G · BS-460G-JC

BS-460G DUAL-MITER HYDRAULIC BAND SAWS, 13"

A 13-inch gear-driven semi-automatic saw whose bow swivels both ways — 45° left and right, 60° right — with a quick lock at every angle. Hydraulic vise, hydraulic descent and a gear-driven motor with variable blade speed by VFD inverter drive make it the workhorse for structural steel, tube and profile cutting. The BS-460G-JC is the same machine with a movable control panel on an arm.

- Ø13" (330 mm) round / 18" × 9-7/8" at 0°; Ø12" at 45° both sides, Ø8" at 60°
- Hydraulic clamping vise and hydraulic bow descent
- Bow swivels left and right with quick lock
- Gear-driven 3 HP (2.2 kW) blade motor with variable blade speed by VFD inverter drive, up to 315 ft/min (96 m/min), and a separate 2 HP (1.5 kW) motor for the hydraulic pump
- BS-460G-JC: movable control panel

OPTIONAL PLC control · Roller stands





BS-460G-JC

Model	BS-460G	BS-460G-JC
CUTTING CAPACITY		
Round at 0° (straight)	Ø13" (330 mm)	
Rectangular W × H at 0°	18-1/8" × 9-7/8" (460 × 250 mm)	
Round at 45° right	Ø12" (305 mm)	
Rectangular W × H at 45° right	12" × 9-7/8" (305 × 250 mm)	
Round at 60° right	Ø8-1/8" (205 mm)	
Rectangular W × H at 60° right	8-1/8" × 9-7/8" (205 × 250 mm)	
Round at 45° left	Ø12" (305 mm)	
Rectangular W × H at 45° left	12" × 9-7/8" (305 × 250 mm)	
Blade speed	Variable, VFD inverter drive — up to 315 ft/min (96 m/min)	
Band blade L × W × T	156 × 1 × .035 in (3960 × 27 × 0.9 mm)	
Main motor	3 HP (2.2 kW)	
Hydraulic motor	2 HP (1.5 kW)	
Vise	Hydraulic	
Drive	Gear, variable blade speed by VFD inverter drive	
Control panel	—	Movable, on arm
Weight	1,984 lb (900 kg)	
Packing size	91 × 41 × 64 in (2300 × 1050 × 1630 mm)	
Gross weight	2,337 lb (1,060 kg)	
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

BS-2114TH

BS-2114TH HYDRAULIC BAND SAW, 15-3/4"

A 15-3/4-inch pivot saw with hydraulic descent and return: the saw frame descends and rises automatically, so one operator can clamp, start and walk away. Gear-driven motor with variable blade speed by VFD inverter drive, sintered-carbide guides, quick-clamp sliding vise and miter cuts up to 60° on stock up to 21-3/4" × 14-1/4".



- Ø15-3/4" (400 mm) round / 21-3/4" × 14-1/4" rectangular at 0°; miter cuts up to 60°
- Automatic bow descent and return on a hydraulic cylinder
- Gear-driven 3.8 HP (2.8 kW) blade motor with variable blade speed by VFD inverter drive, up to 230 ft/min (70 m/min), and a separate 3 HP (2.2 kW) motor for the hydraulic pump
- Sintered-carbide blade guides, quick-clamp sliding vise
- Powerful coolant pump; 1-3/8" × 0.043" × 173-1/2" blade

OPTIONAL Roller stand with length stop

Model	BS-2114TH
CUTTING CAPACITY	
Round at 0° (straight)	Ø15-3/4" (400 mm)
Rectangular W × H at 0°	21-5/8" × 14-1/8" (550 × 360 mm)
Round at 45° right	Ø13-3/8" (340 mm)
Rectangular W × H at 45° right	15-3/4" × 13-3/8" (400 × 340 mm)
Round at 60° right	Ø5-7/8" (150 mm)
Rectangular W × H at 60° right	9-7/8" × 7-7/8" (250 × 200 mm)
Blade speed	Variable, VFD inverter drive — up to 230 ft/min (70 m/min)
Band blade L × W × T	173-1/2 × 1-1/4 × .042 in (4405 × 34 × 1.1 mm)
Main motor	3.8 HP (2.8 kW)
Hydraulic motor	3 HP (2.2 kW)
Drive	Gear, variable blade speed by VFD inverter drive
Weight	1,389 lb (630 kg)
Packing size	91 × 33 × 62 in (2300 × 830 × 1580 mm)
Gross weight	1,676 lb (760 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

BS-650GA

BS-650GA HYDRAULIC SWIVEL-HEAD BAND SAW, 18”

An 18-inch swivel-head saw with automatic cutting and manual feeding: hydraulic vise, variable-frequency drive for stepless blade speed, a digital read-out for the feed position and a movable control panel. The bow swivels 45° to both sides and 60° to the right, and the gear-driven 7.4 HP motor handles 25-1/2” × 13-3/4” sections. Same frame as the automatic BS-650G without the feeder.

- Ø18” (460 mm) round / 25-1/2” × 13-3/4” at 0°; Ø18” at 45° both sides, Ø12-1/4” at 60°
- Automatic cutting cycle; material fed by hand on the roller table
- Hydraulic clamping vise, digital read-out of the feed position
- Variable blade speed 0–312 ft/min (inverter); 7.4 HP (5.5 kW) gear-driven motor
- Movable control panel; 1-5/8” × 0.051” × 205-1/2” blade

OPTIONAL Roller conveyors · Automatic feeding — see BS-650G





Control panel with blade speed and feed controls

Model	BS-650GA
CUTTING CAPACITY	
Round at 0° (straight)	Ø18-1/8” (460 mm)
Rectangular W × H at 0°	25-5/8” × 13-3/4” (650 × 350 mm)
Round at 45° right	Ø18-1/8” (460 mm)
Rectangular W × H at 45° right	18-1/8” × 13-3/4” (460 × 350 mm)
Round at 60° right	Ø12-1/4” (310 mm)
Rectangular W × H at 60° right	12-1/4” × 13-3/4” (310 × 350 mm)
Round at 45° left	Ø18-1/8” (460 mm)
Rectangular W × H at 45° left	18-1/8” × 13-3/4” (460 × 350 mm)
Blade speed	0–312 ft/min (0–95 m/min)
Band blade L × W × T	205-1/2 × 1-1/2 × .050 in (5220 × 41 × 1.3 mm)
Main motor	7.4 HP (5.5 kW)
Vise	Hydraulic
Drive	Gear, inverter
Control panel	Movable
Weight	3,616 lb (1,640 kg)
Packing size	116 × 58 × 83 in (2950 × 1480 × 2120 mm)
Gross weight	4,145 lb (1,880 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

BS-5030


BS-5030 SINGLE-COLUMN BAND SAW WITH TOUCH SCREEN, 11-3/4"

A single-column saw for straight cuts up to Ø11-3/4" / 19-3/4" × 11-3/4" with a PLC and finger-touch screen, hydraulic jaw vise, variable hydraulic down-feed and blade overload protection. The column guides the bow vertically for square, repeatable cuts; bearing and carbide double guides extend blade life. Ideal as a production saw for bar and plate where a feeder is not needed — its automatic sister is the BS-5040.

- Ø11-3/4" (300 mm) round / 19-3/4" × 11-3/4" rectangular (straight cut)
- PLC control with graphical finger-touch screen; work light
- Hydraulic jaw clamping vise, variable hydraulic down-feed
- Blade overload protection; bearing + carbide double guides
- Four blade speeds, 4 HP (3 kW) motor, 1-3/8" × 0.043" × 164-1/2" blade

OPTIONAL Roller stands · Automatic feeding — see BS-5040




Hydraulic jaw clamping vise


PLC with finger-touch screen


Chip box and coolant tank

Model	BS-5030
CUTTING CAPACITY	
Round at 0° (straight)	Ø11-3/4" (300 mm)
Rectangular W × H at 0°	19-5/8" × 11-3/4" (500 × 300 mm)
Blade speed	98/164/246/295 ft/min (30/50/75/90 m/min)
Band blade L × W × T	164-1/2 × 1-1/4 × .042 in (4180 × 34 × 1.1 mm)
Main motor	4 HP (3 kW)
Vise	Hydraulic jaw
Control	PLC, touch screen
Max. hydraulic pressure	2.2 MPa
Drive	V-belt, 4 speeds
Weight	2,392 lb (1,085 kg)
Packing size	89 × 52 × 67 in (2270 × 1320 × 1710 mm)
Gross weight	2,590 lb (1,175 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

02 AUTOMATIC BAND SAWS

5 MODELS · PAGES 8–11

BS300X370 · BS300X370H

BS300X370 AUTOMATIC BAND SAWS WITH ROLLER FEED, 11-3/4"

Compact automatic saws for batch cutting of bar, tube and profile up to Ø11-3/4": a powered roller feed advances the stock, the hydraulic vise clamps, the bow cuts and returns, and the cycle repeats for the programmed count. Stepless blade speed from an inverter, gear drive and a 3 HP motor. The BS300x370H adds a miter head for angle cuts of 30°, 45° and 60°.

- Ø11-3/4" (300 mm) round / 14-1/2" × 11" rectangular at 0°
- Roller feeding with automatic cycle; piece counter
- Hydraulic clamping vise; inverter-driven blade speed 0–371 ft/min
- Gear drive, 3 HP (2.2 kW) main motor, 0.3 HP feed motor
- BS300x370H: miter cutting 0°–60° (Ø11" at 30°, Ø9" at 45°, Ø5-1/8" at 60°)


OPTIONAL Roller conveyors · Extra blades




Control panel with piece...


Powered roller feed and...


BS300x370H


Swivelling miter table

Model	BS300x370	BS300x370H
CUTTING CAPACITY		
Round at 0° (straight)	Ø11-3/4" (300 mm)	
Rectangular W × H at 0°	14-5/8" × 11" (370 × 280 mm)	
Round at 30° right	–	Ø11" (280 mm)
Rectangular W × H at 30° right	–	11" × 11" (280 × 280 mm)
Round at 45° right	–	Ø9" (230 mm)
Rectangular W × H at 45° right	–	9" × 9-7/8" (230 × 250 mm)
Round at 60° right	–	Ø5-1/8" (130 mm)
Rectangular W × H at 60° right	–	5-1/8" × 5-7/8" (130 × 150 mm)
Blade speed	0–371 ft/min (0–113 m/min)	
Band blade L × W × T	150-1/2 × 1 × .035 in (3820 × 27 × 0.9 mm)	
Main motor	3 HP (2.2 kW)	
Feed motor	0.3 HP (0.25 kW)	
Feeding	Roller feed, automatic cycle	
Vise	Hydraulic	
Drive	Gear, inverter	
Working height	28-1/2" (730 mm)	
Weight	1,764 lb (800 kg)	2,072 lb (940 kg)
Packing size	84 × 52 × 59 in (2140 × 1320 × 1500 mm)	
Gross weight	2,094 lb (950 kg)	2,403 lb (1,090 kg)
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

BS-460GB

BS-460GB AUTOMATIC SWIVEL-HEAD MITER BAND SAW WITH 20 FT STAND, 13″

The automatic version of the BS-460G: PLC-controlled feeding and clamping with a shuttle vise (19-3/4″ per stroke), feed length selectable in inches or millimetres, and a 20 ft (6 m) material stand — 10 ft feed and 10 ft return — delivered with the machine. The bow still swivels to both sides for miter cuts, and a guard net protects the operator. Gear drive with variable blade speed by VFD inverter drive.

- Ø13″ (330 mm) round / 18″ × 9-7/8″ at 0°; Ø12″ at 45° both sides, Ø8″ at 60°
- Automatic feeding and clamping, max. 19-3/4″ (500 mm) per stroke; standard PLC
- 20 ft material stand included (feeder width 18″, height 33-1/2″)
- Bow swivels left and right; safety guard net
- Gear-driven 3 HP (2.2 kW) blade motor with variable blade speed by VFD inverter drive and a separate 2 HP (1.5 kW) motor for the hydraulic pump

OPTIONAL Extra stands and supports · Servo motor (variable blade speed)





Feeder with shuttle vise



PLC control panel

Model	BS-460GB
CUTTING CAPACITY	
Round at 0° (straight)	Ø13″ (330 mm)
Rectangular W × H at 0°	18-1/8″ × 9-7/8″ (460 × 250 mm)
Round at 45° right	Ø12″ (305 mm)
Rectangular W × H at 45° right	12″ × 9-7/8″ (305 × 250 mm)
Round at 60° right	Ø8-1/8″ (205 mm)
Rectangular W × H at 60° right	8-1/8″ × 9-7/8″ (205 × 250 mm)
Round at 45° left	Ø12″ (305 mm)
Rectangular W × H at 45° left	12″ × 9-7/8″ (305 × 250 mm)
Blade speed	Variable, VFD inverter drive — up to 315 ft/min (96 m/min)
Band blade L × W × T	156 × 1-1/4 × .042 in (3960 × 34 × 1.1 mm)
Main motor	3 HP (2.2 kW)
Hydraulic motor	2 HP (1.5 kW)
Feeding	Shuttle vise, PLC
Feed length per stroke	19-5/8″ (500 mm)
Vise	Hydraulic
Drive	Gear, variable blade speed by VFD inverter drive
Weight	3,351 lb (1,520 kg)
Packing size	98 × 91 × 64 in (2500 × 2300 × 1630 mm)
Gross weight	3,649 lb (1,655 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

BS-650G


BS-650G NC AUTOMATIC SCISSOR-TYPE BAND SAW, 18-1/8"

A scissor-type (pivot bow) automatic saw for heavy sections: the bow swings down on a pivot instead of running on columns, so the saw is shorter and cuts miters to 60° right. An NC feeder with a linear scale positions the stock up to 25-1/2" (650 mm) per stroke, the vises clamp automatically, a servo motor and an industrial gearbox drive the blade at a stepless speed, and the PLC runs the batch from a swivelling control panel. Ø18-1/8" (460 mm) round and 25-5/8" × 13-3/4" (650 × 350 mm) sections.

- Ø18-1/8" (460 mm) round / 25-5/8" × 13-3/4" at 0°; Ø18-1/8" at 45°, Ø12-1/4" at 60° right
- Scissor-type pivot bow with automatic swivel to 60° right
- NC feeding with linear scale, up to 25-1/2" (650 mm) per stroke; automatic clamping
- Servo blade drive with industrial gearbox, stepless 75–312 ft/min (23–95 m/min)
- 7.4 HP (5.5 kW) main motor; 1-1/2" × .050" × 205-1/2" (41 × 1.3 × 5220 mm) blade
- Swivelling control panel, work light, chip extraction and coolant system included

OPTIONAL Material supports and roller conveyors



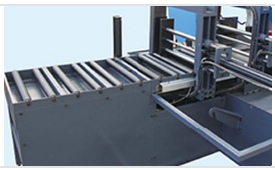

Feeder roller table

Model	BS-650G
CUTTING CAPACITY	
Round at 0° (straight)	Ø18-1/8" (460 mm)
Rectangular W × H at 0°	25-5/8" × 13-3/4" (650 × 350 mm)
Round at 45° right	Ø18-1/8" (460 mm)
Rectangular W × H at 45° right	18-1/8" × 13-3/4" (460 × 350 mm)
Round at 60° right	Ø12-1/4" (310 mm)
Rectangular W × H at 60° right	12-1/4" × 13-3/4" (310 × 350 mm)
Blade speed	75–312 ft/min (23–95 m/min)
Band blade L × W × T	205-1/2 × 1-1/2 × .050 in (5220 × 41 × 1.3 mm)
Main motor	7.4 HP (5.5 kW)
Blade drive	Servo motor + industrial gearbox
Feeding	NC, automatic clamping
Feed length per stroke	25-5/8" (650 mm)
Bow swivel	Automatic, to 60° right
Weight	5,357 lb (2,430 kg)
Packing size	119 × 90 × 87 in (3030 × 2280 × 2220 mm)
Gross weight	6,019 lb (2,730 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

BS-5040

BS-5040 SINGLE-COLUMN AUTOMATIC BAND SAW, 11-3/4"

The automatic version of the single-column saw: a hydraulic shuttle vise feeds up to 19-3/4" (500 mm) per stroke, a batch clamping device holds bundles, and an automatic chip conveyor clears the swarf. PLC control with touch screen, hydraulic jaw vise, variable hydraulic down-feed, rapid descent until the blade touches the work and blade overload protection.

- Ø11-3/4" (300 mm) round / 19-3/4" × 11-3/4" rectangular (straight cut)
- Hydraulic shuttle-vise feeding, up to 19-3/4" per stroke; batch clamping device
- PLC with finger-touch screen; rapid approach, then controlled feed
- Automatic chip conveyor, work light, coolant system
- Four blade speeds, 4 HP (3 kW) motor, 1-3/8" × 0.043" × 164-1/2" blade

OPTIONAL Roller conveyors





Automatic chip conveyor



Shuttle vise for automatic feeding



Batch clamping device

Model	BS-5040
CUTTING CAPACITY	
Round at 0° (straight)	Ø11-3/4" (300 mm)
Rectangular W × H at 0°	19-5/8" × 11-3/4" (500 × 300 mm)
Blade speed	98/164/246/295 ft/min (30/50/75/90 m/min)
Band blade L × W × T	164-1/2 × 1-1/4 × .042 in (4180 × 34 × 1.1 mm)
Main motor	4 HP (3 kW)
Feeding	Hydraulic shuttle vise
Feed length per stroke	19-5/8" (500 mm)
Vise	Hydraulic jaw
Control	PLC, touch screen
Max. hydraulic pressure	2.5 MPa
Drive	V-belt, 4 speeds
Weight	3,417 lb (1,550 kg)
Packing size	89 × 84 × 70 in (2260 × 2130 × 1780 mm)
Gross weight	3,792 lb (1,720 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

03 DOUBLE COLUMN BAND SAWS

10 MODELS · PAGES 12–16

TBK-4228B

TBK-4228B AUTOMATIC DOUBLE COLUMN BAND SAW, 11″

The automatic version of the 11-inch twin-column saw: a hydraulic shuttle vise feeds the bar to a limit-switch stop, the three-position vise clamps single bars or bundles, the bow cuts and returns, and an automatic chip conveyor clears the swarf. Blade speed is stepless from an inverter, the redesigned hydraulic vise holds short remnants, and the PLC counts the pieces — load a bundle, set the length and count, and walk away.


- Ø11″ (280 mm) round / 11″ × 11″ square
- Automatic feed and cut with a hydraulic shuttle vise; feed length set by limit switch; 3-position vise for bundle cutting
- Variable blade speed 0–200 ft/min (0–61 m/min) by inverter
- Automatic chip conveyor; new hydraulic vise design
- Belt drive, 4 HP (3 kW) main motor and 0.7 HP (0.55 kW) hydraulic pump motor; work light, coolant and material stand included

OPTIONAL Roller stand · Extra blades





Automatic chip conveyor



New hydraulic vise design



Roller support stand for TBK-4228 saws

Model	TBK-4228B
CUTTING CAPACITY	
Round at 0° (straight)	Ø11″ (280 mm)
Rectangular W × H at 0°	11″ × 11″ (280 × 280 mm)
Square at 0°	11″ (280 mm)
Blade speed	0–200 ft/min (0–61 m/min)
Band blade L × W × T	138 × 1 × .035 in (3505 × 27 × 0.9 mm)
Main motor	4 HP (3 kW)
Hydraulic motor	0.7 HP (0.55 kW)
Feeding	Automatic, hydraulic shuttle vise
Vise	Hydraulic, new clamp design
Blade tensioning	Mechanical
Drive	V-belt, inverter
Chip conveyor	Automatic
Weight	2,183 lb (990 kg)
Gross weight	2,557 lb (1,160 kg)
Dimensions L × W × H	89 × 79 × 65 in (2250 × 2010 × 1640 mm)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

BS-500G 13-3/4" · BS-500GT 16-3/8" · BS-850G 23-5/8"

BS-500G, BS-500GT AND BS-850G CNC DOUBLE COLUMN AUTOMATIC BAND SAWS, 13-3/4" TO 23-5/8"

Double column production saws with CNC feeding and cutting: a servo-driven feeder positions the stock, hydraulic vises clamp it, the servo blade drive sets a stepless cutting speed and the PLC runs the batch. The BS-500G and BS-500GT have an automatic rotary bow (45°) and chip extraction; the BS-850G cuts 33-1/2" × 23-5/8" sections with a hydraulic feeder as standard.

- Round capacity from Ø13-3/4" (350 mm) to Ø23-5/8" (600 mm); miter cuts to 45°
- CNC / PLC automatic feeding and clamping, hydraulic vises
- Servo motor for stepless blade speed
- Feed per stroke: 19-3/4" (BS-500G/500GT), 23-5/8" (BS-850G)
- Work light, chip extraction and coolant system included

OPTIONAL Material supports and roller conveyors





BS-850G

Model	BS-500G	BS-500GT	BS-850G
CUTTING CAPACITY			
Round at 0° (straight)	Ø13-3/4" (350 mm)	Ø16-3/8" (415 mm)	Ø23-5/8" (600 mm)
Rectangular W × H at 0°	19-5/8" × 13-3/4" (500 × 350 mm)	19-5/8" × 16-3/8" (500 × 415 mm)	33-1/2" × 23-5/8" (850 × 600 mm)
Round at 45° right	Ø13" (330 mm)	Ø13-1/4" (335 mm)	Ø15-3/4" (400 mm)
Rectangular W × H at 45° right	13" × 13-3/4" (330 × 350 mm)	10-3/8" × 16-3/8" (265 × 415 mm)	15-3/4" × 23-5/8" (400 × 600 mm)
Blade speed	–	–	0–390 ft/min (0–119 m/min)
Band blade L × W × T	164-1/2 × 1-1/4 × .042 in (4180 × 34 × 1.1 mm)	179-1/2 × 1-1/4 × .042 in (4555 × 34 × 1.1 mm)	263 × 2 × .063 in (6685 × 54 × 1.6 mm)
Main motor	5 HP (3.7 kW)	5 HP (3.7 kW)	7.4 HP (5.5 kW)
Blade drive		Servo motor, stepless speed	
Feeding	CNC, hydraulic clamping	CNC, hydraulic clamping	Hydraulic feeder, CNC
Feed length per stroke	19-5/8" (500 mm)	19-5/8" (500 mm)	23-5/8" (600 mm)
Bow swivel	Automatic, to 45°	Automatic, to 45°	To 45°
Weight	5,952 lb (2,700 kg)	6,129 lb (2,780 kg)	8,697 lb (3,945 kg)
Packing size	88 × 87 × 67 in (2230 × 2220 × 1700 mm)	89 × 93 × 69 in (2250 × 2350 × 1750 mm)	140 × 83 × 105 in (3550 × 2120 × 2660 mm) (body), 70 × 68 × 59 in (1790 × 1720 × 1490 mm) (feeder)
Gross weight	6,393 lb (2,900 kg)	6,614 lb (3,000 kg)	9,337 lb (4,235 kg)
Voltage	600 V 3-phase (208/240/480 V on request)		

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

TBK-4228 · TBK-4228A

TBK-4228 AND TBK-4228A SEMI-AUTOMATIC DOUBLE COLUMN BAND SAWS, 11”

Twin-column semi-automatic saws for Ø11” / 11” × 11” stock: the bow travels vertically on two columns, so the cut stays square whatever the feed pressure. Hydraulic down-feed with variable speed, hydraulic clamping and automatic shut-off at the end of the cut; the operator positions the bar by hand. Choose the base machine (TBK-4228) or the miter version that swivels for cuts at 30° and 45° (TBK-4228A).


- Ø11” (280 mm) round / 11” × 11” square; TBK-4228A: Ø10-1/4” at 30°, Ø6-3/4” at 45°
- Double column — vertical, rigid bow travel
- Hydraulic variable down-feed, hydraulic clamping, auto shut-off
- Belt drive with three blade speeds, 4 HP (3 kW) main motor and 0.7 HP (0.55 kW) hydraulic pump motor
- Work light, coolant and material stand included

OPTIONAL Roller stand · Extra blades




TBK-4228A


Twin-column head with...


Swivel table for 0°–45° miter cuts


Roller support stand for TBK-...

Model	TBK-4228	TBK-4228A
CUTTING CAPACITY		
Round at 0° (straight)	Ø11” (280 mm)	
Rectangular W × H at 0°	11” × 11” (280 × 280 mm)	
Square at 0°	11” (280 mm)	
Round at 30° right	—	Ø10-1/4” (260 mm)
Rectangular W × H at 30° right	—	10-1/4” × 11” (260 × 280 mm)
Round at 45° right	—	Ø6-3/4” (170 mm)
Rectangular W × H at 45° right	—	6-3/4” × 11” (170 × 280 mm)
Blade speed	89/148/226 ft/min (27/45/69 m/min)	
Band blade L × W × T	138 × 1 × .035 in (3505 × 27 × 0.9 mm)	142-1/2 × 1 × .035 in (3625 × 27 × 0.9 mm)
Main motor	4 HP (3 kW)	
Hydraulic motor	0.7 HP (0.55 kW)	
Feeding	Manual hand wheel	Manual
Vise	Hydraulic	
Blade tensioning	Mechanical	
Drive	V-belt, 3 speeds	
Miter cutting	—	0°–45°
Weight	1,532 lb (695 kg)	1,808 lb (820 kg)
Gross weight	1,839 lb (834 kg)	2,127 lb (965 kg)
Dimensions L × W × H	86 × 52 × 63 in (2180 × 1310 × 1610 mm)	86 × 51 × 63 in (2180 × 1300 × 1600 mm)
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

TGK-4235 · TGK-4240

TGK-4235 AND TGK-4240 GEAR-DRIVEN DOUBLE COLUMN SAWS, 13-3/4" AND 15-3/4"


Heavier twin-column saws with a gear-driven motor and variable blade speed by VFD inverter drive, hydraulic blade tensioning and hydraulic clamping. Vertical lifting on two columns keeps the blade square in Ø13-3/4" and Ø15-3/4" solids; the cutting feed is hydraulically controlled and stepless. A three-position hydraulic clamping vise for bundles is optional.


- TGK-4235: Ø13-3/4" / 13-3/4" × 13-3/4" · TGK-4240: Ø15-3/4" / 15-3/4" × 15-3/4"
- Double column structure, vertical lifting, high stability
- Hydraulic variable down-feed, hydraulic clamping, hydraulic blade tensioning
- Gear-driven 3.8 HP (2.8 kW) or 5.4 HP (4 kW) blade motor with variable blade speed by VFD inverter drive; separate 0.7 HP / 1 HP hydraulic pump motor
- Work light, coolant pump and material stand included

OPTIONAL Three-position hydraulic clamping vise · Roller stands




TGK-4235


Hydraulic clamping vise


Work table and material stand

Model	TGK-4235	TGK-4240
CUTTING CAPACITY		
Round at 0° (straight)	Ø13-3/4" (350 mm)	Ø15-3/4" (400 mm)
Rectangular W × H at 0°	13-3/4" × 13-3/4" (350 × 350 mm)	15-3/4" × 15-3/4" (400 × 400 mm)
Square at 0°	13-3/4" (350 mm)	15-3/4" (400 mm)
Blade speed	Variable, VFD inverter drive — up to 226 ft/min (69 m/min)	Variable, VFD inverter drive — up to 184 ft/min (56 m/min)
Band blade L × W × T	162 × 1-1/4 × .042 in (4115 × 34 × 1.1 mm)	197 × 1-1/2 × .050 in (5000 × 41 × 1.3 mm)
Main motor	3.8 HP (2.8 kW)	5.4 HP (4 kW)
Hydraulic motor	0.7 HP (0.55 kW)	1 HP (0.75 kW)
Coolant pump	0 HP (0.04 kW)	1.2 HP (0.9 kW)
Vise	Hydraulic	
Blade tensioning	Hydraulic	
Drive	Gear, variable blade speed by VFD inverter drive	
Weight	1,940 lb (880 kg)	2,921 lb (1,325 kg)
Gross weight	2,183 lb (990 kg)	3,494 lb (1,585 kg)
Dimensions L × W × H	95 × 45 × 59 in (2410 × 1150 × 1500 mm)	106 × 53 × 85 in (2700 × 1350 × 2150 mm)
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call


GZ4250/70 · GZ4260/120

GZ4250/70 AND GZ4260/120 GANTRY DOUBLE COLUMN SAWS, 19-3/4" AND 23-5/8"

Gantry-type double column saws for heavy plate, blocks, bundles and large tube: Ø19-3/4" / 27-1/2" × 19-3/4" on the GZ4250/70 and Ø23-5/8" / 47-1/4" × 23-5/8" on the GZ4260/120. Hydraulic clamping, stepless blade speed and a powered roller table; the GZ4260/120 adds hydraulic blade tensioning and a 15 HP motor for the 2-5/8" blade.

- GZ4250/70: Ø19-3/4" / 27-1/2" × 19-3/4" · GZ4260/120: Ø23-5/8" / 47-1/4" × 23-5/8"
- Double column gantry structure for batch sawing of tubes, bars, profiles and plates
- Hydraulic clamping; variable blade speed (131–262 and 66–262 ft/min)
- GZ4250/70: 7.4 HP, 1-5/8" × 0.051" blade · GZ4260/120: 15 HP, 2-5/8" × 0.051" × 346-1/2" blade, hydraulic tensioning
- Powered roller table with chain drive

OPTIONAL Roller conveyors · Bundle clamping

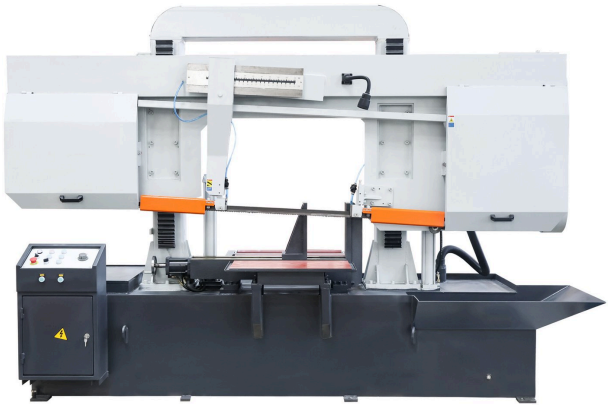



GZ4260/120



Chain-driven powered roller table

Model	GZ4250/70	GZ4260/120
CUTTING CAPACITY		
Round at 0° (straight)	Ø19-5/8" (500 mm)	Ø23-5/8" (600 mm)
Rectangular W × H at 0°	27-1/2" × 19-5/8" (700 × 500 mm)	47-1/4" × 23-5/8" (1200 × 600 mm)
Blade speed	131–262 ft/min (40–80 m/min)	66–262 ft/min (20–80 m/min)
Band blade L × W × T	1-1/2 × .050 in (41 × 1.3 mm)	346-1/2 × 2-5/8 × .050 in (8800 × 67 × 1.3 mm)
Main motor	7.4 HP (5.5 kW)	14.8 HP (11 kW)
Hydraulic motor	2 HP (1.5 kW)	3 HP (2.2 kW)
Coolant pump	0 HP (0.09 kW)	0.2 HP (0.12 kW)
Vise	Hydraulic	
Blade tensioning	Manual	Hydraulic
Drive	Belt	–
Weight	5,710 lb (2,590 kg)	11,155 lb (5,060 kg)
Packing size	140 × 59 × 86 in (3550 × 1500 × 2180 mm)	167 × 69 × 93 in (4250 × 1750 × 2370 mm)
Gross weight	6,526 lb (2,960 kg)	11,729 lb (5,320 kg)
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

04 VERTICAL BAND SAWS

4 MODELS · PAGE 17

VS-300 · VS-400 · VS-500 · VS-585

VS-300 TO VS-585 VERTICAL METAL BAND SAWS WITH BLADE WELDER, 12" TO 23" THROAT

Vertical band saws for contour, slot and straight cuts in sheet, plate, bar and profiles — steel, stainless, aluminum, plastics and wood. The workpiece is pushed across a table that tilts 45° right (30° on the VS-500 and VS-585) and 15° left, the blade speed is set steplessly with an inverter, and every saw has its own blade welder, annealer and grinder on the column, so a blade can be cut, welded and threaded through a hole for internal cut-outs. Four sizes from a 12" to a 23" throat.

- Throat 12-1/4" × 7-1/4" (VS-300) to 23" × 13-1/4" (VS-585) — width × height under the upper guide
- Variable blade speed by inverter: 33 – 590 ft/min (VS-300) to 49 – 1,076 ft/min (VS-500 / 585)
- Built-in blade welder (2.4 kVA) with annealing and a blade grinder: weld a blade for internal cut-outs in minutes
- Table tilts 45° right (30° on VS-500 / 585) and 15° left; table gauge and adjustable blade guard
- Blades 1/8 – 5/8" wide (1/4 – 3/4" on the VS-585); work light; servo feed optional

OPTIONAL Servo-driven table feed · Extra blades in several widths and pitches





VS-300



VS-500

Model	VS-300	VS-400	VS-500	VS-585
CUTTING CAPACITY				
Rectangular W × H at 0°	12-1/4" × 7-1/4" (310 × 185 mm)	15-3/4" × 11-1/4" (400 × 285 mm)	19-5/8" × 12-1/4" (500 × 310 mm)	23" × 13-1/4" (585 × 336 mm)
Blade speed	33–591 ft/min (10–180 m/min)	49–853 ft/min (15–260 m/min)	49–1,076 ft/min (15–328 m/min)	49–1,076 ft/min (15–328 m/min)
Main motor	0.7 HP (0.55 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)	2 HP (1.5 kW)
Table size	19-3/4 × 15-3/4" (500 × 400 mm)	21-5/8 × 23-5/8" (550 × 600 mm)	26 × 27-1/2" (660 × 700 mm)	26 × 27-1/2" (660 × 700 mm)
Table tilt	45° right, 15° left	45° right, 15° left	30° right, 15° left	30° right, 15° left
Blade length	111-5/8 – 114-3/4" (2,835 – 2,915 mm)	133-1/2 – 136-1/2" (3,390 – 3,467 mm)	156-3/4 – 159-1/2" (3,980 – 4,050 mm)	174-1/2 – 178" (4,430 – 4,520 mm)
Blade width	1/8 – 5/8" (3 – 16 mm)	1/8 – 5/8" (3 – 16 mm)	1/8 – 5/8" (3 – 16 mm)	1/4 – 3/4" (6 – 19 mm)
Blade grinder motor	1/8 HP (0.09 kW)			
Blade welder	2.4 kVA			
Weight	606 lb (275 kg)	683 lb (310 kg)	1,067 lb (484 kg)	1,224 lb (555 kg)
Packing size	38 × 26 × 69" (96 × 65 × 175 cm)	43 × 31 × 79" (108 × 80 × 200 cm)	55 × 35 × 87" (140 × 90 × 220 cm)	58 × 37 × 91" (147 × 95 × 230 cm)
Gross weight	761 lb (345 kg)	838 lb (380 kg)	1,208 lb (548 kg)	1,411 lb (640 kg)
Voltage	600 V 3-phase (208/240/480 V on request)			

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario, Canada
- Order today with just 10% down — 0% down financing available
- Installation and training available across Canada
- Shipping across Canada and the US from Ontario
- Remote troubleshooting and technical support by video call

SOLD, INSTALLED AND SUPPORTED IN CANADA

INCLUDED WITH EVERY NOVOTECH MACHINE

Every value-line band saw in this catalogue is sold by NovoTech Machine Tools Inc. and backed from our Mississauga, Ontario, Canada location — the same terms as every other machine we sell:

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario, Canada
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available across Canada
- ✓ Shipping across Canada and the US from Ontario
- ✓ Remote troubleshooting and technical support by video call

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5, Canada

NovoTechMachineTools.com

info@NovoTechMachineTools.com · +1 647 526 5510

Ask us for a quote on any model in this catalogue, for current stock in Mississauga, ON, Canada, or for the machine that fits your cutting range — we will size it against your typical stock and quote delivery, installation and training.

The NovoTech value line — metal cutting band saws selected, sold, installed and supported in Canada by NovoTech. Value-line machines carry a CSA-approved electrical panel and are backed by the same warranty, parts and service as the rest of the NovoTech range.

Catalogue 2026 · Specifications subject to change without notice. Capacities are maximum workpiece sizes; photos may show optional equipment.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario, Canada
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available across Canada
- ✓ Shipping across Canada and the US from Ontario
- ✓ Remote troubleshooting and technical support by video call