NOVOFAB MACHINERY · 28 MODELS · 14 SERIES

METAL CUTTING BAND SAWS

CATALOGUE 2026

Value line · Sold, installed and supported in Canada by NovoTech Machine Tools









CANADA
SALES, INSTALLATION & SERVICE

1-YEAR
WARRANTY · CSA-APPROVED PANEL

10% DOWN
0% DOWN FINANCING AVAILABLE

PARTS
& TECHNICAL SUPPORT IN CANADA

28 MODELS · 14 SERIES · PAGES 3-16

THE NOVOFAB BAND SAW RANGE

NovoFab Machinery is the value line of NovoTech Machine Tools: metal cutting band saws from a 10-inch manual pivot saw to CNC automatic and gantry-type double column machines, every one delivered with a CSA-approved electrical panel, a 1-year warranty, and parts and technical support from our Mississauga, Ontario shop. Capacities below are for straight (0°) cuts; the series pages give mitre capacities, blade data, motors, weights and dimensions in imperial units with metric in brackets.

IN THIS CATALOGUE

Cover	1
Model range	2
Manual band saws	3–4
Semi-automatic band saws	5–9
Automatic band saws	10–13
Double column band saws	14–16
NovoTech services & contact	17

Model	Type	Round capacity at 0°	Rectangular at 0°	Main motor	Page
MANUAL BAND SAWS					PAGES 3–4
NF-M 10	Manual	Ø10" (254 mm)	18" × 5" (457 × 127 mm)	2 HP (1.5 kW)	3
NF-M 10 S	Manual	Ø10" (254 mm)	16" × 6-1/4" (406 × 160 mm)	2 HP (1.5 kW)	3
NF-M 10 D	Manual	Ø10-1/4" (260 mm)	18-1/8" × 4-7/8" (460 × 125 mm)	2 HP (1.5 kW)	3
NF-M 10 T	Manual	Ø10-1/4" (260 mm)	16-7/8" × 10-1/4" (430 × 260 mm)	2 HP (1.5 kW)	3
NF-M 16	Manual	Ø15-3/4" (400 mm)	21-5/8" × 14-1/8" (550 × 360 mm)	3–3.8 HP (2.2–2.8 kW)	4
SEMI-AUTOMATIC BAND SAWS					PAGES 5–9
NF-H 10 S	Semi-automatic	Ø10" (254 mm)	16" × 6-1/4" (406 × 160 mm)	2 HP (1.5 kW)	5
NF-H 10 T	Semi-automatic	Ø10-1/4" (260 mm)	16-7/8" × 10-1/4" (430 × 260 mm)	2 HP (1.5 kW)	5
NF-H 13	Semi-automatic	Ø13" (330 mm)	18-1/8" × 9-7/8" (460 × 250 mm)	2–3 HP (1.5–2.2 kW)	6
NF-H 13 C	Semi-automatic	Ø13" (330 mm)	18-1/8" × 9-7/8" (460 × 250 mm)	2–3 HP (1.5–2.2 kW)	6
NF-H 16	Semi-automatic	Ø15-3/4" (400 mm)	21-5/8" × 14-1/8" (550 × 360 mm)	3–3.8 HP (2.2–2.8 kW)	7
NF-H 12 SC	Semi-automatic	Ø11-3/4" (300 mm)	19-5/8" × 11-3/4" (500 × 300 mm)	4 HP (3 kW)	8
NF-H 18	Semi-automatic	Ø18-1/8" (460 mm)	25-5/8" × 13-3/4" (650 × 350 mm)	7.4 HP (5.5 kW)	9
AUTOMATIC BAND SAWS					PAGES 10–13
NF-A 12	Automatic	Ø11-3/4" (300 mm)	14-5/8" × 11" (370 × 280 mm)	3 HP (2.2 kW)	10
NF-A 12 T	Automatic	Ø11-3/4" (300 mm)	14-5/8" × 11" (370 × 280 mm)	3 HP (2.2 kW)	10
NF-A 12 SC	Automatic	Ø11-3/4" (300 mm)	19-5/8" × 11-3/4" (500 × 300 mm)	4 HP (3 kW)	11
NF-A 13	Automatic	Ø13" (330 mm)	18-1/8" × 9-7/8" (460 × 250 mm)	2–3 HP (1.5–2.2 kW)	12
NF-A 14	Automatic	Ø13-3/4" (350 mm)	19-5/8" × 13-3/4" (500 × 350 mm)	5 HP (3.7 kW)	13
NF-A 16	Automatic	Ø16-3/8" (415 mm)	19-5/8" × 16-3/8" (500 × 415 mm)	5 HP (3.7 kW)	13
NF-A 18	Automatic	Ø18-1/8" (460 mm)	25-5/8" × 13-3/4" (650 × 350 mm)	7.4 HP (5.5 kW)	13
NF-A 24	Automatic	Ø23-5/8" (600 mm)	33-1/2" × 23-5/8" (850 × 600 mm)	7.4 HP (5.5 kW)	13
DOUBLE COLUMN BAND SAWS					PAGES 14–16
NF-DC 11	Double column	Ø11" (280 mm)	11" × 11" (280 × 280 mm)	4 HP (3 kW)	14
NF-DC 11 T	Double column	Ø11" (280 mm)	11" × 11" (280 × 280 mm)	4 HP (3 kW)	14
NF-DC 11 A	Double column	Ø11" (280 mm)	11" × 11" (280 × 280 mm)	4 HP (3 kW)	14
NF-DC 11 AV	Double column	Ø11" (280 mm)	11" × 11" (280 × 280 mm)	4 HP (3 kW)	14
NF-DC 14	Double column	Ø13-3/4" (350 mm)	13-3/4" × 13-3/4" (350 × 350 mm)	3–3.8 HP (2.2–2.8 kW)	15
NF-DC 16	Double column	Ø15-3/4" (400 mm)	15-3/4" × 15-3/4" (400 × 400 mm)	4–5.4 HP (3–4 kW)	15
NF-DC 20	Double column	Ø19-5/8" (500 mm)	27-1/2" × 19-5/8" (700 × 500 mm)	7.4 HP (5.5 kW)	16
NF-DC 24	Double column	Ø23-5/8" (600 mm)	47-1/4" × 23-5/8" (1200 × 600 mm)	14.8 HP (11 kW)	16

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. All capacities are maximum workpiece sizes at a 0° (straight) cut.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available

01 MANUAL BAND SAWS

5 MODELS · PAGES 3-4

NF-M 10 · NF-M 10 S · NF-M 10 D · NF-M 10 T

NF-M 10 SERIES MANUAL PIVOT BAND SAWS, 10"

Four 10-inch gravity-feed pivot saws for the maintenance shop and light fabrication. The bow descends on a hydraulic damper with adjustable feed, a four-speed belt drive matches blade speed to the material, and every model ships with a coolant system and a repeat-cut stop rod. Pick the mitre arrangement you need: mitre vise (NF-M 10), swivel bow 45°–90° (NF-M 10 S), a larger frame with hydraulic down-feed control (NF-M 10 D) or a twin-mitre bow that swings 60° both ways (NF-M 10 T).

- Descent controlled by a hydraulic cylinder — adjustable, repeatable feed pressure
- Four blade speeds on a belt drive (up to 427 ft/min on the NF-M 10 D / 10 T)
- 1-1/8" × 0.035" bi-metal blade, coolant pump and stop rod included
- NF-M 10 S: bow swivels 45°–90° for mitre cuts without moving the stock
- NF-M 10 T: bow swivels both ways — 45° left and right, 60° right
- 2 HP (1.5 kW) three-phase motor; 600 V with CSA-approved panel

OPTIONAL Roller stand with length stop · Extra blades




NF-M 10 S


NF-M 10 D


NF-M 10 T

Model	NF-M 10	NF-M 10 S	NF-M 10 D	NF-M 10 T
CUTTING CAPACITY				
Round at 0° (straight)	Ø10" (254 mm)	Ø10" (254 mm)	Ø10-1/4" (260 mm)	Ø10-1/4" (260 mm)
Rectangular W × H at 0°	18" × 5" (457 × 127 mm)	16" × 6-1/4" (406 × 160 mm)	18-1/8" × 4-7/8" (460 × 125 mm)	16-7/8" × 10-1/4" (430 × 260 mm)
Square at 0°	–	–	10-1/4" (260 mm)	–
Round at 45° right	Ø5-7/8" (150 mm)	Ø6-3/4" (170 mm)	Ø9" (230 mm)	Ø10-1/4" (260 mm)
Rectangular W × H at 45° right	7-1/2" × 5-7/8" (190 × 150 mm)	7-1/2" × 6-1/4" (190 × 160 mm)	9" × 8-5/8" (230 × 220 mm)	11-3/4" × 7-7/8" (300 × 200 mm)
Square at 45° right	–	–	8-5/8" (220 mm)	–
Round at 60° right	–	–	–	Ø6-1/8" (155 mm)
Rectangular W × H at 60° right	–	–	–	4-7/8" × 4-7/8" (125 × 125 mm)
Round at 45° left	–	–	–	Ø10-1/4" (260 mm)
Rectangular W × H at 45° left	–	–	–	10-1/4" × 5-1/8" (260 × 130 mm)
Blade speed	115/197/289/377 ft/min (35/60/88/115 m/min)	115/197/289/377 ft/min (35/60/88/115 m/min)	92/203/305/427 ft/min (28/62/93/130 m/min)	92/203/305/427 ft/min (28/62/93/130 m/min)
Band blade L × W × T	129 × 1-1/8 × 0.035 in (3280 × 27 × 0.9 mm)	126-1/2 × 1-1/8 × 0.035 in (3215 × 27 × 0.9 mm)	144 × 1-1/8 × 0.035 in (3660 × 27 × 0.9 mm)	144 × 1-1/8 × 0.035 in (3660 × 27 × 0.9 mm)
Main motor	2 HP (1.5 kW)			
Mitre cutting	Mitre vise, 45°	Swivel bow, 45°–90°	Swivel bow, 45°	Swivel bow, 45° left / 45° and 60° right
Drive	V-belt, 4 speeds	V-belt, 4 speeds	Belt, 4 speeds	Belt, 4 speeds
Weight	683 lb (310 kg)	750 lb (340 kg)	705 lb (320 kg)	1,027 lb (466 kg)
Packing size	72 × 33 × 46 in (1820 × 830 × 1160 mm)	72 × 31 × 53 in (1820 × 780 × 1340 mm)	84 × 34 × 49 in (2130 × 870 × 1250 mm)	83 × 43 × 48 in (2120 × 1080 × 1220 mm)
Gross weight	864 lb (392 kg)	970 lb (440 kg)	970 lb (440 kg)	1,146 lb (520 kg)
Voltage	600 V 3-phase (208/240/480 V on request)			

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase. NF-M 10: Angle cuts via the mitre vise (the frame does not swivel).


INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

NF-M 16

NF-M 16 MANUAL BAND SAW, 15-3/4"

A big 15¾-inch pivot saw with a gear-driven two-speed motor and sintered-carbide blade guides, for shops that cut heavy sections but do not need an automatic cycle. The bow swivels for mitre cuts up to 60°, the sliding vise has a quick clamp for fast workpiece changes, and the heavy welded base keeps the cut square on 21-3/4" × 14-1/4" stock.

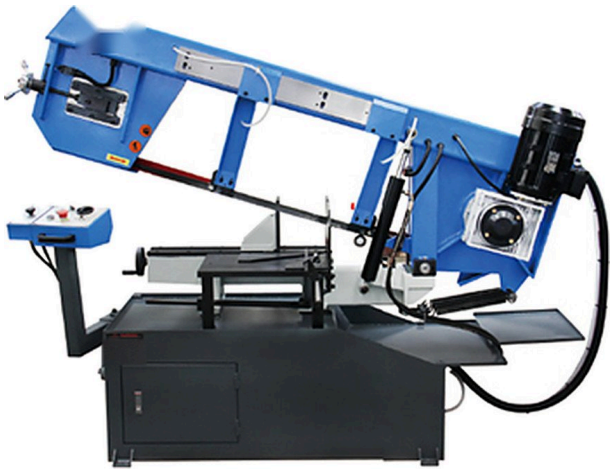

- ✓ Ø15-3/4" (400 mm) round / 21-3/4" × 14-1/4" rectangular at 0°; mitre cuts up to 60°
- ✓ Gear-driven two-speed motor, 3/3.8 HP (2.2/2.8 kW) — no belts to tension
- ✓ Blade guides with sintered-carbide inserts for straight cuts in series production
- ✓ Sliding vise with quick clamp; powerful coolant pump
- ✓ 1-3/8" × 0.043" × 173-1/2" blade

OPTIONAL Roller stand with length stop · Hydraulic version — see NF-H 16

Model	NF-M 16
CUTTING CAPACITY	
Round at 0° (straight)	Ø15-3/4" (400 mm)
Rectangular W × H at 0°	21-5/8" × 14-1/8" (550 × 360 mm)
Round at 45° right	Ø13-3/8" (340 mm)
Rectangular W × H at 45° right	15-3/4" × 13-3/8" (400 × 340 mm)
Round at 60° right	Ø5-7/8" (150 mm)
Rectangular W × H at 60° right	9-7/8" × 7-7/8" (250 × 200 mm)
Blade speed	157/230 ft/min (48/70 m/min)
Band blade L × W × T	173-1/2 × 1-3/8 × 0.043 in (4405 × 34 × 1.1 mm)
Main motor	3–3.8 HP (2.2–2.8 kW)
Drive	Gear, 2 speeds
Weight	1,279 lb (580 kg)
Packing size	91 × 33 × 62 in (2300 × 830 × 1580 mm)
Gross weight	1,565 lb (710 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available

02 SEMI-AUTOMATIC BAND SAWS

7 MODELS · PAGES 5–9


NF-H 10 S · NF-H 10 T


NF-H 10 SERIES HYDRAULIC BAND SAWS, 10″

The hydraulic versions of the 10-inch pivot saws: a hydraulic cylinder lowers the bow at a dialled-in rate, the bow lifts automatically at the end of the cut and the machine shuts off — the operator only loads, clamps and starts. The NF-H 10 S adds a hydraulic clamping vise and a swivel bow for 45° mitres; the NF-H 10 T swings both ways for 45°/60° cuts and comes with a movable control panel.

- Hydraulic descent with variable feed speed; automatic bow return and shut-off
- NF-H 10 S: hydraulic clamping vise, swivel bow 45°–90°, manual or auto-cut cycle
- NF-H 10 T: twin-mitre bow (45° left, 45°/60° right), quick-clamp vise, movable control panel
- Four-speed belt drive, 2 HP (1.5 kW) three-phase motor
- Coolant system and stop rod included

OPTIONAL Roller stand with length stop

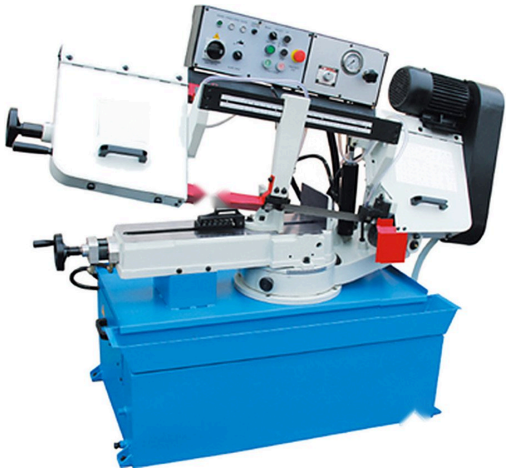

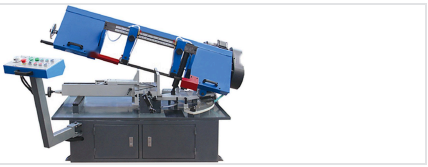

NF-H 10 T

Model	NF-H 10 S	NF-H 10 T
CUTTING CAPACITY		
Round at 0° (straight)	Ø10″ (254 mm)	Ø10-1/4″ (260 mm)
Rectangular W × H at 0°	16″ × 6-1/4″ (406 × 160 mm)	16-7/8″ × 10-1/4″ (430 × 260 mm)
Round at 45° right	Ø6-3/4″ (170 mm)	Ø10-1/4″ (260 mm)
Rectangular W × H at 45° right	7-1/2″ × 6-1/4″ (190 × 160 mm)	11-3/4″ × 7-7/8″ (300 × 200 mm)
Round at 60° right	—	Ø6-1/8″ (155 mm)
Rectangular W × H at 60° right	—	4-7/8″ × 4-7/8″ (125 × 125 mm)
Round at 45° left	—	Ø10-1/4″ (260 mm)
Rectangular W × H at 45° left	—	10-1/4″ × 5-1/8″ (260 × 130 mm)
Blade speed	115/197/289/377 ft/min (35/60/88/115 m/min)	92/203/305/427 ft/min (28/62/93/130 m/min)
Band blade L × W × T	126-1/2 × 1-1/8 × 0.035 in (3215 × 27 × 0.9 mm)	144 × 1-1/8 × 0.035 in (3660 × 27 × 0.9 mm)
Main motor	2 HP (1.5 kW)	
Mitre cutting	Swivel bow, 45°–90°	Swivel bow, 45° left / 45° and 60° right
Vise	Hydraulic	Quick-clamp, manual
Drive	V-belt, 4 speeds	Belt, 4 speeds
Weight	926 lb (420 kg)	1,135 lb (515 kg)
Packing size	74 × 31 × 56 in (1890 × 780 × 1430 mm)	83 × 52 × 48 in (2120 × 1310 × 1220 mm)
Gross weight	1,175 lb (533 kg)	1,440 lb (653 kg)
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

NF-H 13 · NF-H 13 C

NF-H 13 TWIN-MITRE HYDRAULIC BAND SAWS, 13”

A 13-inch gear-driven semi-automatic saw whose bow swivels both ways — 45° left and right, 60° right — with a quick lock at every angle. Hydraulic vise, hydraulic descent and a two-speed gear motor make it the workhorse for structural steel, tube and profile cutting. The NF-H 13 C is the same machine with a movable control panel on an arm. PLC control and servo feed can be added to turn it into an automatic.

- Ø13” (330 mm) round / 18” × 9-7/8” at 0°; Ø12” at 45° both sides, Ø8” at 60°
- Hydraulic clamping vise and hydraulic bow descent
- Bow swivels left and right with quick lock
- Gear drive, two-speed 2/3 HP (1.5/2.2 kW) motor — 157/315 ft/min at 60 Hz
- NF-H 13 C: movable control panel

OPTIONAL PLC control · Servo motor (variable blade speed) · Roller stands





NF-H 13 C

Model	NF-H 13	NF-H 13 C
CUTTING CAPACITY		
Round at 0° (straight)	Ø13” (330 mm)	
Rectangular W × H at 0°	18-1/8” × 9-7/8” (460 × 250 mm)	
Round at 45° right	Ø12” (305 mm)	
Rectangular W × H at 45° right	12” × 9-7/8” (305 × 250 mm)	
Round at 60° right	Ø8-1/8” (205 mm)	
Rectangular W × H at 60° right	8-1/8” × 9-7/8” (205 × 250 mm)	
Round at 45° left	Ø12” (305 mm)	
Rectangular W × H at 45° left	12” × 9-7/8” (305 × 250 mm)	
Blade speed	157/315 ft/min (48/96 m/min)	
Band blade L × W × T	156 × 1-1/8 × 0.035 in (3960 × 27 × 0.9 mm)	
Main motor	2–3 HP (1.5–2.2 kW)	
Vise	Hydraulic	
Drive	Gear, 2 speeds	
Control panel	—	Movable, on arm
Weight	1,984 lb (900 kg)	
Packing size	91 × 41 × 64 in (2300 × 1050 × 1630 mm)	
Gross weight	2,337 lb (1060 kg)	
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

NF-H 16

NF-H 16 HYDRAULIC BAND SAW, 15-3/4"

The hydraulic version of the NF-M 16: the saw frame descends and rises automatically, so one operator can clamp, start and walk away. Gear-driven two-speed motor, sintered-carbide guides, quick-clamp sliding vise and mitre cuts up to 60° on stock up to 21-3/4" × 14-1/4".



- ✓ Ø15-3/4" (400 mm) round / 21-3/4" × 14-1/4" rectangular at 0°; mitre cuts up to 60°
- ✓ Automatic bow descent and return on a hydraulic cylinder
- ✓ Gear-driven two-speed motor, 3/3.8 HP (2.2/2.8 kW)
- ✓ Sintered-carbide blade guides, quick-clamp sliding vise
- ✓ Powerful coolant pump; 1-3/8" × 0.043" × 173-1/2" blade

OPTIONAL Roller stand with length stop

Model	NF-H 16
CUTTING CAPACITY	
Round at 0° (straight)	Ø15-3/4" (400 mm)
Rectangular W × H at 0°	21-5/8" × 14-1/8" (550 × 360 mm)
Round at 45° right	Ø13-3/8" (340 mm)
Rectangular W × H at 45° right	15-3/4" × 13-3/8" (400 × 340 mm)
Round at 60° right	Ø5-7/8" (150 mm)
Rectangular W × H at 60° right	9-7/8" × 7-7/8" (250 × 200 mm)
Blade speed	157/230 ft/min (48/70 m/min)
Band blade L × W × T	173-1/2 × 1-3/8 × 0.043 in (4405 × 34 × 1.1 mm)
Main motor	3–3.8 HP (2.2–2.8 kW)
Drive	Gear, 2 speeds
Weight	1,389 lb (630 kg)
Packing size	91 × 33 × 62 in (2300 × 830 × 1580 mm)
Gross weight	1,676 lb (760 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available

NF-H 12 SC


NF-H 12 SC SINGLE-COLUMN BAND SAW WITH TOUCH SCREEN

A single-column saw for straight cuts up to Ø11-3/4" / 19-3/4" × 11-3/4" with a PLC and finger-touch screen, hydraulic jaw vise, variable hydraulic down-feed and blade overload protection. The column guides the bow vertically for square, repeatable cuts; bearing and carbide double guides extend blade life. Ideal as a production saw for bar and plate where a feeder is not needed — its automatic sister is the NF-A 12 SC.

- Ø11-3/4" (300 mm) round / 19-3/4" × 11-3/4" rectangular (straight cut)
- PLC control with graphical finger-touch screen; work light
- Hydraulic jaw clamping vise, variable hydraulic down-feed
- Blade overload protection; bearing + carbide double guides
- Four blade speeds, 4 HP (3 kW) motor, 1-3/8" × 0.043" × 164-1/2" blade

OPTIONAL Roller stands · Automatic feeding — see NF-A 12 SC





Hydraulic jaw clamping vise



PLC with finger-touch screen



Chip box and coolant tank

Model	NF-H 12 SC
CUTTING CAPACITY	
Round at 0° (straight)	Ø11-3/4" (300 mm)
Rectangular W × H at 0°	19-5/8" × 11-3/4" (500 × 300 mm)
Blade speed	98/164/246/295 ft/min (30/50/75/90 m/min)
Band blade L × W × T	164-1/2 × 1-3/8 × 0.043 in (4180 × 34 × 1.1 mm)
Main motor	4 HP (3 kW)
Vise	Hydraulic jaw
Control	PLC, touch screen
Max. hydraulic pressure	2.2 MPa
Drive	V-belt, 4 speeds
Weight	2,392 lb (1085 kg)
Packing size	89 × 52 × 67 in (2270 × 1320 × 1710 mm)
Gross weight	2,590 lb (1175 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

NF-H 18

NF-H 18 HYDRAULIC SWIVEL-HEAD BAND SAW, 18″

An 18-inch swivel-head saw with automatic cutting and manual feeding: hydraulic vise, variable-frequency drive for stepless blade speed, a digital read-out for the feed position and a movable control panel. The bow swivels 45° to both sides and 60° to the right, and the gear-driven 7.4 HP motor handles 25-1/2″ × 13-3/4″ sections. Same frame as the automatic NF-A 18 without the feeder.

- Ø18″ (460 mm) round / 25-1/2″ × 13-3/4″ at 0°; Ø18″ at 45° both sides, Ø12-1/4″ at 60°
- Automatic cutting cycle; material fed by hand on the roller table
- Hydraulic clamping vise, digital read-out of the feed position
- Variable blade speed 0–312 ft/min (inverter); 7.4 HP (5.5 kW) gear-driven motor
- Movable control panel; 1-5/8″ × 0.051″ × 205-1/2″ blade

OPTIONAL Roller conveyors · Automatic feeding — see NF-A 18





Control panel with blade speed and feed controls

Model	NF-H 18
CUTTING CAPACITY	
Round at 0° (straight)	Ø18-1/8″ (460 mm)
Rectangular W × H at 0°	25-5/8″ × 13-3/4″ (650 × 350 mm)
Round at 45° right	Ø18-1/8″ (460 mm)
Rectangular W × H at 45° right	18-1/8″ × 13-3/4″ (460 × 350 mm)
Round at 60° right	Ø12-1/4″ (310 mm)
Rectangular W × H at 60° right	12-1/4″ × 13-3/4″ (310 × 350 mm)
Round at 45° left	Ø18-1/8″ (460 mm)
Rectangular W × H at 45° left	18-1/8″ × 13-3/4″ (460 × 350 mm)
Blade speed	0–312 ft/min (0–95 m/min)
Band blade L × W × T	205-1/2 × 1-5/8 × 0.051 in (5220 × 41 × 1.3 mm)
Main motor	7.4 HP (5.5 kW)
Vise	Hydraulic
Drive	Gear, inverter
Control panel	Movable
Weight	3,616 lb (1640 kg)
Packing size	116 × 58 × 83 in (2950 × 1480 × 2120 mm)
Gross weight	4,145 lb (1880 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

03 AUTOMATIC BAND SAWS

8 MODELS · PAGES 10–13

NF-A 12 · NF-A 12 T

NF-A 12 AUTOMATIC BAND SAWS WITH ROLLER FEED, 11-3/4"

Compact automatic saws for batch cutting of bar, tube and profile up to Ø11-3/4": a powered roller feed advances the stock, the hydraulic vise clamps, the bow cuts and returns, and the cycle repeats for the programmed count. Stepless blade speed from an inverter, gear drive and a 3 HP motor. The NF-A 12 T adds an automatic mitre head for angle cuts of 30°, 45° and 60°.

- Ø11-3/4" (300 mm) round / 14-1/2" × 11" rectangular at 0°
- Roller feeding with automatic cycle; piece counter
- Hydraulic clamping vise; inverter-driven blade speed 0–371 ft/min
- Gear drive, 3 HP (2.2 kW) main motor, 0.3 HP feed motor
- NF-A 12 T: mitre cutting 0°–60° (Ø11" at 30°, Ø9" at 45°, Ø5-1/8" at 60°)

OPTIONAL Roller conveyors · Extra blades




Control panel with piece...


Powered roller feed and...


NF-A 12 T


Swivelling mitre table

Model	NF-A 12	NF-A 12 T
CUTTING CAPACITY		
Round at 0° (straight)	Ø11-3/4" (300 mm)	
Rectangular W × H at 0°	14-5/8" × 11" (370 × 280 mm)	
Round at 30° right	–	Ø11" (280 mm)
Rectangular W × H at 30° right	–	11" × 11" (280 × 280 mm)
Round at 45° right	–	Ø9" (230 mm)
Rectangular W × H at 45° right	–	9" × 9-7/8" (230 × 250 mm)
Round at 60° right	–	Ø5-1/8" (130 mm)
Rectangular W × H at 60° right	–	5-1/8" × 5-7/8" (130 × 150 mm)
Blade speed	0–371 ft/min (0–113 m/min)	
Band blade L × W × T	150-1/2 × 1-1/8 × 0.035 in (3820 × 27 × 0.9 mm)	
Main motor	3 HP (2.2 kW)	
Feed motor	0.3 HP (0.25 kW)	
Feeding	Roller feed, automatic cycle	
Vise	Hydraulic	
Drive	Gear, inverter	
Working height	28-1/2" (730 mm)	
Weight	1,764 lb (800 kg)	2,072 lb (940 kg)
Packing size	84 × 52 × 59 in (2140 × 1320 × 1500 mm)	
Gross weight	2,094 lb (950 kg)	2,403 lb (1090 kg)
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

NF-A 12 SC


NF-A 12 SC SINGLE-COLUMN AUTOMATIC BAND SAW

The automatic version of the single-column saw: a hydraulic shuttle vise feeds up to 19-3/4" (500 mm) per stroke, a batch clamping device holds bundles, and an automatic chip conveyor clears the swarf. PLC control with touch screen, hydraulic jaw vise, variable hydraulic down-feed, rapid descent until the blade touches the work and blade overload protection.

- Ø11-3/4" (300 mm) round / 19-3/4" × 11-3/4" rectangular (straight cut)
- Hydraulic shuttle-vise feeding, up to 19-3/4" per stroke; batch clamping device
- PLC with finger-touch screen; rapid approach, then controlled feed
- Automatic chip conveyor, work light, coolant system
- Four blade speeds, 4 HP (3 kW) motor, 1-3/8" × 0.043" × 164-1/2" blade

OPTIONAL Roller conveyors






Automatic chip conveyor



Shuttle vise for automatic feeding



Batch clamping device

Model	NF-A 12 SC
CUTTING CAPACITY	
Round at 0° (straight)	Ø11-3/4" (300 mm)
Rectangular W × H at 0°	19-5/8" × 11-3/4" (500 × 300 mm)
Blade speed	98/164/246/295 ft/min (30/50/75/90 m/min)
Band blade L × W × T	164-1/2 × 1-3/8 × 0.043 in (4180 × 34 × 1.1 mm)
Main motor	4 HP (3 kW)
Feeding	Hydraulic shuttle vise
Feed length per stroke	19-5/8" (500 mm)
Vise	Hydraulic jaw
Control	PLC, touch screen
Max. hydraulic pressure	2.5 MPa
Drive	V-belt, 4 speeds
Weight	3,417 lb (1550 kg)
Packing size	89 × 84 × 70 in (2260 × 2130 × 1780 mm)
Gross weight	3,792 lb (1720 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

NF-A 13


NF-A 13 AUTOMATIC TWIN-MITRE BAND SAW WITH 20 FT STAND

The automatic version of the NF-H 13: PLC-controlled feeding and clamping with a shuttle vise (19-3/4" per stroke), feed length selectable in inches or millimetres, and a 20 ft (6 m) material stand — 10 ft feed and 10 ft return — delivered with the machine. The bow still swivels to both sides for mitre cuts, and a guard net protects the operator. Gear drive with a two-speed motor.

- Ø13" (330 mm) round / 18" × 9-7/8" at 0°; Ø12" at 45° both sides, Ø8" at 60°
- Automatic feeding and clamping, max. 19-3/4" (500 mm) per stroke; standard PLC
- 20 ft material stand included (feeder width 18", height 33-1/2")
- Bow swivels left and right; safety guard net
- Gear drive, 2/3 HP (1.5/2.2 kW) two-speed motor

OPTIONAL Extra stands and supports · Servo motor (variable blade speed)





Feeder with shuttle vise



PLC control panel

Model	NF-A 13
CUTTING CAPACITY	
Round at 0° (straight)	Ø13" (330 mm)
Rectangular W × H at 0°	18-1/8" × 9-7/8" (460 × 250 mm)
Round at 45° right	Ø12" (305 mm)
Rectangular W × H at 45° right	12" × 9-7/8" (305 × 250 mm)
Round at 60° right	Ø8-1/8" (205 mm)
Rectangular W × H at 60° right	8-1/8" × 9-7/8" (205 × 250 mm)
Round at 45° left	Ø12" (305 mm)
Rectangular W × H at 45° left	12" × 9-7/8" (305 × 250 mm)
Blade speed	157/315 ft/min (48/96 m/min)
Band blade L × W × T	156 × 1-3/8 × 0.043 in (3960 × 34 × 1.1 mm)
Main motor	2–3 HP (1.5–2.2 kW)
Feeding	Shuttle vise, PLC
Feed length per stroke	19-5/8" (500 mm)
Vise	Hydraulic
Drive	Gear, 2 speeds
Weight	3,351 lb (1520 kg)
Packing size	98 × 91 × 64 in (2500 × 2300 × 1630 mm)
Gross weight	3,649 lb (1655 kg)
Voltage	600 V 3-phase (208/240/480 V on request)

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

NF-A 14 · NF-A 16 · NF-A 18 · NF-A 24

NF-A 14 TO NF-A 24 CNC AUTOMATIC BAND SAWS

Production saws with CNC feeding and cutting: a servo-driven feeder positions the stock, hydraulic vises clamp it, the servo blade drive sets a stepless cutting speed and the PLC runs the batch. The NF-A 14 and NF-A 16 have an automatic rotary bow (45°) and chip extraction; the NF-A 18 feeds up to 25-1/2″ per stroke with a linear scale on the feed and a swivelling control panel; the NF-A 24 cuts 33-1/2″ × 23-5/8″ sections with a hydraulic feeder as standard.


- Round capacity from Ø13-3/4″ (350 mm) to Ø23-5/8″ (600 mm); mitre cuts to 45° (NF-A 18: 60°)
- CNC / PLC automatic feeding and clamping, hydraulic vises
- Servo motor for stepless blade speed; industrial gearbox (NF-A 18)
- Feed per stroke: 19-3/4″ (NF-A 14/16), 25-1/2″ (NF-A 18), 23-5/8″ (NF-A 24)
- Work light, chip extraction and coolant system included

OPTIONAL Material supports and roller conveyors





NF-A 18 NC



Feeder roller table



NF-A 24 CNC

Model	NF-A 14	NF-A 16	NF-A 18	NF-A 24
CUTTING CAPACITY				
Round at 0° (straight)	Ø13-3/4″ (350 mm)	Ø16-3/8″ (415 mm)	Ø18-1/8″ (460 mm)	Ø23-5/8″ (600 mm)
Rectangular W × H at 0°	19-5/8″ × 13-3/4″ (500 × 350 mm)	19-5/8″ × 16-3/8″ (500 × 415 mm)	25-5/8″ × 13-3/4″ (650 × 350 mm)	33-1/2″ × 23-5/8″ (850 × 600 mm)
Round at 45° right	Ø13″ (330 mm)	Ø13-1/4″ (335 mm)	Ø18-1/8″ (460 mm)	Ø15-3/4″ (400 mm)
Rectangular W × H at 45° right	13″ × 13-3/4″ (330 × 350 mm)	10-3/8″ × 16-3/8″ (265 × 415 mm)	18-1/8″ × 13-3/4″ (460 × 350 mm)	15-3/4″ × 23-5/8″ (400 × 600 mm)
Round at 60° right	–	–	Ø12-1/4″ (310 mm)	–
Rectangular W × H at 60° right	–	–	12-1/4″ × 13-3/4″ (310 × 350 mm)	–
Blade speed	–	–	75-312 ft/min (23–95 m/min)	0–390 ft/min (0–119 m/min)
Band blade L × W × T	164-1/2 × 1-3/8 × 0.043 in (4180 × 34 × 1.1 mm)	179-1/2 × 1-3/8 × 0.043 in (4555 × 34 × 1.1 mm)	205-1/2 × 1-5/8 × 0.051 in (5220 × 41 × 1.3 mm)	263 × 2-1/8 × 0.063 in (6685 × 54 × 1.6 mm)
Main motor	5 HP (3.7 kW)	5 HP (3.7 kW)	7.4 HP (5.5 kW)	7.4 HP (5.5 kW)
Blade drive	Servo motor, stepless speed	Servo motor, stepless speed	Servo motor + industrial gearbox	Servo motor, stepless speed
Feeding	CNC, hydraulic clamping	CNC, hydraulic clamping	NC, automatic clamping	Hydraulic feeder, CNC
Feed length per stroke	19-5/8″ (500 mm)	19-5/8″ (500 mm)	25-5/8″ (650 mm)	23-5/8″ (600 mm)
Bow swivel	Automatic, to 45°	Automatic, to 45°	Automatic, to 60° right	To 45°
Weight	5,952 lb (2700 kg)	6,129 lb (2780 kg)	5,357 lb (2430 kg)	8,697 lb (3945 kg)
Packing size	88 × 87 × 67 in (2230 × 2220 × 1700 mm)	89 × 93 × 69 in (2250 × 2350 × 1750 mm)	119 × 90 × 87 in (3030 × 2280 × 2220 mm)	140 × 83 × 105 in (3550 × 2120 × 2660 mm) (body), 70 × 68 × 59 in (1790 × 1720 × 1490 mm) (feeder)
Gross weight	6,393 lb (2900 kg)	6,614 lb (3000 kg)	6,019 lb (2730 kg)	9,337 lb (4235 kg)
Voltage	600 V 3-phase (208/240/480 V on request)			

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

04 DOUBLE COLUMN BAND SAWS

8 MODELS · PAGES 14–16

NF-DC 11 · NF-DC 11 T · NF-DC 11 A · NF-DC 11 AV

NF-DC 11 SERIES DOUBLE COLUMN BAND SAWS, 11”

Twin-column saws for Ø11” / 11” × 11” stock: the bow travels vertically on two columns, so the cut stays square whatever the feed pressure. Hydraulic down-feed with variable speed, hydraulic clamping and automatic shut-off on every model. Choose the base machine with hand-wheel feed (NF-DC 11), the mitre version that cuts at 30° and 45° (NF-DC 11 T), the automatic with a 3-position shuttle vise (NF-DC 11 A) or the automatic with stepless blade speed, chip conveyor and the new vise design (NF-DC 11 AV).

- Ø11” (280 mm) round / 11” × 11” square; NF-DC 11 T: Ø10-1/4” at 30°, Ø6-3/4” at 45°
- Double column — vertical, rigid bow travel
- Hydraulic variable down-feed, hydraulic clamping, auto shut-off
- NF-DC 11 A / AV: automatic feed and cut, 3-position vise for bundle cutting, feed length by limit switch
- NF-DC 11 AV: variable blade speed 0–200 ft/min, automatic chip conveyor
- Belt drive, 4 HP (3 kW) motor; work light, coolant and material stand included

OPTIONAL Roller stand · Extra blades




NF-DC 11 T


Twin-column head with hydraulic...


NF-DC 11 A


NF-DC 11 AV

Model	NF-DC 11	NF-DC 11 T	NF-DC 11 A	NF-DC 11 AV
CUTTING CAPACITY				
Round at 0° (straight)	Ø11” (280 mm)			
Rectangular W × H at 0°	11” × 11” (280 × 280 mm)			
Square at 0°	11” (280 mm)			
Round at 30° right	–	Ø10-1/4” (260 mm)	–	–
Rectangular W × H at 30° right	–	10-1/4” × 11” (260 × 280 mm)	–	–
Round at 45° right	–	Ø6-3/4” (170 mm)	–	–
Rectangular W × H at 45° right	–	6-3/4” × 11” (170 × 280 mm)	–	–
Blade speed	89/148/226 ft/min (27/45/69 m/min)	89/148/226 ft/min (27/45/69 m/min)	89/148/226 ft/min (27/45/69 m/min)	0–200 ft/min (0–61 m/min)
Band blade L × W × T	138 × 1-1/8 × 0.035 in (3505 × 27 × 0.9 mm)	142-1/2 × 1-1/8 × 0.035 in (3625 × 27 × 0.9 mm)	138 × 1-1/8 × 0.035 in (3505 × 27 × 0.9 mm)	138 × 1-1/8 × 0.035 in (3505 × 27 × 0.9 mm)
Main motor	4 HP (3 kW)			
Hydraulic motor	0.7 HP (0.55 kW)			
Feeding	Manual hand wheel	Manual	Automatic, 3-position shuttle vise	Automatic, shuttle vise
Vise	Hydraulic	Hydraulic	Hydraulic	Hydraulic, new clamp design
Blade tensioning	Mechanical			
Drive	V-belt, 3 speeds	V-belt, 3 speeds	V-belt, 3 speeds	V-belt, inverter
Mitre cutting	–	0°–45°	–	–
Chip conveyor	–	–	–	Automatic
Weight	1,532 lb (695 kg)	1,808 lb (820 kg)	2,183 lb (990 kg)	2,183 lb (990 kg)
Gross weight	1,839 lb (834 kg)	2,127 lb (965 kg)	2,557 lb (1160 kg)	2,557 lb (1160 kg)
Dimensions L × W × H	86 × 52 × 63 in (2180 × 1310 × 1610 mm)	86 × 51 × 63 in (2180 × 1300 × 1600 mm)	89 × 79 × 65 in (2250 × 2010 × 1640 mm)	89 × 79 × 65 in (2250 × 2010 × 1640 mm)
Voltage	600 V 3-phase (208/240/480 V on request)			

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available

NF-DC 14 · NF-DC 16


NF-DC 14 AND NF-DC 16 GEAR-DRIVEN DOUBLE COLUMN SAWS

Heavier twin-column saws with a gear-driven two-speed motor, hydraulic blade tensioning and hydraulic clamping. Vertical lifting on two columns keeps the blade square in Ø13-3/4" and Ø15-3/4" solids; the cutting feed is hydraulically controlled and stepless. A three-position hydraulic clamping vise for bundles is optional.


- NF-DC 14: Ø13-3/4" / 13-3/4" × 13-3/4" · NF-DC 16: Ø15-3/4" / 15-3/4" × 15-3/4"
- Double column structure, vertical lifting, high stability
- Hydraulic variable down-feed, hydraulic clamping, hydraulic blade tensioning
- Gear drive with two-speed motor (3/3.8 HP or 4/5.4 HP)
- Work light, coolant pump and material stand included

OPTIONAL Three-position hydraulic clamping vise · Roller stands





Hydraulic clamping vise



Work table and material stand

Model	NF-DC 14	NF-DC 16
CUTTING CAPACITY		
Round at 0° (straight)	Ø13-3/4" (350 mm)	Ø15-3/4" (400 mm)
Rectangular W × H at 0°	13-3/4" × 13-3/4" (350 × 350 mm)	15-3/4" × 15-3/4" (400 × 400 mm)
Square at 0°	13-3/4" (350 mm)	15-3/4" (400 mm)
Blade speed	148/226 ft/min (45/69 m/min)	118/184 ft/min (36/56 m/min)
Band blade L × W × T	162 × 1-3/8 × 0.043 in (4115 × 34 × 1.1 mm)	197 × 1-5/8 × 0.051 in (5000 × 41 × 1.3 mm)
Main motor	3–3.8 HP (2.2–2.8 kW)	4–5.4 HP (3–4 kW)
Hydraulic motor	0.7 HP (0.55 kW)	1 HP (0.75 kW)
Coolant pump	0 HP (0.04 kW)	1.2 HP (0.9 kW)
Vise	Hydraulic	
Blade tensioning	Hydraulic	
Drive	Gear, 2 speeds	
Weight	1,940 lb (880 kg)	2,921 lb (1325 kg)
Gross weight	2,183 lb (990 kg)	3,494 lb (1585 kg)
Dimensions L × W × H	95 × 45 × 59 in (2410 × 1150 × 1500 mm)	106 × 53 × 85 in (2700 × 1350 × 2150 mm)
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee (in-stock machines only)
- Spare parts & technical support readily available from Mississauga, Ontario
- Order today with just 10% down — 0% down financing available
- Installation and training available


NF-DC 20 · NF-DC 24

NF-DC 20 AND NF-DC 24 GANTRY DOUBLE COLUMN SAWS

Gantry-type double column saws for heavy plate, blocks, bundles and large tube: Ø19-3/4″ / 27-1/2″ × 19-3/4″ on the NF-DC 20 and Ø23-5/8″ / 47-1/4″ × 23-5/8″ on the NF-DC 24. Hydraulic clamping, stepless blade speed and a powered roller table; the NF-DC 24 adds hydraulic blade tensioning and a 15 HP motor for the 2-5/8″ blade.

- ✓ NF-DC 20: Ø19-3/4″ / 27-1/2″ × 19-3/4″ · NF-DC 24: Ø23-5/8″ / 47-1/4″ × 23-5/8″
- ✓ Double column gantry structure for batch sawing of tubes, bars, profiles and plates
- ✓ Hydraulic clamping; variable blade speed (131–262 and 66–262 ft/min)
- ✓ NF-DC 20: 7.4 HP, 1-5/8″ × 0.051″ blade · NF-DC 24: 15 HP, 2-5/8″ × 0.051″ × 346-1/2″ blade, hydraulic tensioning
- ✓ Powered roller table with chain drive

OPTIONAL Roller conveyors · Bundle clamping

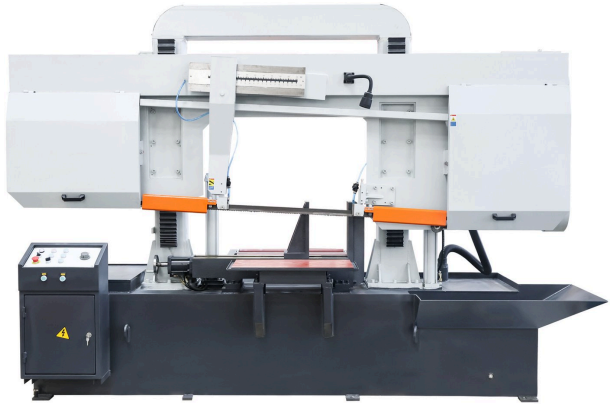



NF-DC 24



Chain-driven powered roller table

Model	NF-DC 20	NF-DC 24
CUTTING CAPACITY		
Round at 0° (straight)	Ø19-5/8″ (500 mm)	Ø23-5/8″ (600 mm)
Rectangular W × H at 0°	27-1/2″ × 19-5/8″ (700 × 500 mm)	47-1/4″ × 23-5/8″ (1200 × 600 mm)
Blade speed	131–262 ft/min (40–80 m/min)	66–262 ft/min (20–80 m/min)
Band blade L × W × T	1-5/8 × 0.051 in (41 × 1.3 mm)	346-1/2 × 2-5/8 × 0.051 in (8800 × 67 × 1.3 mm)
Main motor	7.4 HP (5.5 kW)	14.8 HP (11 kW)
Hydraulic motor	2 HP (1.5 kW)	3 HP (2.2 kW)
Coolant pump	0 HP (0.09 kW)	0.2 HP (0.12 kW)
Vise	Hydraulic	
Blade tensioning	Manual	Hydraulic
Drive	Belt	–
Weight	5,710 lb (2590 kg)	11,155 lb (5060 kg)
Packing size	140 × 59 × 86 in (3550 × 1500 × 2180 mm)	167 × 69 × 93 in (4250 × 1750 × 2370 mm)
Gross weight	6,526 lb (2960 kg)	11,729 lb (5320 kg)
Voltage	600 V 3-phase (208/240/480 V on request)	

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available

SOLD, INSTALLED AND SUPPORTED IN CANADA

INCLUDED WITH EVERY NOVOTECH MACHINE

Every NovoFab band saw in this catalogue is sold by NovoTech Machine Tools Inc. and backed from our Mississauga, Ontario location — the same terms as every other machine we sell:

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

NovoTech MACHINE TOOLS Inc.

NovoTech Machine Tools Inc.

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5, Canada

NovoTechMachineTools.com

info@NovoTechMachineTools.com · +1 647 526 5510

Ask us for a quote on any model in this catalogue, for current stock in Mississauga, or for the machine that fits your cutting range — we will size it against your typical stock and quote delivery, installation and training.

NovoFab MACHINERY

NovoFab Machinery is the value line of NovoTech Machine Tools Inc. — metal cutting band saws selected, sold, installed and supported in Canada by NovoTech. NovoFab machines carry a CSA-approved electrical panel and are backed by the same warranty, parts and service as the rest of the NovoTech range.

Catalogue 2026 · Specifications subject to change without notice. Capacities are maximum workpiece sizes; photos may show optional equipment.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee (in-stock machines only)
- ✓ Spare parts & technical support readily available from Mississauga, Ontario
- ✓ Order today with just 10% down — 0% down financing available
- ✓ Installation and training available