NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2025

İŞITAN MACHINERY · SOLD & SERVICED IN CANADA BY NOVOTECH

SHEET METAL FORMING & TUBE BENDING MACHINERY

PLATE ROLLS · BEADING · CIRCULAR CUTTING · PRESS BRAKES · TUBE BENDERS · COLD SAWS

Since 1959
MANUFACTURING EXPERIENCE

20+
MACHINE FAMILIES

1-Year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

İŞITAN MACHINERY BY NOVOTECH

CONTENTS

PLATE BENDING ROLLS

Hydraulic 4-Roll Plate Bending Machines 4R HMS 04
Hydraulic Asymmetrical 3-Roll Plate Rolls MRM-H 10
Mechanical 3-Roll Plate Rolls IRM 18
Motorized Slip Roll Machines IR 22
Economical Plate Rolls RST / RST-M 26
4-Roll Corrugated & Special Machines 4R OM / 4R HOM / 4RH 09
Mechanical Asymmetrical 3-Roll Plate Rolls MRM-S 14
Motorized & Manual 3-Roll Plate Rolls RM / RS 20
Manual Slip Roll Machines R 24
Mechanical-Hydraulic 3-Roll Plate Rolls 3R HMD 27

BEADING & TRIMMING MACHINES

Hydraulic & Motorized Beading Machines HIBKS / IBKS 28
Manual Beading Machines / Swagers IK / IKS 31
Motorized & Pneumatic Beading Machines IBKS 1.8 / IKM / IKMP 30

CIRCULAR CUTTING & SEAMING

Circular Cutting Machines IDK 32
Lock Seaming Machine LS-13P 34

HYDRAULIC PRESS BRAKES

3-Axis CNC Press Brake Edgebender 1240 CNC 35
2-Axis NC Press Brakes Edgebender NC 37

TUBE & PIPE BENDING

CNC Mandrel Tube Benders SFB-CNC A3 / A5 40
Compact & Aluminum-Profile Benders SFB 32 / SFB 38-NC/A 46
NC Mandrel Tube Benders SFB NC/C / SFB NC 43
Rotary Draw Benders BK 48

PIPE-END PROCESSING & SAWING

Pipe Notching, Deburring & End Forming PN / TD / SFF 50
Circular Cold Saws SFC 52

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded; plate and sheet capacities are fractions for mild steel (34,100 psi yield) unless noted. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR İŞITAN MACHINERY

Sales, installation, parts and technical support across Canada

NovoTech Machine Tools Inc. supplies metal-forming machinery and tooling to fabricators, HVAC and sheet-metal shops, and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is built by İşitan and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

QUOTING & TOOLING

Send your material, size and wall thickness — we'll match the machine and tooling.

CUSTOM VOLTAGE

208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on suitable models.

İŞITAN MAKINE · BURSA, TURKEY

ABOUT THE MANUFACTURER

İşitan was founded in 1959 in a small workshop in Bursa, Turkey, building beading and plate-rolling machines for tinsmiths — many of those early machines are still in production use today. Through the 1970s the range grew to larger pyramid plate rolls, circular cutting shears and flanging machines, and the company began exporting in 1996.

Today İşitan builds in two factories with about 160 employees, producing 3- and 4-roll plate bending machines, beading machines, circular cutting machines, hydraulic press brakes, rotary-draw and mandrel tube and profile benders, pipe-end forming machines and wet-type circular saws — all CE certified and built with European components.

Main production plant — 118,400 sq ft

Second production plant — 43,000 sq ft

Early İşitan plate roll

Classic plate roll

Classic beading machine

Classic slip roll

4R HMS SERIES · NC-CONTROLLED & FULL AUTOMATION

HYDRAULIC 4-ROLL PLATE BENDING MACHINES

Hydraulic 4-roll plate rolls for light and medium plate, aluminum and stainless steel

MODEL **4R HMS 3100x250**

- Motor + planetary reducer drive
- Hydraulic linear roll movement
- Optional NC control
- Optional overhead crane & side supports

Full circles (ferrules) and varying radii are produced easily: the pinch and side rolls travel on a pyramid-style linear path driven by hydraulic cylinders, while the top roll is powered by an electric motor through a planetary gearbox.

STANDARD FEATURES

- Pinch and side rolls moved linearly by hydraulic cylinders
- Top roll driven by electric motor and planetary gearbox; bottom roll driven through a cardan-joint system
- Overload protection
- Three digital readouts for easy roll positioning
- Hydraulic drop-end for easy removal of finished parts
- Mobile control panel
- Welded steel frames
- Induction-hardened forged or rolled SAE 1050 (CK45) steel rolls
- Cone-bending device
- Hydraulic balancing system
- Built to EC safety directives (CE marked)
- Remote technical support via Wi-Fi
- Operator's manual

OPTIONAL EQUIPMENT

- NC control with remote assistance
- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Ground and polished rolls
- Two-speed system
- Infinitely variable speed
- Hydraulic motor for rotation
- Plate ejector system
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

4R HMS · NC CONTROL

SEMI & FULL AUTOMATION

Semi- and full-automation options enable high-volume series production

MODEL **4R HMS 2050x130 · NC + overhead crane + sheet feeder + ejector**

AUTOMATION PACKAGE

- Vacuum sheet lifting and positioning feeder
- Automatic bending with the NC control unit
- Ejector system to transfer parts to the welding line
- Hydraulic overhead crane for large diameters to prevent stretching
- Air-system control and resetting

BENEFITS OF NC CONTROL

- Automatic bending by programming roll positions — standard sizes at high volume
- Easy to use, no high-tech knowledge required; ideal for mass production
- Multilingual interface (16 languages, more on request)
- Standard 4-axis system expandable to 7 axes for overhead crane and side supports
- Works with sheet feeder and part ejector extensions
- Teach mode records programs step by step
- Precise roll positioning with semi-automatic bending
- With stored programs the operator only loads and unloads material
- Stores thousands of programs; save and recall via USB
- Capacity chart viewable on the NC screen

NC control panel

NC program screen

Ejector system

Full automation line

4R HMS · FROM 2.1 FT TO 13.4 FT

4R HMS MODEL RANGE

4R HMS 2050x200

Standard machine with digital readouts

4R HMS 1550x100

Optional NC control + automatic plate ejector + mechanical overhead crane

4R HMS 1270x100

Optional NC control + automatic plate ejector + mechanical overhead crane

4R HMS 2050x180

NC control and automatic plate ejector

4R HMS 4100x250

Standard type

4R HMS 1050x100

Standard type

Standard safety switch on drop-end

Standard pressure adjustment on bottom roll

Standard cone-bending device

4R HMS 650x80 — compact standard type

TECHNICAL SPECIFICATIONS 4R HMS

2.1–3.4 FT — 4R HMS 650 – 1050

WORKING LENGTH 25.6" – 41.3" · 4 MODELS

Model		4R HMS 650x80	4R HMS 1050x80	4R HMS 1050x100	4R HMS 1050x130
Working length	FT	2.1 FT	3.4 FT	3.4 FT	3.4 FT
Working length	in	25.6	41.3	41.3	41.3
Pre-bending capacity		12 ga / 11 ga	16 ga / 14 ga	14 ga / 12 ga	8 ga / 3⁄16"
Rolling capacity		11 ga / 10 ga	14 ga / 12 ga	12 ga / 10 ga	3⁄16" / 1⁄4"
Top & bottom roll Ø	in	3.15	3.15	3.94	5.12
Side roll Ø	in	3.15	3.15	3.54	5.12
Min. rolling Ø	in	4.7 / 15.7	4.7 / 15.7	5.9 / 19.7	7.7 / 25.6
Motor power	HP	1.5 + 1.0	1.5 + 1.0	1.5 + 1.0	3.0 + 1.5
Rolling speed	ft/min	16	16	21	16
Oil tank capacity	L	15	15	15	40
Dimensions L × W × H	in	77 × 37 × 38	93 × 37 × 38	93 × 45 × 38	109 × 45 × 43
Weight	lb	2,094	2,535	2,756	4,519

4.2 FT — 4R HMS 1270

WORKING LENGTH 50.0" · 6 MODELS

Model		4R HMS 1270x80	4R HMS 1270x100	4R HMS 1270x130	4R HMS 1270x150	4R HMS 1270x180	4R HMS 1270x200
Working length	FT	4.2 FT	4.2 FT	4.2 FT	4.2 FT	4.2 FT	4.2 FT
Working length	in	50.0	50.0	50.0	50.0	50.0	50.0
Pre-bending capacity		20 ga / 16 ga	16 ga / 14 ga	11 ga / 8 ga	8 ga / 3⁄16"	3⁄16" / 5⁄16"	5⁄16" / 3⁄8"
Rolling capacity		16 ga / 14 ga	14 ga / 11 ga	8 ga / 3⁄16"	3⁄16" / 1⁄4"	5⁄16" / 3⁄8"	3⁄8" / 1⁄2"
Top & bottom roll Ø	in	3.15	3.94	5.12	5.91	7.09	7.87
Side roll Ø	in	3.15	3.54	5.12	5.12	5.91	7.09
Min. rolling Ø	in	4.7 / 15.7	5.9 / 17.7	7.7 / 25.6	8.9 / 29.5	10.6 / 35.4	11.8 / 39.4
Motor power	HP	1.5 + 1.5	1.5 + 1.5	3.0 + 1.5	3.0 + 1.5	5.4 + 2.0	5.4 + 2.0
Rolling speed	ft/min	16	21	16	20	16	20
Oil tank capacity	L	15	15	40	40	40	40
Dimensions L × W × H	in	101 × 37 × 38	105 × 41 × 38	114 × 45 × 44	119 × 45 × 44	121 × 53 × 51	121 × 53 × 51
Weight	lb	2,756	2,976	4,740	5,027	5,952	6,614

5.1 FT — 4R HMS 1550

WORKING LENGTH 61.0" · 7 MODELS

Model		4R HMS 1550x100	4R HMS 1550x130	4R HMS 1550x150	4R HMS 1550x180	4R HMS 1550x200	4R HMS 1550x220	4R HMS 1550x250
Working length	FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT
Working length	in	61.0	61.0	61.0	61.0	61.0	61.0	61.0
Pre-bending capacity		20 ga / 16 ga	12 ga / 10 ga	10 ga / 7 ga	3⁄16" / 1⁄4"	1⁄4" / 3⁄8"	5⁄16" / 3⁄8"	3⁄8" / 1⁄2"
Rolling capacity		16 ga / 14 ga	10 ga / 7 ga	7 ga / 1⁄4"	1⁄4" / 3⁄8"	3⁄8" / 7⁄16"	3⁄8" / 1⁄2"	1⁄2" / 9⁄16"
Top & bottom roll Ø	in	3.94	5.12	5.91	7.09	7.87	8.66	9.84
Side roll Ø	in	3.54	5.12	5.12	5.91	7.09	7.09	7.87
Min. rolling Ø	in	5.9 / 17.7	7.7 / 25.6	8.9 / 29.5	10.6 / 35.4	11.8 / 39.4	13.0 / 43.3	14.8 / 49.2
Motor power	HP	1.5 + 1.5	3.0 + 1.5	3.0 + 1.5	5.4 + 2.0	5.4 + 2.0	7.4 + 2.0	10 + 2.0
Rolling speed	ft/min	21	16	20	16	20	16	16
Oil tank capacity	L	15	40	40	40	40	40	40
Dimensions L × W × H	in	112 × 37 × 38	130 × 45 × 44	130 × 45 × 44	132 × 53 × 51	132 × 53 × 51	138 × 59 × 54	138 × 59 × 54
Weight	lb	3,307	4,960	5,225	6,393	7,165	9,370	10,251

Capacities shown as two values: at a minimum rolling Ø of 1.5× the top roll Ø / at 5× the top roll Ø. Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

TECHNICAL SPECIFICATIONS 4R HMS

6.7 FT — 4R HMS 2050

WORKING LENGTH 80.7" · 6 MODELS

Model		4R HMS 2050x130	4R HMS 2050x150	4R HMS 2050x180	4R HMS 2050x200	4R HMS 2050x220	4R HMS 2050x250
Working length	FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT
Working length	in	80.7	80.7	80.7	80.7	80.7	80.7
Pre-bending capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 1/4"	1/4" / 5/16"	1/4" / 3/8"	5/16" / 3/8"
Rolling capacity		11 ga / 8 ga	8 ga / 1/4"	1/4" / 5/16"	5/16" / 3/8"	3/8" / 7/16"	3/8" / 1/2"
Top & bottom roll Ø	in	5.12	5.91	7.09	7.87	8.66	9.84
Side roll Ø	in	5.12	5.12	5.91	7.09	7.09	7.87
Min. rolling Ø	in	7.7 / 25.6	8.9 / 29.5	10.6 / 35.4	11.8 / 39.4	13.0 / 43.3	14.8 / 49.2
Motor power	HP	3.0 + 1.5	3.0 + 1.5	5.4 + 2.0	5.4 + 2.0	7.4 + 2.0	10 + 2.0
Rolling speed	ft/min	16	20	16	20	16	16
Oil tank capacity	L	40	40	40	40	40	40
Dimensions L × W × H	in	142 × 47 × 44	142 × 47 × 44	152 × 53 × 51	152 × 56 × 51	157 × 59 × 54	157 × 59 × 54
Weight	lb	4,982	6,173	7,275	8,267	10,582	11,795

8.4 FT — 4R HMS 2550

WORKING LENGTH 100.4" · 5 MODELS

Model		4R HMS 2550x150	4R HMS 2550x180	4R HMS 2550x200	4R HMS 2550x220	4R HMS 2550x250
Working length	FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT
Working length	in	100.4	100.4	100.4	100.4	100.4
Pre-bending capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 1/4"	3/16" / 1/4"	1/4" / 5/16"
Rolling capacity		11 ga / 8 ga	8 ga / 1/4"	1/4" / 5/16"	1/4" / 3/8"	5/16" / 3/8"
Top & bottom roll Ø	in	5.91	7.09	7.87	8.66	9.84
Side roll Ø	in	5.12	5.91	7.09	7.09	7.87
Min. rolling Ø	in	8.9 / 29.5	10.6 / 35.4	11.8 / 39.4	13.0 / 43.3	14.8 / 49.2
Motor power	HP	3.0 + 1.5	5.4 + 2.0	5.4 + 2.0	7.4 + 2.0	10 + 2.0
Rolling speed	ft/min	20	16	20	16	16
Oil tank capacity	L	40	40	40	40	40
Dimensions L × W × H	in	169 × 45 × 44	171 × 53 × 51	171 × 53 × 51	177 × 59 × 54	177 × 59 × 54
Weight	lb	7,121	8,157	9,370	11,905	13,448

10.2 FT — 4R HMS 3100

WORKING LENGTH 122.0" · 4 MODELS

Model		4R HMS 3100x180	4R HMS 3100x200	4R HMS 3100x220	4R HMS 3100x250
Working length	FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT
Working length	in	122.0	122.0	122.0	122.0
Pre-bending capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 1/4"	3/16" / 1/4"
Rolling capacity		11 ga / 8 ga	8 ga / 1/4"	1/4" / 5/16"	1/4" / 3/8"
Top & bottom roll Ø	in	7.09	7.87	8.66	9.84
Side roll Ø	in	5.91	7.09	7.09	7.87
Min. rolling Ø	in	10.6 / 35.4	11.8 / 39.4	13.0 / 43.3	14.8 / 49.2
Motor power	HP	5.4 + 2.0	5.4 + 2.0	7.4 + 2.0	10 + 2.0
Rolling speed	ft/min	16	20	16	16
Oil tank capacity	L	40	40	40	40
Dimensions L × W × H	in	191 × 53 × 51	191 × 53 × 51	197 × 59 × 54	197 × 59 × 54
Weight	lb	9,039	10,472	13,228	14,991

Capacities shown as two values: at a minimum rolling Ø of 1.5× the top roll Ø / at 5× the top roll Ø. Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga). 4R HMS 4100 models available on request.

4R OM · 4R HOM · 4RH · SPECIAL PRODUCTION MACHINES

4-ROLL CORRUGATED SHEET & SPECIAL BENDING MACHINES

Purpose-built machines for corrugated galvanized sheet and special applications

MODEL **4R OM 1550x220**

These forming machines are designed specifically to roll corrugated galvanized steel sheet up to **11 ga** thick. Corrugated steel is mainly rolled for tanks, roofs and silos, and the corrugation profile can be custom made to the customer's requirements.

- Motor + reducer drive
- Motorized linear movement

4R HOM 1270x220

Special-production corrugated sheet bending machine

4R HOM 2050x250

4-roll corrugated sheet bending machine

4RH 10x90

Standard NC controlled · motor + planetary reducer · hydraulic linear movement

3.4 FT **4RH 10X90**

SPECIAL SHEET BENDING MACHINE

Model		4RH 10x90
Working length	FT	3.4 FT
Working length	in	41.3
Pre-bending capacity		14 ga
Rolling capacity		12 ga
Roll Ø	in	3.54
Motor power	HP	3.0
Rolling speed	ft/min	15
Dimensions L × W × H	in	89 × 39 × 59
Weight	lb	1,984

OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

MRM-H SERIES · INITIAL PINCH

HYDRAULIC ASYMMETRICAL 3-ROLL PLATE BENDING MACHINES

Hydraulic back and bottom roll movement with motor-driven rolls

MODEL MRM-H 3100x250

- Motor + planetary reducer drive
- Hydraulic linear movement
- Hydraulic drop-end
- Control panel with digital readouts

STANDARD FEATURES

- Welded steel main frames
- Hydraulic drop-end
- Mobile control panel
- Motor-driven centralized rolls
- Hydraulic movement of back and bottom rolls
- Main motor with brake system
- Cone bending and pre-bending
- Planetary gearbox drive on two rolls
- Back roll on ball bearings for thin-sheet work
- Certified SAE 1050 (CK45) forged steel rolls with high tensile strength
- Hardened rolls
- 2 digital readouts
- Built to EC safety directives (CE marked)
- Operator's manual

OPTIONAL EQUIPMENT

- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Ground and polished rolls
- Wire grooves on roll ends
- NC control
- Two-speed operation
- Adjustable stepless speed
- Hydraulic motor drive
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

MRM-H · FROM 2.1 FT TO 10 FT

MRM-H MODEL RANGE

MRM-H 2050x180

Motor + planetary reducer drive · hydraulic linear movement

MRM-H 1550x150

Standard control panel with digital readouts

Optional wire grooves

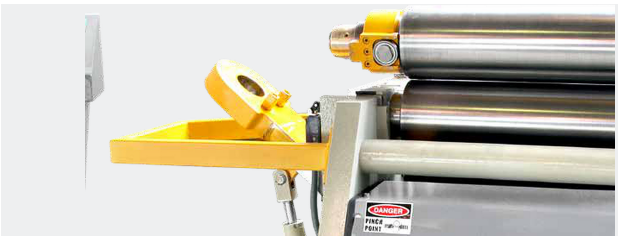

Roll-end and drop-end detail

INITIAL-PINCH ROLLING SEQUENCE

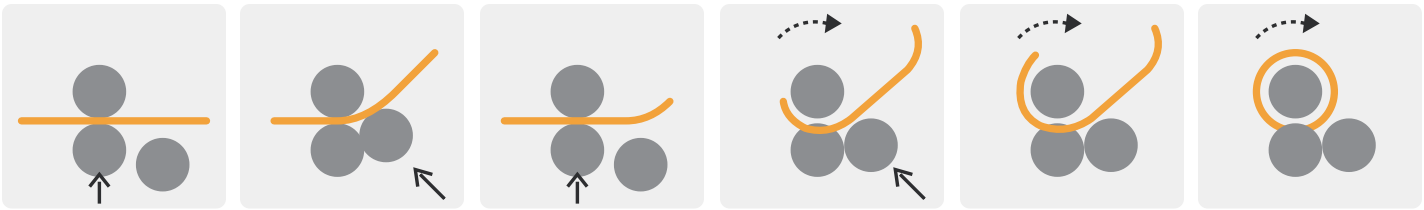

1 PINCH | 2 PRE-BEND | 3 FEED | 4 ROLL | 5 ROLL | 6 CLOSE

TECHNICAL SPECIFICATIONS MRM-H

2.1–3.4 FT — MRM-H 650 – 1050

WORKING LENGTH 25.6″ – 41.3″ · 4 MODELS

Model		MRM-H 650x80	MRM-H 1050x80	MRM-H 1050x100	MRM-H 1050x130
Working length	FT	2.1 FT	3.4 FT	3.4 FT	3.4 FT
Working length	in	25.6	41.3	41.3	41.3
Pre-bending capacity		12 ga / 11 ga	16 ga / 14 ga	14 ga / 12 ga	12 ga / 11 ga
Rolling capacity		11 ga / 10 ga	14 ga / 12 ga	12 ga / 11 ga	11 ga / 3⁄16″
Top & bottom roll Ø	in	3.15	3.15	3.94	5.12
Side roll Ø	in	3.15	3.15	3.54	5.12
Min. rolling Ø	in	4.7 / 15.7	4.7 / 15.7	5.9 / 19.7	7.7 / 25.6
Motor power	HP	1.5 + 1.0	1.5 + 1.5	1.5 + 1.0	3.0 + 1.5
Rolling speed	ft/min	16	16	21	16
Oil tank capacity	L	15	15	15	25
Dimensions L × W × H	in	77 × 30 × 38	93 × 30 × 38	93 × 30 × 38	93 × 37 × 44
Weight	lb	1,764	2,028	2,469	3,792

4.2 FT — MRM-H 1270

WORKING LENGTH 50.0″ · 6 MODELS

Model		MRM-H 1270x80	MRM-H 1270x100	MRM-H 1270x130	MRM-H 1270x150	MRM-H 1270x180	MRM-H 1270x200
Working length	FT	4.2 FT	4.2 FT	4.2 FT	4.2 FT	4.2 FT	4.2 FT
Working length	in	50.0	50.0	50.0	50.0	50.0	50.0
Pre-bending capacity		20 ga / 16 ga	16 ga / 14 ga	11 ga / 8 ga	8 ga / 3⁄16″	3⁄16″ / 5⁄16″	5⁄16″ / 3⁄8″
Rolling capacity		16 ga / 14 ga	14 ga / 11 ga	8 ga / 3⁄16″	3⁄16″ / 1⁄4″	5⁄16″ / 3⁄8″	3⁄8″ / 1⁄2″
Top & bottom roll Ø	in	3.15	3.94	5.12	5.91	7.09	7.87
Side roll Ø	in	3.15	3.54	5.12	5.12	5.91	7.09
Min. rolling Ø	in	4.7 / 15.7	5.9 / 17.7	7.7 / 25.6	8.9 / 29.5	10.6 / 35.4	11.8 / 39.4
Motor power	HP	1.5 + 1.5	1.5 + 1.5	3.0 + 1.5	3.0 + 1.5	5.4 + 1.5	5.4 + 2.0
Rolling speed	ft/min	16	21	16	20	16	20
Oil tank capacity	L	15	15	25	25	25	25
Dimensions L × W × H	in	101 × 30 × 38	101 × 30 × 38	119 × 37 × 44	119 × 37 × 44	121 × 43 × 51	121 × 43 × 51
Weight	lb	2,094	2,535	3,858	4,134	4,630	4,850

5.1 FT — MRM-H 1550

WORKING LENGTH 61.0″ · 7 MODELS

Model		MRM-H 1550x100	MRM-H 1550x130	MRM-H 1550x150	MRM-H 1550x180	MRM-H 1550x200	MRM-H 1550x220	MRM-H 1550x250
Working length	FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT
Working length	in	61.0	61.0	61.0	61.0	61.0	61.0	61.0
Pre-bending capacity		20 ga / 16 ga	12 ga / 10 ga	10 ga / 7 ga	3⁄16″ / 1⁄4″	1⁄4″ / 3⁄8″	5⁄16″ / 3⁄8″	3⁄8″ / 1⁄2″
Rolling capacity		16 ga / 14 ga	10 ga / 7 ga	7 ga / 1⁄4″	1⁄4″ / 3⁄8″	3⁄8″ / 7⁄16″	3⁄8″ / 1⁄2″	1⁄2″ / 9⁄16″
Top & bottom roll Ø	in	3.94	5.12	5.91	7.09	7.87	8.66	9.84
Side roll Ø	in	3.54	5.12	5.12	5.91	7.09	7.09	7.87
Min. rolling Ø	in	5.9 / 17.7	7.7 / 25.6	8.9 / 29.5	10.6 / 35.4	11.8 / 39.4	13.0 / 43.3	14.8 / 49.2
Motor power	HP	1.5 + 1.5	3.0 + 1.5	3.0 + 1.5	5.4 + 1.5	5.4 + 2.0	7.4 + 2.0	10 + 2.0
Rolling speed	ft/min	21	16	20	16	20	16	16
Oil tank capacity	L	15	25	25	25	25	25	25
Dimensions L × W × H	in	112 × 30 × 38	130 × 37 × 44	130 × 37 × 44	132 × 43 × 51	132 × 43 × 51	138 × 47 × 54	138 × 47 × 54
Weight	lb	2,646	4,079	4,409	5,093	5,401	7,165	7,937

Capacities shown as two values: at a minimum rolling Ø of 1.5× the top roll Ø / at 5× the top roll Ø. Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

TECHNICAL SPECIFICATIONS MRM-H

6.7 FT — MRM-H 2050

WORKING LENGTH 80.7" · 6 MODELS

Model		MRM-H 2050x130	MRM-H 2050x150	MRM-H 2050x180	MRM-H 2050x200	MRM-H 2050x220	MRM-H 2050x250
Working length	FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT
Working length	in	80.7	80.7	80.7	80.7	80.7	80.7
Pre-bending capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 1/4"	1/4" / 5/16"	1/4" / 3/8"	5/16" / 3/8"
Rolling capacity		11 ga / 8 ga	8 ga / 1/4"	1/4" / 5/16"	5/16" / 3/8"	3/8" / 7/16"	3/8" / 1/2"
Top & bottom roll Ø	in	5.12	5.91	7.09	7.87	8.66	9.84
Side roll Ø	in	5.12	5.12	5.91	7.09	7.09	7.87
Min. rolling Ø	in	7.7 / 25.6	8.9 / 29.5	10.6 / 35.4	11.8 / 39.4	13.0 / 43.3	14.8 / 49.2
Motor power	HP	3.0 + 1.5	3.0 + 1.5	5.4 + 1.5	5.4 + 2.0	7.4 + 2.0	10 + 2.0
Rolling speed	ft/min	16	20	16	20	16	16
Oil tank capacity	L	25	25	25	25	25	25
Dimensions L × W × H	in	150 × 37 × 44	150 × 37 × 44	152 × 43 × 51	152 × 43 × 51	157 × 47 × 54	157 × 47 × 54
Weight	lb	4,519	4,960	5,930	6,504	8,267	9,259

8.4 FT — MRM-H 2550

WORKING LENGTH 100.4" · 5 MODELS

Model		MRM-H 2550x150	MRM-H 2550x180	MRM-H 2550x200	MRM-H 2550x220	MRM-H 2550x250
Working length	FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT
Working length	in	100.4	100.4	100.4	100.4	100.4
Pre-bending capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 1/4"	3/16" / 1/4"	1/4" / 5/16"
Rolling capacity		11 ga / 8 ga	8 ga / 1/4"	1/4" / 5/16"	1/4" / 3/8"	5/16" / 3/8"
Top & bottom roll Ø	in	5.91	7.09	7.87	8.66	9.84
Side roll Ø	in	5.12	5.91	7.09	7.09	7.87
Min. rolling Ø	in	8.9 / 29.5	10.6 / 35.4	11.8 / 39.4	13.0 / 43.3	14.8 / 49.2
Motor power	HP	3.0 + 1.5	5.4 + 1.5	5.4 + 2.0	7.4 + 2.0	10 + 2.0
Rolling speed	ft/min	20	16	20	16	16
Oil tank capacity	L	25	25	25	25	25
Dimensions L × W × H	in	169 × 37 × 44	171 × 43 × 51	171 × 43 × 51	177 × 47 × 54	177 × 47 × 54
Weight	lb	5,512	6,768	7,606	9,370	10,582

10 FT — MRM-H 3100

WORKING LENGTH 120.1" · 4 MODELS

Model		MRM-H 3100x180	MRM-H 3100x200	MRM-H 3100x220	MRM-H 3100x250
Working length	FT	10 FT	10 FT	10 FT	10 FT
Working length	in	120.1	120.1	120.1	120.1
Pre-bending capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 1/4"	3/16" / 1/4"
Rolling capacity		11 ga / 8 ga	8 ga / 1/4"	1/4" / 5/16"	1/4" / 3/8"
Top & bottom roll Ø	in	7.09	7.87	8.66	9.84
Side roll Ø	in	5.91	7.09	7.09	7.87
Min. rolling Ø	in	10.6 / 35.4	11.8 / 39.4	13.0 / 43.3	14.8 / 49.2
Motor power	HP	5.4 + 1.5	5.4 + 2.0	7.4 + 2.0	10 + 2.0
Rolling speed	ft/min	16	20	16	16
Oil tank capacity	L	25	25	25	25
Dimensions L × W × H	in	191 × 43 × 51	191 × 43 × 51	197 × 47 × 54	197 × 47 × 54
Weight	lb	7,606	8,708	10,472	11,905

Capacities shown as two values: at a minimum rolling Ø of 1.5× the top roll Ø / at 5× the top roll Ø. Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

MRM-S SERIES · INITIAL PINCH

MECHANICAL ASYMMETRICAL 3-ROLL PLATE BENDING MACHINES

Motorized plate rolls for light to medium-duty work

MODEL MRM-S 2050x190

- Motor + planetary gearbox drive
- Linear back-roll movement
- Manual drop-end with safety switch

Built for light to medium-duty work, the MRM-S mechanical series rolls plate up to 3/8" (0.39") thick. It is ideal for aluminum forming, HVAC and ventilation ducting, signage panels, machine guards and general sheet-metal enclosures.

STANDARD FEATURES

- Planetary gearbox drive on all models
- High-tensile rolls in certified SAE 1050 (CK45) steel
- Fabricated welded-steel main frames
- Manual drop-end top roll
- Mobile pendant control panel
- Cone-bending device
- Central lubrication system
- Top-roll support system
- Precision rolling with brake motor
- Motorized back-roll adjustment
- Built to EC safety directives (CE certified)
- Operator's manual

OPTIONAL EQUIPMENT

- Digital readout (DRO) for back roll
- Induction-hardened rolls
- Extended roll shafts for profile & pipe bending
- Profile & section bending roll set
- Motorized bottom roll
- Plastic-coated top roll for Alucobond / ACM
- Variable stepless speed
- NC control
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Optional control panel with digital readout

Optional extended roll shafts and section bending roll set

Standard cone-bending device

Manual drop-end with safety switch

INITIAL-PINCH ROLLING SEQUENCE

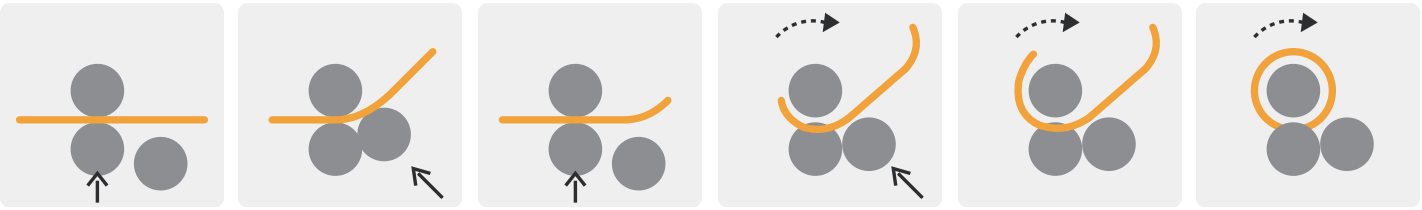

MRM-S · SPECIAL MODEL

SPECIAL MODEL FOR COMPOSITE PANELS

Top roll with segmented plastic (Delrin) rings

A special version of the MRM-S fitted with a top roll covered in segmented hard-plastic (Delrin) rings. Designed to roll aluminum composite panels for exterior signage, architectural cladding and outdoor design work — without marking the finished surface.

Optional segmented plastic-coated top roll for composite panels

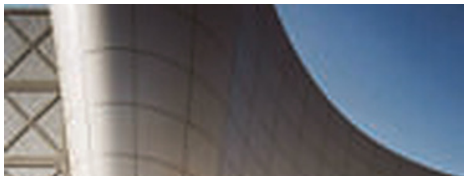

TECHNICAL SPECIFICATIONS MRM-S

3.4 FT — MRM-S 1050

WORKING LENGTH 41.3" · 4 MODELS

Model		MRM-S 1050x130	MRM-S 1050x150	MRM-S 1050x170	MRM-S 1050x190
Working length	FT	3.4 FT	3.4 FT	3.4 FT	3.4 FT
Working length	in	41.3	41.3	41.3	41.3
Pre-bending capacity		3/16" / 1/4"	1/4" / 1/4"	1/4" / 5/16"	5/16" / 3/8"
Rolling capacity		1/4" / 1/4"	1/4" / 5/16"	5/16" / 3/8"	3/8" / 3/8"
Top & bottom roll Ø	in	5.12	5.91	6.69	7.48
Min. rolling Ø	in	7.7	8.9	10.0	11.2
Motor power	HP	3.0	3.0	5.4	5.4
Back roll motor	HP	1.5	1.5	1.5	2.0
Dimensions L × W × H	in	108 × 26 × 40	108 × 27 × 41	112 × 28 × 41	126 × 37 × 51
Weight	lb	2,646	3,197	3,527	5,401

5.1 FT — MRM-S 1550

WORKING LENGTH 61.0" · 4 MODELS

Model		MRM-S 1550x130	MRM-S 1550x150	MRM-S 1550x170	MRM-S 1550x190
Working length	FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT
Working length	in	61.0	61.0	61.0	61.0
Pre-bending capacity		8 ga / 3/16"	3/16" / 1/4"	1/4" / 1/4"	1/4" / 5/16"
Rolling capacity		3/16" / 1/4"	1/4" / 1/4"	1/4" / 5/16"	5/16" / 3/8"
Top & bottom roll Ø	in	5.12	5.91	6.69	7.48
Min. rolling Ø	in	7.7	8.9	10.0	11.2
Motor power	HP	3.0	3.0	5.4	5.4
Back roll motor	HP	1.5	1.5	1.5	2.0
Dimensions L × W × H	in	128 × 26 × 40	128 × 27 × 41	132 × 28 × 41	146 × 37 × 51
Weight	lb	3,086	3,638	4,079	6,063

6.7 FT — MRM-S 2050

WORKING LENGTH 80.7" · 5 MODELS

Model		MRM-S 2050x130	MRM-S 2050x150	MRM-S 2050x170	MRM-S 2050x190	MRM-S 2050x220
Working length	FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT
Working length	in	80.7	80.7	80.7	80.7	80.7
Pre-bending capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 3/16"	3/16" / 1/4"	1/4" / 1/4"
Rolling capacity		11 ga / 8 ga	8 ga / 3/16"	3/16" / 1/4"	1/4" / 1/4"	1/4" / 5/16"
Top & bottom roll Ø	in	5.12	5.91	6.69	7.48	8.66
Min. rolling Ø	in	7.7	8.9	10.0	11.2	—
Motor power	HP	3.0	3.0	5.4	5.4	5.4
Back roll motor	HP	1.5	1.5	1.5	2.0	3.0
Dimensions L × W × H	in	148 × 26 × 40	148 × 27 × 41	152 × 28 × 41	165 × 37 × 51	165 × 45 × 55
Weight	lb	3,527	4,156	4,630	6,834	8,818

Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga). Capacity values shown as pairs, as published by the manufacturer.

TECHNICAL SPECIFICATIONS MRM-S

8.4 FT MRM-S 2550

WORKING LENGTH 100.4" · 4 MODELS

Model		MRM-S 2550x150	MRM-S 2550x180	MRM-S 2550x190	MRM-S 2550x220
Working length	FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT
Working length	in	100.4	100.4	100.4	100.4
Pre-bending capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 3⁄16"	3⁄16" / 1⁄4"
Rolling capacity		11 ga / 8 ga	8 ga / 3⁄16"	3⁄16" / 1⁄4"	1⁄4" / 1⁄4"
Top & bottom roll Ø	in	5.91	7.09	7.48	8.66
Min. rolling Ø	in	8.9	10.6	11.2	13.0
Motor power	HP	3.0	5.4	5.4	5.4
Back roll motor	HP	1.5	2.0	2.0	3.0
Dimensions L × W × H	in	167 × 26 × 40	171 × 37 × 51	185 × 37 × 51	185 × 45 × 55
Weight	lb	4,740	6,724	7,496	11,023

10 FT MRM-S 3050

WORKING LENGTH 120.1" · 4 MODELS

Model		MRM-S 3050x160	MRM-S 3050x190	MRM-S 3050x200	MRM-S 3050x220
Working length	FT	10 FT	10 FT	10 FT	10 FT
Working length	in	120.1	120.1	120.1	120.1
Pre-bending capacity		16 ga / 14 ga	14 ga / 11 ga	11 ga / 8 ga	8 ga / 3⁄16"
Rolling capacity		14 ga / 11 ga	11 ga / 8 ga	8 ga / 3⁄16"	3⁄16" / 1⁄4"
Top & bottom roll Ø	in	6.30	7.48	7.87	8.66
Min. rolling Ø	in	9.4	11.2	11.8	13.0
Motor power	HP	3.0	5.4	5.4	5.4
Back roll motor	HP	1.5	2.0	2.0	3.0
Dimensions L × W × H	in	191 × 28 × 41	205 × 37 × 51	205 × 37 × 51	205 × 45 × 55
Weight	lb	5,842	8,267	8,818	13,228

Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

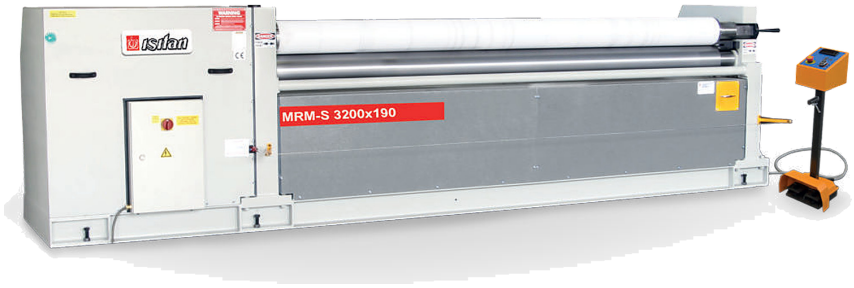

LONG BED **MRM-S long-bed models**

Working lengths up to 10 FT with mobile pendant control.

IRM SERIES

MECHANICAL ASYMMETRICAL 3-ROLL PLATE BENDING MACHINES

Value-priced motorized plate rolls — a favourite of small workshops

IRM 1550x140

Motor driven · linear back-roll movement

IRM 1050x110

Compact cast-frame model

Designed for light to medium work up to 3⁄16" thick. Used for aluminum forming, HVAC ducting, signage panels and sheet-metal enclosures — and its attractive price makes it ideal for small workshops.

STANDARD FEATURES

- Top and bottom rolls driven by a single gearbox and gear system
- Certified SAE 1050 steel rolls with high tensile strength
- Spheroidal cast-iron main frames
- Mobile control panel with foot pedal
- Cone-bending device
- Manual drop-end
- Top-roll support system with bearing
- Wire grooves at roll ends
- Precision bending with brake motor
- IRM 2550x140 supplied with motorized back roll as standard
- Built to EC safety directives (CE certified)
- Operator's manual

OPTIONAL EQUIPMENT

- Motorized back-roll adjustment
- Digital readout for back roll
- Induction-hardened rolls
- Adjustable stepless speed
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TECHNICAL SPECIFICATIONS IRM

3.4–5.1 FT — IRM 1050 – 1550

5 MODELS

Model		IRM 1050x110	IRM 1050x130	IRM 1270x120	IRM 1270x140	IRM 1550x110
Working length	FT	3.4 FT	3.4 FT	4.2 FT	4.2 FT	5.1 FT
Working length	in	41.3	41.3	50.0	50.0	61.0
Rolling capacity		8 ga	3/16"	8 ga	3/16"	11 ga
Roll Ø	in	4.33	5.12	4.72	5.51	4.33
Rolling speed	ft/min	10	11	10	11	10
Motor power	HP	3.0	3.0	3.0	3.0	3.0
Wire grooves Ø		3/16", 1/4", 3/8", 1/2"	3/16", 1/4", 3/8", 1/2"	3/16", 1/4", 3/8", 1/2"	3/16", 1/4", 3/8", 1/2"	3/16", 1/4", 3/8", 1/2"
Dimensions L × W × H	in	87 × 30 × 39	87 × 30 × 39	98 × 33 × 39	97 × 30 × 39	106 × 30 × 39
Weight	lb	2,183	2,646	2,381	2,976	2,646

5.1–8.4 FT — IRM 1550 – 2550

5 MODELS

Model		IRM 1550x140	IRM 2050x110	IRM 2050x130	IRM 2050x140	IRM 2550x140
Working length	FT	5.1 FT	6.7 FT	6.7 FT	6.7 FT	8.4 FT
Working length	in	61.0	80.7	80.7	80.7	100.4
Rolling capacity		8 ga	14 ga	11 ga	8 ga	12 ga
Roll Ø	in	5.51	4.33	5.12	5.51	5.51
Rolling speed	ft/min	11	10	11	11	11
Motor power	HP	3.0	3.0	3.0	3.0	3.0 + 1.0
Wire grooves Ø		3/16", 1/4", 3/8", 1/2"	3/16", 1/4", 3/8", 1/2"	3/16", 1/4", 3/8", 1/2"	3/16", 1/4", 3/8", 1/2"	3/16", 1/4", 3/8", 1/2"
Dimensions L × W × H	in	106 × 30 × 39	126 × 30 × 39	126 × 30 × 39	126 × 30 × 39	146 × 30 × 39
Weight	lb	3,131	3,042	3,307	3,638	4,079

Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

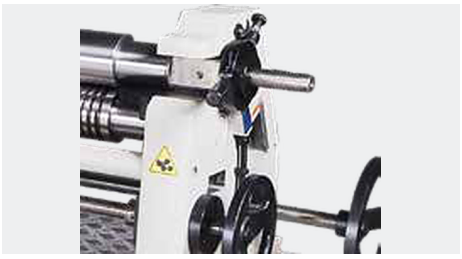

Standard manual drop-end

ROLLING SEQUENCE

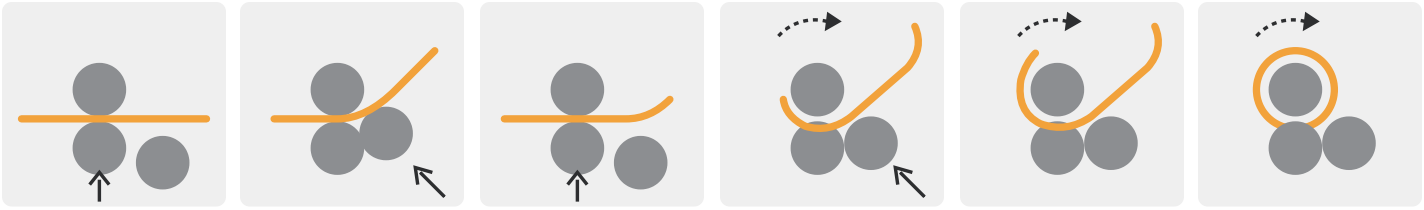

1 PINCH 2 PRE-BEND 3 FEED 4 ROLL 5 ROLL 6 CLOSE

RM (MOTORIZED) · RS (MANUAL)

MOTORIZED & MANUAL 3-ROLL ASYMMETRICAL PLATE ROLLS

RM 1270x90

Motorized · foot-pedal control

RS 1270x90

Manual · hand-crank operation

STANDARD FEATURES

- Top and bottom rolls driven by a single gearbox and chain/gear system (RM)
- Certified SAE 1050 steel rolls with high tensile strength
- Reinforced steel main frame
- Mobile control panel with foot pedal (RM)
- Cone-bending device
- Manual drop-end
- Wire grooves at roll ends
- Precision bending with brake motor (RM)
- Built to EC safety directives (CE)
- Operator's manual

OPTIONAL EQUIPMENT

- Motorized back-roll adjustment
- Digital readout for back roll
- Induction-hardened rolls
- Variable speed system
- Fully enclosed sheet covers (RS)
- Coated rolls
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Standard manual drop-end

Standard drop-end safety switch

TECHNICAL SPECIFICATIONS RM · RS

3.4–6.7 FT RM — MOTORIZED

4 MODELS

Model		RM 1050x90	RM 1270x90	RM 1550x90	RM 2050x95
Working length	FT	3.4 FT	4.2 FT	5.1 FT	6.7 FT
Working length	in	41.3	50.0	61.0	80.7
Rolling capacity		11 ga	12 ga	14 ga	16 ga
Roll Ø	in	3.54	3.54	3.54	3.74
Rolling speed	ft/min	20	20	20	20
Motor power	HP	1.5	1.5	2.0	2.0
Wire grooves Ø		3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"
Dimensions L × W × H	in	64 × 28 × 47	73 × 28 × 47	84 × 28 × 47	104 × 28 × 47
Weight	lb	1,014	1,146	1,279	1,576

3.4–6.7 FT RS — MANUAL

4 MODELS

Model		RS 1050x90	RS 1270x90	RS 1550x90	RS 2050x95
Working length	FT	3.4 FT	4.2 FT	5.1 FT	6.7 FT
Working length	in	41.3	50.0	61.0	80.7
Rolling capacity		11 ga	12 ga	14 ga	16 ga
Roll Ø	in	3.54	3.54	3.54	3.74
Rolling speed	ft/min	—	—	—	—
Motor power	HP	—	—	—	—
Wire grooves Ø		3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"
Dimensions L × W × H	in	82 × 28 × 49	91 × 28 × 49	102 × 28 × 49	121 × 28 × 49
Weight	lb	904	926	1,235	1,433

Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga). Manual RS models carry the NovoTech warranty and support; electrical items apply to RM models.

IR SERIES

MOTORIZED 3-ROLL SLIP ROLL MACHINES

Motorized slip rolls with foot-pedal control

IR 1270x75

Motorized with foot pedal

IR 1050x56

Reinforced main frame made of special steel

Standard manual drop-end

Geared lock for quick back-roll adjustment

Optional drop-end safety switch

STANDARD FEATURES

- Top and bottom rolls driven by a single gearbox and chain/gear system
- Certified SAE 1050 steel rolls with high tensile strength
- Steel frame (68 and 75 mm roll models)
- Mobile control panel with foot pedal
- Manual drop-end
- Wire grooves at roll ends
- Precision bending with brake motor
- Built to EC safety directives (CE certified)
- Operator's manual

OPTIONAL EQUIPMENT

- Induction-hardened rolls
- Drop-end safety switch
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TECHNICAL SPECIFICATIONS IR

3.4–4.2 FT

IR 1050 – 1270

5 MODELS

Model		IR 1050x46	IR 1050x56	IR 1050x68	IR 1050x75	IR 1270x56
Working length	FT	3.4 FT	3.4 FT	3.4 FT	3.4 FT	4.2 FT
Working length	in	41.3	41.3	41.3	41.3	50.0
Rolling capacity		20 ga	18 ga	16 ga	14 ga	20 ga
Roll Ø	in	1.81	2.20	2.68	2.95	2.20
Motor power	HP	1.0	1.0	2.0	2.0	1.0
Wire grooves Ø		3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"
Dimensions L × W × H	in	59 × 28 × 44	59 × 28 × 44	63 × 28 × 46	63 × 28 × 46	69 × 28 × 44
Weight	lb	463	529	750	849	661

4.2–6.7 FT

IR 1270 – 2050

5 MODELS

Model		IR 1270x68	IR 1270x75	IR 1550x68	IR 1550x75	IR 2050x75
Working length	FT	4.2 FT	4.2 FT	5.1 FT	5.1 FT	6.7 FT
Working length	in	50.0	50.0	61.0	61.0	80.7
Rolling capacity		18 ga	16 ga	20 ga	18 ga	20 ga
Roll Ø	in	2.68	2.95	2.68	2.95	2.95
Motor power	HP	2.0	2.0	2.0	2.0	2.0
Wire grooves Ø		3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"
Dimensions L × W × H	in	72 × 28 × 46	72 × 28 × 46	83 × 28 × 46	83 × 28 × 46	103 × 28 × 46
Weight	lb	827	794	882	948	1,301

Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

R SERIES · FLOOR-STANDING & BENCH MODELS

MANUAL 3-ROLL SLIP ROLL MACHINES

R 1050x56

Manual · hand-crank on stand

Easy bottom-roll pinching lever

Wire grooves as standard

R 610x46

Bench slip roll, without stand

R 1270x46

Bench slip roll with geared lock for quick back-roll adjustment

STANDARD FEATURES

- Certified SAE 1050 steel rolls with high tensile strength
- Steel frame (68 and 75 mm roll models)
- Manual drop-end
- Wire grooves at roll ends
- Operator's manual

OPTIONAL EQUIPMENT

+ Induction-hardened rolls

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TECHNICAL SPECIFICATIONS R

3.4–4.2 FT

R 1050 – 1270 · FLOOR-STANDING

5 MODELS

Model		R 1050x46	R 1050x56	R 1050x68	R 1050x75	R 1270x56
Working length	FT	3.4 FT	3.4 FT	3.4 FT	3.4 FT	4.2 FT
Working length	in	41.3	41.3	41.3	41.3	50.0
Rolling capacity		20 ga	18 ga	16 ga	14 ga	20 ga
Roll Ø	in	1.81	2.20	2.68	2.95	2.20
Wire grooves Ø		3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"
Dimensions L × W × H	in	55 × 28 × 44	55 × 28 × 44	76 × 28 × 46	76 × 28 × 46	69 × 28 × 44
Weight	lb	353	408	617	573	507

4.2–6.7 FT

R 1270 – 2050 · FLOOR-STANDING

5 MODELS

Model		R 1270x68	R 1270x75	R 1550x68	R 1550x75	R 2050x75
Working length	FT	4.2 FT	4.2 FT	5.1 FT	5.1 FT	6.7 FT
Working length	in	50.0	50.0	61.0	61.0	80.7
Rolling capacity		18 ga	16 ga	20 ga	18 ga	20 ga
Roll Ø	in	2.68	2.95	2.68	2.95	2.95
Wire grooves Ø		3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"
Dimensions L × W × H	in	85 × 28 × 46	85 × 28 × 46	96 × 28 × 46	96 × 28 × 46	115 × 28 × 46
Weight	lb	683	728	772	805	1,157

2–4.2 FT

R BENCH MODELS · WITHOUT STAND

3 MODELS

Model		R 610x46	R 1050x46	R 1270x46
Working length	FT	2 FT	3.3 FT	4.2 FT
Working length	in	23.6	39.4	50.0
Rolling capacity		18 ga	20 ga	22 ga
Roll Ø	in	1.81	1.81	1.81
Wire grooves Ø		3/16", 1/4", 3/8"	3/16", 1/4", 3/8"	3/16", 1/4", 3/8"
Dimensions L × W × H	in	35 × 20 × 16	55 × 20 × 16	64 × 20 × 16
Weight	lb	198	265	331

Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

RST-M (MOTORIZED) · RST (MANUAL)

ECONOMICAL MOTORIZED & MANUAL PLATE ROLLS

Reinforced, value-priced plate rolls for light work

RST-M 1270x86
Motorized · electrical box and foot pedal

RST 1270x86
Manual economical plate roll

Built for light work up to 12 ga thick — ventilation ducting, signage panels, machine guards and sheet-metal parts. Its attractive price and versatility make it a favourite of small workshops.

STANDARD FEATURES

- Cast main frames
- Geared main motor (RST-M)
- Manual drop-end top roll
- Back and bottom rolls adjusted up/down by screws on both sides
- Motor- or hand-driven center rolls
- Certified SAE 1050 steel rolls with high tensile strength
- Foot-pedal control (RST-M)
- Operator's manual

OPTIONAL EQUIPMENT

+ Hardened rolls
+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

Manual up/down setting of bottom and back rolls by screws

INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

4.1–5.1 FT

RST · RST-M
4 MODELS

Model		RST 1270x86	RST-M 1270x86	RST 1550x86	RST-M 1550x86
Working length	FT	4.1 FT	4.1 FT	5.1 FT	5.1 FT
Working length	in	49.2	49.2	61.0	61.0
Rolling capacity		12 ga	12 ga	14 ga	14 ga
Roll Ø	in	3.39	3.39	3.39	3.39
Rolling speed	ft/min	—	39	—	39
Motor power	HP	—	2.0	—	2.0
Dimensions L × W × H	in	90 × 28 × 49	73 × 28 × 49	83 × 28 × 49	98 × 28 × 49
Weight	lb	937	926	1,014	1,146

Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

3R HMD SERIES · NEW

MECHANICAL-HYDRAULIC 3-ROLL ASYMMETRICAL PLATE ROLLS

All 3 rolls motor + planetary reducer driven, with hydraulic back roll

MODEL 3R HMD 1270x90

STANDARD FEATURES

- All 3 rolls powered by a single gearbox and gear system
- Certified SAE 1050 induction-hardened steel rolls with high tensile strength
- Cast-iron main frames
- Mobile control panel with foot pedal
- Cone bending with easy joystick positioning
- Manual drop-end mechanism
- Wire grooves on rolls: Ø3⁄16", 1⁄4", 3⁄8"
- Hydraulic back-roll piston
- Digital readout and joystick control for back-roll adjustment
- Precision bending with brake motor
- Built to EC safety directives (CE certified)
- Operator's manual

OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

4.2–6.7 FT 3R HMD

3 MODELS

Model		3R HMD 1270x90	3R HMD 1550x90	3R HMD 2050x95
Working length	FT	4.2 FT	5.1 FT	6.7 FT
Working length	in	50.0	61.0	80.7
Rolling capacity		12 ga	14 ga	16 ga
Roll Ø	in	3.54	3.54	3.74
Rolling speed	ft/min	20	20	20
Motor power	HP	1.5 + 1.0	2.0 + 1.0	2.0 + 1.0
Wire grooves Ø		3⁄16", 1⁄4", 3⁄8"	3⁄16", 1⁄4", 3⁄8"	3⁄16", 1⁄4", 3⁄8"
Oil tank capacity	L	6	6	6
Dimensions L × W × H	in	93 × 28 × 30	104 × 28 × 30	120 × 28 × 30
Weight	lb	1,146	1,279	1,576

Plate bending capacities are based on mild steel with a yield strength of 34,100 psi. Thin-sheet values shown in gauge (ga).

HIBKS · IBKS 4.0

HYDRAULIC & MOTORIZED BEADING MACHINES

Heavy-duty beading / trimming machines for sheet up to 8 ga thick

HIBKS 4.0

Hydraulic top-roll movement

IBKS 4.0

Motorized, manual top-roll setting

STANDARD FEATURES — HIBKS (IBKS: MANUAL TOP ROLL)

- Welded steel construction frame
- Hydraulic up/down top roll
- Forward-backward adjustable bottom roll
- Forward-backward adjustable sheet support
- Special-steel shafts in tapered roller bearings
- Gearbox motor with brake
- Foot-pedal control
- Complete with floor stand
- 4 sets of standard rolls and roll spanner key
- Low-maintenance ball-bearing design
- Built to EC safety directives (CE)
- Operator's manual

OPTIONAL EQUIPMENT

- Rolls for special jobs (made to order)
- Digital readout (HIBKS)
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

HIBKS · IBKS 4.0

Model		HIBKS 4.0 · hydraulic	IBKS 4.0 · motorized
Shaft length	in	11.8	11.8
Beading capacity		8 ga	8 ga
Roll Ø	in	4.96	4.96
Throat depth	in	7.9	7.9
Spindle speed	rpm	10	10
Motor power	HP	3.0 + 1.0	3.0
Oil tank capacity	L	6	—
Dimensions L × W × H	in	68 × 23 × 50	58 × 22 × 47
Weight	lb	1,213	1,014

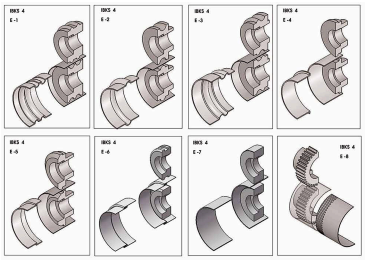

Standard roll sets S1–S4 and extra roll sets E1–E8

HIBKS · IBKS 2.5

HYDRAULIC & MOTORIZED BEADING MACHINES

Beading / trimming machines for sheet up to 12 ga thick

HIBKS 2.5

Hydraulic top-roll movement

IBKS 2.5

Motorized, manual top-roll setting

HIBKS · IBKS 2.5

Model		HIBKS 2.5 · hydraulic	IBKS 2.5 · motorized
Shaft length	in	9.8	9.8
Beading capacity		12 ga	12 ga
Roll Ø	in	3.78	3.78
Throat depth	in	6.3	6.3
Spindle speed	rpm	13	13
Motor power	HP	2.0 + 0.7	2.0
Oil tank capacity	L	6	—
Dimensions L × W × H	in	68 × 23 × 50	58 × 22 × 47
Weight	lb	838	705

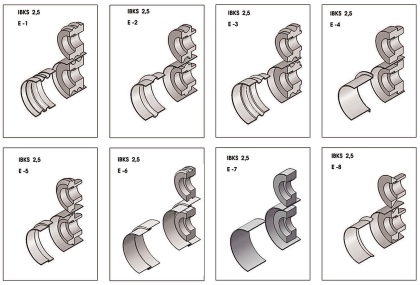

Standard roll sets S1–S4 and extra roll sets E1–E8

Standard and optional equipment as listed for the 4.0 models; 4 sets of standard rolls and roll spanner key included.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

IBKS 1.8 · IKM 1.2 · IKMP 1.2 · IKMP 1.2 P

MOTORIZED & PNEUMATIC BEADING MACHINES

IBKS 1.8

3 sets of standard rolls and roll spanner key

- Welded steel-plate main frame
- Forward-backward adjustable sheet support
- Forward-backward adjustable upper roll
- Gearbox motor with brake
- Easy to move around the shop
- Foot-pedal control
- Special-steel roll shafts
- 3 sets of standard rolls
- Complete with floor stand
- Built to EC safety directives (CE)

IKM 1.2

8 sets of standard rolls and roll spanner key

- Heavy-duty cast-iron main frame
- Forward-backward adjustable sheet support
- Forward-backward adjustable bottom roll
- Special-steel shafts
- 8 sets of standard rolls
- Tooling cupboard
- 4 working speeds via pulley belt: 30 / 60 / 90 / 120 rpm

IKMP 1.2

Standard motorized

IKMP 1.2 P

Pneumatic top shaft

- Heavy-duty cast-iron main frame
- Forward-backward adjustable sheet support
- Adjustable bottom roll
- Foot-pedal control
- Special-steel roll shafts
- 8 sets of standard rolls
- Complete with floor stand
- Built to EC safety directives (CE)

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

IBKS 1.8 · IKM 1.2

Model		IBKS 1.8	IKM 1.2
Shaft length	in	4.7	5.5
Beading capacity		14 ga	18 ga
Roll Ø	in	3.23	2.44
Throat depth	in	11.0	3.9
Spindle speed	rpm	48	30 / 60 / 90 / 120
Motor power	HP	2.0	1.0
Dimensions L × W × H	in	33 × 16 × 48	35 × 18 × 53
Weight	lb	309	298

IKMP 1.2 · IKMP 1.2 P

Model		IKMP 1.2	IKMP 1.2 P
Shaft length	in	5.5	5.5
Beading capacity		18 ga	18 ga
Roll Ø	in	2.44	2.44
Throat depth	in	3.9	3.9
Spindle speed	rpm	32	32
Motor power	HP	1.0	1.0
Dimensions L × W × H	in	39 × 18 × 53	35 × 18 × 65
Weight	lb	287	331

OPTIONAL EQUIPMENT

+ Rolls for special jobs (made to order)
+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*



Extra rolls for IKMP and IKM



Standard rolls for IKMP and IKM

IK (CAST IRON) · IKS (STEEL PLATE)

MANUAL BEADING MACHINES / SWAGERS

IK 1.2

8 sets of standard rolls and roll spanner key

IK 0.8

7 sets of standard rolls and roll spanner key

IKS 1.3

8 sets of standard rolls · compatible with IK 1.2 rolls

IKS 1.0

7 sets of standard rolls · compatible with IK 0.8 rolls

IK — CAST-IRON FRAME

- Heavy-duty cast-iron main frame
- Forward-backward adjustable sheet support
- Adjustable bottom roll
- Special-steel roll shafts
- Easy to carry around the shop

IKS — STEEL-PLATE FRAME

- Steel-plate construction
- Forward-backward adjustable sheet support
- Adjustable bottom roll
- Special-steel roll shafts
- Easy to carry around the shop
- Operator's manual

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

IK 1.2 · IK 0.8

Model		IK 1.2	IK 0.8
Shaft length	in	5.5	4.3
Beading capacity		18 ga	22 ga
Roll Ø	in	2.44	2.20
Throat depth	in	3.9	3.1
Dimensions L × W × H	in	22 × 9 × 20	15 × 7 × 15
Weight	lb	110	66

IKS 1.3 · IKS 1.0

Model		IKS 1.3	IKS 1.0
Shaft length	in	7.1	10.2
Beading capacity		18 ga	20 ga
Roll Ø	in	2.44	2.20
Throat depth	in	9.1	6.3
Dimensions L × W × H	in	20 × 12 × 20	20 × 10 × 20
Weight	lb	110	88



Extra rolls for IK / IKMP 1.2



Standard rolls S1–S5



Standard rolls S7–S8

IDK-5

HYDRAULIC CIRCULAR CUTTING & FLANGING MACHINE

Cuts discs Ø9.8" – 78.7" in sheet up to 3⁄16" thick

MODEL **IDK-5**

STANDARD FEATURES

- Welded steel construction frame
- Hydraulic center clamp
- Special-steel blades
- Long blade life — shafts on special conical bearings
- Gearbox motor with brake
- Motorized cutting-diameter adjustment
- Mobile control panel
- Inside-diameter cutting system
- Built to EC safety directives (CE)
- Operator's manual

OPTIONAL EQUIPMENT

- Special rolls and attachments for edge flanging up to 3⁄8"
- Digital readout
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

Hydraulic clamping and cutting system

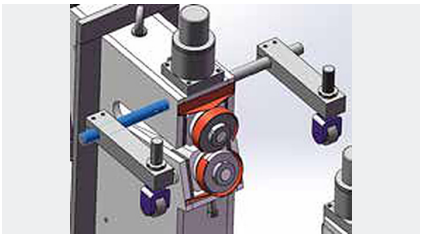

Optional flanging attachment

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

IDK-3.5 (PNEUMATIC CLAMP) · IDK-2 (HEAVY DUTY)

MOTORIZED CIRCULAR CUTTING MACHINES

IDK-3.5

Pneumatic-pressure motorized circular cutting shear

- Welded steel construction frame
- Special-steel blades
- Long blade life — shafts on special conical bearings
- Gearbox motor with brake
- Motorized cutting-diameter adjustment
- Mobile control panel
- Inside-diameter cutting system
- Pneumatic center clamp (requires 116 psi air supply)
- Built to EC safety directives (CE)
- Operator's manual

IDK-2

Heavy-duty motorized circular cutting machine

- Rigid cast frame
- Special-steel blades
- Blades mounted in bearings
- Gearbox motor with brake
- Mobile control panel with foot pedal
- Inside-diameter cutting system
- Built to EC safety directives (CE)
- Operator's manual

OPTIONAL EQUIPMENT

- + Pneumatic sheet-centering device (IDK-2)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

IDK-1.8

Motorized · rigid cast frame · blades in bronze bushings · foot pedal (no inside-Ø cutting)

IDK-1

Manual · rigid cast frame · blades in cast-iron bushings (no inside-Ø cutting)

TECHNICAL SPECIFICATIONS IDK CIRCULAR CUTTING

IDK SERIES

5 MODELS

Model		IDK-5	IDK-3.5	IDK-2	IDK-1.8	IDK-1
Min. cutting Ø	in	9.8	7.9	4.7	4.3	5.9
Max. cutting Ø	in	78.7	47.2	39.4	39.4	39.4
Cutting capacity (mild steel)		3⁄16"	10 ga	14 ga	14 ga	20 ga
Cutting speed	ft/min	13	20	25	25	manual
Blade material		1.2379 tool steel	1.2379 tool steel	1.2379 tool steel	1.2379 tool steel	1.2379 tool steel
Motor power	HP	3.0 + 1.0	3.0	1.5	1.5	—
Hump depth	in	47.2	29.5	27.6	24.0	23.6
Throat depth	in	11.8	9.8	11.0	8.5	7.9
Inside-diameter cutting		Yes	Yes	Yes	No	No
Dimensions L × W × H	in	118 × 30 × 55	79 × 24 × 55	55 × 16 × 51	59 × 16 × 51	47 × 8 × 18
Weight	lb	2,976	1,653	772	529	132

Cutting capacities for mild steel. IDK-1 is manually operated.

LS-13P

PNEUMATIC HEAVY-DUTY LOCK SEAMING MACHINE

Motorized lock seamer with pneumatic pressing for duct and pipe seams

LS-13P

Pneumatic motorized heavy-duty lock seaming machine

STANDARD FEATURES

- Gearbox-driven pinching system
- Easy operation with pneumatic pressing system
- Pinching and rotation controlled by standard foot pedal
- Pneumatic system protected by air filter
- Hardened seaming rolls
- Sliding system on ball bearings
- Operator's manual



Lock-seam profile



Finished lock seam

Model		LS-13P
Seaming capacity		18 ga
Seaming length	FT	4.3 FT
Seaming length	in	51.2
Seaming Ø (min – max)	in	3.9 – 5.1
Working pressure (pneumatic)	psi	120
Press force	lbf	220
Motor power	HP	0.5
Dimensions L × W × H	in	68 × 35 × 65
Weight	lb	661

INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Optional: Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase *240 V single-phase depends on the machine's motor power and is not available on all models.*

EDGEBENDER 1240 CNC

3-AXIS (Y1 + Y2 + X) CNC HYDRAULIC PRESS BRAKE

44 US tons · 4.2 FT working length · Cybelec Cybtouch 12 CNC

MODEL Edgebender 1240 CNC

CYBELEC CYBTOUCH 12
CNC controller

3 AXES
Y1 + Y2 + X

FAST TOOL EXCHANGER
Quick-release Promecam clamping

PROMECAM TOOLING
Top and bottom Promecam-adaptable tools

SIDE COVERS
with safety switch

LIGHTGUARD
in the front working area

PROGRAMMABLE RETREAT
Sensitive backgauge retract to avoid collision

FRONT SUPPORT ARMS
Height adjustable

OPTIONAL
Motorized crowning (cambering) system

Cybelec Cybtouch 12 CNC controller

Motorized backgauge

HAWE or Rexroth hydraulics

Promecam blade installed

EDGEBENDER 1240 CNC FEATURES & SPECIFICATIONS

GENERAL FEATURES

- Double-cylinder bending system on the upper beam
- Static and dynamic rigidity: strong steel frame and upper beam
- Upper beam guided by easily adjustable fiber slide bearings
- Durable balancing spindle and eccentric bearings for parallelism
- High stroke and daylight for a wide range of tooling
- Hydraulic safety system against pressure overload
- Two-speed operation: free fall, bending, return
- Compact, low-maintenance REXROTH or HAWE hydraulic unit at the rear top
- European SIEMENS electrical equipment with remote-connection service
- LEUZE front safety barrier with learning mode for different part shapes

Model		EB 1240 CNC
Bending force	US tons	44
Working length	FT	4.2 FT
Working length	in	50.0
Distance between frames	in	39.8
Stroke	in	8.7
Throat depth	in	11.6
Y free-fall speed	in/s	5.91
Y working speed	in/s	0.39
Daylight	in	16.1
Main motor	HP	5.4
X-axis motor	HP	0.7
Backgauge travel	in	19.7
Dimensions L × W × H	in	81 × 60 × 89
Weight	lb	5,181

STANDARD FEATURES

- Cybelec Cybtouch 12 CNC control
- Quick-release PROMECAM top-tool clamping for partial and quick removal
- GIVI magnetic linear scales
- Standard top tools and bottom die for short-edge bends
- CNC X-axis backgauge on HIWIN linear guides with ball screws; 19.7" travel; manual R axis
- Manual crowning with bottom die and Promecam tooling
- Foot pedal
- Front support arms on linear slides and bearings

OPTIONAL EQUIPMENT

- Special bending dies
- Special safety systems (DSP, FIESSLER)
- Extended backgauge length
- Extra backgauge fingers
- Extra front support arms
- Servo-motorized R axis
- Servo-motorized X axis
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Easy adjustment and fixing on lower die bed

Separate height setting on front supports

Optional FIESSLER barrier system

EDGEBENDER 1230 · 1540 · 2160 NC

2-AXIS (Y + X) NC-CONTROLLED HYDRAULIC PRESS BRAKES

33 – 66 US tons · 4.2 – 6.9 FT working length

Edgebender 2160

6.9 FT × 66 US tons

Edgebender 1230

4.1 FT × 33 US tons

Precision bending results

Motorized backgauge

Promecam blade installed (EB 1540 / 2160)



Optional motorized or manual lower-blade crowning

EDGEBENDER NC STANDARD & OPTIONAL EQUIPMENT

STANDARD FEATURES

- Double-cylinder bending system on the upper beam
- Static and dynamic rigidity: strong steel frame and upper beam
- Upper beam guided by easily adjustable fiber slide bearings
- Durable balancing spindle and eccentric bearings for parallelism
- Stroke-controlled angle adjustment with mechanical stop and motor control
- High stroke and daylight for a wide range of tooling
- Easy tonnage adjustment with pressure switch; stop at bottom of stroke via NC
- Hydraulic safety system against pressure overload
- Two-speed operation: free fall, slow bend and fast return
- Safety foot pedal with emergency stop linked to the NC control (CE compliant)
- Compact, low-maintenance HAWE or REXROTH hydraulic unit on top of the machine
- European SIEMENS, PIZZATO and BALLUFF electrical components with remote service connection
- LEUZE front safety system with learning mode for different part shapes
- NC control storing 500 programs of 200 lines each; save and load via USB
- High-speed motorized X backgauge on linear guides: 23.6" travel, 0.008" accuracy
- Motor-driven Y-axis angle setting via the NC control
- Quick-release PROMECAM upper-tool clamping; manual crowning by wedges in the upper tool holders
- Floating-arm control panel
- Front support arms on linear slides and bearings
- Bolts for centering and fixing the bottom die
- Sensitive programmable backgauge retract to avoid collision
- Standard upper and lower tools
- Tooling selection / drawing feature and bending-force calculation on the controller

OPTIONAL EQUIPMENT

- Special bending dies
- Special two-hand and foot-pedal control system
- Special safety systems (DSP, FIESSLER)
- Additional backgauge length
- Extra backgauge fingers
- Extra front support arm
- Motorized R axis with precision movement
- Manual or motorized crowning on lower blade
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Safety lightguard complying with CE

Torsion bar for sensitive bending

Motorized backgauge with ball screw

Standard LEUZE lightguard with work-area learning

TECHNICAL SPECIFICATIONS EDGEBENDER NC

Model		EB 1230 NC	EB 1540 NC	EB 2160 NC
Bending force	US tons	33	44	66
Bending capacity*		8 ga	8 ga	8 ga
Working length	FT	4.2 FT	5.1 FT	6.9 FT
Working length	in	50.0	61.0	82.7
Distance between frames	in	39.8	49.6	66.9
Stroke	in	5.9	6.3	6.3
Bending speed	in/s	0.39	0.39	0.39
Idle ram speed	in/s	2.76	3.54	3.54
Throat depth	in	10.0	12.6	12.6
Daylight	in	10.4	15.0	15.0
Table width	in	5.1	3.9	3.9
Lower table height	in	32.7	33.3	33.3
Main motor	HP	4.0	7.4	10
X-axis motor	HP	0.7	1.0	1.0
Y-axis motor	HP	0.2	0.5	0.5
R-axis motor (optional)	HP	0.3	0.3	0.3
Backgauge travel	in	19.7	23.6	23.6
Oil tank capacity	L	90	120	120
Dimensions L × W × H	in	69 × 54 × 85	79 × 63 × 88	96 × 63 × 88
Weight	lb	3,748	7,606	9,568

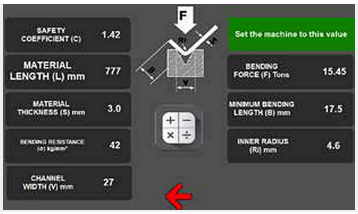

Sensitive bending feature on the NC

Tool selection and drawing on the NC

EB 1230 NC motor-controlled Y axis (angle set)


EB 1540 / 2160 gearbox-driven angle adjustment

**Bending capacity varies with V-die opening and sheet length — please check the bending chart.*

User-friendly NC interface

Rexroth or HAWE hydraulics

Remote assistance and maintenance via network

Well-known electrical components

SFB-CNC · 3-AXIS (A3) & 5-AXIS (A5)

CNC MANDREL TUBE & PIPE BENDERS

Fully servo-driven mandrel benders with 21" touchscreen CNC and 3D simulation

MODEL **SFB 38-CNC/A5 · 5-axis**

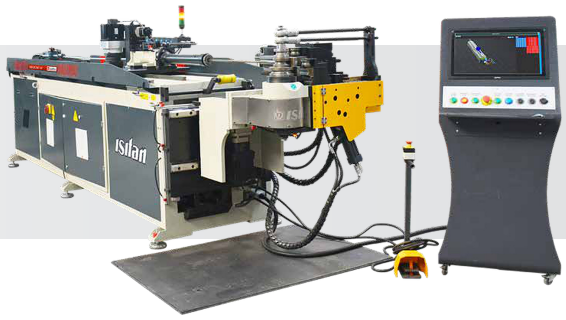

- Servo feeding, rotation & bending axes
- 21" touchscreen CNC
- 3D simulation
- Hydraulic mandrel & collet

STANDARD FEATURES

- 1 die set (3 pieces) in requested size
- Servo-motorized feeding axis (Y)
- Servo-motorized rotation axis (B)
- Servo-motorized bending axis (C) — A5 and SFB 38/51/65 A3; geared electric bending drive on SFB 76/90 A3
- Mobile CNC control unit with 21" TFT touchscreen
- 3D bending simulation
- Daily, weekly and monthly working reports, e-mailed automatically
- Tube length and bending-time calculation
- X-Y-Z to Y-B-C conversion
- Remote assistance
- Mobile foot pedal with emergency stop
- Manual and automatic operation
- Bending with or without mandrel
- Safety plate behind the bending head
- Hydraulic clamping, mandrel, pressure die and linear slider
- Hydraulic collet
- Hydraulic oil cooler (A3)
- Automatic mandrel lubrication (SFB 38 CNC/A3)
- Lockable electrical panel with safety interlock
- Electrical cabinet cooler
- Overload protection
- Roll bending (A5)

OPTIONAL EQUIPMENT

- Extra die sets
- Safety mat (30 × 39" or 39 × 59")
- Hydraulic oil heater
- Extended mandrel length (up to 20 FT)
- Ball mandrel and wiper die
- Automatic mandrel lubrication (SFB 51 / 65 / 76 / 90)
- Hydraulic oil cooler (A5)
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SFB CNC CONTROL, SOFTWARE & KEY COMPONENTS

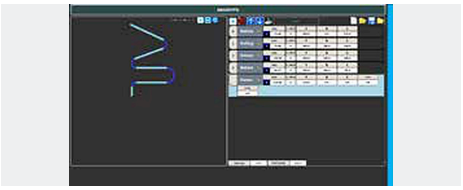

21" touchscreen CNC control

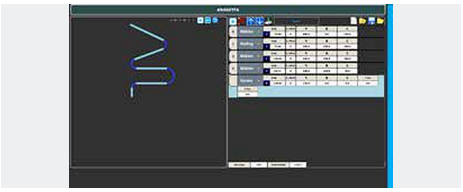

3D simulation

SPRING-BACK CALCULATION
precise, repeatable production values and fast setup

3D SIMULATION
upgraded 3D bending simulation with collision warning

X-Y-Z TO Y-B-C
converts drawing coordinates automatically

MATERIAL & TIME ESTIMATE
calculates required tube length and cycle time before bending

HARDNESS COMPENSATION
removes angle differences between materials of different hardness

ALL PROFILE TYPES
round, square and rectangular tube and profile calculations

REPORTING
daily, weekly and monthly job reports over the local network

TWO AXES TOGETHER
simultaneous axis motion cuts wasted time

REMOTE ASSISTANCE
fast support over the network



Hydraulic mandrel

Safety plate behind bending head

Hydraulic oil cooler

CNC control unit

Typical parts: furniture, seating and fitness frames, automotive and exhaust tube, handrails and fabricated tube assemblies.

TECHNICAL SPECIFICATIONS SFB CNC

MODEL **SFB 90-CNC/A3**

5-AXIS SFB CNC/A5

Y + B + C SERVO AXES PLUS SERVO ROLL-BENDING AXES

Model		SFB 38-CNC/A5	SFB 51-CNC/A5	SFB 65-CNC/A5
Max. tube capacity (OD × wall)		Ø1-½" × 11 ga	Ø2" × 11 ga	Ø2-½" × 11 ga
Max. bending radius (CLR)	in	9.8	9.8	9.8
Max. bending angle	°	190	190	190
Hydraulic pressure	psi	730 – 2,900	730 – 2,900	730 – 2,900
Working length	FT	9.8 FT	9.8 FT	9.8 FT
Working length	in	118.1	118.1	118.1
Rotation tolerance	°	±0.1	±0.1	±0.1
Bending speed		Adjustable	Adjustable	Adjustable
Motor power	HP	20	30	30
Dimensions L × W × H	in	217 × 51 × 63	250 × 55 × 63	250 × 55 × 63
Weight	lb	4,960	8,267	8,708

3-AXIS SFB CNC/A3

Y + B + C SERVO AXES

Model		SFB 38-CNC/A3	SFB 51-CNC/A3	SFB 65-CNC/A3	SFB 76-CNC/A3	SFB 90-CNC/A3
Max. tube capacity (OD × wall)		Ø1-½" × 11 ga	Ø2" × 11 ga	Ø2-½" × 11 ga	Ø3" × 8 ga	Ø3-½" × 8 ga
Max. bending radius (CLR)	in	9.8	9.8	9.8	9.8	9.8
Max. bending angle	°	190	190	190	190	190
Hydraulic pressure	psi	730 – 2,610	730 – 2,610	730 – 2,610	730 – 2,610	730 – 2,610
Working length	FT	9.8 FT	9.8 FT	9.8 FT	13.1 FT	13.1 FT
Working length	in	118.1	118.1	118.1	157.5	157.5
Rotation tolerance	°	±0.1	±0.1	±0.1	±0.1	±0.1
Bending speed		Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Motor power	HP	14	21	21	27	34
Dimensions L × W × H	in	177 × 47 × 59	195 × 51 × 63	195 × 51 × 63	236 × 57 × 69	236 × 57 × 69
Weight	lb	2,866	3,858	4,079	6,945	7,385

Tube capacities for mild steel tube. Wall thickness shown as nearest fraction.

SFB NC/C · SERVO ROTATION, HYDRAULIC COLLET

NC MANDREL TUBE BENDERS WITH CARRIER

Servo rotation axis on a carrier — fast, repeatable series production

MODEL SFB 90-NC/C

Servo rotation axis on carrier

Servo-motorized rotation axis

NC CARRIER FEATURES

- Hydraulic collet holds the workpiece firmly while bending
- Servo-motorized rotation axis controlled from the screen — the same servo motors as the CNC models for very low rotation tolerance
- Manual feeding axis with adjustable stoppers on the carrier slide — faster than standard NC models
- Screen on the carrier shows feed length and rotation angle while working
- Ideal for furniture, metal accessories, lighting and other series production

STANDARD FEATURES

- 1 die set in requested size
- NC carrier: servo-motorized rotation (B axis), hydraulic collet, manual feeding (Y axis), screen on carrier
- 5 hydraulic cylinders: slider support, clamping, mandrel, pressure die and collet
- NC control unit with 10" touchscreen on mobile panel
- 100-program memory, 20 bends per program
- Working status reports; error and warning messages
- Mobile foot pedal with emergency stop
- Electric bending axis with reducer (C axis)
- Bending with or without mandrel
- Brake motor for precise bends
- Bending angle measured by encoder
- Safety plate behind bending head
- Overload protection
- CE certified

OPTIONAL EQUIPMENT

- Extra die sets
- Extended mandrel length (up to 20 FT)
- Ball mandrel
- Wiper die
- Motorized feeding (Y axis)
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SFB NC · 38 / 51 / 65 / 76 / 90

NC MANDREL TUBE BENDERS

10" touchscreen NC with 100 programs and hydraulic mandrel

MODEL **SFB 90-NC**

MODEL **SFB 65-NC**

STANDARD FEATURES

- 1 die set in requested size
- NC control unit with 10" TFT touchscreen
- Electric bending drive with reducer (direct-drive reducer on 76 & 90 NC)
- 100-program memory, 20 sequential bends per program
- Working status reports; error and warning messages
- Mobile foot pedal with emergency stop
- Gauge-distance bracket
- Bending with or without mandrel
- Safety plate on bending head
- Bending angle measured by encoder
- Brake motor for precise bends
- 4 hydraulic cylinders: slider support, clamping, mandrel and pressure die
- Lockable electrical panel with safety interlock
- Overload protection

OPTIONAL EQUIPMENT

- Manual carrier
- Extra die sets in requested size
- Extended mandrel length (up to 20 FT)
- Ball mandrel
- Wiper die
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Direct-drive reducer system on 76 & 90 NC

Carrier screen: feed and rotation

Hydraulic collet

SFB 38-NC standard

TECHNICAL SPECIFICATIONS SFB NC/C · SFB NC

NC/C SFB NC/C — WITH CARRIER

4 MODELS

Model		SFB 38-NC/C	SFB 51-NC/C	SFB 65-NC/C	SFB 76-NC/C
Max. tube capacity (OD × wall)		Ø1-½" × 11 ga	Ø2" × 11 ga	Ø2-½" × 11 ga	Ø3" × 8 ga
Max. bending radius (CLR)	in	9.8	9.8	9.8	9.8
Max. bending angle	°	190	190	190	190
Hydraulic pressure	psi	730 – 2,610	730 – 2,610	730 – 2,610	730 – 2,610
Working length	FT	9.8 FT	9.8 FT	9.8 FT	13.1 FT
Working length	in	118.1	118.1	118.1	157.5
Bending speed		Adjustable	Adjustable	Adjustable	Adjustable
Motor power	HP	7.1	12	15	22
Dimensions L × W × H	in	177 × 45 × 65	191 × 59 × 73	191 × 59 × 73	236 × 63 × 73
Weight	lb	2,646	3,638	3,858	6,614

NC SFB NC

5 MODELS

Model		SFB 38-NC	SFB 51-NC	SFB 65-NC	SFB 76-NC	SFB 90-NC
Max. tube capacity (OD × wall)		Ø1-½" × 11 ga	Ø2" × 11 ga	Ø2-½" × 11 ga	Ø3" × 8 ga	Ø3-½" × 8 ga
Max. bending radius (CLR)	in	9.8	9.8	9.8	9.8	9.8
Max. bending angle	°	190	190	190	190	190
Hydraulic pressure	psi	730 – 2,610	730 – 2,610	730 – 2,610	730 – 2,610	730 – 2,610
Working length	FT	11.8 FT	11.8 FT	11.8 FT	15.1 FT	15.1 FT
Working length	in	141.7	141.7	141.7	181.1	181.1
Bending speed		Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Oil tank capacity	L	40	70	70	100	100
Motor power	HP	7.0	11	14	20	25
Dimensions L × W × H	in	177 × 45 × 55	191 × 59 × 59	191 × 59 × 59	236 × 63 × 63	236 × 63 × 63
Weight	lb	2,205	3,417	3,527	5,842	6,283

SFB 51-NC/C
Carrier type

SFB 38-NC/C
Carrier type

SFB 51-NC
Standard NC

Tube capacities for mild steel tube.

SFB 32-HD (PLC HYDRAULIC) · SFB 32-M (MOTORIZED)

COMPACT MANDREL TUBE BENDERS

SFB 32-HD

PLC-controlled hydraulic tube bender with mandrel

- 1 die set in requested size
- Bending system with special direct gear-drive reducer
- PLC control with 4.7" TFT touchscreen
- 20-program memory, 10 sequential bends per program
- Hydraulic clamping
- Mobile foot pedal with emergency stop
- Brake motor for precise bends
- Gauge-distance attachment
- Square attachment
- Support pulley
- Lockable electrical panel with safety interlock
- Overload protection
- CE certified

SFB 32-M

Motorized tube bender with mandrel

- 1 die set in requested size
- Special direct-drive reducer
- Mobile foot pedal with emergency stop
- Manual clamping
- Square attachment
- Manual angle scale
- Brake motor for precise bends
- Gauge-distance bracket
- Support pulley
- Lockable electrical panel with safety interlock
- CE certified

SFB 32-HD

Model		SFB 32-HD
Max. tube capacity (OD × wall)		Ø1-¼" × 11 ga
Max. bending radius (CLR)	in	9.8
Max. bending angle	°	190
Hydraulic pressure	psi	730 – 2,610
Working length	FT	6.9 FT
Working length	in	82.7
Motor power	HP	5.0
Oil tank capacity	L	20
Dimensions L × W × H	in	91 × 43 × 45
Weight	lb	794

SFB 32-M

Model		SFB 32-M
Max. tube capacity (OD × wall)		Ø1-¼" × 11 ga
Max. bending radius (CLR)	in	9.8
Max. bending angle	°	190
Working length	FT	4.9 FT
Working length	in	59.1
Motor power	HP	3.0
Dimensions L × W × H	in	91 × 43 × 45
Weight	lb	639

OPTIONAL EQUIPMENT

+ Extra die sets in requested size
+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SFB 38-NC/A2 (WITH CARRIER) · SFB 38-NC/A · SPECIAL PRODUCTION

NC ALUMINUM-PROFILE BENDING MACHINES

Special tooling for aluminum profiles — windows, doors and frames

MODEL **SFB 38-NC/A2**

MODEL **SFB 38-NC/A**

STANDARD FEATURES

- 1 special aluminum-profile bending die set in requested size
- Mobile NC control unit with 10" TFT touchscreen
- Electric bending drive with reducer
- 100-program memory, 20 bends per program
- Working status reports; error and warning messages
- Mobile foot pedal with emergency stop
- Safety plate behind bending head
- Bending angle measured by encoder
- Gauge-distance bracket
- Hydraulic support and clamping
- Hydraulic tooling clamp
- Lockable electrical panel with safety interlock
- Overload protection

OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SFB 38-NC/A2 · NC/A

Model		SFB 38-NC/A2	SFB 38-NC/A
Max. bending radius (CLR)	in	9.8	9.8
Max. bending angle	°	190	190
Hydraulic pressure	psi	730 – 2,610	730 – 2,610
Working length	FT	9.8 FT	9.8 FT
Working length	in	118.1	118.1
Bending speed		Adjustable	Adjustable
Motor power	HP	9.4	7.4
Dimensions L × W × H	in	177 × 45 × 39	177 × 45 × 53

Special tooling for aluminum profiles

Typical part: window frame

Typical part: door frame

BK SERIES · NON-MANDREL

ROTARY DRAW TUBE & PROFILE BENDERS

Compact benders for tube, pipe, solid bar, flat bar and box section — 1 tooling set included

BK-42

Ø1-5/8" × 1/8" steel tube · touchscreen · quick tooling change

BK-050

Ø2-3/8" × 1/8" steel tube · NC (PLC) control · two speeds

BK-H 060

Hydraulic · Ø2-3/8" × 1/8" steel tube · 0–210°

BK 030 (76)

Ø3" × 1/8" steel tube · touchscreen programming

BK-42 · BK 030 (76)

- Touchscreen programming of bend angle, multilingual diagnostics
- 20 programs of 10 lines with NC (PLC) control
- Quick-change tooling
- Sequential bends with high repeatability
- Digital display of bend angle
- Foot-pedal control for hands-free operation

BK-050 · BK-H 060

- One-touch control: any operator can program and store bend angles
- Two bending speeds
- Bend from the control panel or the foot pedal
- Mobile on rollers with handle, compact design
- BK-H 060: hydraulic, draws tube from one direction for easier sequential bending
- BK-H 060: one-piece solid bronze counter-bend die, swiveling bend head, angle indicator

Model		BK-42	BK-050	BK-H 060	BK 030 (76)
Tube capacity (pipe size)	NPS	1/8" – 1-1/4"	1/8" – 2"	1/8" – 2"	1/8" – 2-1/2"
Max. bending radius (CLR)	in	7.9	7.9	7.9	7.9
Bending angle	°	—	—	0–210	—
Motor power	HP	1.0	3.0	3.0	3.0
Oil tank capacity	L	—	—	25	—
Dimensions L × W × H	in	22 × 18 × 41	30 × 22 × 43	30 × 22 × 43	30 × 22 × 43
Weight	lb	243	309	311	397

OPTIONAL EQUIPMENT

+ Additional tooling for other diameters and profiles
+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERYNOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

MAXIMUM BENDING CAPACITIES BK SERIES

Model	BK-42	BK-050	BK-H 060	BK 030 (76)
Gas pipe (Sch. 40)	1-1/4" NPS	2" NPS	—	—
Steel tube	Ø1-5/8" × 11 ga	Ø2-3/8" × 11 ga	Ø2-3/8" × 11 ga	Ø3" × 11 ga
Stainless steel tube (304/316)	Ø1-5/8" × 14 ga	Ø2-3/8" × 14 ga	Ø2-3/8" × 12 ga	Ø2-3/4" × 8 ga
Hard copper & aluminum tube	Ø2-1/8" × 14 ga	Ø2-1/2" × 8 ga	Ø2-3/8" × 3/16"	Ø3" × 1/4"
Solid round bar	Ø1-1/8"	Ø1-3/8"	Ø1-3/4"	Ø1-3/4"
Solid square / rectangular bar	1/4" × 1-5/8"	3/8" × 2-3/8"	1-1/8" × 2-3/8"	3/8" × 3-1/2"
Flat bar — hard way	1-5/8" × 1/2"	2-3/8" × 5/8"	2-3/8" × 5/8"	3" × 9/16"
Flat bar — easy way	1-5/8" × 13/16"	2-3/8" × 1-1/8"	2-3/8" × 1-1/8"	3" × 1-1/8"
Box section	1-5/8" × 13/16" × 12 ga	2-3/8" × 1-1/8" × 8 ga	2-3/8" × 1-1/8" × 8 ga	2-3/4" × 1-5/8" × 8 ga

Tube shown as OD × wall. Capacities at maximum, with matching tooling.



Touchscreen with manual, program, auto and parameter modes

NC (PLC) control

Tooling for BK models

Mandrel tooling: SFB-CNC



Mandrel tooling: SFB-NC

TOOLING QUOTE CHECKLIST

- Material type
- Tube / profile size
- Wall thickness
- Min. centerline radius (CLR)
- Max. bending angle
- Max. tube / profile length

PN 17/90 · PN 20/76

MOTORIZED PIPE NOTCHING MACHINES

Belt-sander tube notchers — 10 dovetail drums standard

PN 17/90

Basic centering and easy belt adjustment

PN 20/76

Compact notcher with movable clamp

- Quickly opens the right dovetail for each tube diameter using the processing drum
- Fast clamping and release with the moving clamp
- Clamp moves left and right
- Notching up to 50° with the movable clamp
- 10 dovetail drums standard: Ø¾", 13⁄16", 1", 1-¼", 1-½", 1-⅝", 1-⅞", 2", 2-⅜", 3"
- Special dovetails for other sizes (optional)

Model		PN 17/90	PN 20/76
Notching capacity (tube OD)	in	11⁄16" – 3-½"	13⁄16" – 3"
Max. notching angle	°	50	50
Sanding belt	in	4 × 47	4 × 79
Motor power	HP	3.0	3.0
Dimensions L × W × H	in	43 × 33 × 47	53 × 28 × 47
Weight	lb	375	287

Typical notched tube joints

TD-01

MOTORIZED TUBE-END DEBURRING MACHINE

TD-01

Wire-brush deburring for tube ends

- Balanced, long-life construction
- Inside and outside deburring up to Ø3-½"
- Fast, easy wire-brush deburring at high speed
- Round, rectangular, oval and other profiles
- Stainless steel, mild steel, aluminum and more
- Works alongside tube benders and saws
- Low running cost, high productivity

Model		TD-01
Deburring capacity (in & out)	in	Ø3-½"
Wire brush	in	Ø1 0 × 4
Brush speed	rpm	1,500
Motor power	HP	3.0
Dimensions L × W × H	in	18 × 18 × 14
Weight	lb	88

SFF 90-1 · SFF 60-1

SINGLE-STATION HYDRAULIC PIPE-END FORMING MACHINES

Expand or reduce tube ends — easy tool change system

SFF 90-1

Single-station hydraulic end former

SFF 60-1

Single-station hydraulic end former

Easy tool-changing system

STANDARD FEATURES

- Expands or reduces (collapses) pipe ends
- 1 set of end-forming tooling in requested size
- Easy tool-changing system
- Mobile foot pedal
- CE certified

OPTIONAL EQUIPMENT

- Additional end-forming tooling sets
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		SFF 90-1	SFF 60-1
Expanding capacity	in	Ø1-3/8" – 3-1/2" × 14 ga	Ø1-3/8" – 2-3/8" × 14 ga
Reducing capacity	in	Ø5/16" – 3-1/2" × 14 ga	Ø5/16" – 2-3/8" × 14 ga
Motor power	HP	15	10
Dimensions L × W × H	in	51 × 28 × 45	51 × 28 × 45
Weight	lb	1,301	992

Capacities for mild steel tube, wall thickness shown.

SFC 350-VX · SFC 275/315-VP · SFC 275/315-V

CIRCULAR COLD SAWS

Wet-type circular cold saws for burr-free cuts in tube, bar and profile

SFC 350-VX

Semi-automatic, double-gear

SFC 275/315-VP

Pneumatic vise

SFC 275/315-V

Manual vise

SFC 350-VX · SEMI-AUTOMATIC

- Semi-automatic circular saw for fast cutting
- High output, ideal for short batch runs
- Heavy-duty gearbox
- Cast-iron base
- Foot-switch actuation
- Hydro-pneumatic head descent for optimum cut
- Cutting-speed regulator
- Head stroke adjustable to material size
- Mitre cuts 45° right to 45° left
- Air supply: 85 psi (8.5 cfm)

SFC VP · PNEUMATIC VISE

- Air-operated material vise
- Low-voltage start/stop trigger in the pull-down handle
- Mitre cuts 45° left and right
- Double split vise grips both sides of the material
- Self-centering vise optimizes cutting position
- Large base for stability

SFC V · MANUAL VISE

- Manually operated material vise
- Robust double-hinged pivot
- Low-voltage start/stop trigger in the pull-down handle
- Mitre cuts 45° left and right
- Double split vise grips both sides of the material

NO-BURR CUTTING
wet-type cold sawing for clean, burr-free cuts

BLADE COATINGS
TiN for medium-hard steel · TiCN for high-strength steel · TiAlN for stainless steel

ELECTRICAL
24 V control voltage; main voltage to suit Canadian supply

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TECHNICAL SPECIFICATIONS SFC CIRCULAR COLD SAWS

Model		SFC 350-VX	SFC 275-VP	SFC 315-VP	SFC 275-V	SFC 315-V
Blade Ø	in	13-¾"	10-¾"	12-½"	10-¾"	12-½"
Round — 90° / 45°	in	4-½" / 4-⅜"	3-⅜" / 2-¾"	4-⅛" / 3-½"	3-⅜" / 2-¾"	4-⅛" / 3-½"
Square — 90°	in	3-⅞" × 3-⅞"	2-¾" × 2-¾"	3-⅜" × 3-⅜"	2-¾" × 2-¾"	3-⅜" × 3-⅜"
Square — 45°	in	3-½" × 3-½"	2-⅜" × 2-⅜"	3-⅛" × 3-⅛"	2-⅜" × 2-⅜"	3-⅛" × 3-⅛"
Rectangular — 90°	in	4-¾" × 3-⅛"	3-¾" × 2-⅜"	4-¾" × 2-⅜"	3-¾" × 2-⅜"	4-¾" × 2-⅜"
Rectangular — 45°	in	3-½" × 3-½"	2-¾" × 2-⅛"	3-½" × 2-⅜"	2-¾" × 2-⅛"	3-½" × 2-⅜"
Mitre range	°	0 – 45 L/R	0 – 45 L/R	0 – 45 L/R	0 – 45 L/R	0 – 45 L/R
Blade speeds	rpm	45 / 80	45 / 90	45 / 90	45 / 90	45 / 90
Saw motor	HP	2.4 – 3.0	1.7 – 2.4	1.7 – 2.4	1.7 – 2.4	1.7 – 2.4
Installed power	HP	7.8	5.0	6.3	5.0	6.3
Blade bore / pin holes	mm	32 / 2 × Ø11	32 / 2 × Ø11	32 / 2 × Ø11	32 / 2 × Ø11	32 / 2 × Ø11
Dimensions L × W × H	in	43 × 24 × 55	39 × 24 × 55	39 × 24 × 55	39 × 24 × 55	39 × 24 × 55
Net weight	lb	661	463	441	419	441

Cutting capacities shown at 90° / 45°. Coolant pump 0.08 HP on all models.

OPTIONAL EQUIPMENT

- Saw blades for specific materials (TiN, TiCN, TiAlN)
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

SFC 350-VX

SFC 315-VP

SFC 315-V

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded; plate and sheet capacities are fractions for mild steel (34,100 psi yield) unless noted. Model numbers are manufacturer designations. Photos may show optional equipment.