
NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026


NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

HYDRAULIC IRONWORKERS

Q35Y FIVE-STATION STEELWORKERS 55 – 276 US TONS · PUNCHING, FLAT BAR, ANGLE, BAR AND SECTION SHEARING, NOTCHING

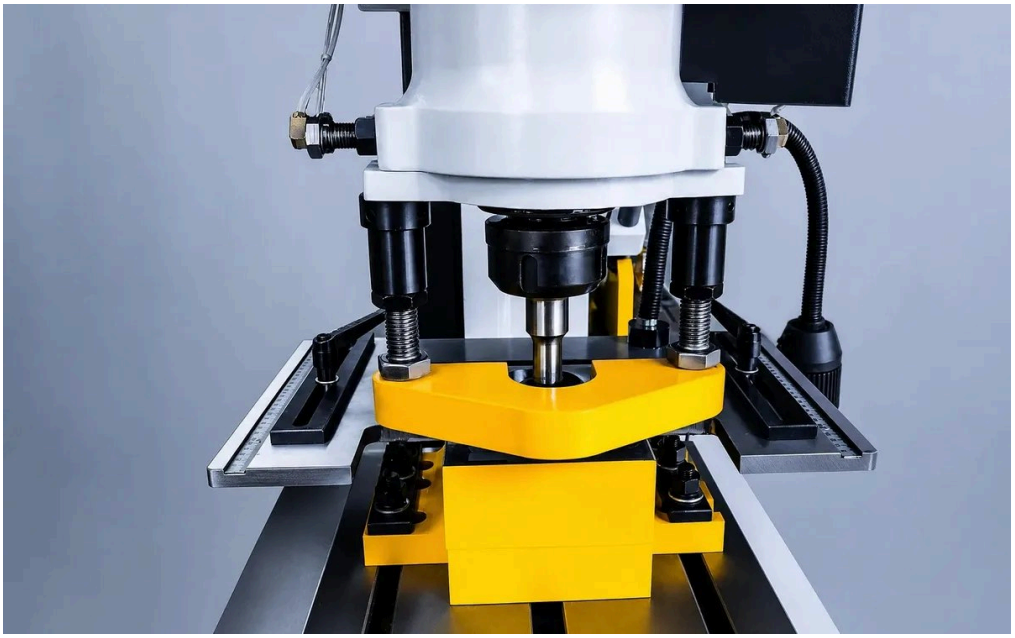



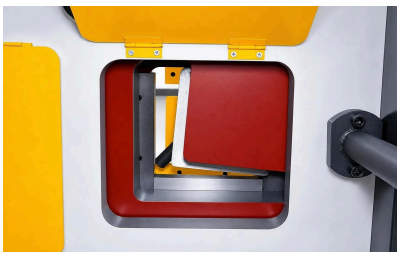

China
MADE IN CHINA

2
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE IRONWORKERS

CONTENTS

Q35Y HYDRAULIC IRONWORKERS

Q35Y hydraulic ironworkers, 55 – 276 US tons — NovoTech value line Q35Y-50 · 60 · 90 · 120 · 160 · 200 · 250 04

COMPACT SINGLE-CYLINDER IRONWORKERS

M50 · M55 · M60 compact single-cylinder ironworkers, 50 – 60 tons M50 · M55 · M60 · 3 models 08

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE IRONWORKERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

FIVE STATIONS, ONE MACHINE, TOOLING INCLUDED

NovoTech's value line is our own brand: machines built in China to our specification with European and Japanese controls and hydraulics — Delem, Estun, Schneider, Siemens, NOK — inspected before they ship and sold under NovoTech's name with the same CSA-approved panel, 1-year warranty and parts and technical support from Mississauga, Ontario, Canada, as every machine we sell.

The Q35Y puts the five jobs of the structural shop on one hydraulic cylinder: punching, flat-bar shear, angle shear at 90° and 45°, round and square bar shear and rectangular notching, each with its own hold-down and guard — and the punch, dies and blade sets are in the crate. Seven models from the compact 55 US ton bench machine to the 276 ton Q35Y-250 that punches Ø1-9/16″ through 1-9/16″ plate and shears 7-7/8″ angle, 12″ channel and 2″ flat bar.

Q35Y-50 · 60 · 90 · 120 · 160 · 200 · 250


Q35Y HYDRAULIC IRONWORKERS, 55 – 276 US TONS — NOVOTECH VALUE LINE



MODEL Q35Y · NOVOTECH Q35Y HYDRAULIC IRONWORKER — PUNCHING, FLAT BAR, ANGLE, ROUND AND SQUARE BAR SHEARING AND NOTCHING STATIONS



Punching station with the hold-down and the adjustable stripper

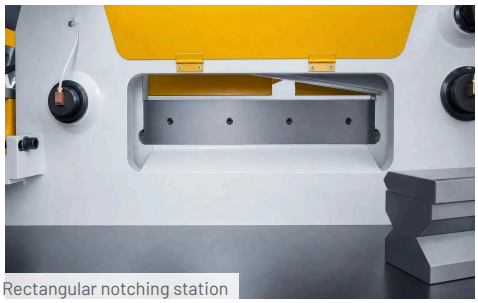

Rectangular notching station

The value-line steelworker: one hydraulic cylinder, five stations — punching, flat-bar shear, angle shear at 90° and 45°, round and square bar shear and rectangular notching — and the tooling to use them in the crate. The 66 US ton Q35Y-60 punches Ø1″ through 5/8″ and shears 4-3/4 × 4-3/4 × 1/2″ angle; the 132-ton Q35Y-120 punches Ø1-3/8″ through 1″ and shears 6-1/4″ angle and 1″ flat; the 200 and 250 t machines cut 7-7/8″ angle, 12″ channel and 1-9/16″ to 2″ plate. The Q35Y-50 is the compact single-station bench model.

STANDARD FEATURES

- ✓ Punching to Ø1-9/16″ × 1-9/16″, angle to 7-7/8 × 7-7/8 × 11/16″, flat bar to 15-3/4 × 1-9/16″
- ✓ Five stations: punching, flat-bar shear, angle shear at 90° and 45°, round / square bar shear and rectangular notching — each with hold-down and guard
- ✓ Single cylinder with adjustable stroke and two foot pedals; strokes per minute as the table
- ✓ Punch and die, flat-bar blades, angle blades, bar blades and notching blades included
- ✓ Hydraulic valve block with overload protection; Schneider electrics; LED lighting at the stations
- ✓ Travel-limit switches and interlocked guards
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Tee, I-beam and channel blades; V-notching; pipe notching; bending tools
- + Large-hole and section punching tools; punch sets
- + Back gauge for the shear station; length stops
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

Q35Y HYDRAULIC IRONWORKERS, 55 – 276 US TONS — NOVOTECH VALUE LINE



Angle shearing station with the guard open




Flat bar shearing station with the ruler and hold-down




Notching die and the opened guard



Punches, dies and notching tools supplied with the ironworker

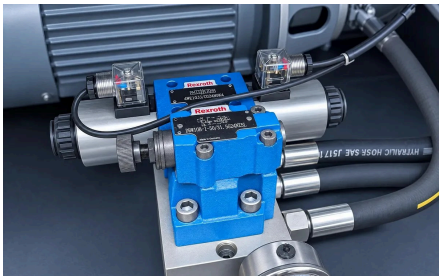

Hydraulic valve block of the ironworker

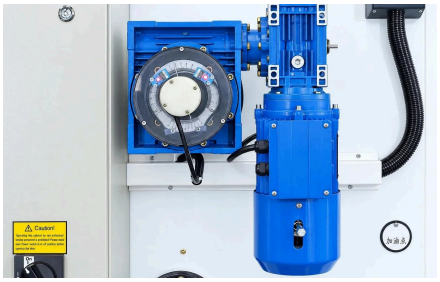

Main motor and pump unit



Checking the angle on a sheared and bent sample

TECHNICAL SPECIFICATIONS · 1 / 2

Q35Y HYDRAULIC IRONWORKERS, 55 – 276 US TONS — NOVOTECH VALUE LINE

Q35Y HYDRAULIC IRONWORKERS

7 models · 55 – 276 US tons

Model	Q35Y-50	Q35Y-60	Q35Y-90	Q35Y-120	Q35Y-160	Q35Y-200	Q35Y-250
Punching force	55 US tons (50 t)	66 US tons (60 t)	99 US tons (90 t)	132 US tons (120 t)	176 US tons (160 t)	220 US tons (200 t)	276 US tons (250 t)
Punching, max. thickness	15/32″ (12 mm)	5/8″ (16 mm)	3/4″ (20 mm)	1″ (25 mm)	1-1/8″ (28 mm)	1-3/8″ (35 mm)	1-9/16″ (40 mm)
Punching, max. Ø	Ø0.98″ (25 mm)	Ø0.98″ (25 mm)	Ø1.18″ (30 mm)	Ø1.38″ (35 mm)	Ø1.50″ (38 mm)	Ø1.57″ (40 mm)	Ø1.57″ (40 mm)
Flat bar shear, max. thickness	15/32″ (12 mm)	5/8″ (16 mm)	3/4″ (20 mm)	1″ (25 mm)	1-3/16″ (30 mm)	1-9/16″ (40 mm)	2″ (50 mm)
Flat bar shear, width × thickness	11.8 × 15/32″ (300 × 12 mm)	9.8 × 5/8″ · 15.7 × 5/16″ (250 × 16 · 400 × 8 mm)	13.0 × 3/4″ · 18.9 × 3/8″ (330 × 20 · 480 × 10 mm)	13.0 × 1″ · 23.6 × 5/8″ (330 × 25 · 600 × 16 mm)	13.2 × 1-3/16″ · 23.6 × 3/4″ (335 × 30 · 600 × 20 mm)	15.7 × 1-3/8″ · 27.6 × 1″ (400 × 35 · 700 × 25 mm)	15.7 × 1-9/16″ · 29.5 × 1-3/16″ (400 × 40 · 750 × 30 mm)
Bar shear — round · square	—	Ø1.77″ · □1.57″ (45 · 40 mm)	Ø1.97″ · □1.97″ (50 · 50 mm)	Ø2.36″ · □1.97″ (60 · 50 mm)	Ø2.56″ · □2.17″ (65 · 55 mm)	Ø2.76″ · □2.36″ (70 · 60 mm)	Ø2.95″ · □2.56″ (75 · 65 mm)
Angle shear 90°	—	4.7 × 4.7 × 15/32″ (120×120×12 mm)	5.5 × 5.5 × 15/32″ (140×140×12 mm)	6.3 × 6.3 × 9/16″ (160×160×14 mm)	7.1 × 7.1 × 5/8″ (180×180×16 mm)	7.9 × 7.9 × 11/16″ (200×200×18 mm)	7.9 × 7.9 × 11/16″ (200×200×18 mm)
Angle shear 45°	—	2.0 × 2.0 × 3/16″ (50×50×5 mm)	2.8 × 2.8 × 9/32″ (70×70×7 mm)	3.1 × 3.1 × 9/32″ (80×80×7 mm)	3.1 × 3.1 × 3/8″ (80×80×10 mm)	3.9 × 3.9 × 3/8″ (100×100×10 mm)	4.7 × 4.7 × 5/8″ (120×120×16 mm)
Tee shear 90° · 45°	—	4.7 × 4.7 × 15/32″ (120×120×12 mm) · 2.4 × 2.4 × 5/16″ (60×60×8 mm)	5.5 × 5.5 × 15/32″ (140×140×12 mm) · 2.8 × 2.8 × 3/8″ (70×70×10 mm)	6.3 × 6.3 × 9/16″ (160×160×14 mm) · 3.1 × 3.1 × 3/8″ (80×80×10 mm)	7.1 × 7.1 × 5/8″ (180×180×16 mm) · 3.1 × 3.1 × 3/8″ (80×80×10 mm)	7.9 × 7.9 × 11/16″ (200×200×18 mm) · 3.1 × 3.1 × 3/8″ (80×80×10 mm)	7.9 × 7.9 × 11/16″ (200×200×18 mm) · 3.1 × 3.1 × 3/8″ (80×80×10 mm)
I-beam · channel shear	—	5.0 × 2.9 × 3/16″ (126×74×5 mm) · 5.0 × 2.1 × 3/16″ (126×53×5 mm)	6.3 × 3.4 × 1/4″ (160×86×6 mm) · 6.3 × 2.4 × 3/16″ (160×60×5 mm)	7.9 × 4.0 × 11/32″ (200×102×9 mm) · 7.9 × 3.0 × 11/32″ (200×75×9 mm)	11.0 × 4.9 × 3/8″ (280×124×10 mm) · 11.0 × 3.4 × 7/16″ (280×86×11 mm)	11.8 × 5.0 × 7/16″ (300×126×11 mm) · 11.8 × 3.5 × 15/32″ (300×89×12 mm)	12.6 × 5.1 × 3/8″ (320×130×10 mm) · 11.8 × 3.6 × 15/32″ (300×92×12 mm)
Shear angle	7°	7°	8°	8°	8°	8°	8°
Ram stroke	1.4″ (35 mm)	3.1″ (80 mm)	3.1″ (80 mm)	3.1″ (80 mm)	3.1″ (80 mm)	3.1″ (80 mm)	3.1″ (80 mm)
Strokes per minute	10 – 18	9 – 25	12 – 28	12 – 28	12 – 28	10	10

TECHNICAL SPECIFICATIONS · 2 / 2

Q35Y HYDRAULIC IRONWORKERS, 55 – 276 US TONS — NOVOTECH VALUE LINE

Q35Y HYDRAULIC IRONWORKERS (CONTINUED)

7 models · 55 – 276 US tons

Model	Q35Y-50	Q35Y-60	Q35Y-90	Q35Y-120	Q35Y-160	Q35Y-200	Q35Y-250
Throat depth	4.5″ (115 mm)	11.8″ (300 mm)	14.0″ (355 mm)	15.7″ (400 mm)	23.6″ (600 mm)	23.6″ (600 mm)	23.6″ (600 mm)
Main motor	5.4 HP (4 kW)	7.4 HP (5.5 kW)	10.1 HP (7.5 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	20.1 HP (15 kW)	24.8 HP (18.5 kW)
Dimensions L × W × H	37 × 22 × 71″ (950 × 550 × 1,800 mm)	65 × 29 × 70″ (1,640 × 730 × 1,770 mm)	73 × 31 × 75″ (1,860 × 800 × 1,900 mm)	93 × 38 × 82″ (2,355 × 960 × 2,090 mm)	106 × 41 × 91″ (2,680 × 1,040 × 2,300 mm)	117 × 49 × 93″ (2,970 × 1,240 × 2,350 mm)	118 × 57 × 96″ (3,000 × 1,440 × 2,450 mm)

Capacities are the supplier's ratings for steel of up to 65,000 psi (450 N/mm^2); the Q35Y-50 is the compact single-station bench model, the Q35Y-60 and up have the five stations and the section-shear capacities shown. The model number is the metric tonnage.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

M50 · M55 · M60 · 3 MODELS

M50 · M55 · M60 COMPACT SINGLE-CYLINDER IRONWORKERS, 50 – 60 TONS



MODEL M50 · M55 COMPACT SINGLE-CYLINDER IRONWORKER WITH PUNCH, SHEAR AND NOTCHER

50 – 60 tons

Compact ironworkers for the small fabrication and repair shop: one cylinder punches, shears flat bar and angle, notches and — with the optional tooling — brakes, shears round and square bar, notches pipe and punches shaped holes. 50 to 60 tons: a 1" to 1-1/16" hole through 5/8" plate, 12 × 5/8" flat bar and 4 × 4 × 3/8" angle on the M60, with a 7-1/2" throat.

STANDARD FEATURES

- ✓ Punching: 1" hole in 5/8" plate (M50), 1-1/16" in 5/8" (M55, M60)
- ✓ Flat bar: 10 × 1/2" (M50), 12 × 5/8" or 14 × 3/8" (M55, M60)
- ✓ Angle: 4 × 4 × 1/4" (M50, M55), 4 × 4 × 3/8" (M60)
- ✓ Standard tooling: 15/16" punch and die, flat bar shear, angle shear
- ✓ 5.5 – 7 HP; 7-1/2" throat; 1-1/4" stroke

OPTIONAL EQUIPMENT

- + Punch and die sets 3/16 – 1-1/16"
- + Right-angle notcher
- + Press brake die
- + Slot die
- + Pipe notcher 3/4 – 2"
- + Round pipe shear die
- + Bar shear die for round, square and angle
- + Gauging table kit and fabricator's guard

M50 · M55 · M60 — TECHNICAL SPECIFICATIONS

Model	M50	M55	M60
Punching	1" hole in 5/8" plate	1-1/16" hole in 5/8" plate	1-1/16" hole in 5/8" plate
Flat bar shear	10 × 1/2"; 4 × 3/4"	12 × 5/8" or 14 × 3/8"; 4 × 3/4"	12 × 5/8" or 14 × 3/8"; 4 × 3/4"
Angle shear	4 × 4 × 1/4" or 3 × 3 × 3/8"	4 × 4 × 1/4" or 3 × 3 × 3/8"	4 × 4 × 3/8" or 3 × 3 × 1/2"
Rated force	50 tons	55 tons	60 tons
Throat depth	7-1/2"	7-1/2"	7-1/2"
Open / shut height	8" / 6-3/4"	8" / 6-3/4"	8" / 6-3/4"
Stroke	1-1/4"	1-1/4"	1-1/4"
Motor	5.5 HP (4 kW)	6 HP (4.5 kW)	7 HP (5 kW)
Packing size L × W × H	43 × 44 × 59" (108 × 113 × 151 cm)	45 × 44 × 60" (115 × 113 × 152 cm)	48 × 44 × 60" (123 × 113 × 152 cm)
Weight	1,477 lb (670 kg)	1,819 lb (825 kg)	2,328 lb (1,056 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.