NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

# ROLLS, BENDERS AND TUBE MACHINES

## PROFILE AND RING BENDERS · PLATE ROLLS AND SLIP ROLLS · TUBE AND PIPE BENDERS · TUBE NOTCHERS AND END GRINDERS · HORIZONTAL BENDERS







**China**
MADE IN CHINA

**13**
MACHINE FAMILIES

**1-year**
WARRANTY

**Canada**
PARTS & TECHNICAL SUPPORT

VALUE-LINE ROLLS, BENDERS AND TUBE MACHINES

# CONTENTS

## RING ROLLERS, PROFILE BENDERS AND TUBE ROLLERS

RBM40HV – HRBM65 profile benders, Ø1-9/16 – 2-1/2″ shafts RBM40HV – HRBM65 · 6 models ..... 04

ERBM10HV – RBM30HV motorized ring rollers, Ø13/16 – 1-3/16″ shafts ERBM10HV – RBM30HV · 4 models ..... 08

ETR-50 electric tube roller and CRB-76 decorative ring roller ETR-50 · CRB-76 · 2 models ..... 12

## HYDRAULIC SLIP ROLLS

HER hydraulic slip rolls, 12 ga – 1/2″ × 4 – 10 ft HER-1300×6.5 – HER-3050×3.5 · 12 models ..... 14

## SLIP ROLLS

ESR electric slip rolls, 22 ga – 1/4″ × 3.3 – 10 ft ESR-1020×2 – ESR3050×3.5E · 16 models ..... 16

## TUBE AND PIPE BENDERS

EHB-10 electric hydraulic pipe bender, 11 US tons, 1/2 – 2″ pipe EHB-10 · 1 model ..... 20

TB-3A · TB-3B · TB-3C · HTB-1000 benders for 2″ schedule 40 pipe — air and electric hydraulic TB-3A – HTB-1000 · 4 models ..... 21

TBM-60 electric bender and HTB-25T 25-ton hydraulic tubing bender HTB-25T · TBM-60 · 2 models ..... 23

HTB-2000 exhaust tube bender and HTES-3000 expander-swager HTB-2000 · HTES-3000 · 2 models ..... 25

JTB-40 · JTB-50 · JTB-80 hydraulic PLC tube benders, to 3-1/8″ JTB-40 · JTB-50 · JTB-80 · 3 models ..... 26

## TUBE END GRINDERS

PRS tube and profile end grinders — belt notchers, Ø3/4 – 5-3/4″ PRS-76A – PRS-150 · 4 models ..... 27

## TUBE AND PIPE NOTCHERS

PTN-30 hole-saw notcher, UTN40 end-mill notchers and PTN-12U PTN-30 – PTN-12U · 4 models ..... 30

## HYDRAULIC HORIZONTAL BENDERS

HB-10T · HB-25T · HB-40T hydraulic horizontal benders HB-10T · HB-25T · HB-40T · 3 models ..... 32

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

# YOUR CANADIAN SOURCE FOR VALUE-LINE ROLLS, BENDERS AND TUBE MACHINES

Sales, installation, parts and technical support across Canada.

**NovoTech Machine Tools Inc.** supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

# BENDING AND TUBE MACHINES FOR THE FABRICATION SHOP

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.

Machines that bend and shape bar, sections, plate and tube: profile and ring benders that roll angle, flat bar and tube into rings, plate rolls and slip rolls, hydraulic and manual tube and pipe benders, tube notchers and belt tube-end grinders that cope tube for welding, and hydraulic horizontal benders for flat bar.

RBM40HV – HRBM65 · 6 MODELS

# RBM40HV – HRBM65 PROFILE BENDERS, Ø1-9/16 – 2-1/2" SHAFTS



**MODEL** RBM · RBM50HV PROFILE BENDER WITH Ø2" SHAFTS AND FOOT PEDAL



HRBM50HV profile bender with hydraulic top roll and pedestal control



HRBM65 hydraulic profile bender with Ø2-1/2" shafts and mobile control panel

## Shafts Ø1-9/16 – 2-1/2"

Motorized three-roll profile benders that roll flat bar, square and round bar, angle, channel, tee and square and rectangular tube into rings and arcs, horizontally or vertically: one combination roll set does every profile in the table. The H models move the top roll hydraulically; the HRBM65 has Ø2-1/2" shafts, a hydraulic drive and a mobile control panel and rolls 4-3/4 × 1" flat bar the easy way and 3-1/8 × 1" on edge. Rolls for round tube and special profiles — also in nylon — are made to order.

### STANDARD FEATURES

- Shafts Ø1-9/16" (40 mm), Ø2" (50 mm) and Ø2-1/2" (65 mm); 2 – 3 HP; 9 – 9.3 rpm
- Horizontal and vertical operation (HV models)
- Hydraulic top roll on the HRBM models
- One standard combination roll set for all listed profiles
- Foot pedal; special rolls (also nylon) to order

### OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS


# RBM40HV – HRBM65 PROFILE BENDERS, Ø1-9/16 – 2-1/2" SHAFTS



HRBM40HV profile bender with hydraulic top roll and pressure gauge



RBM40HV profile bender, horizontal and vertical, with foot pedal

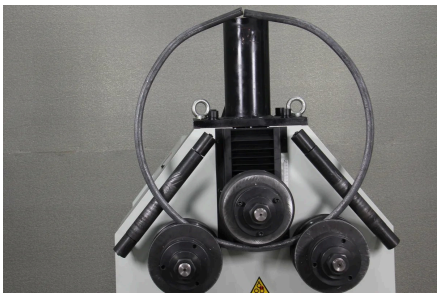

Rolling a ring of round tube on the HRBM profile bender — the three rolls and the top-roll screw

TECHNICAL SPECIFICATIONS · 1 / 2

# RBM40HV – HRBM65 PROFILE BENDERS, Ø1-9/16 – 2-1/2" SHAFTS

## RBM40HV · HRBM40HV · RBM50 · RBM50HV · HRBM50HV · HRBM65

Profile benders with Ø1-9/16 – 2-9/16" shafts — H models with hydraulic top roll

| Model | RBM40HV | HRBM40HV | RBM50 | RBM50HV | HRBM50HV | HRBM65 |
|---|---|---|---|---|---|---|
| Shaft diameter | **Ø1-9/16" (40 mm)** | **Ø1-9/16" (40 mm)** | **Ø1-15/16" (50 mm)** | **Ø1-15/16" (50 mm)** | **Ø1-15/16" (50 mm)** | **Ø2-1/2" (65 mm)** |
| Motor | **2 HP (1.5 kW), 9.3 rpm** | **2 HP (1.5 kW), 9.3 rpm** | **3 HP (2.2 kW), 9 rpm** | **3 HP (2.2 kW), 9 rpm** | **3 HP (2.2 kW), 9 rpm** | **3 HP (2.2 kW), 9.3 rpm, hydraulic drive** |
| Top roll | Manual | Hydraulic | Manual | Manual | Hydraulic | Hydraulic |
| Working position | Horizontal and vertical | Horizontal and vertical | Vertical | Horizontal and vertical | Horizontal and vertical | Horizontal and vertical |
| Flat bar on edge (hard way) | **2 × 3/8" (50 × 10 mm), min. Ø23.6" (600 mm)** | **2 × 3/8" (50 × 10 mm), min. Ø23.6" (600 mm)** | **2-3/8 × 3/8" (60 × 10 mm), min. Ø19.7" (500 mm)** | **2-3/8 × 3/8" (60 × 10 mm), min. Ø19.7" (500 mm)** | **2-3/8 × 3/8" (60 × 10 mm), min. Ø19.7" (500 mm)** | **3-1/8 × 1" (80 × 25 mm), min. Ø23.6" (600 mm)** |
| Flat bar flat (easy way) | **2 × 13/16" (50 × 20 mm), min. Ø31.5" (800 mm)** | **2 × 13/16" (50 × 20 mm), min. Ø31.5" (800 mm)** | **4 × 9/16" (100 × 15 mm), min. Ø36.2" (920 mm)** | **4 × 9/16" (100 × 15 mm), min. Ø36.2" (920 mm)** | **4 × 9/16" (100 × 15 mm), min. Ø36.2" (920 mm)** | **4-3/4 × 1" (120 × 25 mm), min. Ø23.6" (600 mm)** |
| Square bar | 13/16 × 13/16" (20 × 20 mm), min. Ø31.5" (800 mm) | 13/16 × 13/16" (20 × 20 mm), min. Ø31.5" (800 mm) | 1 × 1" (25 × 25 mm), min. Ø25.6" (650 mm) | 1 × 1" (25 × 25 mm), min. Ø25.6" (650 mm) | 1 × 1" (25 × 25 mm), min. Ø25.6" (650 mm) | 1-3/8 × 1-3/8" (35 × 35 mm), min. Ø21.7" (550 mm) |
| T-bar, stem out | 2 × 2 × 1/4" (50 × 50 × 6 mm), min. Ø23.6" (600 mm) | 2 × 2 × 1/4" (50 × 50 × 6 mm), min. Ø23.6" (600 mm) | 2-3/8 × 2-3/8 × 1/4" (60 × 60 × 7 mm), min. Ø29.5" (750 mm) | 2-3/8 × 2-3/8 × 1/4" (60 × 60 × 7 mm), min. Ø29.5" (750 mm) | 2-3/8 × 2-3/8 × 1/4" (60 × 60 × 7 mm), min. Ø29.5" (750 mm) | 3-1/8 × 1-9/16 × 1/4" (80 × 40 × 7 mm), min. Ø19.7" (500 mm) |
| T-bar, stem in | 2 × 2 × 1/4" (50 × 50 × 6 mm), min. Ø23.6" (600 mm) | 2 × 2 × 1/4" (50 × 50 × 6 mm), min. Ø23.6" (600 mm) | 2-3/8 × 2-3/8 × 1/4" (60 × 60 × 7 mm), min. Ø29.5" (750 mm) | 2-3/8 × 2-3/8 × 1/4" (60 × 60 × 7 mm), min. Ø29.5" (750 mm) | 2-3/8 × 2-3/8 × 1/4" (60 × 60 × 7 mm), min. Ø29.5" (750 mm) | 3-1/8 × 1-9/16 × 1/4" (80 × 40 × 7 mm), min. Ø15.7" (400 mm) |
| Channel, flanges out | 2 × 1-7/16 × 3/16" (50 × 37 × 4.5 mm), min. Ø23.6" (600 mm) | 2 × 1-7/16 × 3/16" (50 × 37 × 4.5 mm), min. Ø23.6" (600 mm) | 2-1/2 × 1-9/16 × 3/16" (65 × 40 × 5 mm), min. Ø21.7" (550 mm) | 2-1/2 × 1-9/16 × 3/16" (65 × 40 × 5 mm), min. Ø21.7" (550 mm) | 2-1/2 × 1-9/16 × 3/16" (65 × 40 × 5 mm), min. Ø21.7" (550 mm) | 4 × 2 × 1/4" (100 × 50 × 6 mm), min. Ø23.6" (600 mm) |
| Channel, flanges in | 2 × 1-7/16 × 3/16" (50 × 37 × 4.5 mm), min. Ø23.6" (600 mm) | 2 × 1-7/16 × 3/16" (50 × 37 × 4.5 mm), min. Ø23.6" (600 mm) | 3-1/8 × 1-3/4 × 1/4" (80 × 45 × 6 mm), min. Ø25.6" (650 mm) | 3-1/8 × 1-3/4 × 1/4" (80 × 45 × 6 mm), min. Ø25.6" (650 mm) | 3-1/8 × 1-3/4 × 1/4" (80 × 45 × 6 mm), min. Ø25.6" (650 mm) | 4 × 2 × 1/4" (100 × 50 × 6 mm), min. Ø23.6" (600 mm) |
| Angle, leg out | 2 × 2 × 3/16" (50 × 50 × 5 mm), min. Ø19.7" (500 mm) | 2 × 2 × 3/16" (50 × 50 × 5 mm), min. Ø19.7" (500 mm) | 2-3/8 × 2-3/8 × 3/16" (60 × 60 × 5 mm), min. Ø19.7" (500 mm) | 2-3/8 × 2-3/8 × 3/16" (60 × 60 × 5 mm), min. Ø19.7" (500 mm) | 2-3/8 × 2-3/8 × 3/16" (60 × 60 × 5 mm), min. Ø19.7" (500 mm) | 2-3/4 × 2-3/4 × 1/4" (70 × 70 × 6 mm), min. Ø19.7" (500 mm) |
| Angle, leg in | 2 × 2 × 3/16" (50 × 50 × 5 mm), min. Ø19.7" (500 mm) | 2 × 2 × 3/16" (50 × 50 × 5 mm), min. Ø19.7" (500 mm) | 2-3/8 × 2-3/8 × 3/16" (60 × 60 × 5 mm), min. Ø27.6" (700 mm) | 2-3/8 × 2-3/8 × 3/16" (60 × 60 × 5 mm), min. Ø27.6" (700 mm) | 2-3/8 × 2-3/8 × 3/16" (60 × 60 × 5 mm), min. Ø27.6" (700 mm) | 2-3/4 × 2-3/4 × 1/4" (70 × 70 × 6 mm), min. Ø23.6" (600 mm) |
| Round bar | **Ø1-3/16" (30 mm), min. Ø25.6" (650 mm)** | **Ø1-3/16" (30 mm), min. Ø25.6" (650 mm)** | **Ø1-3/8" (35 mm), min. Ø23.6" (600 mm)** | **Ø1-3/8" (35 mm), min. Ø23.6" (600 mm)** | **Ø1-3/8" (35 mm), min. Ø23.6" (600 mm)** | **Ø1-9/16" (40 mm), min. Ø19.7" (500 mm)** |

TECHNICAL SPECIFICATIONS · 2 / 2

# RBM40HV – HRBM65 PROFILE BENDERS, Ø1-9/16 – 2-1/2" SHAFTS

## RBM40HV · HRBM40HV · RBM50 · RBM50HV · HRBM50HV · HRBM65 (CONTINUED)

Profile benders with Ø1-9/16 – 2-9/16" shafts — H models with hydraulic top roll

| Model | RBM40HV | HRBM40HV | RBM50 | RBM50HV | HRBM50HV | HRBM65 |
|---|---|---|---|---|---|---|
| **Square tube** | 2 × 2 × 0.098" (50 × 50 × 2.5 mm), min. Ø27.6" (700 mm) | 2 × 2 × 0.098" (50 × 50 × 2.5 mm), min. Ø27.6" (700 mm) | 2 × 2 × 0.118" (50 × 50 × 3 mm), min. Ø21.7" (550 mm) | 2 × 2 × 0.118" (50 × 50 × 3 mm), min. Ø21.7" (550 mm) | 2 × 2 × 0.118" (50 × 50 × 3 mm), min. Ø21.7" (550 mm) | 2 × 2 × 0.118" (50 × 50 × 3 mm), min. Ø23.6" (600 mm) |
| **Rectangular tube** | 2 × 1 × 0.098" (50 × 25 × 2.5 mm), min. Ø31.5" (800 mm) | 2 × 1 × 0.098" (50 × 25 × 2.5 mm), min. Ø31.5" (800 mm) | 2-3/4 × 2 × 0.118" (70 × 50 × 3 mm), min. Ø47.2" (1200 mm) | 2-3/4 × 2 × 0.118" (70 × 50 × 3 mm), min. Ø47.2" (1200 mm) | 2-3/4 × 2 × 0.118" (70 × 50 × 3 mm), min. Ø47.2" (1200 mm) | 2-3/8 × 1-9/16 × 0.118" (60 × 40 × 3 mm), min. Ø31.5" (800 mm) |
| **Round tube (optional special rolls)** | **Ø1-3/16 – 2-3/4 × 0.08" (30 – 70 × 2 mm), min. Ø27.6" (700 mm)** | **Ø1-3/16 – 2-3/4 × 0.08" (30 – 70 × 2 mm), min. Ø27.6" (700 mm)** | **Ø1-3/16 – 2-3/4 × 0.08" (30 – 70 × 2 mm), min. Ø23.6" (600 mm)** | **Ø1-3/16 – 2-3/4 × 0.08" (30 – 70 × 2 mm), min. Ø23.6" (600 mm)** | **Ø1-3/16 – 2-3/4 × 0.08" (30 – 70 × 2 mm), min. Ø23.6" (600 mm)** | **Ø2-3/8 × 0.08" (60 × 2 mm), min. Ø19.7" (500 mm); Ø3-15/16 × 0.08" (100 × 2 mm), min. Ø39.4" (1,000 mm)** |
| **Packing size L × W × H** | 55 × 37 × 53" (140 × 95 × 134 cm) | 53 × 37 × 73" (134 × 93 × 185 cm) | 39 × 32 × 61" (100 × 82 × 155 cm) | 39 × 32 × 60" (100 × 82 × 153 cm) | 48 × 32 × 71" (122 × 82 × 180 cm) | 48 × 43 × 74" (122 × 110 × 188 cm) |
| **Weight** | **937 lb (425 kg)** | **1,080 lb (490 kg)** | **992 lb (450 kg)** | **1,014 lb (460 kg)** | **1,135 lb (515 kg)** | **1,587 lb (720 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ERBM10HV – RBM30HV · 4 MODELS

# ERBM10HV – RBM30HV MOTORIZED RING ROLLERS, Ø13/16 – 1-3/16" SHAFTS



**MODEL** RBM · RBM30HV RING ROLLER, HORIZONTAL AND VERTICAL, WITH PEDESTAL CONTROL



RBM20 ring roller with LED top-roll readout and foot pedal



ERBM10HV motorized ring roller, horizontal and vertical, with foot pedal

## Shafts Ø13/16 – 1-3/16"

Small motorized ring rollers for flat bar, square and round bar, light angle, channel and tube — railings, gates, frames and ornamental work: the ERBM10HV, RBM30 and RBM30HV with a motor and foot pedal — the HV models horizontal and vertical — and the RBM20 with two driven rolls, an LED readout for the top roll and single-phase or 3-phase power.

### STANDARD FEATURES

- ✓ Shafts Ø13/16" (20 mm) and Ø1-3/16" (30 mm); 3/4 – 1.5 HP; 8 – 12 rpm
- ✓ Flat bar on edge to 1-3/16 × 3/8", the easy way to 2 × 9/16"
- ✓ Foot pedal; horizontal and vertical working position on the HV models
- ✓ RBM20: LED top-roll readout, two driven rolls, 1-phase or 3-phase

### OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS

# ERBM10HV – RBM30HV MOTORIZED RING ROLLERS, Ø13/16 – 1-3/16" SHAFTS



RBM30 motorized ring roller with foot pedal



Combination roll set of the ring roller

TECHNICAL SPECIFICATIONS · 1 / 2

# ERBM10HV – RBM30HV MOTORIZED RING ROLLERS, Ø13/16 – 1-3/16" SHAFTS

## ERBM10HV · RBM20 · RBM30 · RBM30HV

Motorized ring rollers with Ø13/16 – 1-3/16" shafts

| Model | ERBM10HV | RBM20 | RBM30 | RBM30HV |
|---|---|---|---|---|
| Shaft diameter | **Ø1-3/16" (30 mm)** | **Ø13/16" (20 mm)** | **Ø1-3/16" (30 mm)** | **Ø1-3/16" (30 mm)** |
| Drive | **1.5 HP (1.1 kW), 8 rpm, foot pedal** | **1 HP (0.75 kW) 1-phase or 3/4 HP (0.55 kW) 3-phase, 12 rpm, two driven rolls** | **1.5 HP (1.1 kW), 9 rpm, foot pedal** | **1 HP (0.75 kW), 9 rpm, foot pedal** |
| Working position | Horizontal and vertical | Vertical | Vertical | Horizontal and vertical |
| Top roll readout | – | LED readout | – | – |
| Flat bar on edge (hard way) | **1-3/16 × 3/8" (30 × 10 mm), min. Ø19.7" (500 mm)** | **1 × 1/4" (25 × 6 mm), min. Ø7.9" (200 mm)** | **1-3/16 × 3/8" (30 × 10 mm), min. Ø12.6" (320 mm)** | **–** |
| Flat bar flat (easy way) | **2 × 3/8" (50 × 10 mm), min. Ø15.7" (400 mm)** | **1-3/4 × 3/8" (45 × 10 mm), min. Ø11.8" (300 mm)** | **–** | **2 × 9/16" (50 × 15 mm), min. Ø13.8" (350 mm)** |
| Square bar | 13/16 × 13/16" (20 × 20 mm), min. Ø19.7" (500 mm) | 1/2 × 1/2" (12 × 12 mm), min. Ø4.3" (110 mm) | – | – |
| T-bar, stem out | – | 1 × 1 × 5/32" (25 × 25 × 4 mm), min. Ø7.9" (200 mm) | – | 2 × 2 × 3/16" (50 × 50 × 5 mm), min. Ø15.7" (400 mm) |
| T-bar, stem in | – | 1 × 1 × 5/32" (25 × 25 × 4 mm), min. Ø7.9" (200 mm) | – | 2 × 2 × 3/16" (50 × 50 × 5 mm), min. Ø15.7" (400 mm) |
| Channel, flanges out | – | 1-3/16 × 9/16 × 5/32" (30 × 15 × 4 mm), min. Ø9.8" (250 mm) | – | 2 × 1 × 3/16" (50 × 25 × 5 mm), min. Ø15.7" (400 mm) |
| Channel, flanges in | – | 1-3/16 × 9/16 × 5/32" (30 × 15 × 4 mm), min. Ø9.8" (250 mm) | – | 2 × 1 × 3/16" (50 × 25 × 5 mm), min. Ø11.8" (300 mm) |
| Angle, leg out | – | 13/16 × 13/16 × 5/32" (20 × 20 × 4 mm), min. Ø5.9" (150 mm) | – | 1-9/16 × 1-9/16 × 3/16" (40 × 40 × 5 mm), min. Ø15.7" (400 mm) |
| Angle, leg in | – | 13/16 × 13/16 × 5/32" (20 × 20 × 4 mm), min. Ø7.9" (200 mm) | – | 1-9/16 × 1-9/16 × 3/16" (40 × 40 × 5 mm), min. Ø15.7" (400 mm) |
| Round bar | **–** | **Ø1/2" (12 mm), min. Ø4.7" (120 mm)** | **Ø5/8" (16 mm), min. Ø15.7" (400 mm)** | **Ø1-3/16" (30 mm), min. Ø23.6" (600 mm)** |
| Square tube | – | 13/16 × 13/16 × 0.059" (20 × 20 × 1.5 mm), min. Ø9.8" (250 mm) | 1-3/16 × 1-3/16 × 0.039" (30 × 30 × 1 mm), min. Ø35.4" (900 mm) | 1-9/16 × 1-9/16 × 0.118" (40 × 40 × 3 mm), min. Ø39.4" (1000 mm) |
| Rectangular tube | – | 1-3/16 × 3/8 × 0.059" (30 × 10 × 1.5 mm), min. Ø11.8" (300 mm) | – | 2 × 1-3/16 × 0.118" (50 × 30 × 3 mm), min. Ø47.2" (1200 mm) |
| Round tube | **–** | **Ø3/8 × 0.06" (10 × 1.5 mm), min. Ø3.1" (80 mm); Ø3/4" pipe, min. Ø15.7" (400 mm); Ø1-3/16 × 0.06" (30 × 1.5 mm), min. Ø15.7" (400 mm)** | **Ø13/16 × 0.04" (20 × 1 mm), min. Ø19.7" (500 mm); Ø1-3/16 × 0.04" (30 × 1 mm), min. Ø31.5" (800 mm)** | **Ø1-3/8 – 2-3/8 × 0.08" (35 – 60 × 2 mm), min. Ø39.4" (1,000 mm), optional special rolls** |

TECHNICAL SPECIFICATIONS · 2 / 2

# ERBM10HV – RBM30HV MOTORIZED RING ROLLERS, Ø13/16 – 1-3/16" SHAFTS

## ERBM10HV · RBM20 · RBM30 · RBM30HV (CONTINUED)

Motorized ring rollers with Ø13/16 – 1-3/16" shafts

| Model | ERBM10HV | RBM20 | RBM30 | RBM30HV |
|---|---|---|---|---|
| **Packing size L × W × H** | 37 × 31 × 53" (95 × 80 × 135 cm) | 39 × 19 × 54" (98 × 47 × 138 cm) + base 28 × 18 × 31" (70 × 45 × 80 cm) | 37 × 24 × 59" (93 × 62 × 150 cm) | 46 × 30 × 50" (116 × 75 × 127 cm) |
| **Weight** | **518 lb (235 kg)** | **265 lb (120 kg)** | **470 lb (213 kg)** | **494 lb (224 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ETR-50 · CRB-76 · 2 MODELS

# ETR-50 ELECTRIC TUBE ROLLER AND CRB-76 DECORATIVE RING ROLLER



MODEL ETR-50 · ETR-50 ELECTRIC TUBE ROLLER WITH FOOT PEDAL



CRB-76 decorative ring roller for tube and flat bar



Formers of the decorative ring roller

## Tube to Ø3"

Two motorized rollers for tube and pipe: the ETR-50 rolls 1/2 – 2" round tube, 1/4 – 1-1/2" pipe and 1/2 – 1" square tube into arcs and rings with CNC-machined dies, a 1/2 HP motor and a foot pedal; the CRB-76 rolls decorative rings and scrolls in round and square tube and flat bar on formers from Ø5/8 to 3" — the metal-craft machine for gates, railings and furniture.

### STANDARD FEATURES

- ETR-50: round tube 1/2 – 2", pipe 1/4 – 1-1/2", square tube 1/2 – 1" with optional rolls
- ETR-50: 1/2 HP (0.37 kW) motor, foot pedal, 1- or 3-phase
- CRB-76: round tube formers Ø5/8 – 3", square tube formers 5/8 – 2", walls 0.02 – 0.08"
- CRB-76: 1.5 HP (1.1 kW)

### OPTIONAL EQUIPMENT

### ETR-50 — TECHNICAL SPECIFICATIONS

| Model | ETR-50 |
|---|---|
| Capacity | Round tube 1/2 – 2", pipe 1/4 – 1-1/2", square tube 1/2 – 1" with optional rolls |
| Standard rolls | 1-1/2" round tube |
| Drive | 1/2 HP (0.37 kW) motor, foot pedal, 1- or 3-phase |
| Weight | 126 lb (57 kg) |

TECHNICAL SPECIFICATIONS

# ETR-50 ELECTRIC TUBE ROLLER AND CRB-76 DECORATIVE RING ROLLER

## CRB-76

Decorative ring roller for tube and flat bar — metal-craft rings and scrolls

| Model | CRB-76 |
|---|---|
| Round tube formers | Ø5/8, 3/4, 7/8, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3" (Ø16, 19, 22, 25, 32, 38, 51, 63, 76 mm) |
| Square tube formers | 5/8, 3/4, 7/8, 1, 1-3/16, 1-1/2, 1-9/16, 2" (16, 19, 22, 25, 30, 38, 40, 50 mm) |
| Wall thickness | 0.02 – 0.08" (0.5 – 2 mm) |
| Motor | 1.5 HP (1.1 kW) |
| Packing size L × W × H | 22 × 36 × 47" (56 × 92 × 120 cm) |
| Weight | 661 lb (300 kg) |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HER-1300×6.5 – HER-3050×3.5 · 12 MODELS

# HER HYDRAULIC SLIP ROLLS, 12 GA – 1/2″ × 4 – 10 FT



**MODEL** HER · HER-1300×6.5 HYDRAULIC SLIP ROLL WITH DIGITAL REAR-ROLL READOUT ON THE CONTROL PEDESTAL



HER-2070×6.5 hydraulic slip roll, 1/4″ × 81″

## 12 ga – 1/2″ × 4 – 10 ft

Three-roll slip rolls with all three rolls driven hydraulically: the pinch-roll cylinders move in sync, a digital counter shows the pinch-roll position, the rolls are alloy steel hardened to HRC 55, the top roll swings out to take off a closed cylinder, and a foot pedal runs forward and reverse. 1/4″ over 4′ 3″ to 8′ 2″, 3/16″ over 5′ 1″ and 6′ 8″, 5/16″ over 8′ 2″, 1/2″ over 6′ 7″, and 12 – 10 ga over 8′ 3″ and 9′ 11″.

### STANDARD FEATURES

- Rolling capacity 12 ga to 1/2″ (2.5 – 12 mm) × 4′ 3″ – 9′ 11″
- All three rolls driven hydraulically; pinch rolls synchronized
- Digital pinch-roll position counter
- Rolls HRC 55; top roll swings out; forward / reverse foot pedal
- 3 – 7.5 HP

### OPTIONAL EQUIPMENT

TECHNICAL SPECIFICATIONS

# HER HYDRAULIC SLIP ROLLS, 12 GA – 1/2″ × 4 – 10 FT

## HER HYDRAULIC SLIP ROLLS

3-roll slip rolls with hydraulic drive on all rolls, 12 ga – 1/2″ × 4 – 10 ft

| Model | HER-1300×6.5 | HER-1550×4.5 | HER-1550×6.5 | HER-2070×4.5 | HER-2070×6.5 | HER-2000×12 | HER-2500×8 | HER-2500×6.5 | HER-2550×2.5 | HER-2550×3.5 | HER-3050×2.5 | HER-3050×3.5 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Working width** | **4′ 3″ (1,300 mm)** | **5′ 1″ (1,550 mm)** | **5′ 1″ (1,550 mm)** | **6′ 8″ (2,070 mm)** | **6′ 8″ (2,070 mm)** | **6′ 7″ (2,000 mm)** | **8′ 2″ (2,500 mm)** | **8′ 2″ (2,500 mm)** | **8′ 3″ (2,510 mm)** | **8′ 3″ (2,510 mm)** | **9′ 11″ (3,010 mm)** | **9′ 11″ (3,010 mm)** |
| **Capacity, mild steel** | **1/4″ (6.5 mm)** | **3/16″ (4.5 mm)** | **1/4″ (6.5 mm)** | **3/16″ (4.5 mm)** | **1/4″ (6.5 mm)** | **1/2″ (12 mm)** | **5/16″ (8 mm)** | **1/4″ (6.5 mm)** | **12 ga (2.5 mm)** | **10 ga (3.5 mm)** | **12 ga (2.5 mm)** | **10 ga (3.5 mm)** |
| **Roll diameter** | **Ø6″ (151 mm)** | **Ø6″ (151 mm)** | **Ø7-1/8″ (181 mm)** | **Ø7-1/8″ (181 mm)** | **Ø7-1/2″ (191 mm)** | **Ø9-1/2″ (240 mm)** | **Ø9-1/2″ (240 mm)** | **Ø7-7/8″ (200 mm)** | **Ø5-1/2″ (140 mm)** | **Ø5-7/8″ (150 mm)** | **Ø6-1/4″ (160 mm)** | **Ø6-3/4″ (170 mm)** |
| **Min. rolling diameter** | Ø6-3/4″ (170 mm) | Ø6-3/4″ (170 mm) | Ø7-7/8″ (200 mm) | Ø7-7/8″ (200 mm) | Ø8-1/2″ (215 mm) | Ø16-1/2″ (420 mm) | Ø16-1/2″ (420 mm) | Ø8-5/8″ (220 mm) | Ø6-1/4″ (160 mm) | Ø6-3/4″ (170 mm) | Ø7-1/8″ (180 mm) | Ø7-1/2″ (190 mm) |
| **Roll speed at 60 Hz** | 5 rpm | 5 rpm | 5 rpm | 5 rpm | 5 rpm | 4 rpm | 4 rpm | 5 rpm | 5 rpm | 5 rpm | 5 rpm | 5 rpm |
| **Motor** | **3 HP (2.2 kW)** | **5.5 HP (4 kW)** | **5.5 HP (4 kW)** | **5.5 HP (4 kW)** | **5.5 HP (4 kW)** | **7.5 HP (5.5 kW)** | **7.5 HP (5.5 kW)** | **7.5 HP (5.5 kW)** | **3 HP (2.2 kW)** | **4 HP (3 kW)** | **5.5 HP (4 kW)** | **7.5 HP (5.5 kW)** |
| **Packing size L × W × H** | 95 × 43 × 57″ (241 × 108 × 144 cm) | 105 × 43 × 57″ (266 × 108 × 144 cm) | 105 × 44 × 58″ (267 × 111 × 147 cm) | 124 × 43 × 60″ (315 × 109 × 152 cm) | 126 × 44 × 58″ (319 × 111 × 148 cm) | 123 × 46 × 60″ (313 × 116 × 152 cm) | 140 × 41 × 58″ (355 × 104 × 147 cm) | 142 × 44 × 58″ (361 × 111 × 147 cm) | 142 × 43 × 61″ (361 × 108 × 154 cm) | 142 × 43 × 61″ (361 × 108 × 154 cm) | 162 × 43 × 61″ (411 × 108 × 154 cm) | 164 × 44 × 57″ (416 × 111 × 144 cm) |
| **Weight** | **4,123 lb (1,870 kg)** | **5,490 lb (2,490 kg)** | **5,666 lb (2,570 kg)** | **6,327 lb (2,870 kg)** | **6,856 lb (3,110 kg)** | **7,672 lb (3,480 kg)** | **7,330 lb (3,325 kg)** | **7,628 lb (3,460 kg)** | **4,960 lb (2,250 kg)** | **5,049 lb (2,290 kg)** | **5,688 lb (2,580 kg)** | **6,900 lb (3,130 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine. Speeds marked "rated at 50 Hz" are the manufacturer's 50 Hz figures — motors run about 20 % faster on 60 Hz power.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ESR-1020×2 – ESR3050×3.5E · 16 MODELS

# ESR ELECTRIC SLIP ROLLS, 22 GA – 1/4″ × 3.3 – 10 FT



**MODEL** ESR · ESR-1300×2.5 ELECTRIC SLIP ROLL WITH WIRE GROOVES, CONE ROLLING AND FOOT PEDAL



ESR-1300×4.5E electric slip roll with digital rear-roll readout on the pedestal control



ESR-1300×1.5 electric slip roll, 16 ga × 51″, with foot pedal

## 22 ga – 1/4″ × 3.3 – 10 ft

Motorized three-roll slip rolls for HVAC, duct and sheet-metal work: a fixed top roll, adjustable lower and rear rolls of high-strength steel, wire grooves, a top roll that swings out over a cam lock and cone rolling. From the ESR-1020×2 for 14 ga over 40″ to 1/4″ over 51″, 3/16″ over 61″ and 10 ga over 80″ and 10 ft; the E models have a motorized rear roll with a digital position readout.

### STANDARD FEATURES

- Rolling capacity 22 ga to 1/4″ (0.8 – 6.5 mm) × 40 – 118″
- Fixed top roll, adjustable lower and rear rolls; wire grooves; cone rolling
- Foot pedal; 1 – 7.5 HP
- ESR2550 / ESR3050 E: motorized rear roll with digital position readout
- Options: hand-wheel adjustment of the rear roll, fast lower-roll adjustment

### OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS

# ESR ELECTRIC SLIP ROLLS, 22 GA – 1/4" × 3.3 – 10 FT



ESR-1300×1.5E motorized slip roll, European design, with foot pedal



ESR-1300×4.5 electric slip roll, 3/16" × 51"



ESR-1550×3.5 electric slip roll, 10 ga × 61"



ESR-2550×2.5E / ESR-2550×3.5E electric slip rolls, 100" long, with the E-series control pedestal

TECHNICAL SPECIFICATIONS · 1 / 2

# ESR ELECTRIC SLIP ROLLS, 22 GA – 1/4" × 3.3 – 10 FT

## ESR ELECTRIC SLIP ROLLS

Motorized 3-roll slip rolls with foot pedal, 22 ga – 1/4" × 3.3 – 10 ft

| Model | ESR-1020×2 | ESR-1300×1.5 | ESR-1300×1.5E | ESR-1300×2.5 | ESR-1300×4.5 | ESR-1300×6.5 | ESR-1550×3.5 | ESR-1550×4.5 |
|---|---|---|---|---|---|---|---|---|
| Working width | 40.2" (1,020 mm) | 51.2" (1,300 mm) | 51.2" (1,300 mm) | 51.2" (1,300 mm) | 51.2" (1,300 mm) | 51.2" (1,300 mm) | 61" (1,550 mm) | 61" (1,550 mm) |
| Capacity, mild steel | 14 ga (2 mm) | 16 ga (1.5 mm) | 16 ga (1.5 mm) | 12 ga (2.5 mm) | 3/16" (4.5 mm) | 1/4" (6.5 mm) | 10 ga (3.5 mm) | 3/16" (4.5 mm) |
| Roll diameter | Ø2-3/8" (60 mm) | Ø3" (75 mm) | Ø2-3/8" (60 mm) | Ø3-1/2" (90 mm) | Ø4-3/4" (120 mm) | Ø5-7/8" (150 mm) | Ø4-3/4" (120 mm) | Ø5-7/8" (150 mm) |
| Min. rolling diameter | – | – | – | Ø3-7/8" (100 mm) | Ø5-1/8" (130 mm) | Ø6-3/4" (170 mm) | Ø5-1/8" (130 mm) | Ø9" (230 mm) |
| Roll speed at 60 Hz | – | – | – | 10.8 rpm | 11.2 rpm | 7.8 rpm | 11.2 rpm | 7.8 rpm |
| Motor | 1.5 HP (1.1 kW) 1-phase or 1 HP (0.75 kW) 3-phase | 1.5 HP (1.1 kW) 1-phase or 1 HP (0.75 kW) 3-phase | 1.5 HP (1.1 kW) 1-phase or 1 HP (0.75 kW) 3-phase | 2 HP (1.5 kW) | 3 HP (2.2 kW) | 4 HP (3 kW) | 3 HP (2.2 kW) | 4 HP (3 kW) |
| Back roll | Manual | Manual | Manual | Manual | Manual | Manual | Manual | Manual |
| Packing size L × W × H | 69 × 24 × 50" (174 × 60 × 126 cm) | 70 × 23 × 43" (179 × 59 × 110 cm) | 75 × 22 × 43" (190 × 55 × 108 cm) | 79 × 28 × 47" (200 × 70 × 120 cm) | 79 × 30 × 50" (200 × 76 × 127 cm) | 82 × 31 × 53" (208 × 80 × 134 cm) | 87 × 30 × 50" (222 × 76 × 127 cm) | 91 × 30 × 57" (230 × 77 × 145 cm) |
| Weight | 573 lb (260 kg) | 661 lb (300 kg) | 606 lb (275 kg) | 1,202 lb (545 kg) | 1,653 lb (750 kg) | 1,984 lb (900 kg) | 1,852 lb (840 kg) | 2,216 lb (1,005 kg) |

TECHNICAL SPECIFICATIONS · 2 / 2

# ESR ELECTRIC SLIP ROLLS, 22 GA – 1/4" × 3.3 – 10 FT

## ESR ELECTRIC SLIP ROLLS (CONTINUED)

Motorized 3-roll slip rolls with foot pedal, 22 ga – 1/4" × 3.3 – 10 ft

| Model | ESR-2020×3.5 | ESR-2070×2.5 | ESR-2070×3.5 | ESR-2500×0.8 | ESR2550×2.5E | ESR2550×3.5E | ESR3050×2.5E | ESR3050×3.5E |
|---|---|---|---|---|---|---|---|---|
| **Working width** | **79.5" (2,020 mm)** | **81.5" (2,070 mm)** | **81.5" (2,070 mm)** | **98.4" (2,500 mm)** | **98.8" (2,510 mm)** | **98.8" (2,510 mm)** | **118.5" (3,010 mm)** | **118.5" (3,010 mm)** |
| **Capacity, mild steel** | **10 ga (3.5 mm)** | **12 ga (2.5 mm)** | **10 ga (3.5 mm)** | **22 ga (0.8 mm)** | **12 ga (2.5 mm)** | **10 ga (3.5 mm)** | **12 ga (2.5 mm)** | **10 ga (3.5 mm)** |
| **Roll diameter** | **Ø5" (127 mm)** | **Ø4-3/4" (120 mm)** | **Ø5" (127 mm)** | **Ø3-1/2" (90 mm)** | **Ø5-1/2" (140 mm)** | **Ø5-7/8" (150 mm)** | **Ø6-1/4" (160 mm)** | **Ø6-3/4" (170 mm)** |
| **Min. rolling diameter** | Ø5-1/2" (140 mm) | Ø5-1/8" (130 mm) | Ø5-1/2" (140 mm) | Ø3-7/8" (100 mm) | Ø6-1/4" (160 mm) | Ø6-3/4" (170 mm) | Ø7-1/8" (180 mm) | Ø7-1/2" (190 mm) |
| **Roll speed at 60 Hz** | 7.8 rpm | 7.8 rpm | 7.8 rpm | 10.8 rpm | 7.8 rpm | 7.8 rpm | 7.8 rpm | 7.8 rpm |
| **Motor** | **4 HP (3 kW)** | **3 HP (2.2 kW)** | **4 HP (3 kW)** | **3 HP (2.2 kW)** | **4 HP (3 kW)** | **4 HP (3 kW)** | **5.5 HP (4 kW)** | **7.5 HP (5.5 kW)** |
| **Back roll** | Manual | Manual | Manual | Manual | Motorized lift, digital position readout | Motorized lift, digital position readout | Motorized lift, digital position readout | Motorized lift, digital position readout |
| **Packing size L × W × H** | 106 × 34 × 51" (270 × 87 × 130 cm) | 111 × 34 × 51" (282 × 87 × 130 cm) | 111 × 34 × 51" (282 × 87 × 130 cm) | 122 × 29 × 47" (310 × 74 × 120 cm) | 135 × 33 × 52" (342 × 83 × 132 cm) | 135 × 33 × 52" (342 × 83 × 132 cm) | 151 × 32 × 56" (384 × 82 × 142 cm) | 154 × 36 × 54" (391 × 91 × 136 cm) |
| **Weight** | **2,414 lb (1,095 kg)** | **2,337 lb (1,060 kg)** | **2,447 lb (1,110 kg)** | **1,720 lb (780 kg)** | **3,325 lb (1,508 kg)** | **3,371 lb (1,529 kg)** | **3,739 lb (1,696 kg)** | **4,810 lb (2,182 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine. Speeds marked "rated at 50 Hz" are the manufacturer's 50 Hz figures — motors run about 20 % faster on 60 Hz power.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

EHB-10 · 1 MODEL

# EHB-10 ELECTRIC HYDRAULIC PIPE BENDER, 11 US TONS, 1/2 – 2″ PIPE



MODEL EHB-10 · EHB-10 ELECTRIC-HYDRAULIC PIPE BENDER

## 1/2 – 2″ pipe

A push-type pipe bender for plumbing, electrical and maintenance work with an electric pump instead of a hand pump: the ram pushes the pipe into the bending die between two supports with 11 US tons, with dies for 1/2 to 2″ pipe — simple and fast where a little ovality is acceptable.

### STANDARD FEATURES

- 11 US tons (10 t); ram stroke 6.1″ (155 mm)
- Dies 1/2, 3/4, 1, 1-1/4, 1-1/2 and 2″
- Electric pump: 1 HP (0.75 kW) 1-phase or 3/4 HP (0.55 kW) 3-phase
- 117 lb (53 kg) — moves to the job

### OPTIONAL EQUIPMENT

### EHB-10 — TECHNICAL SPECIFICATIONS

| Model | EHB-10 |
|---|---|
| Force | **11 US tons (10 t)** |
| Pipe dies | **1/2, 3/4, 1, 1-1/4, 1-1/2, 2″** |
| Ram stroke | 6.1″ (155 mm) |
| Drive | **Electric pump: 1 HP (0.75 kW) 1-phase or 3/4 HP (0.55 kW) 3-phase** |
| Packing size L × W × H | 28 × 23 × 20″ (72 × 59 × 50 cm) |
| Weight | **117 lb (53 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TB-3A – HTB-1000 · 4 MODELS


# TB-3A · TB-3B · TB-3C · HTB-1000 BENDERS FOR 2″ SCHEDULE 40 PIPE — AIR AND ELECTRIC HYDRAULIC



MODEL TB-3 · TB-3A PIPE BENDER WITH 10-TON HYDRAULIC JACK ON A FLOOR PEDESTAL



TB-3B air-hydraulic pipe bender on caster stand with the foot-operated air pump



TB-3C electric-hydraulic pipe bender on caster stand with power pack and foot switch

## 2″ schedule 40 pipe

The bender family for 2″ schedule 40 pipe and roll-cage tube: the TB-3A with a 10-ton air / hydraulic jack on a pedestal; the TB-3B and TB-3C with a 10-ton cylinder and 12″ stroke on a caster stand with a die rack, air-hydraulic or electric-hydraulic; and the HTB-1000 electric-hydraulic bender, about three times faster than an air-hydraulic unit. Dies for 120°, 180° and 240°.

### STANDARD FEATURES

- 2″ schedule 40 pipe (0.154″ wall); centre-line radius 3 – 6″
- Standard dies 1″ × 3″, 1-1/2″ × 5″, 1-3/4″ × 6″ (120°)
- Optional round dies 3/4 – 2″ and square dies 3/4 – 1-1/2″; 120°, 180° and 240° dies
- TB-3B / TB-3C: 10-ton cylinder, 12″ stroke, caster stand with die rack
- HTB-1000: 1 HP electric-hydraulic, aluminum-bronze bushings at the pivots

### OPTIONAL EQUIPMENT

### TB-3A · TB-3B · TB-3C · HTB-1000 — TECHNICAL SPECIFICATIONS

| Model | TB-3A | TB-3B | TB-3C | HTB-1000 |
|---|---|---|---|---|
| **Capacity** | **2″ schedule 40 pipe (0.154″ wall)** | **2″ schedule 40 pipe (0.154″ wall)** | **2″ schedule 40 pipe (0.154″ wall)** | **2″ schedule 40 pipe (0.154″ wall)** |
| **Drive** | **10-ton air / hydraulic jack** | **10-ton air-hydraulic cylinder, 12″ stroke** | **10-ton electric-hydraulic cylinder, 12″ stroke** | **Electric hydraulic pump: 1 HP (0.75 kW) 1-phase or 3/4 HP (0.55 kW) 3-phase — about 3× faster than air-hydraulic** |
| **Centre-line radius** | 3 – 6″ | 3 – 6″ | 3 – 6″ | 3 – 6″ |
| **Standard dies** | **1″ × 3″, 1-1/2″ × 5″, 1-3/4″ × 6″ (120°)** | **1″ × 3″, 1-1/2″ × 5″, 1-3/4″ × 6″ (120°)** | **1″ × 3″, 1-1/2″ × 5″, 1-3/4″ × 6″ (120°)** | **1″ × 3″, 1-1/2″ × 5″, 1-3/4″ × 6″ (120°)** |
| **Optional dies** | Round 3/4 – 2″, square 3/4 – 1-1/2″; 120°, 180° and 240° dies | Round 3/4 – 2″, square 3/4 – 1-1/2″; 120°, 180° and 240° dies | Round 3/4 – 2″, square 3/4 – 1-1/2″; 120°, 180° and 240° dies | Round 3/4 – 2″, square 3/4 – 1-1/2″; 120°, 180° and 240° dies |
| **Stand** | Pedestal | Caster stand with die rack | Caster stand with die rack | Caster stand with die rack |
| **Packing size L × W × H** | — | — | — | 49 × 26 × 42″ (125 × 65 × 106 cm) |
| **Weight** | **—** | **—** | **—** | **245 lb (111 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

# TB-3A · TB-3B · TB-3C · HTB-1000 BENDERS FOR 2″ SCHEDULE 40 PIPE — AIR AND ELECTRIC HYDRAULIC



HTB-1000 electric-hydraulic pipe bender on caster stand

HTB-25T · TBM-60 · 2 MODELS

# TBM-60 ELECTRIC BENDER AND HTB-25T 25-TON HYDRAULIC TUBING BENDER



MODEL TBM-60 · HTB-25T 25-TON HYDRAULIC TUBING BENDER WITH AIR-HYDRAULIC PUMP



TBM-60 electric rotary-draw tube bender with foot pedal



HTB-25T on the optional floor stand

## Tube to 2-1/2"

Two benders for the fabrication shop and the roll-cage builder: the TBM-60 electric top bender bends tube, pipe, square, rectangular, solids and profiles from 1/4 to 2-1/2" OD to 180° at two speeds, with a remote foot pedal, transport wheels and an optional two-axis positioner; the HTB-25T puts 25 tons of air-hydraulic force on round and square tube 3/4 – 2" with walls to 0.125", portable, with an engraved reference scale for repeatable bends.

### STANDARD FEATURES

- ✓ TBM-60: 1/4 – 2-1/2" OD, 0 – 180°, 1.7 / 3.4 rpm, 2 HP, foot pedal
- ✓ HTB-25T: 25-ton hydraulic ram with air-hydraulic pump; 90° bends
- ✓ HTB-25T dies: 1" × 4" CLR standard; 3/4 – 2" round and square dies optional; floor stand optional
- ✓ TBM-60: one 1" tube kit standard; two-axis positioner optional

### OPTIONAL EQUIPMENT

### HTB-25T · TBM-60 — TECHNICAL SPECIFICATIONS

| Model | HTB-25T | TBM-60 |
|---|---|---|
| Capacity | Round and square tube 3/4 – 2" OD (19 – 50 mm), wall 0.065 – 0.125" (1.6 – 3 mm); mild steel, stainless, aluminum | Tube, pipe, square, rectangular and solid 1/4 – 2-1/2" OD |
| Drive | 25-ton hydraulic ram, air-hydraulic foot pump | 2 HP (1.5 kW), two speeds 1.7 / 3.4 rpm, foot pedal |
| Bend angle | 90° | 0 – 180° |
| Dies | 1" × 4" CLR standard; round 3/4 – 2" (CLR 4 – 8", 13 sets), 25 – 45 mm, square 3/4 – 2" (CLR 4 – 8") optional | 1" tube kit standard; dies to order; two-axis positioner optional |
| Packing size L × W × H | — | 39 × 24 × 52" (100 × 60 × 132 cm) |
| Weight | — | 474 lb (215 kg) |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

# TBM-60 ELECTRIC BENDER AND HTB-25T 25-TON HYDRAULIC TUBING BENDER



TBM-60 with the optional two-axis positioner

HTB-2000 · HTES-3000 · 2 MODELS

# HTB-2000 EXHAUST TUBE BENDER AND HTES-3000 EXPANDER-SWAGER



MODEL EXHAUST · HTB-2000 HYDRAULIC EXHAUST TUBE BENDER WITH TOOLING PACKAGE



HTES-3000 hydraulic tube expander and swager on portable cart

## Exhaust tube 1 – 3″

For the exhaust and muffler shop: the HTB-2000 hydraulic bender bends tube from 1 to 3″ with 58,000 lb of force, with a built-in swager / expander for end finishing, a knee-pad control, a depth-of-bend indicator and a complete tooling package; the HTES-3000 expands tube 1 – 3-1/2″ and swages 1 – 3″ on a portable cart.

### STANDARD FEATURES

- HTB-2000: tube 1 – 3″ OD, 0.098 – 0.118″ wall; 58,000 lb; 4 – 5.5 HP
- Tooling package: radius dies 3 – 5″, back shoes, collets, ball and swage dies, flare tool
- HTES-3000: expands 1 – 3-1/2″, swages 1 – 3″; 3,000 psi; Ø3.5″ cylinder, 6.5″ stroke
- Swivel casters with brakes

### OPTIONAL EQUIPMENT

### HTB-2000 · HTES-3000 — TECHNICAL SPECIFICATIONS

| Model | HTB-2000 | HTES-3000 |
|---|---|---|
| Capacity | **Bends tube 1 – 3″ OD; expands to 3″** | **Expands 1 – 3-1/2″, swages 1 – 3″; collets for 1 – 2-1/2″ OD** |
| Force / pressure | **58,000 lb bending force** | **3,000 psi; cylinder Ø3.5″ (90 mm), stroke 6.5″ (165 mm)** |
| Motor | **4 HP (3 kW) 3-phase or 5.5 HP (4 kW) 1-phase** | **5.5 HP (4 kW)** |
| Equipment | Tooling package (radius dies 3 – 5″ for 1-1/2 – 3″ tube, back shoes, collets, ball and swage dies, flare tool); knee-pad control; depth-of-bend indicator; safety guards; casters with brakes | Portable cart with swivel casters; adjustable collar; arbor tips, reducing dies, segments, ball and swage dies optional |
| Packing size L × W × H | 71 × 33 × 53″ (180 × 85 × 134 cm) | 45 × 20 × 39″ (115 × 50 × 100 cm) |
| Weight | **1,279 lb (580 kg)** | **631 lb (286 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

JTB-40 · JTB-50 · JTB-80 · 3 MODELS

# JTB-40 · JTB-50 · JTB-80 HYDRAULIC PLC TUBE BENDERS, TO 3-1/8"



**MODEL** JTB · JTB-40 HYDRAULIC TUBE BENDER WITH FOOT PEDAL



JTB-50 hydraulic PLC tube bender



JTB-80 hydraulic PLC tube bender for 3-1/8" tube

## Tube to Ø3-1/8"

Hydraulic tube benders with a PLC: one-touch operation for single parts and programmed batches of round tube, stainless tube, square tube and round bar, bending to 180°. The JTB-40 takes Ø5/8 – 1-9/16" tube, the JTB-50 Ø5/8 – 2" round and 2" square with walls to 0.2", the JTB-80 Ø1-9/16 – 3-1/8" round and 3-1/8" square with walls to 0.35" and a movable control pedal.

### STANDARD FEATURES

- Round tube Ø5/8 – 3-1/8" (16 – 80 mm); square tube to 3-1/8"; round bar
- Bends to 180°; PLC control for programmed batches
- JTB-50: dies 25, 32, 38, 48 mm; JTB-80: 76 × 265 mm and 60 × 210 mm CLR
- 3 – 7.5 HP drive plus hydraulic motor

### OPTIONAL EQUIPMENT

### JTB-40 · JTB-50 · JTB-80 — TECHNICAL SPECIFICATIONS

| Model | JTB-40 | JTB-50 | JTB-80 |
|---|---|---|---|
| Round tube | **Ø5/8 – 1-9/16" (16 – 40 mm), wall 0.04 – 0.12" (1 – 3 mm)** | **Ø5/8 – 2" (16 – 51 mm), wall 0.04 – 0.2" (1 – 5 mm)** | **Ø1-9/16 – 3-1/8" (40 – 80 mm), wall 0.04 – 0.35" (1 – 9 mm)** |
| Stainless tube | **—** | **Ø5/8 – 1-1/2" (16 – 38 mm)** | **Ø1-1/4 – 2" (32.2 – 50.8 mm)** |
| Square tube | **—** | **5/8 – 2" (16 × 16 – 50 × 50 mm)** | **1-9/16 – 3-1/8" (40 × 40 – 80 × 80 mm)** |
| Bend angle / speed | — | 180°, 5 rpm | 180°, 2 rpm |
| Standard dies | 16, 20, 25, 32, 38 mm | 25, 32, 38, 48 mm | 76 mm × 265 mm CLR, 60 mm × 210 mm CLR |
| Motor | **2 HP (1.5 kW)** | **3 HP (2.2 kW) + 1.5 HP (1.1 kW) hydraulic** | **7.5 HP (5.5 kW) + 2 HP (1.5 kW) hydraulic** |
| Packing size L × W × H | 31 × 21 × 30" (78 × 54 × 77 cm) | 57 × 27 × 46" (145 × 69 × 117 cm) | 59 × 36 × 61" (150 × 91 × 155 cm) |
| Weight | **485 lb (220 kg)** | **1,213 lb (550 kg)** | **2,866 lb (1,300 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

PRS-76A – PRS-150 · 4 MODELS

# PRS TUBE AND PROFILE END GRINDERS — BELT NOTCHERS, Ø3/4 – 5-3/4"



**MODEL** PRS · PRS-76C TUBE AND PROFILE END GRINDER WITH TWO-SPEED MOTOR, FORWARD AND REVERSE



PRS-76 tube end grinder with 4" belt



PRS-76A tube end grinder with the tube clamp swung out

## Tube Ø3/4 – 5-3/4"

Belt grinders built to notch tube ends: the tube sits in the adjustable slide and is fed against a contact roller the size of the mating tube, at any angle from 30 to 90° — a clean, burr-free saddle in steel, stainless and aluminum tube and profiles without saws or tooling. The PRS-76 models take Ø3/4 – 3" tube with a 4" belt, two speeds and forward / reverse on the C; the PRS-150 takes Ø1-3/8 – 5-3/4" with a 6" belt and 7.5 HP and grinds flat and on a contact wheel as well.

### STANDARD FEATURES

- ✓ PRS-76A / 76C / 76: tube Ø3/4 – 3", 4 × 79" belt, 4 HP or two-speed 3 / 3.75 HP
- ✓ PRS-150: tube Ø1-3/8 – 5-3/4", 6 × 79" belt, 7.5 HP two-speed, forward and reverse
- ✓ Notching angle 30 – 90°; contact rollers for 1/2 to 2-1/2" pipe sizes
- ✓ Dust collector connection; flat and contact-wheel grinding too

### OPTIONAL EQUIPMENT

- \+ Contact rollers Ø20, 26, 32, 42, 48, 60 and 76 mm (1/2 – 2-1/2" pipe)

### PRS-76A · PRS-76C · PRS-76 — TECHNICAL SPECIFICATIONS

| Model | PRS-76A | PRS-76C | PRS-76 |
|---|---|---|---|
| **Motor** | **3 / 3.75 HP (2.2 / 2.8 kW), two-speed** | **3 / 3.75 HP (2.2 / 2.8 kW), two-speed, forward and reverse** | **4 HP (3 kW)** |
| **Belt size** | **4 × 79" (100 × 2,000 mm)** | **4 × 79" (100 × 2,000 mm)** | **4 × 79" (100 × 2,000 mm)** |
| **Belt speed** | **2,953 / 5,906 ft/min (15 / 30 m/s)** | **2,953 / 5,906 ft/min (15 / 30 m/s)** | **5,906 ft/min (30 m/s)** |
| **Notching angle** | **30 – 90°** | **30 – 90°** | **30 – 90°** |
| **Tube diameter** | Ø3/4 – 3" (20 – 76 mm) with the optional rollers | Ø3/4 – 3" (20 – 76 mm) with the optional rollers | Ø3/4 – 3" (20 – 76 mm) |
| **Adjustable slide** | 6-1/4 × 2-3/4" (160 × 70 mm) | 6-1/4 × 2-3/4" (160 × 70 mm) | 6-1/4 × 2-3/4" (160 × 70 mm) |
| **Standard contact roller** | Ø1-1/8" (28 mm) | Ø1-1/8" (28 mm) | Ø1-1/8" (28 mm) |
| **Drive wheel** | — | — | Ø7-3/4" (198 mm) |
| **Graphite platen pad** | — | — | 15 × 3.9" (380 × 100 mm) |
| **Packing size L × W × H** | 54 × 24 × 26" (137 × 62 × 66 cm) | 54 × 24 × 26" (137 × 62 × 66 cm) | 51 × 22 × 18" (130 × 56 × 46 cm) |
| **Weight** | **353 lb (160 kg)** | **348 lb (158 kg)** | **370 lb (168 kg)** |

DETAILS, COMPONENTS AND OPTIONS

# PRS TUBE AND PROFILE END GRINDERS — BELT NOTCHERS, Ø3/4 - 5-3/4"



PRS-150 tube end grinder with 6" belt for tube up to 5-3/4"

TECHNICAL SPECIFICATIONS

# PRS TUBE AND PROFILE END GRINDERS — BELT NOTCHERS, Ø3/4 – 5-3/4"

## PRS-150

Tube end grinder, 6" belt — notch tube ends Ø1-3/8 – 5-3/4", grind flat and on the contact wheel

| Model | PRS-150 |
|---|---|
| Motor | **7.5 HP (5.5 kW), two-speed 1,400 / 2,800 rpm, forward and reverse** |
| Belt size | **6 × 79" (150 × 2,000 mm)** |
| Belt speed | **2,953 / 5,906 ft/min (15 / 30 m/s)** |
| Notching angle | **30 – 90°** |
| Tube diameter | Ø1-3/8 – 5-3/4" (35 – 145 mm) |
| Adjustable slide, horizontal × cross | 6-7/8 × 5-7/8" (175 × 150 mm) |
| Standard contact rollers | Ø1-1/2" and Ø4" |
| Drive wheel | Ø7-7/8" (200 mm) |
| Contact wheel | Ø1-3/8 – 5-3/4" (35 – 145 mm) |
| Graphite platen pad | 15.7 × 6.3" (400 × 160 mm) |
| Packing size L × W × H | 65 × 35 × 60" (165 × 88 × 152 cm) |
| Weight | **683 lb (310 kg)** |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

PTN-30 – PTN-12U · 4 MODELS

# PTN-30 HOLE-SAW NOTCHER, UTN40 END-MILL NOTCHERS AND PTN-12U

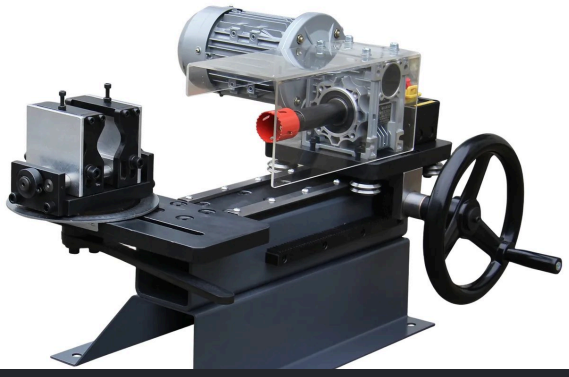

**MODEL** PTN · PTN-30 MOTORIZED TUBE AND PIPE NOTCHER WITH HOLE SAW AND DEGREE WHEEL



UTN40 end-mill tube notcher, 1/2 – 2″



UTN40V variable-speed end-mill tube notcher

## Tube to 3″

Motorized notchers that cut the saddle on the end of a tube or pipe so it fits against another for a T or angled joint. The PTN-30 drives a bi-metal hole saw through a gearbox — 1/2 to 3″ tube and 1/2 to 2-1/2″ schedule 40 pipe at any angle from 0 to 90° with a quick-release cam vise, a taper lock and a large degree wheel; the UTN40 and UTN40V cut with an end mill — fast, without coolant, dust or noise — on 1/2 to 2″ tube with a swivel vise in 1° steps; the PTN-12U is an electric notcher for 1/4 to 2″ pipe.

### STANDARD FEATURES

- PTN-30: tube 1/2 – 3″ OD, pipe 1/2 – 2-1/2″ schedule 40; 0 – 90°; 3/4 HP; hole-saw arbors 1/2″-20 and 5/8″-18
- UTN40: end mill, 1-1/2 HP, 280 rpm; UTN40V: 1 HP DC, 75 – 250 rpm variable
- V-block vise, swivels in 1° steps (UTN40)
- PTN-12U: pipe 1/4 – 2″, electric

### OPTIONAL EQUIPMENT

### PTN-30 · UTN40 · UTN40V · PTN-12U — TECHNICAL SPECIFICATIONS

| Model | PTN-30 | UTN40 | UTN40V | PTN-12U |
|---|---|---|---|---|
| Capacity | Tube 1/2 – 3″ OD, pipe 1/2 – 2-1/2″ schedule 40 (5/8 – 3″ OD) | Tube 1/2 – 2″ | Tube 1/2 – 2″ | Pipe 1/4 – 2″ (inside diameter) |
| Notch angle | 0 – 90°, large degree wheel | Swivel vise, 1° steps | Swivel vise, 1° steps | — |
| Cutter | Bi-metal hole saws (1/2″-20 and 5/8″-18 arbors) | End mill — no coolant, no dust | End mill — no coolant, no dust | Hole saws |
| Motor / speed | 3/4 HP (0.55 kW); 230 rpm at 60 Hz (186 at 50 Hz) | 1.5 HP AC motor, 280 rpm | 1 HP DC motor, variable 75 – 250 rpm | Electric |
| Packing size L × W × H | 35 × 25 × 18″ (90 × 63 × 45 cm) | — | — | 32 × 18 × 19″ (82 × 45 × 48 cm) |
| Weight | 143 lb (65 kg) | 309 lb (140 kg) | 265 lb (120 kg) | 216 lb (98 kg) |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

# PTN-30 HOLE-SAW NOTCHER, UTN40 END-MILL NOTCHERS AND PTN-12U



PTN-12U electric pipe notcher



Tube saddle notched on the pipe notcher

HB-10T · HB-25T · HB-40T · 3 MODELS


# HB-10T · HB-25T · HB-40T HYDRAULIC HORIZONTAL BENDERS



MODEL HB · HB-40T HYDRAULIC HORIZONTAL BENDER WITH PLC TOUCH SCREEN



HB-10T mobile hydraulic horizontal bender



Vee bending die of the horizontal bender

## 11 – 44 US tons

Hydraulic horizontal benders for flat bar and plate strip: hooks, U-bolts, loops, eyes, brackets and clamps. The HB-10T works by hand lever on a mobile stand and bends flat bar up to 4-1/2 × 5/16″; the HB-25T and HB-40T bend up to 6-1/4 × 1/2″, with a foot pedal, a PLC touch screen, a manual back gauge of 33.5″ and a massive ground-steel table. Special tools for pipe and flat bar at any angle are made to order.

### STANDARD FEATURES

- ✓ HB-10T: 11 US tons, flat bar 4-1/2 × 5/16″; hand control; mobile
- ✓ HB-25T / HB-40T: 27.6 / 44 US tons, flat bar to 6-1/4 × 1/2″; PLC touch screen; foot pedal
- ✓ Adjustable pressure with gauge; adjustable stroke
- ✓ 33.5″ (850 mm) manual back gauge; ground-steel table

### OPTIONAL EQUIPMENT

- \+ Special dies for pipe and flat bar

### HB-10T · HB-25T · HB-40T — TECHNICAL SPECIFICATIONS

| Model | HB-10T | HB-25T | HB-40T |
|---|---|---|---|
| Bending force | 11 US tons (10 t) | 27.6 US tons (25 t) | 44 US tons (40 t) |
| Flat bar | 4-1/2 × 5/16″ (115 × 8 mm) | 4-3/4 × 1/2″ (120 × 12 mm) | 6-1/4 × 1/2″ (160 × 12 mm) |
| Vee bending die | 4-1/2 × 4-1/8″ (115 × 105 mm) | 4-3/4 × 3-1/8″ (120 × 80 mm) | 6-1/4 × 3-1/8″ (160 × 80 mm) |
| Stroke | 7.9″ (200 mm) | 9.8″ (250 mm) | 9.8″ (250 mm) |
| Table | 38.2 × 9.8″ (970 × 250 mm) | 41.3 × 24.4″ (1,050 × 620 mm) | 41.3 × 24.4″ (1,050 × 620 mm) |
| Speed | Bend / return 0.38 / 0.43 in/s (9.7 / 11 mm/s) | Approach 0.79 in/s (20 mm/s), bend 0.11 in/s (2.8 mm/s) | Approach 0.85 in/s (21.5 mm/s), bend 0.11 in/s (2.8 mm/s) |
| Control | Hand lever valve; mobile on casters | Foot pedal; PLC touch screen; 33.5″ (850 mm) manual back gauge | Foot pedal; PLC touch screen; 33.5″ (850 mm) manual back gauge |
| Motor | 2 HP (1.5 kW) | 1.5 HP (1.1 kW) | 2 HP (1.5 kW) |
| Packing size L × W × H | 53 × 20 × 49″ (134 × 50 × 125 cm) | 60 × 31 × 54″ (153 × 80 × 136 cm) | 61 × 31 × 54″ (155 × 80 × 136 cm) |
| Weight | 331 lb (150 kg) | 1,367 lb (620 kg) | 1,400 lb (635 kg) |

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

# LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.


**PHONE**

+1 647 526 5510

**WEB & EMAIL**

NovoTechMachineTools.com
info@NovoTechMachineTools.com

**ADDRESS**

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5


NT NovoTech MACHINE TOOLS Inc.


Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.