NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

SHEET METAL BRAKES AND FOLDING MACHINES

HYDRAULIC, ELECTRIC AND CNC FOLDERS · BOX AND PAN BRAKES · STRAIGHT BRAKES AND FOOT-CLAMP FOLDERS · MAGNETIC BRAKES · ROOFING AND SIDING BRAKES · 3-IN-1 MACHINES







China
MADE IN CHINA

18
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE SHEET METAL BRAKES

CONTENTS

HYDRAULIC FOLDING MACHINES

HW hydraulic folding machines, 10 ga × 4 – 10 ft HW1220×3.5 – HW3050×3.5 · 4 models 04

HW...E NC hydraulic folding machines, 3/16″ × 80 – 100″ and 10 ga × 10 ft HW2040×4.5E · HW2540×4.5E · HW3050×3.5E · 3 models 07

CNC ELECTRIC FOLDING MACHINES

TFM / TFMS CNC electric folding machines, 14 ga × 122″ and 145″ TFM 3100×2E – TFMS 3680×2E · 4 models 10

ELECTRIC FOLDING MACHINES

EFM / EFMS electric folding machines, 16 – 20 ga × 80 – 120″ EFM 2020 – EFMS-2540×1.5L · 7 models 13

BOX AND PAN BRAKES

Box and pan brakes, 22 ga – 12 ga × 12 – 157″ W1.0×305A – W0.8×4000A · 20 models 16

HYDRAULIC BOX AND PAN BRAKES

HW2.0×1320H · HW2.0×2540H hydraulic box and pan brakes, 14 ga × 52″ and 100″ HW2.0×1320H · HW2.0×2540H · 2 models 19

HEAVY BOX AND PAN BRAKES

Heavy box and pan brakes, 18 – 14 ga × 52 – 100″, boxes to 9″ deep W1830×1.5P – W2.0×2540H · 6 models 20

BOX AND PAN FOLDING MACHINES

Box and pan folding machines with segmented blades, 20 – 14 ga × 40 – 119″ PBB1020/2A – TSBS 3020/1.2 · 10 models 23

STRAIGHT HAND BRAKES

Hand brakes, 22 ga – 12 ga × 12″ – 13 ft HB-2248 – W1.5×1050F · 23 models 26

FOOT-CLAMP FOLDING MACHINES

Foot-clamp folding machines, 22 – 12 ga × 36 – 119″ PBB1020/2.5 – WF1.0×3000 · 18 models 29

BENCH AND OFFSET BRAKES

Bench and offset brakes, 20 – 18 ga × 14 – 39″ WB-14 – ZWJ-36 · 7 models 32

MAGNETIC SHEET METAL BRAKES

EB magnetic sheet metal brakes, 16 ga × 2 – 8 ft and 18 ga × 10 ft EB625 – EB3200 · 6 models 34

PORTABLE ROOFING AND SIDING BRAKES

BSM1550 and BSM3150 shear and brake machines, 22 ga × 61″ and 124″ BSM1550 · BSM3150 · 2 models 36

ALB portable roofing brakes with slitter, 24 ga × 7 – 12.5 ft ALB-2200 – ALB-3800 · 6 models 38

BSM folding brakes with slitter, 22 – 20 ga × 40 – 100″ BSM1016 · BSM1220 · BSM2540 · 3 models 39

TRIM COIL DISPENSER

CD-24 coil dispenser for trim coil, 24″ CD-24 · 1 model 40

MOTORIZED E3-IN-1 MACHINES

E3-IN-1 motorized shear, brake and roll machines, 1/8″ × 52″ and 80″ E3-IN-1/1320 · E3-IN-1/2040 · 2 models 41

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE SHEET METAL BRAKES AND FOLDING MACHINES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

SHEET METAL BRAKES FOR THE HVAC, ROOFING AND FABRICATION SHOP

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.


A sheet metal brake bends sheet by clamping it under a straight beam and swinging a folding leaf up around the edge: no punch and die, no marks on painted sheet, and long, straight bends in thin material. From the largest machines to the smallest: hydraulic, electric and CNC folding machines for 10 ga over 10 ft and production panels, box and pan brakes with removable fingers, straight brakes and foot-clamp folders, magnetic brakes that fold boxes of any depth, portable roofing and siding brakes for the job site and 3-in-1 shear, brake and roll machines.

HW1220×3.5 – HW3050×3.5 · 4 MODELS


HW HYDRAULIC FOLDING MACHINES, 10 GA × 4 – 10 FT



MODEL HW · HW2440×3.5 HYDRAULIC FOLDING MACHINE

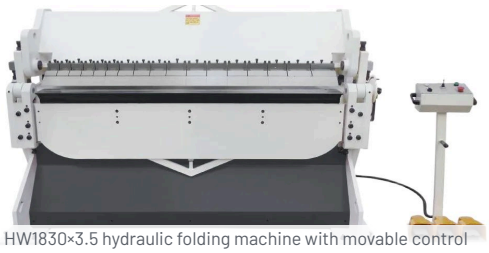

HW1830×3.5 hydraulic folding machine with movable control panel

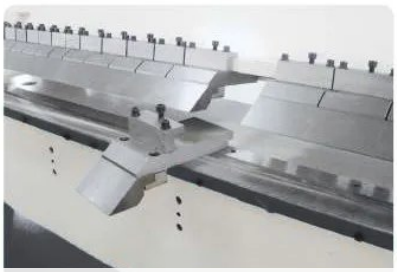

Segments for bending boxes on the hydraulic folding machine

10 ga × 4 – 10 ft

Hydraulic folding machines for the production sheet-metal shop. Four models fold 10 ga (3.5 mm) mild steel and 12 ga (2.5 mm) stainless over 4, 6, 8 and 10 ft, with segmented upper tools for boxes up to 5.9″ deep, a bending angle stop from 0 to 135°, hand wheels that set the upper beam and the gap between the tools, foot pedals and a 26″ manual back gauge. The control panel stands on a movable pedestal or is fixed to the machine. The HW…E NC models below add a touch screen and a servo back gauge.


STANDARD FEATURES

- ✓ 10 ga (3.5 mm) mild steel and 12 ga (2.5 mm) stainless × 48, 72, 96 and 120″
- ✓ Boxes to 5.9″ (150 mm) deep with the segmented upper tools
- ✓ Bending angle setting 0 – 135°; hand wheels set the upper beam and the tool gap
- ✓ 26″ (660 mm) manual back gauge; foot pedals; control panel on a movable pedestal or fixed
- ✓ 5 – 10 HP hydraulic unit; full protective covers

OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS

HW HYDRAULIC FOLDING MACHINES, 10 GA × 4 – 10 FT

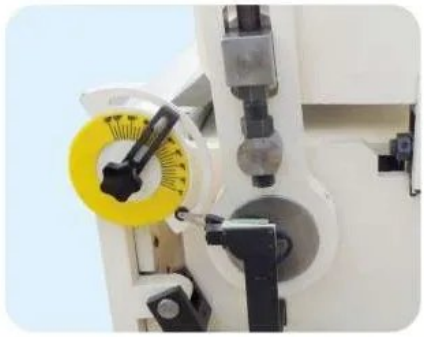

Bending angle setting on the hydraulic folding machine

TECHNICAL SPECIFICATIONS

HW HYDRAULIC FOLDING MACHINES, 10 GA × 4 – 10 FT

HW1220×3.5 – HW3050×3.5

Hydraulic folding machines, 10 ga × 4 – 10 ft, manual back gauge

Model	HW1220×3.5	HW1830×3.5	HW2440×3.5	HW3050×3.5
Bending length	**48″ (1,220 mm)**	**72″ (1,830 mm)**	**96″ (2,440 mm)**	**120″ (3,050 mm)**
Capacity	**10 ga (3.5 mm) mild steel, 12 ga (2.5 mm) stainless**	**10 ga (3.5 mm) mild steel, 12 ga (2.5 mm) stainless**	**10 ga (3.5 mm) mild steel, 12 ga (2.5 mm) stainless**	**10 ga (3.5 mm) mild steel, 12 ga (2.5 mm) stainless**
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Box depth, max	**5.9″ (150 mm)**	**5.9″ (150 mm)**	**5.9″ (150 mm)**	**5.9″ (150 mm)**
Beam opening	3″ (75 mm); beam adjustment 0 – 1″ (0 – 25 mm) front and back	3″ (75 mm); beam adjustment 0 – 1″ (0 – 25 mm) front and back	3″ (75 mm); beam adjustment 0 – 1″ (0 – 25 mm) front and back	3″ (75 mm); beam adjustment 0 – 1″ (0 – 25 mm) front and back
Back gauge	26″ (660 mm), manual	26″ (660 mm), manual	26″ (660 mm), manual	26″ (660 mm), manual
Hydraulics	Up to 2,176 psi (15 MPa); 2 – 3.3 in/s (50 – 85 mm/s)	Up to 2,176 psi (15 MPa); 2 – 3.3 in/s (50 – 85 mm/s)	Up to 2,176 psi (15 MPa); 2 – 3.3 in/s (50 – 85 mm/s)	Up to 2,176 psi (15 MPa); 2 – 3 in/s (50 – 75 mm/s)
Control panel	Type A on a movable pedestal or type B fixed; foot pedals	Type A on a movable pedestal or type B fixed; foot pedals	Type A on a movable pedestal or type B fixed; foot pedals	Type A on a movable pedestal or type B fixed; foot pedals
Motor	**5 HP (3.7 kW)**	**5 HP (3.7 kW)**	**7.5 HP (5.5 kW)**	**10 HP (7.5 kW)**
Packing size L × W × H	81 × 40 × 67″ (205 × 102 × 170 cm)	104 × 40 × 67″ (265 × 102 × 170 cm)	128 × 40 × 67″ (325 × 102 × 170 cm)	154 × 40 × 67″ (390 × 102 × 170 cm)
Weight	**3,924 lb (1,780 kg)**	**4,784 lb (2,170 kg)**	**6,283 lb (2,850 kg)**	**7,496 lb (3,400 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HW2040×4.5E · HW2540×4.5E · HW3050×3.5E · 3 MODELS

HW…E NC HYDRAULIC FOLDING MACHINES, 3/16″ × 80 – 100″ AND 10 GA × 10 FT



MODEL HW…E · HW2040×4.5E HYDRAULIC FOLDING MACHINE WITH TOUCH SCREEN, SERVO BACK GAUGE AND LIGHT CURTAINS



Control cabinet on the side frame of the HW…E NC folding machine: touch screen, pressure gauge and emergency stop



Light curtain at the front of the HW…E NC folding machine

3/16″ × 80 – 100″, 10 ga × 10 ft

The NC version of the HW folding machine. A touch screen shows the bending angle and the back-gauge position and makes the bending program easy to set up, and a servo motor drives the back gauge on a ball screw — 21.7″, 31.9″ or 49.2″ of travel — for accurate flanges. The HW2040×4.5E and HW2540×4.5E fold 3/16″ (4.5 mm) structural steel and 1/8″ (3 mm) stainless over 80″ and 100″; the HW3050×3.5E folds 10 ga over 10 ft. Hydraulic cylinders drive the clamping beam with the pressure set to the thickness, the bending beam swings on two hydraulic cylinders and levers, segmented upper tools fold boxes up to 5.9″ deep, and a light curtain guards the front of the machine.

STANDARD FEATURES

- 3/16″ (4.5 mm) structural steel and 1/8″ (3 mm) stainless × 80″ and 100″; 10 ga (3.5 mm) × 120″
- Touch screen shows the bending angle and the back-gauge position
- Servo back gauge on a ball screw: 21.7″, 31.9″ and 49.2″ (550, 810 and 1,250 mm)
- Boxes to 5.9″ (150 mm) deep; optional segment sets for the upper beam
- Light curtain at the front; welded steel-plate frame, stress-relieved; 10 HP (7.5 kW)

OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS

HW...E NC HYDRAULIC FOLDING MACHINES, 3/16" × 80 – 100" AND 10 GA × 10 FT



Servo back gauge with sheet supports on the HW... E NC folding machine

TECHNICAL SPECIFICATIONS

HW…E NC HYDRAULIC FOLDING MACHINES, 3/16″ × 80 – 100″ AND 10 GA × 10 FT

HW2040×4.5E · HW2540×4.5E · HW3050×3.5E

Hydraulic folding machines with touch screen and servo back gauge, to 3/16″ × 10 ft

Model	HW2040×4.5E	HW2540×4.5E	HW3050×3.5E
Bending length	**80″ (2,040 mm)**	**100″ (2,540 mm)**	**120″ (3,050 mm)**
Capacity	**3/16″ (4.5 mm) structural steel, 1/8″ (3 mm) stainless**	**3/16″ (4.5 mm) structural steel, 1/8″ (3 mm) stainless**	**10 ga (3.5 mm) structural steel, 14 ga (2 mm) stainless**
Bending angle	0 – 135°	0 – 135°	0 – 135°
Box depth, max	**5.9″ (150 mm)**	**5.9″ (150 mm)**	**5.9″ (150 mm)**
Opening height / lower beam adjustment	3.5″ (90 mm) / 1″ (25 mm)	3.5″ (90 mm) / 1″ (25 mm)	3.5″ (90 mm) / 1″ (25 mm)
Back gauge	**21.7″ (550 mm), servo with ball screw**	**31.9″ (810 mm), servo with ball screw**	**49.2″ (1,250 mm), servo with ball screw**
Optional segment set	3″ × 7, 4″ × 3, 5″ × 7, 6″ × 2	3″ × 6, 4″ × 5, 5″ × 10, 6″ × 2	3″ × 6, 4″ × 4, 5″ × 10, 6″ × 6
Table height	35.8″ (910 mm)	35.8″ (910 mm)	35.8″ (910 mm)
Motor	**10 HP (7.5 kW); max. 2,321 psi (16 MPa)**	**10 HP (7.5 kW); max. 2,321 psi (16 MPa)**	**10 HP (7.5 kW); max. 2,321 psi (16 MPa)**
Packing size L × W × H	120 × 74 × 79″ (305 × 188 × 200 cm)	141 × 74 × 79″ (358 × 188 × 200 cm)	162 × 85 × 79″ (412 × 215 × 200 cm)
Weight	**7,385 lb (3,350 kg)**	**9,370 lb (4,250 kg)**	**10,141 lb (4,600 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TFM 3100×2E – TFMS 3680×2E · 4 MODELS

TFM / TFMS CNC ELECTRIC FOLDING MACHINES, 14 GA × 122″ AND 145″



MODEL TFM · TFM 3100×2E CNC ELECTRIC FOLDING MACHINE WITH TOUCH-SCREEN CONTROL

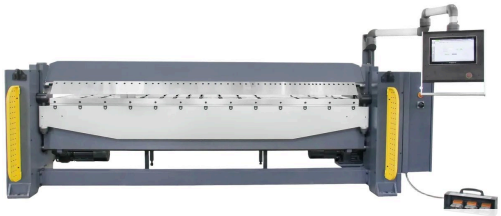

TFMS 3100×2E CNC electric folding machine with segmented upper beam



Touch-screen CNC of the folding machine

14 ga × 122 – 145″

CNC folding machines for production panels: electric drives clamp and fold 14 ga mild steel or 18 ga stainless over 122″ or 145″ to a programmed angle from 0 to 135°, and a CNC back gauge positions every flange from 1/2 to 48-3/8″ with ±0.004″ repeatability. The touch screen stores 2,000 programs of up to 99 bends, draws the profile from a graphic library and handles radius bending and angle correction. The TFMS models have a segmented upper beam — segments from 2 to 6″ — for boxes 4″ deep.

STANDARD FEATURES

- ✓ 14 ga (2 mm) mild steel, 18 ga (1.2 mm) stainless × 122″ (3,100 mm) or 144-7/8″ (3,680 mm)
- ✓ CNC back gauge 1/2 – 48-3/8″ (12.7 – 1,228 mm), repeatability ±0.004″ (0.1 mm)
- ✓ Touch screen: 2,000 programs of 99 bends, graphic profile library, radius bending, angle correction
- ✓ Bending angle 0 – 135°; clamping opening 4-7/8″ (125 mm); reverse bends from 1/2″
- ✓ TFMS: segmented upper beam for boxes 4″ (100 mm) deep

OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS


TFM / TFMS CNC ELECTRIC FOLDING MACHINES, 14 GA × 122" AND 145"



CNC back gauge table with fingers



Segmented upper beam

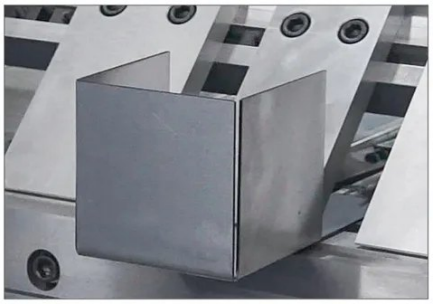

Box folded on the segmented folding machine

TECHNICAL SPECIFICATIONS

TFM / TFMS CNC ELECTRIC FOLDING MACHINES, 14 GA × 122″ AND 145″

TFM 3100×2E · TFM 3680×2E · TFMS 3100×2E · TFMS 3680×2E

CNC electric folding machines, 14 ga × 122″ and 145″ — TFMS with segmented upper beam

Model	TFM 3100×2E	TFM 3680×2E	TFMS 3100×2E	TFMS 3680×2E
Bending length	**122″ (3,100 mm)**	**144-7/8″ (3,680 mm)**	**122″ (3,100 mm)**	**144-7/8″ (3,680 mm)**
Capacity	**14 ga (2 mm) mild steel, 18 ga (1.2 mm) stainless**	**14 ga (2 mm) mild steel, 18 ga (1.2 mm) stainless**	**14 ga (2 mm) mild steel, 18 ga (1.2 mm) stainless**	**14 ga (2 mm) mild steel, 18 ga (1.2 mm) stainless**
Bending angle	0 – 135°, programmable	0 – 135°, programmable	0 – 135°, programmable	0 – 135°, programmable
Clamping opening	4-7/8″ (125 mm)	4-7/8″ (125 mm)	4-7/8″ (125 mm)	4-7/8″ (125 mm)
Min. reverse bend	1/2″ (12.7 mm)	1/2″ (12.7 mm)	1/2″ (12.7 mm)	1/2″ (12.7 mm)
Back gauge	**CNC, 1/2 – 48-3/8″ (12.7 – 1,228 mm), repeatability ±0.004″ (0.1 mm)**	**CNC, 1/2 – 48-3/8″ (12.7 – 1,228 mm), repeatability ±0.004″ (0.1 mm)**	**CNC, 1/2 – 48-3/8″ (12.7 – 1,228 mm), repeatability ±0.004″ (0.1 mm)**	**CNC, 1/2 – 48-3/8″ (12.7 – 1,228 mm), repeatability ±0.004″ (0.1 mm)**
Back gauge table height	35-3/4″ (910 mm)	35-3/4″ (910 mm)	35-3/4″ (910 mm)	35-3/4″ (910 mm)
Upper beam	One-piece	One-piece	Segments 2″ × 7, 3″ × 2, 4″ × 4, 5″ × 10, 6″ × 6 — boxes 4″ (100 mm) deep; 10.5 and 25 mm one-piece beams also supplied	Segments 2″ × 7, 3″ × 2, 4″ × 4, 5″ × 10, 6″ × 6 — boxes 4″ (100 mm) deep; 10.5 and 25 mm one-piece beams also supplied
Motors	**4 HP (3 kW) main, 2 HP (1.5 kW) back gauge servo, 1-1/2 HP (1.1 kW) clamping**	**5-1/2 HP (4 kW) main, 2 HP (1.5 kW) back gauge servo, 2 HP (1.5 kW) clamping**	**4 HP (3 kW) main, 2 HP (1.5 kW) back gauge servo, 1-1/2 HP (1.1 kW) clamping**	**5-1/2 HP (4 kW) main, 2 HP (1.5 kW) back gauge servo, 2 HP (1.5 kW) clamping**
Control	Touch screen: 2,000 programs, 99 bends per program, profile library with graphics, radius bending and angle correction	Touch screen: 2,000 programs, 99 bends per program, profile library with graphics, radius bending and angle correction	Touch screen: 2,000 programs, 99 bends per program, profile library with graphics, radius bending and angle correction	Touch screen: 2,000 programs, 99 bends per program, profile library with graphics, radius bending and angle correction
Packing size L × W × H	171 × 79 × 63″ (434 × 201 × 160 cm)	195 × 83 × 59″ (496 × 210 × 150 cm)	171 × 79 × 63″ (434 × 201 × 160 cm)	195 × 83 × 59″ (496 × 210 × 150 cm)
Weight	**9,436 lb (4,280 kg)**	**11,640 lb (5,280 kg)**	**9,436 lb (4,280 kg)**	**11,640 lb (5,280 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

EFM 2020 – EFMS-2540×1.5L · 7 MODELS

EFM / EFMS ELECTRIC FOLDING MACHINES, 16 – 20 GA × 80 – 120″



MODEL EFM · EFM 3020 ELECTRIC FOLDING MACHINE, 10 FT



EFMS-2540×1.5L electric folding machine with segmented beams and foot pedals



EFMS 2020 electric folding machine with foot pedal

16 ga × 80 – 100″, 20 ga × 100 – 120″

Motorized folding with the operator's hands free: one motor closes the clamping beam, a second swings the folding beam, both run from a foot pedal while the operator holds and positions the sheet. 16 ga (1.5 mm) mild steel over 80″, 20 ga (1 mm) over 100″ and 120″. The EFMS models have a segmented blade (25 to 400 mm segments) for boxes and pans, the EFM models a one-piece blade for long straight bends. The EFMS-2540×1.5L takes 16 ga over the full 100″, with 2 HP and 3 HP motors, a ten-segment blade and the bending angle set on a dial.

STANDARD FEATURES

- ✓ 16 ga (1.5 mm) × 80″ and 100″ (EFMS-2540×1.5L); 20 ga (1 mm) × 100″ and 120″; bending angle 0 – 135°
- ✓ Clamping motor 1/2 HP (0.37 kW) and folding motor 1 HP (0.75 kW) — 2 HP and 3 HP on the EFMS-2540×1.5L; foot pedal control
- ✓ EFMS: segmented blade, segments 25 – 400 mm, for boxes and pans; EFM: one-piece blade
- ✓ 4″ (100 mm) opening height


OPTIONAL EQUIPMENT

EFM · EFMS ELECTRIC FOLDING MACHINES — TECHNICAL SPECIFICATIONS

Model	EFM 2020	EFMS 2020	EFM 2520	EFMS 2520	EFM 3020	EFMS 3020
Bending length	**80″ (2,020 mm)**	**80″ (2,020 mm)**	**100″ (2,520 mm)**	**100″ (2,520 mm)**	**119″ (3,020 mm)**	**119″ (3,020 mm)**
Capacity, mild steel	**16 ga (1.5 mm)**	**16 ga (1.5 mm)**	**20 ga (1 mm)**	**20 ga (1 mm)**	**20 ga (1 mm)**	**20 ga (1 mm)**
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Opening height	4″ (100 mm)	4″ (100 mm)	4″ (100 mm)	4″ (100 mm)	4″ (100 mm)	4″ (100 mm)
Blade	One-piece	Segments 25 – 400 mm	One-piece	Segments 25 – 400 mm	One-piece	Segments 25 – 400 mm
Motors	**1/2 HP (0.37 kW) clamping, 1 HP (0.75 kW) folding**	**1/2 HP (0.37 kW) clamping, 1 HP (0.75 kW) folding**	**1/2 HP (0.37 kW) clamping, 1 HP (0.75 kW) folding**	**1/2 HP (0.37 kW) clamping, 1 HP (0.75 kW) folding**	**1/2 HP (0.37 kW) clamping, 1 HP (0.75 kW) folding**	**1/2 HP (0.37 kW) clamping, 1 HP (0.75 kW) folding**
Packing size L × W × H	111 × 30 × 56″ (283 × 76 × 142 cm)	111 × 30 × 56″ (283 × 76 × 142 cm)	131 × 30 × 56″ (333 × 76 × 141 cm)	131 × 30 × 56″ (333 × 76 × 141 cm)	151 × 30 × 57″ (383 × 76 × 145 cm)	151 × 30 × 57″ (383 × 76 × 145 cm)
Weight	**2,039 lb (925 kg)**	**2,127 lb (965 kg)**	**2,778 lb (1,260 kg)**	**2,888 lb (1,310 kg)**	**3,439 lb (1,560 kg)**	**3,594 lb (1,630 kg)**

DETAILS, COMPONENTS AND OPTIONS

EFM / EFMS ELECTRIC FOLDING MACHINES, 16 – 20 GA × 80 – 120″

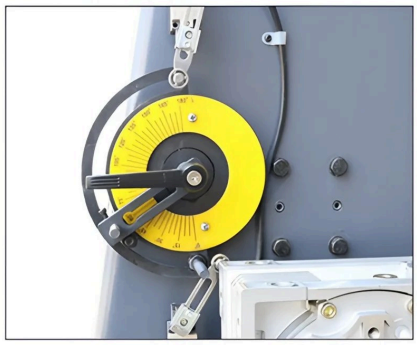

Bending angle setting dial

TECHNICAL SPECIFICATIONS

EFM / EFMS ELECTRIC FOLDING MACHINES, 16 – 20 GA × 80 – 120″

EFMS-2540×1.5L

Electric folding machine with segmented beams and motorized clamping, 16 ga × 100″

Model	EFMS-2540×1.5L
Bending length	**100″ (2,540 mm)**
Capacity, mild steel	**16 ga (1.5 mm)**
Bending angle	0 – 120°, set on a dial; limit switches
Opening height	3-1/8″ (80 mm) clamping bar lift
Blade	10 segments, 10″ (254 mm) wide
Motors	**2 HP (1.5 kW) clamping, 3 HP (2.2 kW) folding**
Packing size L × W × H	146 × 35 × 53″ (370 × 90 × 135 cm)
Weight	**2,425 lb (1,100 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

W1.0×305A – W0.8×4000A · 20 MODELS

BOX AND PAN BRAKES, 22 GA – 12 GA × 12 – 157″



MODEL BOX · W2.5×2540A FLOOR PAN AND BOX BRAKE WITH SEGMENT BLADE, 100″ × 12 GA



W2.5×1220 floor pan and box brake



BP-1648H pan and box brake on stand

22 ga – 12 ga × 12 – 157″

Hand-operated box and pan brakes with removable fingers, from a 12″ bench brake to 13 ft floor brakes with counterweights. The bench and stand brakes take 20 to 16 ga over 12 to 50″; the BP-1650 and BP-1648H fold 16 ga over 48 – 50″ with 4″ deep boxes; the floor brakes with segment blades and counterweights fold 12 ga over 4 to 8 ft, 14 ga over 10 ft, 18 ga over 12 ft and 22 ga over 13 ft. Take the fingers out where the sides of the box come up and fold all four sides of a pan.

STANDARD FEATURES

- Segmented fingers that are taken out and repositioned for any box size
- Bench brakes 12 – 50″ in 20 – 16 ga; BP-1650 / BP-1648H 16 ga × 48 – 50″, boxes 4″ (100 mm) deep
- Floor brakes with counterweights: 12 ga × 48 – 100″, 14 ga × 80 – 120″, 18 ga × 146″, 22 ga × 157″
- Bending angle to 135°, 140° on the W1.5×1500 and W1.2×2000
- BP-1648H: all-steel welded, adjustable truss bars, bronze bushings, removable nose bar and stop rod for repeat bends

OPTIONAL EQUIPMENT

W1.0A · W1.5 PAN AND BOX BRAKES — TECHNICAL SPECIFICATIONS

Model	W1.0×305A	W1.0×610A	W1.0×915A	W1.5×1220	W1.5×610Z	W1.5×915Z	W1.5×1220Z	W1.5×1260A
Bending length	12″ (305 mm)	24″ (610 mm)	36″ (915 mm)	48″ (1,220 mm)	24″ (610 mm)	36″ (915 mm)	48″ (1,220 mm)	49.6″ (1,260 mm)
Capacity, mild steel	20 ga (1 mm)	20 ga (1 mm)	20 ga (1 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Fingers	Removable segments	Removable segments	Removable segments	Removable segments	Heavy-duty segments, many widths	Heavy-duty segments, many widths	Heavy-duty segments, many widths	Heavy-duty segments, many widths
Packing size L × W × H	20 × 14 × 16″ (50 × 35 × 41 cm)	32 × 14 × 17″ (82 × 35 × 44 cm)	44 × 14 × 22″ (113 × 35 × 55 cm)	62 × 18 × 26″ (158 × 45 × 66 cm)	33 × 15 × 22″ (85 × 37 × 56 cm)	46 × 16 × 23″ (117 × 40 × 58 cm)	62 × 18 × 26″ (158 × 45 × 65 cm)	62 × 18 × 26″ (158 × 45 × 65 cm)
Weight	62 lb (28 kg)	95 lb (43 kg)	176 lb (80 kg)	313 lb (142 kg)	112 lb (51 kg)	234 lb (106 kg)	366 lb (166 kg)	331 lb (150 kg)

DETAILS, COMPONENTS AND OPTIONS

BOX AND PAN BRAKES, 22 GA – 12 GA × 12 – 157″



BP-1650 pan and box brake, 16 ga × 50″



W1.5×1220Z heavy-duty pan and box brake



W1.5×1220 pan and box brake with removable fingers



W1.0×305A / W1.0×610A / W1.0×915A bench pan and box brake

TECHNICAL SPECIFICATIONS

BOX AND PAN BRAKES, 22 GA – 12 GA × 12 – 157″

BP-1650 · BP-1648H

Pan and box brakes, 16 ga × 48 – 50″, 4″ box depth

Model	BP-1650	BP-1648H
Bending length	**50″ (1,270 mm)**	**48″ (1,220 mm)**
Capacity, mild steel	**16 ga (1.5 mm)**	**16 ga (1.5 mm)**
Box depth, max	**4″ (100 mm)**	**4″ (100 mm)**
Finger (blade) height	7-1/4″ (184 mm)	7-3/4″ (198 mm)
Beam lift, max / adjustment	1-1/4″ (32 mm) / 5/8″ (16 mm)	1-1/4″ (32 mm) / 1/4″ (6.5 mm)
Bending angle	0 – 135°	0 – 135°
Packing size L × W × H	66 × 23 × 33″ (168 × 59 × 83 cm)	65 × 24 × 28″ (166 × 61 × 72 cm)
Weight	**452 lb (205 kg)**	**522 lb (237 kg)**

W1.5 · W1.2 · W2.0A · W2.5A FLOOR PAN AND BOX BRAKES

Floor pan and box brakes with segment blade and counterweights, 5 – 13 ft

Model	W1.5×1500	W1.2×2000	W2.5×1220	W2.0×2040A	W2.5×2040A	W2.0×2540A	W2.5×2540A	W2.0×3050A	W1.2×3700A	W0.8×4000A
Bending length	**59″ (1,500 mm)**	**79″ (2,000 mm)**	**48″ (1,220 mm)**	**80″ (2,040 mm)**	**80″ (2,040 mm)**	**100″ (2,540 mm)**	**100″ (2,540 mm)**	**120″ (3,050 mm)**	**146″ (3,700 mm)**	**157″ (4,000 mm)**
Capacity, mild steel	**16 ga (1.5 mm)**	**18 ga (1.2 mm)**	**12 ga (2.5 mm)**	**14 ga (2 mm)**	**12 ga (2.5 mm)**	**14 ga (2 mm)**	**12 ga (2.5 mm)**	**14 ga (2 mm)**	**18 ga (1.2 mm)**	**22 ga (0.8 mm)**
Bending angle	0 – 140°	0 – 140°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Packing size L × W × H	79 × 30 × 48″ (200 × 75 × 123 cm)	98 × 30 × 48″ (250 × 75 × 123 cm)	67 × 30 × 38″ (170 × 75 × 96 cm)	100 × 30 × 40″ (254 × 76 × 102 cm)	100 × 30 × 40″ (253 × 75 × 101 cm)	118 × 30 × 40″ (300 × 76 × 102 cm)	118 × 30 × 39″ (300 × 76 × 100 cm)	142 × 30 × 40″ (360 × 76 × 102 cm)	167 × 33 × 47″ (425 × 85 × 120 cm)	185 × 35 × 47″ (470 × 90 × 120 cm)
Weight	**981 lb (445 kg)**	**1,281 lb (581 kg)**	**1,091 lb (495 kg)**	**2,116 lb (960 kg)**	**2,337 lb (1,060 kg)**	**2,458 lb (1,115 kg)**	**2,701 lb (1,225 kg)**	**3,164 lb (1,435 kg)**	**5,401 lb (2,450 kg)**	**5,952 lb (2,700 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HW2.0×1320H · HW2.0×2540H · 2 MODELS

HW2.0×1320H · HW2.0×2540H HYDRAULIC BOX AND PAN BRAKES, 14 GA × 52″ AND 100″



MODEL HYDRAULIC · HW2.0×2540H HYDRAULIC PAN AND BOX BRAKE WITH NC CONTROL PEDESTAL AND FOOT PEDAL



NC control panel: open height, bending angle and dwell time

14 ga × 52 – 100″

The box and pan brake with hydraulic power: the bending leaf is swung by hydraulics while the operator holds the sheet, and a single-program NC sets the bending angle, the opening height and the dwell time, so every box in a batch comes out the same. Removable fingers from 3 to 12″ fold boxes and pans up to 9″ deep in 14 ga mild steel over 52″ or 100″, with a 44″ back gauge and a foot pedal — for the shop that folds boxes, trays and enclosures all day.

STANDARD FEATURES

- 14 ga (2 mm) mild steel × 52″ (HW2.0×1320H) and 100″ (HW2.0×2540H)
- Boxes and pans to 9″ (230 mm) deep; removable fingers 3 – 12″
- NC control panel: bending angle, opening height and dwell time; foot pedal
- Bending angle 0 – 120°; back gauge 44″ (1,125 mm)
- 3 – 4 HP (2.2 – 3 kW) hydraulic unit

OPTIONAL EQUIPMENT

HW2.0×1320H · HW2.0×2540H — TECHNICAL SPECIFICATIONS

Model	HW2.0×1320H	HW2.0×2540H
Bending length	**52″ (1,320 mm)**	**100″ (2,540 mm)**
Capacity	**14 ga (2 mm) mild steel**	**14 ga (2 mm) mild steel**
Bending angle	0 – 120°	0 – 120°
Box depth, max	**9.1″ (230 mm)**	**9.1″ (230 mm)**
Fingers	12″ × 1, 6″ × 2, 5″ × 2, 4″ × 3, 3″ × 2	12″ × 4, 6″ × 4, 5″ × 2, 4″ × 3, 3″ × 2
Back gauge	44.3″ (1,125 mm)	44.3″ (1,125 mm)
Control	Single-program NC with programmable angle readout; foot pedal	Single-program NC with programmable angle readout; foot pedal
Motor	**3 HP (2.2 kW)**	**4 HP (3 kW)**
Packing size L × W × H	82 × 29 × 62″ (208 × 73 × 157 cm)	130 × 29 × 68″ (330 × 73 × 172 cm)
Weight	**2,469 lb (1,120 kg)**	**3,483 lb (1,580 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

W1830×1.5P – W2.0×2540H · 6 MODELS

HEAVY BOX AND PAN BRAKES, 18 – 14 GA × 52 – 100″, BOXES TO 9″ DEEP



MODEL HEAVY · W2.0×2540H HEAVY PAN AND BOX BRAKE WITH EXTENDED FINGERS AND COUNTERWEIGHT



WU2.0×2500 pan and box brake with two counterweights



W1.5×2540H heavy pan and box brake for pans to 5-1/8″ deep

18 – 14 ga × 52 – 100″

Heavy fabricated box and pan brakes for boxes and pans deeper than a standard brake allows. The W2.0×1320H and W2.0×2540H fold 14 ga over 52″ and 100″ and take boxes and pans up to 9″ deep, with extended fingers, a 44″ back gauge and a digital angle gauge on the bending leaf; the W1.5×2540H folds 16 ga over 100″ with fingers for pans up to 5-1/8″ deep and a 6-1/4″ clamping-beam lift; the WU2.0×2500 folds 14 ga over 100″ with two counterweights; the W1830×1.5P folds 16 ga over 72″ with 2, 3 and 4″ fingers; the W1.2×1500H folds 18 ga over 59″ with 4-7/8″ fingers and a precision angle stop. The counterweights hold the beam in any position.

STANDARD FEATURES

- W2.0×1320H / W2.0×2540H: 14 ga (2 mm) × 52″ and 100″; boxes and pans to 9″ (230 mm) deep; digital angle gauge; back gauge 44″
- W1.5×2540H: 16 ga × 100″; pans to 5-1/8″ (130 mm) deep; fingers 60 – 305 mm; quick beam adjustment
- WU2.0×2500: 14 ga × 100″; fingers 75 mm (5) and 125 mm (17), easy to remove; two counterweights; stop rod
- W1830×1.5P: 16 ga × 72″; eight fingers each of 2, 3 and 4″
- W1.2×1500H: 18 ga × 59″; 4-7/8″ (125 mm) fingers; counterweight stops in any position; precision angle stop

OPTIONAL EQUIPMENT

W1830×1.5P · W1.2×1500H · W1.5×2540H · WU2.0×2500 — TECHNICAL SPECIFICATIONS

Model	W1830×1.5P	W1.2×1500H	W1.5×2540H	WU2.0×2500
Bending length	72″ (1,830 mm)	59″ (1,500 mm)	100″ (2,540 mm)	100″ (2,500 mm)
Capacity, mild steel	16 ga (1.5 mm)	18 ga (1.2 mm)	16 ga (1.5 mm)	14 ga (2 mm)
Box depth / fingers	Fingers 8 × 2″, 8 × 3″, 8 × 4″	Fingers 4-7/8″ (125 mm) high	Pans and boxes to 5-1/8″ (130 mm) deep; fingers 60 – 305 mm	Fingers 75 mm (5) and 125 mm (17)
Clamping beam lift	—	2-3/8″ (60 mm)	6-1/4″ (160 mm)	—
Bending angle	0 – 135°	0 – 125°	0 – 135°	0 – 135°
Packing size L × W × H	96 × 30 × 41″ (243 × 77 × 104 cm)	83 × 30 × 56″ (211 × 75 × 142 cm)	138 × 39 × 72″ (350 × 100 × 184 cm)	122 × 41 × 72″ (310 × 104 × 182 cm)
Weight	1,720 lb (780 kg)	1,014 lb (460 kg)	2,425 lb (1,100 kg)	3,020 lb (1,370 kg)

DETAILS, COMPONENTS AND OPTIONS

HEAVY BOX AND PAN BRAKES, 18 – 14 GA × 52 – 100", BOXES TO 9" DEEP



W1830×1.5P pan and box brake, 72" × 16 ga



W1.2×1500H pan and box brake with 125 mm fingers



Ground segmented fingers of the heavy pan and box brake



Digital angle gauge on the bending leaf

TECHNICAL SPECIFICATIONS

HEAVY BOX AND PAN BRAKES, 18 – 14 GA × 52 – 100″, BOXES TO 9″ DEEP

W2.0×1320H · W2.0×2540H

Heavy pan and box brakes with extended fingers and digital angle gauge, 14 ga × 52″ and 100″

Model	W2.0×1320H	W2.0×2540H
Bending length	**52″ (1,320 mm)**	**100″ (2,540 mm)**
Capacity, mild steel	**14 ga (2 mm)**	**14 ga (2 mm)**
Box depth / fingers	**Boxes and pans to 9″ (230 mm) deep; fingers 12″ × 1, 6″ × 2, 5″ × 2, 4″ × 3, 3″ × 2**	**Boxes and pans to 9″ (230 mm) deep; fingers 12″ × 4, 6″ × 4, 5″ × 2, 4″ × 3, 3″ × 2**
Back gauge	44.3″ (1,125 mm)	44.3″ (1,125 mm)
Bending angle	0 – 120°; digital angle gauge	0 – 120°; digital angle gauge
Packing size L × W × H	76 × 30 × 68″ (193 × 75 × 172 cm)	124 × 30 × 68″ (315 × 75 × 172 cm)
Weight	**1,995 lb (905 kg)**	**3,053 lb (1,385 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

PBB1020/2A – TSBS 3020/1.2 · 10 MODELS

BOX AND PAN FOLDING MACHINES WITH SEGMENTED BLADES, 20 – 14 GA × 40 – 119″

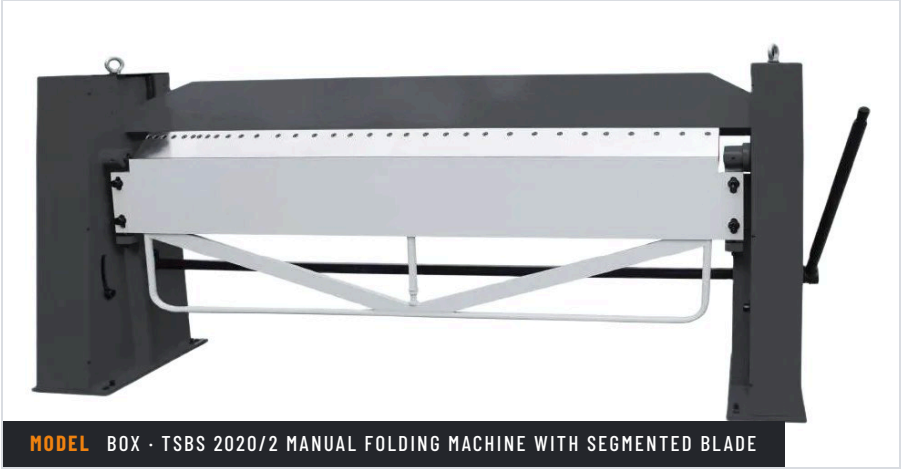

MODEL BOX · TSBS 2020/2 MANUAL FOLDING MACHINE WITH SEGMENTED BLADE



MFS 2020 folding machine with foot clamping and segments



PBB1020/2A · PBB1270/2A · PBB1520/1.5A folding machine with foot clamping

20 – 14 ga × 40 – 119″

Folding machines that fold boxes and pans: the blade is made of segments, so they come out where the sides of a box come up, and with every segment in place the machine folds straight. The PBB A and 3SH foot-clamp machines fold 14 ga over 40 and 50″, 16 ga over 50 and 60″ and 20 ga over 80″ — segmented clamp and folding blades on the A models, quick-release clamp segments, an angle stop and bending to 150° on the 3SH; the TSBS and MFS heavy folding machines take 14 ga over 80″, 16 ga over 80 and 100″ and 18 ga over 10 ft, with segments from 1″ to 15-3/4″ (TSBS) or 19-3/4″ (MFS).

STANDARD FEATURES

- Segmented blades for boxes and pans; foot-operated clamping beam (PBB, MFS) or lever-swung beam (TSBS)
- PBB A / 3SH: 14 ga × 40 – 50″, 16 ga × 50 – 60″, 20 ga × 80″; quick-release clamp segments on the 3SH
- TSBS / MFS: 14 ga × 80″, 16 ga × 80 – 100″, 18 ga × 119″; segments 1 – 15-3/4″ / 19-3/4″ (25 – 400 / 500 mm)
- Bending angle to 135°, 150° on the 3SH models, with an angle stop
- Back gauge on pre-drilled points (3SH) as an option

OPTIONAL EQUIPMENT

PBB A · PBB 3SH BOX AND PAN FOLDING MACHINES — TECHNICAL SPECIFICATIONS

Model	PBB1020/2A	PBB1020/3SH	PBB1270/2A	PBB1270/3SH	PBB1520/1.5A	PBB2050/3SH
Bending length	**40.2″ (1,020 mm)**	**40.2″ (1,020 mm)**	**50″ (1,270 mm)**	**50″ (1,270 mm)**	**59.8″ (1,520 mm)**	**79.5″ (2,020 mm)**
Capacity, mild steel	**14 ga (2 mm)**	**14 ga (2 mm)**	**14 ga (2 mm)**	**16 ga (1.5 mm)**	**16 ga (1.5 mm)**	**20 ga (1 mm)**
Clamping beam lift	1.9″ (47 mm)	1.8″ (45 mm)	1.9″ (47 mm)	1.8″ (45 mm)	1.9″ (47 mm)	1.9″ (47 mm)
Bending angle	0 – 135°	0 – 150°	0 – 135°	0 – 150°	0 – 135°	0 – 135°
Blades	Segmented clamp and folding blades	Segmented, quick-release clamp segments	Segmented clamp and folding blades	Segmented, quick-release clamp segments	Segmented clamp and folding blades	Segmented, quick-release clamp segments
Packing size L × W × H	57 × 25 × 52″ (146 × 64 × 131 cm)	56 × 23 × 56″ (142 × 59 × 142 cm)	67 × 28 × 52″ (171 × 71 × 131 cm)	66 × 26 × 56″ (167 × 66 × 142 cm)	77 × 28 × 51″ (196 × 71 × 130 cm)	98 × 38 × 61″ (248 × 97 × 154 cm)
Weight	**717 lb (325 kg)**	**794 lb (360 kg)**	**816 lb (370 kg)**	**926 lb (420 kg)**	**871 lb (395 kg)**	**1,653 lb (750 kg)**

DETAILS, COMPONENTS AND OPTIONS

BOX AND PAN FOLDING MACHINES WITH SEGMENTED BLADES, 20 – 14 GA × 40 – 119″



PBB1020/3SH folding machine with quick-release clamp segments

TECHNICAL SPECIFICATIONS

BOX AND PAN FOLDING MACHINES WITH SEGMENTED BLADES, 20 – 14 GA × 40 – 119″

TSBS · MFS

Heavy folding machines with blade segments, 6.7 – 10 ft

Model	TSBS 2020/2	MFS 2020	TSBS 2540/1.5	TSBS 3020/1.2
Bending length	**80″ (2,020 mm)**	**80″ (2,020 mm)**	**100″ (2,540 mm)**	**119″ (3,020 mm)**
Capacity, mild steel	**14 ga (2 mm)**	**16 ga (1.5 mm)**	**16 ga (1.5 mm)**	**18 ga (1.2 mm)**
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Blades / clamping	Segments 25 – 400 mm; lever-swung beam	Segments 25 – 500 mm; foot clamping	Segments 25 – 400 mm	Segments 25 – 400 mm
Packing size L × W × H	110 × 28 × 60″ (280 × 71 × 152 cm)	105 × 33 × 58″ (267 × 84 × 147 cm)	133 × 28 × 59″ (337 × 72 × 150 cm)	152 × 28 × 59″ (385 × 72 × 150 cm)
Weight	**2,260 lb (1,025 kg)**	**1,797 lb (815 kg)**	**2,756 lb (1,250 kg)**	**3,053 lb (1,385 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HB-2248 – W1.5×1050F · 23 MODELS

HAND BRAKES, 22 GA – 12 GA × 12″ – 13 FT



MODEL HAND · W2.0×2040 FLOOR HAND BRAKE WITH COUNTERWEIGHTS, 80″ × 14 GA



W2.5×1220N floor brake with counterweights



W1.5×1050F floor brake

22 ga – 12 ga × 12″ – 13 ft

Straight brakes for HVAC, flashing and general sheet work: bench brakes from 12 to 48″, the HB brakes on stand for 22 ga and 16 ga over 48 – 50″, floor brakes for 18 – 16 ga over 40 – 51″ with a one-piece blade or sliding segments, and heavy floor brakes with counterweights and a stop rod for 12 ga over 48 – 100″, 14 ga over 120″ and up to 157″ in 22 ga.

STANDARD FEATURES

- HB-2248 / HB-2250: 22 ga × 48 – 50″; HB-1650: 16 ga × 50″ with 1-1/4″ beam lift
- W1.0 / W1.2 brakes 12 – 79″ in 20 – 18 ga, bending to 135 – 140°
- W1.2 / W1.5 floor brakes 40 – 51″ with a one-piece blade or sliding segments, bending to 150°
- Heavy floor brakes with counterweights and stop rod: 12 ga × 48 – 100″, 14 ga × 120″, 18 ga × 146″, 22 ga × 157″
- HB-2248: all-steel welded, adjustable truss bars and bronze bushings, removable nose bar, stop rod, folding stand

OPTIONAL EQUIPMENT

HB-2248 · HB-2250 · HB-1650 — TECHNICAL SPECIFICATIONS

Model	HB-2248	HB-2250	HB-1650
Bending length	**48″ (1,220 mm)**	**50″ (1,270 mm)**	**50″ (1,270 mm)**
Capacity, mild steel	**22 ga (0.8 mm)**	**22 ga (0.8 mm)**	**16 ga (1.5 mm)**
Beam lift, max	1″ (25.4 mm)	7/8″ (22 mm)	1-1/4″ (32 mm)
Beam adjustment	—	1/8″ (3 mm)	5/8″ (16 mm)
Packing size L × W × H	62 × 26 × 28″ (157 × 67 × 71 cm)	66 × 21 × 28″ (168 × 54 × 71 cm)	66 × 23 × 32″ (168 × 59 × 82 cm)
Weight	**265 lb (120 kg)**	**313 lb (142 kg)**	**421 lb (191 kg)**

DETAILS, COMPONENTS AND OPTIONS

HAND BRAKES, 22 GA – 12 GA × 12″ – 13 FT



W1.2×1500 floor hand brake with one-piece blade



HB-1650 hand brake on stand



W1.5×1050 floor brake with sliding segments




HB-2250 hand brake on stand, 50″



W1.2×1060 hand brake on stand



HB-2248 all-steel hand brake on folding stand

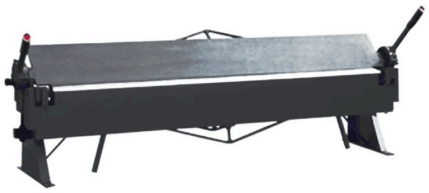

W1.2×1220 bench hand brake



W1.0×610 bench hand brake, 24″

TECHNICAL SPECIFICATIONS

HAND BRAKES, 22 GA – 12 GA × 12″ – 13 FT

W1.0 · W1.2 STRAIGHT HAND BRAKES

Bench and floor hand brakes with one-piece blade, 12 – 79″

Model	W1.0×305	W1.0×610	W1.0×915	W1.2×1220	W1.2×1500	W1.0×2000
Bending length	12″ (305 mm)	24″ (610 mm)	36″ (915 mm)	48″ (1,220 mm)	59.1″ (1,500 mm)	78.7″ (2,000 mm)
Capacity, mild steel	20 ga (1 mm)	20 ga (1 mm)	20 ga (1 mm)	18 ga (1.2 mm)	18 ga (1.2 mm)	20 ga (1 mm)
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 140°	0 – 140°
Packing size L × W × H	20 × 12 × 14″ (51 × 30 × 35 cm)	32 × 12 × 15″ (82 × 30 × 37 cm)	46 × 16 × 23″ (116 × 41 × 59 cm)	62 × 15 × 23″ (158 × 39 × 58 cm)	79 × 30 × 49″ (200 × 76 × 125 cm)	98 × 30 × 49″ (250 × 76 × 125 cm)
Weight	42 lb (19 kg)	64 lb (29 kg)	143 lb (65 kg)	198 lb (90 kg)	628 lb (285 kg)	904 lb (410 kg)

W2.0 · W2.5 HEAVY HAND BRAKES

Floor hand brakes with one-piece blade, counterweights and stop rod, 4 – 13 ft

Model	W2.5×1220N	W2.0×2040	W2.5×2040	W2.0×2540	W2.5×2540	W2.0×3050	W1.2×3700	W0.8×4000
Bending length	48″ (1,220 mm)	80″ (2,040 mm)	80″ (2,040 mm)	100″ (2,540 mm)	100″ (2,540 mm)	120″ (3,050 mm)	146″ (3,700 mm)	157″ (4,000 mm)
Capacity, mild steel	12 ga (2.5 mm)	14 ga (2 mm)	12 ga (2.5 mm)	14 ga (2 mm)	12 ga (2.5 mm)	14 ga (2 mm)	18 ga (1.2 mm)	22 ga (0.8 mm)
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Packing size L × W × H	67 × 30 × 37″ (171 × 75 × 94 cm)	100 × 30 × 40″ (253 × 75 × 101 cm)	100 × 30 × 39″ (255 × 76 × 100 cm)	118 × 30 × 39″ (300 × 76 × 100 cm)	118 × 30 × 39″ (300 × 76 × 100 cm)	138 × 30 × 43″ (350 × 77 × 110 cm)	167 × 33 × 47″ (425 × 85 × 120 cm)	185 × 35 × 47″ (470 × 90 × 120 cm)
Weight	1,080 lb (490 kg)	2,039 lb (925 kg)	2,227 lb (1,010 kg)	2,359 lb (1,070 kg)	2,568 lb (1,165 kg)	3,285 lb (1,490 kg)	3,968 lb (1,800 kg)	4,850 lb (2,200 kg)

W1.2 · W1.5 FLOOR BRAKES, 40 – 51″

Floor brakes with one-piece blade or segments

Model	W1.2×1010	W1.2×1040	W1.2×1060	W1.2×1300	W1.5×1050	W1.5×1050F
Bending length	39.8″ (1,010 mm)	40.9″ (1,040 mm)	41.7″ (1,060 mm)	51.2″ (1,300 mm)	41.3″ (1,050 mm)	41.3″ (1,050 mm)
Capacity, mild steel	18 ga (1.2 mm)	18 ga (1.2 mm)	18 ga (1.2 mm)	18 ga (1.2 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)
Bending angle	0 – 150°	0 – 140°	0 – 150°	0 – 140°	0 – 135°	0 – 150°
Blade	One-piece (segments available)	One-piece or segments	One-piece or segments	Segments (one-piece available)	Segments of various widths, sliding	Segments of various widths, sliding
Packing size L × W × H	51 × 30 × 20″ (130 × 77 × 52 cm)	56 × 29 × 49″ (141 × 73 × 125 cm)	57 × 30 × 43″ (144 × 77 × 110 cm)	62 × 30 × 20″ (157 × 76 × 52 cm)	57 × 30 × 43″ (144 × 77 × 110 cm)	57 × 28 × 52″ (145 × 70 × 131 cm)
Weight	260 lb (118 kg)	176 lb (80 kg)	291 lb (132 kg)	260 lb (118 kg)	408 lb (185 kg)	648 lb (294 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

PBB1020/2.5 – WF1.0×3000 · 18 MODELS

FOOT-CLAMP FOLDING MACHINES, 22 – 12 GA × 36 – 119″



MODEL MANUAL · TSB 2060/2 CAST-IRON FOLDING MACHINE WITH COUNTERWEIGHT



TSB 2020/2 manual folding machine



MF 3020 folding machine, 10 ft

22 – 12 ga × 36 – 119″

Folding machines with a foot-operated clamping beam: press the pedal to clamp, swing the folding beam with the handle, both hands free to hold the sheet. The PBB machines fold 12 ga over 40″ down to 20 ga over 99″ with one-piece blades; the TSB, TFS and MF heavy folding machines take 14 ga over 80″, 18 ga over 80″ and 20 ga over 10 ft — the TSB 2060/2 on a cast-iron frame with a counterweight; the WF folders take 20 ga over 80 to 118″ and the light brakes fold 36 to 72″.

STANDARD FEATURES

- Foot-operated clamping beam; counterbalanced folding beam; one-piece blades
- PBB: 12 ga × 40″, 14 ga × 50″, 16 ga × 60″, 18 ga × 80″, 20 ga × 99″
- TSB 14 ga × 80″ (TSB 2060/2: cast-iron frame with counterweight); TFS 2020B 18 ga × 80″; MF 3020 20 ga × 119″
- WF1.0 folders 20 ga × 80 – 118″; light brakes 36 – 72″
- Bending angle 0 – 135°; gas spring in the arm (PBB) as an option

OPTIONAL EQUIPMENT

PBB FOOT-CLAMP FOLDING MACHINES — TECHNICAL SPECIFICATIONS

Model	PBB1020/2.5	PBB1270/2	PBB1520/1.5	PBB2020/1.2	PBB2520/1.0
Bending length	**40.2″ (1,020 mm)**	**50″ (1,270 mm)**	**59.8″ (1,520 mm)**	**79.5″ (2,020 mm)**	**99.2″ (2,520 mm)**
Capacity, mild steel	**12 ga (2.5 mm)**	**14 ga (2 mm)**	**16 ga (1.5 mm)**	**18 ga (1.2 mm)**	**20 ga (1 mm)**
Clamping beam lift	1.9″ (47 mm)	1.9″ (47 mm)	1.9″ (47 mm)	1.9″ (47 mm)	1.9″ (47 mm)
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Blades	One-piece	One-piece	One-piece	One-piece	One-piece
Packing size L × W × H	57 × 25 × 52″ (146 × 63 × 131 cm)	67 × 28 × 52″ (171 × 71 × 131 cm)	76 × 27 × 52″ (193 × 68 × 133 cm)	97 × 37 × 53″ (246 × 95 × 134 cm)	117 × 37 × 52″ (297 × 94 × 132 cm)
Weight	**639 lb (290 kg)**	**750 lb (340 kg)**	**860 lb (390 kg)**	**1,190 lb (540 kg)**	**1,301 lb (590 kg)**

DETAILS, COMPONENTS AND OPTIONS

FOOT-CLAMP FOLDING MACHINES, 22 – 12 GA × 36 – 119″



TFS 2020B folding machine with foot clamping



WF1.0×3000 folding machine, 10 ft



PBB2020/1.2 folding machine with foot-operated clamping beam



PBB1020/2.5 folding machine with foot clamping



PBB1020/1A · PBB1250/1A folding machine on stand



36″, 40″, 48″ and 72″ manual bending brake on stand

TECHNICAL SPECIFICATIONS

FOOT-CLAMP FOLDING MACHINES, 22 – 12 GA × 36 – 119″

TSB · TFS · MF

Heavy manual folding machines, 6.7 – 10 ft

Model	TSB 2020/2	TSB 2060/2	TFS 2020B	MF 3020
Bending length	80″ (2,020 mm)	81″ (2,060 mm)	80″ (2,020 mm)	119″ (3,020 mm)
Capacity, mild steel	14 ga (2 mm)	14 ga (2 mm)	18 ga (1.2 mm)	20 ga (1 mm)
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Blades / clamping	One-piece blade; lever-swung beam	One-piece; cast-iron frame, counterweight	Foot clamping	One-piece; foot clamping
Packing size L × W × H	110 × 28 × 59″ (280 × 71 × 150 cm)	122 × 30 × 59″ (310 × 76 × 150 cm)	98 × 38 × 61″ (248 × 97 × 154 cm)	144 × 33 × 58″ (365 × 84 × 147 cm)
Weight	2,227 lb (1,010 kg)	3,880 lb (1,760 kg)	1,433 lb (650 kg)	2,161 lb (980 kg)

PBB1020/1A · PBB1250/1A · LIGHT BRAKES · WF1.0

Folding machines for light sheet, 36 – 118″

Model	PBB1020/1A	PBB1250/1A	36″ brake	40″ brake	48″ brake	72″ brake	WF1.0×2020	WF1.0×2500	WF1.0×3000
Bending length	40.2″ (1,020 mm)	49.2″ (1,250 mm)	36″ (915 mm)	40″ (1,016 mm)	48″ (1,220 mm)	72″ (1,830 mm)	79.5″ (2,020 mm)	98.4″ (2,500 mm)	118.1″ (3,000 mm)
Capacity, mild steel	20 ga (1 mm)	20 ga (1 mm)	Light gauge — ask us	Light gauge — ask us	20 ga	22 ga	20 ga (1 mm)	20 ga (1 mm)	20 ga (1 mm)
Bending angle	0 – 135°	0 – 135°	0 – 120°	0 – 120°	0 – 120°	0 – 120°	0 – 135°	0 – 135°	0 – 135°
Packing size L × W × H	54 × 20 × 27″ (136 × 52 × 68 cm)	64 × 27 × 18″ (162 × 69 × 45 cm)	48 × 9 × 20″ (123 × 24 × 50 cm)	53 × 9 × 20″ (134 × 24 × 50 cm)	60 × 9 × 21″ (153 × 24 × 53 cm)	85 × 14 × 25″ (217 × 36 × 64 cm)	96 × 37 × 25″ (245 × 95 × 63 cm)	121 × 37 × 24″ (307 × 94 × 62 cm)	141 × 37 × 25″ (358 × 94 × 63 cm)
Weight	298 lb (135 kg)	254 lb (115 kg)	150 lb (68 kg)	154 lb (70 kg)	168 lb (76 kg)	320 lb (145 kg)	1,036 lb (470 kg)	1,213 lb (550 kg)	1,411 lb (640 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

WB-14 – ZWJ-36 · 7 MODELS

BENCH AND OFFSET BRAKES, 20 – 18 GA × 14 – 39″



MODEL BENCH · W1.2×1000 BENCH HAND BRAKE



W1.2×610 bench brake with toggle clamps



WB-14 bench hand brake

20 – 18 ga × 14 – 39″

Small brakes for the bench and the van: the WB-14 and W1.2 bench brakes bend 20 – 18 ga over 14 to 39″ to 90° or 135°; the ZWJ offset brakes make accurate 1/2″ offsets (jogs) up to 90° in 20 ga steel and 18 ga aluminum.

STANDARD FEATURES

- W1.2 bench brakes 18 – 39″ in 18 ga; WB-14 14″ in 20 ga
- ZWJ-20 / ZWJ-36 offset brakes: 1/2″ jogs to 90° in 20 ga steel and 18 ga aluminum
- Aluminum, copper and steel

OPTIONAL EQUIPMENT

WB-14 · W1.2 BENCH BRAKES · ZWJ OFFSET BRAKES — TECHNICAL SPECIFICATIONS

Model	WB-14	W1.2×460	W1.2×610	W1.2×760	W1.2×1000	ZWJ-20	ZWJ-36
Bending length	14″ (356 mm)	18″ (460 mm)	24″ (610 mm)	30″ (760 mm)	39.4″ (1,000 mm)	20″	36″
Capacity, mild steel	20 ga (1 mm)	18 ga (1.2 mm)	18 ga (1.2 mm)	18 ga (1.2 mm)	18 ga (1.2 mm)	20 ga – 1/2″ offsets to 90°; 18 ga aluminum	20 ga
Bending angle	0 – 90°	0 – 90°	0 – 135°	0 – 90°	0 – 135°	90°	90°
Packing size L × W × H	26 × 9 × 18″ (66 × 24 × 46 cm)	20 × 5 × 3″ (50 × 12 × 6.5 cm)	33 × 8 × 15″ (83 × 21 × 37 cm)	35 × 7 × 5″ (90 × 17 × 12 cm)	49 × 11 × 12″ (125 × 27 × 30 cm)	28 × 8 × 5″ (72 × 20 × 12 cm)	45 × 7 × 6″ (114 × 19 × 14 cm)
Weight	53 lb (24 kg)	10 lb (4.5 kg)	53 lb (24 kg)	31 lb (14 kg)	79 lb (36 kg)	35 lb (16 kg)	75 lb (34 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

BENCH AND OFFSET BRAKES, 20 – 18 GA × 14 – 39″



W1.2×460 / W1.2×760 bench hand brake



ZWJ offset (jog) brake

EB625 – EB3200 · 6 MODELS

EB MAGNETIC SHEET METAL BRAKES, 16 GA × 2 – 8 FT AND 18 GA × 10 FT



MODEL EB · EB2500 MAGNETIC SHEET METAL BRAKE, 8 FT × 16 GA



EB1250 magnetic sheet metal brake, 4 ft × 16 ga, with foot switch



EB625 magnetic sheet metal brake on pedestal stand with foot switch

16 ga × 2 – 8 ft, 18 ga × 10 ft

The magnetic brake clamps the sheet electromagnetically instead of mechanically: an electromagnet in the bed pulls the steel clamp bar down on the sheet with 3.3 to 13.2 US tons, and the bending beam folds it around the front edge of the bar. With no clamping beam frame at the ends, a short clamp bar folds the side of a box of any depth, and closed and narrow shapes a box and pan brake cannot reach. Six models from 2 to 10 ft — 16 ga mild steel to 8 ft, 18 ga over 10 ft — each with a foot switch, a back gauge, a bending stop and four sets of clamp bars.

STANDARD FEATURES

- 16 ga (1.6 mm) mild steel over 2, 3, 4, 6 and 8 ft; 18 ga (1.2 mm) over 10 ft
- Electromagnetic clamping, 3.3 – 13.2 US tons (3 – 12 t); thermal cut-out at 158 °F (70 °C), 30 % duty cycle
- Unlimited box depth; return flanges down to 3/4" (19 mm)
- Four sets of clamping bars — full length, short set for boxes, narrow and slotted
- Foot switch, easy-raise clamp bar and bending stop standard; back gauge 15.4 – 25.2" (390 – 640 mm)

OPTIONAL EQUIPMENT

EB625 – EB3200 — TECHNICAL SPECIFICATIONS


Model	EB625	EB1000	EB1250	EB2000	EB2500	EB3200
Capacity, length × mild steel	**2 ft × 16 ga (625 × 1.6 mm)**	**3 ft × 16 ga (1,000 × 1.6 mm)**	**4 ft × 16 ga (1,250 × 1.6 mm)**	**6 ft × 16 ga (2,000 × 1.6 mm)**	**8 ft × 16 ga (2,500 × 1.6 mm)**	**10 ft × 18 ga (3,200 × 1.2 mm)**
Clamping force	**3.3 US tons (3 t)**	**5 US tons (4.5 t)**	**6.6 US tons (6 t)**	**9.9 US tons (9 t)**	**13.2 US tons (12 t)**	**11 US tons (10 t)**
Bending edge length	26.4" (670 mm)	41.3" (1,050 mm)	51.2" (1,300 mm)	82.3" (2,090 mm)	102" (2,590 mm)	129.5" (3,290 mm)
Distance between lifters	24.8" (630 mm)	39.8" (1,010 mm)	49.6" (1,260 mm)	79.8" (2,028 mm)	99.5" (2,528 mm)	127.1" (3,228 mm)
Back gauge	15.4" (390 mm)	25.2" (640 mm)	25.2" (640 mm)	25.2" (640 mm)	25.2" (640 mm)	25.2" (640 mm)
Duty cycle / protection	30 % / thermal cut-out at 158 °F (70 °C)	30 % / thermal cut-out at 158 °F (70 °C)	30 % / thermal cut-out at 158 °F (70 °C)	30 % / thermal cut-out at 158 °F (70 °C)	30 % / thermal cut-out at 158 °F (70 °C)	30 % / thermal cut-out at 158 °F (70 °C)
Rated current	4 A	6 A	6 A	12 A	15 A	15 A
Packing size L × W × H	33 × 44 × 15" (83 × 112 × 38 cm)	47 × 44 × 15" (120 × 112 × 38 cm)	57 × 44 × 15" (145 × 112 × 38 cm)	87 × 44 × 15" (220 × 112 × 38 cm)	106 × 44 × 15" (270 × 112 × 38 cm)	134 × 44 × 15" (340 × 112 × 38 cm)
Weight	**225 lb (102 kg)**	**313 lb (142 kg)**	**408 lb (185 kg)**	**571 lb (259 kg)**	**639 lb (290 kg)**	**840 lb (381 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

EB MAGNETIC SHEET METAL BRAKES, 16 GA × 2 – 8 FT AND 18 GA × 10 FT



Standard clamping bars of the magnetic brake — full length, short set, narrow and slotted

BSM1550 · BSM3150 · 2 MODELS

BSM1550 AND BSM3150 SHEAR AND BRAKE MACHINES, 22 GA × 61″ AND 124″



MODEL BSM · BSM3150 SHEAR AND BRAKE MACHINE ON ITS MOBILE STAND



Slitter head of the shear and brake machine



Gas spring that lifts the bending beam of the shear and brake machine

22 ga × 61″ and 124″

Shear and brake machines for roofing and siding trim on a mobile stand: the BSM1550 and BSM3150 bend 22 ga (0.8 mm) steel over 61″ and 124″ to 135° and slit it over 59″ and 122″ with a slitter head that runs along the beam. The updated version is labor-saving: a gas spring lifts the bending beam, two more carry the slitter head, and the casters have an improved mounting for a longer service life and a steadier machine at work.

STANDARD FEATURES

- Bends 22 ga (0.8 mm) over 61″ (BSM1550) and 124″ (BSM3150), 0 – 135°
- Slitter head cuts over 59″ and 122″ along the beam
- Gas spring lifts the bending beam; two more gas springs move the slitter head
- Mobile stand on casters with an improved mounting structure
- Aluminum, copper and steel

OPTIONAL EQUIPMENT

BSM1550 · BSM3150 — TECHNICAL SPECIFICATIONS

Model	BSM1550	BSM3150
Working length	**Bending 61″ (1,550 mm), shearing 59″ (1,500 mm)**	**Bending 124″ (3,150 mm), shearing 122″ (3,100 mm)**
Bending and shearing capacity, mild steel	**22 ga (0.8 mm)**	**22 ga (0.8 mm)**
Bending angle	0 – 135°	0 – 135°
Stand	Mobile stand on casters; gas springs lift the bending beam and move the slitter head	Mobile stand on casters; gas springs lift the bending beam and move the slitter head
Packing size L × W × H	80 × 34 × 20″ (203 × 87 × 50 cm)	143 × 35 × 20″ (363 × 89 × 52 cm)
Weight	**430 lb (195 kg)**	**937 lb (425 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

BSM1550 AND BSM3150 SHEAR AND BRAKE MACHINES, 22 GA × 61" AND 124"



Caster mounting of the shear and brake machine's mobile stand

ALB-2200 – ALB-3800 · 6 MODELS

ALB PORTABLE ROOFING BRAKES WITH SLITTER, 24 GA × 7 – 12.5 FT



MODEL ALB · ALB-3200 PORTABLE ALUMINUM ROOFING BRAKE WITH ROLLER SLITTER



Bending flashing on the portable roofing brake

24 ga × 7 – 12.5 ft

Portable roofing brakes for flashing, drip edge, sills, cornices and trim on the job site: an anodized aluminum frame on folding legs that is set up in 10 to 15 minutes, bends painted and coated steel up to 24 ga, aluminum up to 0.032″, copper and brass to 180° — the silicone insert in the bending beam does not mark the finish — and a roller knife slits the sheet to width. Bending lengths of 7.2, 8.5, 10.5 and 12.5 ft, from 132 lb.

STANDARD FEATURES

- 24 ga (0.7 mm) steel and 0.032″ (0.8 mm) aluminum; copper and brass; painted and coated sheet
- Bends to 180°; silicone insert in the bending beam protects the finish
- Roller knife for slitting; infeed depth 19 – 23″ (485 – 580 mm)
- Anodized light-alloy frame, 132 – 234 lb; set up in 10 – 15 minutes

OPTIONAL EQUIPMENT

ALB-2200 – ALB-3800 — TECHNICAL SPECIFICATIONS

Model	ALB-2200	ALB-2600	ALB-2600A	ALB-3200	ALB-3200A	ALB-3800
Bending length	7.2 ft (2,200 mm)	8.5 ft (2,600 mm)	8.5 ft (2,600 mm)	10.5 ft (3,200 mm)	10.5 ft (3,200 mm)	12.5 ft (3,800 mm)
Capacity	24 ga (0.7 mm) steel, 0.032″ (0.8 mm) aluminum	24 ga (0.7 mm) steel, 0.032″ (0.8 mm) aluminum	24 ga (0.7 mm) steel, 0.032″ (0.8 mm) aluminum	24 ga (0.7 mm) steel, 0.032″ (0.8 mm) aluminum	24 ga (0.7 mm) steel, 0.032″ (0.8 mm) aluminum	24 ga (0.7 mm) steel, 0.032″ (0.8 mm) aluminum
Bending angle	0 – 180°	0 – 180°	0 – 180°	0 – 180°	0 – 180°	0 – 180°
Throat (infeed depth)	22.8″ (580 mm)	22.8″ (580 mm)	19.1″ (485 mm)	22.8″ (580 mm)	19.1″ (485 mm)	22.8″ (580 mm)
Packing size L × W × H	90 × 29 × 11″ (229 × 73 × 28 cm)	110 × 30 × 11″ (280 × 75 × 28 cm)	110 × 30 × 11″ (280 × 75 × 28 cm)	129 × 30 × 12″ (327 × 77 × 30 cm)	129 × 30 × 12″ (327 × 77 × 30 cm)	157 × 30 × 12″ (400 × 75 × 30 cm)
Weight	132 lb (60 kg)	168 lb (76 kg)	161 lb (73 kg)	196 lb (89 kg)	187 lb (85 kg)	234 lb (106 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BSM1016 · BSM1220 · BSM2540 · 3 MODELS

BSM FOLDING BRAKES WITH SLITTER, 22 – 20 GA × 40 – 100″



MODEL BSM · BSM2540 FOLDING BRAKE WITH SLITTER, 100″



BSM1220 folding brake with slitter on stand



BSM1016 folding brake with slitter on folding stand

22 – 20 ga × 40 – 100″

Folding brakes with a slitter for the van and the job site: the BSM1016, BSM1220 and BSM2540 bend and slit 20 – 22 ga over 40, 48 and 100″ to 135° on a fold-away steel stand, with a slitting device that comes off.

STANDARD FEATURES

- ✓ BSM1016 20 ga × 40″; BSM1220 22 ga × 48″; BSM2540 22 ga × 100″
- ✓ Bends to 135°; slitting device that comes off
- ✓ Foldable steel stand, 35.4″ or 25.6″ high
- ✓ Aluminum, copper and steel

OPTIONAL EQUIPMENT

BSM1016 · BSM1220 · BSM2540 — TECHNICAL SPECIFICATIONS

Model	BSM1016	BSM1220	BSM2540
Working length	**40″ (1,016 mm)**	**48″ (1,220 mm)**	**100″ (2,540 mm)**
Bending and shearing capacity, mild steel	**20 ga (1 mm)**	**22 ga (0.8 mm)**	**22 ga (0.8 mm)**
Bending angle	0 – 135°	0 – 135°	0 – 135°
Stand height	35.4″ (900 mm)	35.4″ (900 mm)	25.6″ (650 mm)
Packing size L × W × H	57 × 13 × 9″ (145 × 32 × 24 cm)	65 × 12 × 9″ (165 × 31 × 23 cm)	118 × 30 × 20″ (300 × 77 × 51 cm)
Weight	**137 lb (62 kg)**	**181 lb (82 kg)**	**507 lb (230 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

CD-24 · 1 MODEL

CD-24 COIL DISPENSER FOR TRIM COIL, 24"



MODEL CD-24 · CD-24 COIL DISPENSER ON ITS FOLDING STAND



Trim coil on the CD-24 next to a portable brake

Coil to 24"

A coil dispenser for the job site: trim coil up to 24" wide sits on two non-marring bottom rollers under a quick-release tension roller, so the sheet pulls off flat into the portable brake and is cut to length with the brake's own cutter. The stand folds flat for the van; 35 lb.

STANDARD FEATURES

- ✓ Trim coil to 24" (610 mm) wide
- ✓ Two non-marring bottom rollers and a quick-release tension roller
- ✓ Folding support stand; 35 lb (16 kg)
- ✓ Works with the cutter of the portable brake; roller cutter optional

OPTIONAL EQUIPMENT

- \+ Roller cutter

CD-24 — TECHNICAL SPECIFICATIONS

Model	CD-24
Coil width	**To 24" (610 mm)**
Rolls	**Two non-marring bottom rollers and a quick-release tension roller**
Stand	Folding support stand
Cutting	Works with the cutter of the portable brake; roller cutter optional
Packing size L × W × H	40 × 25 × 7" (102 × 64 × 18 cm)
Weight	**35 lb (16 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

E3-IN-1/1320 · E3-IN-1/2040 · 2 MODELS

E3-IN-1 MOTORIZED SHEAR, BRAKE AND ROLL MACHINES, 1/8" × 52" AND 80"



MODEL E3-IN-1 · E3-IN-1/2040 MOTORIZED SHEAR, BRAKE AND ROLL MACHINE

1/8" shear × 52 – 80"

The motorized combination machine: a 4.7 or 5.5 HP motor drives a shear that cuts 1/8" (3 mm) mild steel at 30 strokes a minute, a brake that folds 14 ga and rolls that roll 12 ga with cone rolling, over 52" or 80". A function selector switches between shear, brake and roll; shearing and bending run single-stroke or continuous; the back gauge has a digital readout.

STANDARD FEATURES

- ✓ Shear 1/8" (3 mm) × 52" / 80", 2° shearing angle, 30 strokes a minute
- ✓ Brake 14 ga (2 mm); rolls 12 ga (2.5 mm) × 59" / 83" with cone rolling
- ✓ Back gauge 17.7" (450 mm) with digital readout and hand wheel
- ✓ Function selector brake / shear / roll; single stroke or continuous; quick-release top roll

OPTIONAL EQUIPMENT

E3-IN-1/1320 · E3-IN-1/2040 — TECHNICAL SPECIFICATIONS

Model	E3-IN-1/1320	E3-IN-1/2040
Shearing capacity × width	**1/8" (3 mm) × 52" (1,320 mm)**	**1/8" (3 mm) × 80.3" (2,040 mm)**
Shearing angle / strokes per minute	2° / 30 per min	2° / 30 per min
Back gauge range	17.7" (450 mm), digital readout	17.7" (450 mm), digital readout
Bending capacity × width	**14 ga (2 mm) × 52" (1,320 mm)**	**14 ga (2 mm) × 80.3" (2,040 mm)**
Rolling capacity × width	**12 ga (2.5 mm) × 59" (1,500 mm)**	**12 ga (2.5 mm) × 82.7" (2,100 mm)**
Min. rolling diameter	Ø3-1/2" (90 mm)	Ø4-3/4" (120 mm)
Work table height	29.9" (760 mm)	29.9" (760 mm)
Motor	**4.7 HP (3.5 kW)**	**5.5 HP (4 kW)**
Packing size L × W × H	100 × 57 × 78" (254 × 145 × 197 cm)	126 × 60 × 81" (320 × 152 × 206 cm)
Weight	**5,368 lb (2,435 kg)**	**7,374 lb (3,345 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

MINI SHEAR BRAKE 8″ – 3-IN-1/1320A · 13 MODELS

3-IN-1 SHEAR, BRAKE AND ROLL MACHINES, 20 – 16 GA × 8 – 52″



MODEL 3-IN-1 · 3-IN-1/1067×1.5 SHEAR, BRAKE AND SLIP ROLL MACHINE



3-IN-1/1016, 1067 and 1320 shear, brake and roll machine with segmented fingers and two crank handles



3-IN-1/760A shear, brake and roll with separate bending section

20 – 16 ga × 8 – 52″

Hand-operated combination machines that shear, bend and roll sheet on one frame: 20 ga (1 mm) mild steel over 8 to 52″ and 16 ga (1.5 mm) over 42 and 52″, folding to 90° and rolling down to 1-1/8″ diameter on the small models. The floor models have removable segmented fingers for boxes and pans, a back gauge and wire grooves in the rolls; the A models have a separate bending section that needs less effort.

STANDARD FEATURES

- 20 ga (1 mm) × 8 – 52″; 16 ga (1.5 mm) × 42 and 52″ on the ×1.5 models
- Shear, brake to 90° and slip roll on one frame; minimum rolling diameter 1-1/8 – 2-3/4″
- Removable segmented upper dies (fingers) for boxes and pans; back gauge
- Wire grooves in the rolls; two handle positions
- A models: independent bending section; mini shear brake 8″ for copper, brass and aluminum

OPTIONAL EQUIPMENT

MINI SHEAR BRAKE 8″ · 3-IN-1/200 – 760 — TECHNICAL SPECIFICATIONS

Model	Mini shear brake 8″	3-IN-1/200	3-IN-1/305	3-IN-1/610	3-IN-1/760
Working width	**7.9″ (200 mm)**	**7.9″ (200 mm)**	**12″ (305 mm)**	**24″ (610 mm)**	**29.9″ (760 mm)**
Shear / brake / roll capacity, mild steel	**20 ga (1 mm) copper and brass, 18 ga (1.2 mm) aluminum — shear and brake**	**20 ga (1 mm)**	**20 ga (1 mm)**	**20 ga (1 mm)**	**20 ga (1 mm)**
Bending angle, max	90°	90°	90°	90°	90°
Min. rolling diameter	**–**	**Ø1-1/8″ (29 mm)**	**Ø1-1/2″ (39 mm)**	**Ø1-1/2″ (39 mm)**	**Ø1-1/2″ (39 mm)**
Packing size L × W × H	20 × 13 × 7″ (50 × 32 × 17 cm)	14 × 10 × 12″ (36 × 25 × 30 cm)	20 × 16 × 14″ (50 × 40 × 35 cm)	33 × 16 × 26″ (84 × 41 × 66 cm)	39 × 18 × 28″ (100 × 45 × 72 cm)
Weight	**29 lb (13 kg)**	**37 lb (17 kg)**	**95 lb (43 kg)**	**247 lb (112 kg)**	**300 lb (136 kg)**

DETAILS, COMPONENTS AND OPTIONS

3-IN-1 SHEAR, BRAKE AND ROLL MACHINES, 20 – 16 GA × 8 – 52″



3-IN-1/610 and 760 shear, brake and roll machine on cast side frames



3-IN-1/200 and 305 bench shear, brake and slip roll with crank handle



8″ mini shear brake for the bench

TECHNICAL SPECIFICATIONS

3-IN-1 SHEAR, BRAKE AND ROLL MACHINES, 20 – 16 GA × 8 – 52″

3-IN-1/1016 – 1320

Floor shear, brake and slip roll machines, 40 – 52″

Model	3-IN-1/1016	3-IN-1/1067	3-IN-1/1320	3-IN-1/1067×1.5	3-IN-1/1320×1.5
Working width	40″ (1,016 mm)	42″ (1,067 mm)	52″ (1,320 mm)	42″ (1,067 mm)	52″ (1,320 mm)
Shear / brake / roll capacity, mild steel	20 ga (1 mm)	20 ga (1 mm)	20 ga (1 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)
Bending angle, max	90°	90°	90°	90°	90°
Min. rolling diameter	Ø1-9/16″ (40 mm)	Ø1-5/8″ (42 mm)	Ø1-15/16″ (50 mm)	Ø2-3/8″ (60 mm)	Ø2-3/4″ (70 mm)
Packing size L × W × H	53 × 18 × 28″ (135 × 45 × 72 cm)	55 × 21 × 31″ (139 × 54 × 78 cm)	66 × 21 × 31″ (168 × 54 × 78 cm)	59 × 23 × 37″ (150 × 59 × 93 cm)	70 × 23 × 37″ (179 × 59 × 94 cm)
Weight	430 lb (195 kg)	608 lb (276 kg)	769 lb (349 kg)	860 lb (390 kg)	1,036 lb (470 kg)

3-IN-1/760A · 1016A · 1320A

Shear, brake and roll machines with separate bending section, 30 – 52″

Model	3-IN-1/760A	3-IN-1/1016A	3-IN-1/1320A
Working width	29.9″ (760 mm)	40″ (1,016 mm)	52″ (1,320 mm)
Shear / brake / roll capacity, mild steel	20 ga (1 mm)	20 ga (1 mm)	20 ga (1 mm)
Bending angle, max	90°	90°	90°
Min. rolling diameter	Ø1-9/16″ (39 mm)	Ø1-9/16″ (40 mm)	Ø1-15/16″ (50 mm)
Packing size L × W × H	42 × 19 × 20″ (106 × 49 × 51 cm)	53 × 18 × 28″ (135 × 45 × 72 cm)	66 × 22 × 24″ (167 × 57 × 62 cm)
Weight	282 lb (128 kg)	430 lb (195 kg)	736 lb (334 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.