NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2027

ŞAHINLER MACHINERY · SOLD & SERVICED IN CANADA BY NOVOTECH

PLATE ROLLS, SECTION BENDERS & STEELWORKERS

PLATE ROLLS · SECTION & PIPE BENDERS · STEELWORKERS · PUNCHING · FLANGING · PRESSES

Turkey
MADE IN TURKEY

25+
MACHINE FAMILIES

1-Year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

ŞAHINLER MACHINERY BY NOVOTECH

CONTENTS

PLATE BENDING ROLLS

Hydraulic Heavy-Duty 4-Roll Plate Rolls 4R HSS 04
Hydraulic 4-Roll Plate Rolls — Linear & Orbital 4R HS-L / 4R HS 09
Hydraulic 4-Roll Plate Rolls — Cassette Type 4RH 15
Hydraulic Translating Heavy-Duty 3-Roll Plate Rolls 3R UHS 17
Hydraulic 3-Roll Plate Rolls 3R HS 19
Hydraulic 4-Roll Conical Plate Rolls 4R HC 21

SECTION & PIPE BENDING

Pipe Polishing Machine BT 114-S 22
Pipe Draw Benders SPB 60 / 76 23
Motorized Section & Pipe Benders PK 30 / PK 35 24
Hydraulic Section & Pipe Bender HPK 40 25
Hydraulic Section & Pipe Benders HPK 50 / HPK 60 26
Hydraulic Section & Pipe Benders HPK 65 / HPK 80 27
Hydraulic Section & Pipe Benders HPK 100 / HPK 120 28
Heavy-Duty Section & Beam Benders HPK DP 30
NC Tube Coiling Machine TC-42 NC 31
Section Bending Capacity Charts PK / HPK 32

IRONWORKERS & PUNCHING

Steelworker Work Stations & Tooling HKM 35
Hydraulic Steelworkers HKM 40 – 175 37
Hydraulic Punching Machines HPM / HPM DP / CNC / NC 41

CIRCLE CUTTING AND FLANGING

Circular Cutting & Flanging Machines SDK 6 / SDK 8 46
Elliptical Cutting & Flanging Machine EFM 6 48

HYDRAULIC PRESSES

3-Axis Straightening Presses DK-S 49
Hydraulic Shop Presses DPM / DPM-K / DK 51
T-Slot Press & Garage-Type Press Brake AT / AP 54

HYDRAULIC CORNER NOTCHERS

Hydraulic Corner Notchers HNM 56

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and sections in common fractions (1/2, 1/4, 1/8, 1/16). Plate-roll capacities are for 37,700 psi (260 N/mm²) yield-strength steel unless noted. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR ŞAHINLER MACHINERY

Sales, installation, parts and technical support across Canada

NovoTech Machine Tools Inc. supplies metal-forming machinery and tooling to fabricators, steel-structure, HVAC and sheet-metal shops, and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is built by Şahinler Metal and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

QUOTING & TOOLING

Send your material, section size and bending radius — we'll match the machine and rolls.

CUSTOM VOLTAGE

208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on suitable models.

ŞAHINLER METAL MAKINA ENDÜSTRI · BURSA, TURKEY

ABOUT THE MANUFACTURER

Şahinler Metal is a Turkish manufacturer based in Bursa, building plate bending rolls, section and pipe benders, hydraulic steelworkers, punching machines, flanging machines and hydraulic presses — all CE certified and exported worldwide.

Early workshop

The founders

Production hall

Şahinler factory, Bursa

Construction

Tanks & silos

Bridges & structures

Pressure vessels

4R HSS SERIES · 6.7 FT TO 20 FT

HYDRAULIC HEAVY-DUTY 4-ROLL PLATE BENDING MACHINES

Built for wind-tower, shipyard, pressure-vessel and pipeline fabrication

MODEL **4R HSS**

- Pyramid linear roll movement
- Plate up to 3-3/8" thick
- Hydraulic tilting drop-end
- Optional NC / CNC control

STANDARD FEATURES

- Very suitable for medium and heavy plate and stainless steel
- Full circles, ellipses and varying radii rolled easily
- Pinch and side rolls move on a pyramid linear path with hydraulic cylinders
- Linear guide system — cylinders apply all their force to the plate
- Overload protection
- Three digital readouts for easy roll positioning
- Hydraulic tilting drop-end for easy removal of finished parts
- Mobile control panel
- Welded steel frames
- SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls
- Cone-bending device
- Hydraulic roll balancing (Ø11.0" – 18.1" rolls); electronic balancing (Ø19.7" – 26.8" rolls)
- Central lubrication (automatic on Ø19.7" – 26.8" rolls)
- Two-speed operation

OPTIONAL EQUIPMENT

- Automation with NC or CNC control (ESA, Italy)
- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Hydraulic plate ejector
- Ground rolls for special jobs
- Infinitely variable speed
- Electronic roll balancing on Ø11.0" – 18.1" rolls
- Accumulator system for rotating welded parts + welding safety system
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

4R HSS OPTIONS & AUTOMATION

OPTION Overhead crane & side supports

NC
NC control system

CNC
CNC control system (ESA, Italy)

OPTION Side supports

OPTIONAL EJECTOR ARM

The optional ejector arm lifts finished shells off the machine, speeding up series production.

Wheel-rim body production: hydraulic automatic wheel-rim body rolling machine with hydraulic plate ejector, built for high-volume series production.

TECHNICAL SPECIFICATIONS 4R HSS · 6.7 & 8.4 FT

6.7 FT 4R HSS · 6.7 FT SERIES

WORKING LENGTH 80.7" · 8 MODELS

Model		4R HSS 20-280	4R HSS 20-320	4R HSS 20-350	4R HSS 20-380	4R HSS 20-400	4R HSS 20-460	4R HSS 20-500	4R HSS 20-550
Working length	FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT
Working length	in	80.7	80.7	80.7	80.7	80.7	80.7	80.7	80.7
No pre-bend · Min. rolling Dia. ≥ 5× top roll		13/16"	1"	1-1/8"	1-5/8"	1-3/4"	2"	2-1/8"	2-3/8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		5/8"	13/16"	1"	1-1/8"	1-3/8"	1-5/8"	1-3/4"	2"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		5/8"	13/16"	1"	1-1/8"	1-3/8"	1-5/8"	1-3/4"	2"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1/2"	5/8"	13/16"	1"	1-1/8"	1-3/8"	1-5/8"	1-3/4"
Top & bottom roll Ø	in	11.0	12.6	13.8	15.0	15.7	18.1	19.7	21.7
Side roll Ø	in	8.7	9.4	10.2	11.8	11.8	15.0	15.7	17.7
Motor power	HP	22	27	32	42	52	52	84	94
Rolling speed	ft/min	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	3.3 – 13	3.3 – 13
Dimensions L × W × H	in	171 × 67 × 73	171 × 71 × 77	171 × 75 × 77	191 × 89 × 93	191 × 89 × 93	191 × 91 × 93	219 × 110 × 114	224 × 114 × 116
Weight	lb	18,850	23,149	25,353	32,298	36,376	43,652	73,855	88,185

8.4 FT 4R HSS · 8.4 FT SERIES

WORKING LENGTH 100.4" · 8 MODELS

Model		4R HSS 25-280	4R HSS 25-320	4R HSS 25-350	4R HSS 25-380	4R HSS 25-400	4R HSS 25-460	4R HSS 25-500	4R HSS 25-550
Working length	FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT
Working length	in	100.4	100.4	100.4	100.4	100.4	100.4	100.4	100.4
No pre-bend · Min. rolling Dia. ≥ 5× top roll		5/8"	13/16"	1"	1-1/8"	1-5/8"	1-3/4"	2"	2-1/8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1/2"	5/8"	13/16"	1"	1-1/8"	1-3/8"	1-5/8"	1-3/4"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		1/2"	5/8"	13/16"	1"	1-1/8"	1-3/8"	1-5/8"	1-3/4"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		3/8"	1/2"	5/8"	13/16"	1"	1-1/8"	1-3/8"	1-5/8"
Top & bottom roll Ø	in	11.0	12.6	13.8	15.0	15.7	18.1	19.7	21.7
Side roll Ø	in	8.7	9.4	10.2	11.8	11.8	15.0	15.7	17.7
Motor power	HP	22	27	32	42	52	52	84	94
Rolling speed	ft/min	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	3.3 – 13	3.3 – 13
Dimensions L × W × H	in	191 × 67 × 73	191 × 71 × 77	191 × 75 × 77	211 × 89 × 93	211 × 89 × 93	211 × 91 × 93	238 × 110 × 114	244 × 114 × 116
Weight	lb	21,275	25,574	28,219	36,861	39,242	49,384	79,366	95,901

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction.

TECHNICAL SPECIFICATIONS 4R HSS · 10 FT

10.2 FT 4R HSS · 10.2 FT SERIES

WORKING LENGTH 122.0" · 11 MODELS

Model		4R HSS 30-280	4R HSS 30-320	4R HSS 30-350	4R HSS 30-380	4R HSS 30-400	4R HSS 30-460
Working length	FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT
Working length	in	122.0	122.0	122.0	122.0	122.0	122.0
No pre-bend · Min. rolling Dia. ≥ 5× top roll		1/2"	5/8"	13/16"	1"	1-1/8"	1-5/8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		3/8"	1/2"	5/8"	13/16"	1"	1-1/8"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		3/8"	1/2"	5/8"	13/16"	1"	1-1/8"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		5/16"	3/8"	1/2"	5/8"	13/16"	1"
Top & bottom roll Ø	in	11.0	12.6	13.8	15.0	15.7	18.1
Side roll Ø	in	8.7	9.4	10.2	11.8	11.8	15.0
Motor power	HP	22	27	32	42	52	52
Rolling speed	ft/min	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16
Dimensions L × W × H	in	211 × 67 × 73	211 × 71 × 77	211 × 75 × 77	230 × 89 × 93	230 × 89 × 93	230 × 91 × 93
Weight	lb	23,369	28,109	31,857	42,329	44,533	55,336

10.2 FT 4R HSS · 10.2 FT SERIES (CONT.)

WORKING LENGTH 122.0" · 11 MODELS

Model		4R HSS 30-500	4R HSS 30-550	4R HSS 30-580	4R HSS 30-620	4R HSS 30-680
Working length	FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT
Working length	in	122.0	122.0	122.0	122.0	122.0
No pre-bend · Min. rolling Dia. ≥ 5× top roll		1-3/4"	2"	2-3/8"	2-3/4"	3-3/8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1-3/8"	1-5/8"	1-3/4"	2-3/8"	2-3/4"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		1-3/8"	1-5/8"	1-3/4"	2-3/8"	2-3/4"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1-1/8"	1-3/8"	1-5/8"	2"	2-3/8"
Top & bottom roll Ø	in	19.7	21.7	22.8	24.4	26.8
Side roll Ø	in	15.7	17.7	18.9	20.5	22.8
Motor power	HP	84	94	98	165	201
Rolling speed	ft/min	3.3 – 13	3.3 – 13	3.3 – 13	3.3 – 13	3.3 – 13
Dimensions L × W × H	in	260 × 110 × 114	266 × 114 × 116	266 × 116 × 116	283 × 128 × 128	303 × 138 × 142
Weight	lb	84,878	103,617	110,231	136,687	181,881

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction.

TECHNICAL SPECIFICATIONS 4R HSS · 13.5 & 20 FT

13.5 FT — 4R HSS · 13.5 FT SERIES

WORKING LENGTH 161.4" · 8 MODELS

Model		4R HSS 40-280	4R HSS 40-320	4R HSS 40-350	4R HSS 40-380	4R HSS 40-400	4R HSS 40-460	4R HSS 40-500	4R HSS 40-550
Working length	FT	13.5 FT	13.5 FT	13.5 FT	13.5 FT	13.5 FT	13.5 FT	13.5 FT	13.5 FT
Working length	in	161.4	161.4	161.4	161.4	161.4	161.4	161.4	161.4
No pre-bend · Min. rolling Dia. ≥ 5× top roll		5/16"	3/8"	1/2"	5/8"	13/16"	1"	1-3/8"	1-5/8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1/4"	5/16"	3/8"	1/2"	5/8"	13/16"	1"	1-1/8"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		1/4"	5/16"	3/8"	1/2"	5/8"	13/16"	1"	1-1/8"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		8 ga	1/4"	5/16"	3/8"	1/2"	5/8"	13/16"	1"
Top & bottom roll Ø	in	11.0	12.6	13.8	15.0	15.7	18.1	19.7	21.7
Side roll Ø	in	8.7	9.4	10.2	11.8	11.8	15.0	15.7	17.7
Motor power	HP	22	27	32	42	52	52	84	94
Rolling speed	ft/min	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	3.3 – 13	3.3 – 13
Dimensions L × W × H	in	254 × 67 × 73	254 × 71 × 77	254 × 75 × 77	274 × 89 × 93	274 × 89 × 93	274 × 91 × 93	299 × 110 × 114	305 × 114 × 116
Weight	lb	28,660	32,518	37,809	48,502	51,809	65,036	95,901	119,050

20 FT — 4R HSS · 20 FT SERIES

WORKING LENGTH 240.2" · 7 MODELS

Model		4R HSS 60-350	4R HSS 60-380	4R HSS 60-400	4R HSS 60-460	4R HSS 60-500	4R HSS 60-550	4R HSS 60-620
Working length	FT	20 FT	20 FT	20 FT	20 FT	20 FT	20 FT	20 FT
Working length	in	240.2	240.2	240.2	240.2	240.2	240.2	240.2
No pre-bend · Min. rolling Dia. ≥ 5× top roll		5/16"	3/8"	1/2"	9/16"	13/16"	1"	1-1/8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1/4"	5/16"	3/8"	1/2"	5/8"	13/16"	1"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		1/4"	5/16"	3/8"	1/2"	5/8"	13/16"	1"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		8 ga	1/4"	5/16"	3/8"	1/2"	5/8"	13/16"
Top & bottom roll Ø	in	13.8	15.0	15.7	18.1	19.7	21.7	24.4
Side roll Ø	in	10.2	11.8	11.8	15.0	15.7	17.7	20.5
Motor power	HP	32	42	52	52	84	94	165
Rolling speed	ft/min	4.9 – 16	4.9 – 16	4.9 – 16	4.9 – 16	3.3 – 13	3.3 – 13	3.3 – 13
Dimensions L × W × H	in	333 × 75 × 77	352 × 89 × 93	352 × 89 × 93	352 × 91 × 93	378 × 100 × 93	384 × 114 × 114	402 × 128 × 128
Weight	lb	52,911	62,281	66,139	88,185	148,812	154,324	195,109

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction.

4R HS-L · Ø3.9" – 5.1" ROLL MODELS

HYDRAULIC 4-ROLL PLATE BENDING MACHINES — LINEAR

Linear roll movement with hydraulic wedge pinch system

MODEL **4R HS-L**

- Hydraulic wedge pinch system
- Double pre-bend in one pass
- Hydromotor + planetary gearbox

STANDARD FEATURES

- Bottom pinch roll with hydraulic WEDGE system (up/down movement)
- Double pre-bend (both ends) in one pass
- Two side rolls with double-pinch pyramid action
- Top roll driven by hydraulic motor through planetary gearbox
- Bottom roll driven by cardan-joint system through gears
- Central lubrication system
- Very suitable for light and medium plate and stainless steel
- Full circles and varying radii rolled easily
- Overload protection
- Three digital readouts for easy roll positioning
- Hydraulic drop-end for easy removal of finished parts
- Mobile control panel
- Welded steel frames
- SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls
- Cone-bending device
- Two-speed operation

OPTIONAL EQUIPMENT

- Automation with NC or CNC control
- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Hydraulic plate ejector
- Ground rolls for special jobs
- Infinitely variable speed
- Electronic roll balancing for parallel roll movement
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

4R HS · Ø5.9" – 10.2" ROLL MODELS

HYDRAULIC 4-ROLL PLATE BENDING MACHINES — ORBITAL

Orbital roll movement for light and medium plate

MODEL **4R HS 25-245**

- Orbital roll movement
- Hydromotor + planetary gearbox
- Hydraulic balancing

STANDARD FEATURES

- Pinch and side rolls move on an orbital path with hydraulic cylinders
- Top roll driven by hydromotor and planetary gearbox; bottom roll by gear and cardan system
- Hydraulic balancing system
- Very suitable for light and medium plate and stainless steel
- Full circles and varying radii rolled easily
- Overload protection
- Three digital readouts for easy roll positioning
- Hydraulic drop-end for easy removal of finished parts
- Mobile control panel
- Welded steel frames
- SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls
- Cone-bending device
- Two-speed operation

OPTIONAL EQUIPMENT

- Automation with NC or CNC control
- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Hydraulic plate ejector
- Ground rolls for special jobs
- Infinitely variable speed
- Electronic roll balancing for parallel roll movement
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

4R HS-L · 4R HS OPTIONS

OPTION **4R HS-L with overhead crane, NC control & side supports**

Overhead crane for large diameters

NC control system

CNC control system

Standard hydraulic drop-end

Wheel-rim body production: automatic wheel-rim body rolling machine with hydraulic plate ejector available for high-volume production.

TECHNICAL SPECIFICATIONS 4R HS-L LINEAR

3.4–6.7 FT 4R HS-L SERIES
7 MODELS

Model		4R HS-L 10-100	4R HS-L 10-130	4R HS-L 12-100	4R HS-L 12-130	4R HS-L 15-100	4R HS-L 15-130	4R HS-L 20-130
Working length	FT	3.4 FT	3.4 FT	4.2 FT	4.2 FT	5.1 FT	5.1 FT	6.7 FT
Working length	in	41.3	41.3	50.0	50.0	61.0	61.0	80.7
No pre-bend · Min. rolling Dia. ≥ 5× top roll		10 ga	1/4″	11 ga	3/16″	12 ga	7 ga	8 ga
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		11 ga	3/16″	12 ga	8 ga	14 ga	10 ga	11 ga
With pre-bend · Min. rolling Dia. ≥ 5× top roll		11 ga	3/16″	12 ga	8 ga	14 ga	10 ga	11 ga
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		12 ga	8 ga	14 ga	11 ga	16 ga	12 ga	14 ga
Top & bottom roll Ø	in	3.9	5.1	3.9	5.1	3.9	5.1	5.1
Side roll Ø	in	4.3	5.1	4.3	5.1	4.3	5.1	5.1
Motor power	HP	3.0	4.0	3.0	4.0	3.0	4.0	4.0
Rolling speed	ft/min	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20
Dimensions L × W × H	in	122 × 43 × 43	122 × 43 × 45	132 × 43 × 43	132 × 43 × 45	142 × 43 × 43	142 × 43 × 45	161 × 43 × 45
Weight	lb	4,431	4,806	4,850	4,938	4,960	5,357	5,952

TECHNICAL SPECIFICATIONS 4R HS ORBITAL

5.1 FT 4R HS · 5.1 FT SERIES
WORKING LENGTH 61.0″ · 5 MODELS

Model		4R HS 15-150	4R HS 15-180	4R HS 15-200	4R HS 15-220	4R HS 15-245
Working length	FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT	5.1 FT
Working length	in	61.0	61.0	61.0	61.0	61.0
No pre-bend · Min. rolling Dia. ≥ 5× top roll		1/4″	3/8″	7/16″	1/2″	9/16″
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		7 ga	1/4″	3/8″	3/8″	1/2″
With pre-bend · Min. rolling Dia. ≥ 5× top roll		7 ga	1/4″	3/8″	3/8″	1/2″
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		10 ga	3/16″	1/4″	5/16″	3/8″
Top & bottom roll Ø	in	5.9	7.1	7.9 / 8.7	8.7	9.6
Side roll Ø	in	5.1	5.9	6.3	6.3	7.1
Motor power	HP	5.4	7.4	7.4	7.4	10
Rolling speed	ft/min	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20
Dimensions L × W × H	in	148 × 38 × 43	154 × 45 × 49	154 × 45 × 49	154 × 45 × 49	150 × 63 × 58
Weight	lb	5,809	7,297	7,716	7,937	10,803

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction.

TECHNICAL SPECIFICATIONS 4R HS ORBITAL

6.7 FT — 4R HS · 6.7 FT SERIES

WORKING LENGTH 80.7" · 6 MODELS

Model		4R HS 20-150	4R HS 20-180	4R HS 20-200	4R HS 20-220	4R HS 20-245	4R HS 20-260
Working length	FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT
Working length	in	80.7	80.7	80.7	80.7	80.7	80.7
No pre-bend · Min. rolling Dia. ≥ 5× top roll		1/4"	5/16"	3/8"	7/16"	1/2"	5/8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		8 ga	1/4"	5/16"	3/8"	3/8"	1/2"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		8 ga	1/4"	5/16"	3/8"	3/8"	1/2"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		11 ga	8 ga	1/4"	1/4"	5/16"	3/8"
Top & bottom roll Ø	in	5.9	7.1	7.9 / 8.7	8.7	9.6	10.2
Side roll Ø	in	5.1	5.9	6.3	6.3	7.1	7.9
Motor power	HP	5.4	7.4	7.4	7.4	10	10
Rolling speed	ft/min	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20
Dimensions L × W × H	in	167 × 38 × 43	173 × 45 × 49	173 × 45 × 49	173 × 45 × 49	169 × 63 × 58	169 × 63 × 61
Weight	lb	6,173	8,300	8,874	8,995	12,015	13,448

8.4 FT — 4R HS · 8.4 FT SERIES

WORKING LENGTH 100.4" · 5 MODELS

Model		4R HS 25-180	4R HS 25-200	4R HS 25-220	4R HS 25-245	4R HS 25-260
Working length	FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT
Working length	in	100.4	100.4	100.4	100.4	100.4
No pre-bend · Min. rolling Dia. ≥ 5× top roll		1/4"	5/16"	3/8"	3/8"	1/2"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		8 ga	1/4"	1/4"	5/16"	3/8"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		8 ga	1/4"	1/4"	5/16"	3/8"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		11 ga	8 ga	3/16"	1/4"	5/16"
Top & bottom roll Ø	in	7.1	7.9 / 8.7	8.7	9.6	10.2
Side roll Ø	in	5.9	6.3	6.3	7.1	7.9
Motor power	HP	7.4	7.4	7.4	10	10
Rolling speed	ft/min	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20
Dimensions L × W × H	in	193 × 45 × 49	193 × 45 × 49	193 × 45 × 49	189 × 63 × 58	189 × 63 × 61
Weight	lb	8,598	10,274	10,141	13,603	14,991

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction. Ø7.9/8.7" = top / bottom roll.

TECHNICAL SPECIFICATIONS 4R HS ORBITAL

10.2 FT 4R HS · 10.2 FT SERIES

WORKING LENGTH 122.0" · 5 MODELS

Model		4R HS 30-180	4R HS 30-200	4R HS 30-220	4R HS 30-245	4R HS 30-260
Working length	FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT
Working length	in	122.0	122.0	122.0	122.0	122.0
No pre-bend · Min. rolling Dia. ≥ 5× top roll		3⁄16"	1⁄4"	5⁄16"	3⁄8"	3⁄8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		11 ga	8 ga	1⁄4"	1⁄4"	5⁄16"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		11 ga	8 ga	1⁄4"	1⁄4"	5⁄16"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		14 ga	11 ga	8 ga	3⁄16"	1⁄4"
Top & bottom roll Ø	in	7.1	7.9 / 8.7	8.7	9.6	10.2
Side roll Ø	in	5.9	6.3	6.3	7.1	7.9
Motor power	HP	7.4	7.4	7.4	10	10
Rolling speed	ft/min	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20	4.9 – 20
Dimensions L × W × H	in	215 × 45 × 49	215 × 45 × 49	215 × 45 × 49	211 × 63 × 58	211 × 63 × 61
Weight	lb	9,480	11,211	11,464	15,102	17,108

13.5 FT 4R HS · 13.5 FT SERIES

WORKING LENGTH 161.4" · 1 MODELS

Model		4R HS 40-260
Working length	FT	13.5 FT
Working length	in	161.4
No pre-bend · Min. rolling Dia. ≥ 5× top roll		1⁄4"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		8 ga
With pre-bend · Min. rolling Dia. ≥ 5× top roll		8 ga
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		11 ga
Top & bottom roll Ø	in	10.2
Side roll Ø	in	7.9
Motor power	HP	10
Rolling speed	ft/min	4.9 – 20
Dimensions L × W × H	in	258 × 63 × 61
Weight	lb	19,621

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction.

4RH SERIES · CASSETTE-TYPE FRAME

HYDRAULIC 4-ROLL PLATE BENDING MACHINES

Compact NC-controlled 4-roll machines for light plate — and special jobs

MODEL 4RH

STANDARD FEATURES

- NC control panel
- Very suitable for light plate, aluminum and stainless steel
- Full circles and varying radii rolled easily
- Rolls move with one hydraulic cylinder through a cassette-type frame
- Overload protection
- Top roll driven by planetary gearbox; bottom and side rolls by gear system
- Mobile control panel
- Welded steel frames
- Hydraulic drop-end for easy removal of finished parts
- Feeding table

SPECIAL JOBS

Cassette-type special systems designed for automotive and similar sectors — mass production of elliptical and cylindrical shapes such as exhaust mufflers.

NC control panel

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TECHNICAL SPECIFICATIONS 4RH

3.4–5.1 FT 4RH SERIES

7 MODELS · Ø2.4/3.1" = TOP / BOTTOM ROLL

Model		4RH 10-60	4RH 10-75	4RH 10-90	4RH 10-130	4RH 13-115	4RH 15-90	4RH 15-130
Working length	FT	3.4 FT	3.4 FT	3.4 FT	3.4 FT	4.4 FT	5.1 FT	5.1 FT
Working length	in	41.3	41.3	41.3	41.3	53.1	61.0	61.0
No pre-bend · Min. rolling Dia. ≥ 5× top roll		16 ga	14 ga	12 ga	3⁄16"	8 ga	14 ga	8 ga
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		20 ga	16 ga	14 ga	8 ga	11 ga	16 ga	11 ga
With pre-bend · Min. rolling Dia. ≥ 5× top roll		20 ga	16 ga	14 ga	8 ga	11 ga	16 ga	11 ga
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		22 ga	20 ga	16 ga	11 ga	14 ga	20 ga	14 ga
Top & bottom roll Ø	in	2.4 / 3.1	3.0 / 3.1	3.5 / 3.9	5.1 / 5.1	4.5 / 4.5	3.5 / 3.9	5.1 / 5.1
Side roll Ø	in	3.1	3.1	3.9	4.3	4.5	3.9	4.3
Motor power	HP	3.0	3.0	3.0	4.0	4.0	3.0	4.0
Rolling speed	ft/min	15	15	15	15	15	15	16
Dimensions L × W × H	in	104 × 33 × 42	104 × 33 × 42	104 × 33 × 43	104 × 35 × 47	110 × 33 × 43	124 × 33 × 43	124 × 35 × 47
Weight	lb	3,086	3,153	3,197	3,638	3,858	4,123	4,817

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction.

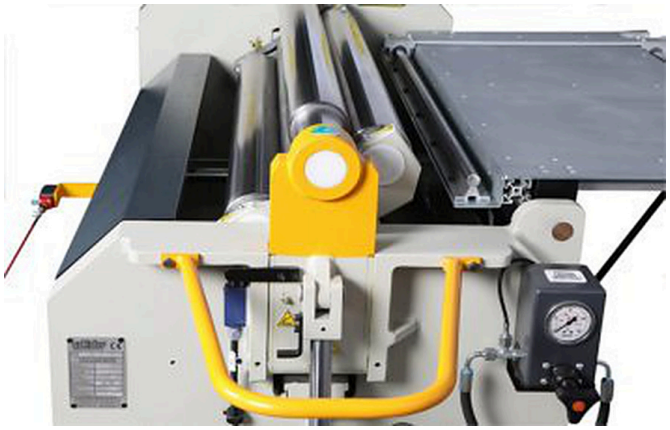

Feeding table

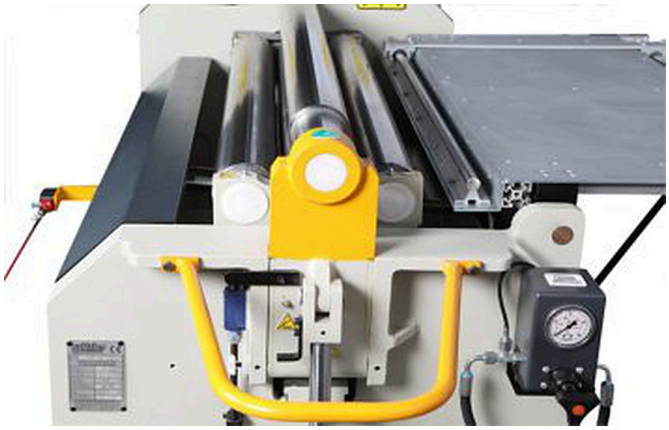

Hydraulic drop-end

OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

3R UHS SERIES · HEAVY DUTY

3-ROLL HYDRAULIC TRANSLATING-TYPE HEAVY-DUTY PLATE ROLLS

Horizontally moving bottom rolls — maximum plate thickness, best pre-bending

MODEL **3R UHS**

STANDARD FEATURES

- High efficiency for heavy plate bending
- Reduced overall dimensions and easier transport on medium and large machines
- Horizontally moving bottom rolls give a lower working height — smaller foundation pit; no pit on smaller models
- Plate stays horizontal during pre-bending and bending, so material moves more easily
- Solid construction lets the machine work as a press brake for re-rolling and calibrating tubes
- Best pre-bending on every required diameter; reducing side-roll distance improves pre-bending on small diameters
- Heavy cones can be produced by bending the plate in several strokes
- No need to tilt the top roll to remove finished tubes
- Large working stroke for the best bending result
- Bends thicker plate than equivalent 3- or 4-roll machines
- SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls
- Two-speed operation
- Cone-bending device
- Electronic roll balancing
- Standard brake system
- Hydraulic drop-end

OPTIONAL EQUIPMENT

- NC control system
- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

3R UHS OPTIONS & SPECIFICATIONS

OPTION 3R UHS with options

Overhead crane

Hydraulic side supports

10 FT 3R UHS · 10 FT SERIES

WORKING LENGTH 122.0" · 6 MODELS

Model		3R UHS 30-450	3R UHS 30-500	3R UHS 30-550	3R UHS 30-580	3R UHS 30-620	3R UHS 30-680
Working length	FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT
Working length	in	122.0	122.0	122.0	122.0	122.0	122.0
No pre-bend · Min. rolling Dia. ≥ 5× top roll		2-1/8"	2-3/8"	2-1/2"	2-3/4"	3-1/8"	3-1/2"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1-5/8"	1-3/4"	2"	2-3/8"	2-1/2"	3"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		1-5/8"	1-3/4"	2"	2-3/8"	2-1/2"	3"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1-1/8"	1-3/8"	1-5/8"	1-3/4"	2-1/8"	2-1/2"
Top roll Ø	in	17.7	19.7	21.7	22.8	24.4	26.8
Bottom rolls Ø	in	16.5	18.1	19.7	19.7	22.0	23.6
Motor power	HP	70	99	99	99	227	241
Rolling speed	ft/min	4.9 – 16	4.9 – 13	4.9 – 13	4.9 – 13	4.9 – 13	4.9 – 13
Dimensions L × W × H	in	262 × 110 × 87	293 × 122 × 104	299 × 132 × 106	315 × 150 × 112	354 × 173 × 118	362 × 177 × 118
Weight	lb	55,116	72,753	99,208	110,231	143,300	160,937

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction.

Bending sequence

Brake system

Drop-end

Control panel

3R HS SERIES · LIGHT & MEDIUM JOBS

3-ROLL HYDRAULIC PLATE BENDING MACHINES

MODEL 3R HS

Optional profile bending rolls on extended shafts

Drive system

Hydraulic system

Cone-bending device

STANDARD FEATURES

- Very suitable for light and medium plate, aluminum and stainless steel
- Full circles and varying radii rolled easily
- Side rolls move on an orbital path with hydraulic cylinders
- Overload protection
- 3 rolls driven by a single planetary gearbox and gear system
- Hydraulic drop-end for easy removal of finished parts
- Mobile control panel
- Two digital readouts for bottom-roll positioning
- Welded steel frames
- SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls
- Cone-bending device with ball bearing
- Hydraulic balancing for parallel roll movement
- Extended shafts for profile and pipe bending rolls

OPTIONAL EQUIPMENT

- Overhead crane for large diameters
- Hydraulic side supports for large diameters
- Ground rolls for special jobs
- Profile bending roll set
- Infinitely variable speed
- Electronic roll balancing
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TECHNICAL SPECIFICATIONS 3R HS

6.7 FT — 3R HS · 6.7 FT SERIES

WORKING LENGTH 80.7" · 4 MODELS

Model		3R HS 20-210	3R HS 20-240	3R HS 20-280	3R HS 20-300
Working length	FT	6.7 FT	6.7 FT	6.7 FT	6.7 FT
Working length	in	80.7	80.7	80.7	80.7
No pre-bend · Min. rolling Dia. ≥ 5× top roll		1/2"	9/16"	11/16"	7/8"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		3/8"	1/2"	5/8"	13/16"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		3/8"	1/2"	5/8"	13/16"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		5/16"	3/8"	1/2"	5/8"
Top roll Ø	in	8.3	9.4	11.0	11.8
Bottom rolls Ø	in	7.5	8.7	10.2	11.0
Motor power	HP	10	10	10	15
Rolling speed	ft/min	16	16	16	16
Dimensions L × W × H	in	134 × 47 × 51	134 × 51 × 57	161 × 55 × 61	161 × 59 × 61
Weight	lb	9,039	11,078	15,102	16,314

8.4 FT — 3R HS · 8.4 FT SERIES

WORKING LENGTH 100.4" · 4 MODELS

Model		3R HS 25-210	3R HS 25-240	3R HS 25-280	3R HS 25-300
Working length	FT	8.4 FT	8.4 FT	8.4 FT	8.4 FT
Working length	in	100.4	100.4	100.4	100.4
No pre-bend · Min. rolling Dia. ≥ 5× top roll		3/8"	1/2"	9/16"	11/16"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		5/16"	3/8"	1/2"	5/8"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		5/16"	3/8"	1/2"	5/8"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1/4"	5/16"	3/8"	1/2"
Top roll Ø	in	8.3	9.4	11.0	11.8
Bottom rolls Ø	in	7.5	8.7	10.2	11.0
Motor power	HP	10	10	10	15
Rolling speed	ft/min	16	16	16	16
Dimensions L × W × H	in	154 × 47 × 51	154 × 51 × 57	181 × 55 × 61	181 × 59 × 61
Weight	lb	10,075	12,346	17,020	18,519

10.2 FT — 3R HS · 10.2 FT SERIES

WORKING LENGTH 122.0" · 4 MODELS

Model		3R HS 30-210	3R HS 30-240	3R HS 30-280	3R HS 30-300
Working length	FT	10.2 FT	10.2 FT	10.2 FT	10.2 FT
Working length	in	122.0	122.0	122.0	122.0
No pre-bend · Min. rolling Dia. ≥ 5× top roll		1/4"	3/8"	1/2"	9/16"
No pre-bend · Min. rolling Dia. ≥ 1.5× top roll		1/4"	5/16"	3/8"	1/2"
With pre-bend · Min. rolling Dia. ≥ 5× top roll		1/4"	5/16"	3/8"	1/2"
With pre-bend · Min. rolling Dia. ≥ 1.5× top roll		8 ga	1/4"	5/16"	3/8"
Top roll Ø	in	8.3	9.4	11.0	11.8
Bottom rolls Ø	in	7.5	8.7	10.2	11.0
Motor power	HP	10	10	10	15
Rolling speed	ft/min	16	16	16	16
Dimensions L × W × H	in	175 × 47 × 51	175 × 51 × 57	203 × 55 × 61	203 × 59 × 61
Weight	lb	11,475	14,551	18,453	19,952

Capacities without pre-bending leave a flat end depending on diameter. Plate bending capacities are based on mild steel with a yield strength of 37,700 psi (260 N/mm²). Thin sheet shown in gauge (ga); plate in nearest common fraction.

4R HC SERIES · CONICAL JOBS

HYDRAULIC 4-ROLL CONICAL-TYPE PLATE BENDING MACHINES

Cone-machined rolls for rolling cones in light plate, aluminum and stainless steel

MODEL 4R HC

STANDARD FEATURES

- Very suitable for rolling cones in light plate, aluminum and stainless steel
- Pinch and side rolls move with hydraulic cylinders
- Overload protection
- Four rolls driven by a gear system from a single planetary gearbox and hydromotor
- Special polished, cone-machined rolls
- 5 digital readouts for easy roll positioning
- Hydraulic drop-end
- Mobile control panel
- Welded steel frames
- SAE 1050 (CK45-50) forged or hot-rolled, induction-hardened and polished rolls
- Manual central lubrication

Cone rolled on the 4R HC

Mobile control panel

3.4–5.1 FT **4R HC SERIES**
3 MODELS

Model		4R HC 10-155	4R HC 10-185	4R HC 15-185
Working length	FT	3.4 FT	3.4 FT	5.1 FT
Working length	in	41.3	41.3	61.0
Rolling capacity (mild steel)		11 ga	8 ga	11 ga
Largest roll Ø (cone end)	in	6.1	7.3	7.3
Smallest roll Ø (cone end)	in	1.6	2.8	2.8
Min. rolling Ø	in	2.5	4.1	4.1
Motor power	HP	5.4	7.4	7.4
Rolling speed	ft/min	16	16	16
Dimensions L × W × H	in	138 × 43 × 46	138 × 43 × 47	157 × 43 × 47
Weight	lb	4,828	5,478	6,272

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

BT 114-S

AUTOMATIC PIPE POLISHING & SANDING MACHINE

Perfect for finishing and removing rust from straight or bent pipe and square tubing

MODEL BT 114-S

Automatic pipe feeder

Abrasive-belt head

STANDARD FEATURES

- BT 114-S automatic pipe polishing and sanding machine
- Perfect for finishing and removing rust from straight or bent pipe and square tubing
- Comes with automatic pipe feeder — delivers material without operator intervention (separate motor)
- Diameter Ø3⁄8″ – Ø4.5″ (10 – 114 mm)
- Variable feeding speed by inverter drive
- Variable sanding-belt speed by inverter drive
- Belt size 37″ × 2″
- 2 abrasive belts included as standard (separate motor)
- Manual pipe-clamping adjustment
- Fixing attachment for the motor
- Opening cover for belt changes and cleaning
- Holder for manual feeding
- Polishes bent pipe and tube up to a 45° bend
- No need to turn the material when using the automatic feeder

Model		BT 114-S
Working capacity (pipe / tube OD)	in	Ø3⁄8″ – Ø4.5″ (10 – 114 mm)
Abrasive-belt motor	HP	4.0 + 2.0
Feed-wheel motor	HP	0.3
Total motor power	HP	6.4
Belt size (2 belts included)	in	37 × 2
Feeding speed (variable, inverter drive)	ft/min	9.8 – 72
Sanding-belt speed		Variable, inverter drive
Automatic pipe feeder		Standard
Dimensions L × W × H	in	39 × 30 × 59
Weight (approx.)	lb	617

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

SPB 60 · SPB 76

PIPE DRAW BENDERS

NC-controlled rotary benders with 500-program memory

MODEL **SPB 76**

Typical bent parts



Handrail application

STANDARD FEATURES

- NC control screen with memory for professional, easy operation
- SPB 60 bends up to Ø2-3/8" × 8 ga pipe; SPB 76 up to Ø3" × 11 ga pipe
- Holder attachment supports the tube while it is clamped
- Free holes for mounting special tools
- Welded steel construction frame
- Thermal overload / power reset
- Emergency stop button
- 500-program internal memory
- Minimum bending radius 3 × tube Ø (varies with wall thickness and material)
- 1 set of pipe bending tooling included
- Infinitely variable speed

OPTIONAL EQUIPMENT

- Pipe, tube, section or bar tooling sets to required size
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		SPB 60	SPB 76
Min. bending radius	in	R2.4 (Ø5/8" × 8 ga)	R3.0 (Ø5/8" × 11 ga)
Max. bending radius	in	R5.9 (Ø2-3/8" × 10 ga)	R8.7 (Ø3" × 10 ga)
Working speed	rpm	0 – 4.5	0 – 4
Motor power	HP	3.0	4.0
Dimensions L × W × H	in	33 × 30 × 47	37 × 33 × 49
Weight	lb	728	1,102

MAX TUBE CAPACITIES

Model	SPB 60	SPB 76
Boiler tube	Ø2-3/8" × 12 ga	Ø3" × 11 ga
Mild steel tube	Ø2-3/8" × 11 ga	Ø3" × 10 ga
Aluminum tube	Ø2-3/8" × 8 ga	Ø3" × 1/4"
Round bar (mild steel)	Ø1-5/8"	Ø1-3/4"
Square tube (mild steel)	□1-5/8" × 8 ga	□1-5/8" × 3/16"

PK 30 · PK 35

MOTORIZED SECTION & PIPE BENDING MACHINES

Compact benders for flat bar, angle, tube and pipe

PK 30
Two bottom rolls driven, idle top roll

PK 35
Two rolls direct-driven by gear system

PK 30 — STANDARD

- Steel frame
- 2 bottom rolls driven by gear system directly from gearbox
- Top roll idle (free turning)
- Hardened rolls
- Roll shafts of special steel, hardened and ground
- Two-speed motor
- Standard rolls
- Adjustable guide rolls
- Horizontal and vertical working position

PK 35 — STANDARD

- Steel frame
- Two rolls direct-driven by gear system
- Hardened rolls
- Roll shafts of special steel, hardened and ground
- Roll shafts in bearings
- Standard rolls
- Guide rolls
- Horizontal and vertical working position

OPTIONAL EQUIPMENT

- + Pipe / tube bending rolls
- + Special profile bending rolls
- + Angle bending rolls
- + Digital readout
- + Special lateral angle guides
- + Bar-twist attachment (PK 35)
- + C & S forming attachment (PK 35)
- + Two-speed motor (PK 35)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

Model		PK 30	PK 35
Roll shaft Ø	in	1.18	1.97
Top roll Ø	in	5.8	6.1
Bottom rolls Ø	in	4.6	6.1
Rolling speed	ft/min	6.6 – 13	15
Motor power	HP	0.9 – 1.1	2.0
Dimensions L × W × H	in	24 × 28 × 53	39 × 30 × 55
Weight	lb	474	882



INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

HPK 40

HYDRAULIC SECTION & PIPE BENDING MACHINE

MODEL HPK 40

Spiral bending

Angle ring

STANDARD FEATURES

- Stable cast-steel frame
- Rolls motor-driven
- Special hardened and polished rolls
- Horizontal and vertical working position
- Lateral side supports
- Brake motor for precision bending
- Hardened standard roll set
- Mobile control panel
- Two digital readouts for bottom-roll position
- Bottom rolls hydraulic up/down

OPTIONAL EQUIPMENT

- NC control
- Spiral bending crane
- Special profile rolls
- Pipe / tube bending rolls
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		HPK 40
Top roll shaft Ø	in	1.38
Bottom roll shafts Ø	in	1.38
Standard roll Ø	in	5.4
Rolling speed	ft/min	23
Motor power	HP	2.0
Dimensions L × W × H	in	41 × 28 × 49
Weight	lb	915

HPK 50 · HPK 60

HYDRAULIC SECTION & PIPE BENDING MACHINES

HPK 50

8 US tons hydraulic force

HPK 60

16 US tons hydraulic force

Spiral coil

Angle ring

Pipe rolls

STANDARD FEATURES

- Steel welded construction frame
- All 3 rolls motor-driven
- Hardened shafts of special steel
- Top roll hydraulic up/down
- Horizontal and vertical working position
- Standard rolls
- Guide rolls
- Brake motor for precision bending
- Mobile control panel

OPTIONAL EQUIPMENT

- Pipe / tube bending rolls
- Profile bending rolls
- Angle bending rolls
- Digital readout
- Lateral angle guides
- Stairway bending attachment
- NC control
- Special Delrin rolls for aluminum and stainless steel
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		HPK 50	HPK 60
Roll shaft Ø	in	1.97	2.36
Top roll Ø	in	7.6	8.5
Bottom rolls Ø	in	6.4	8.5
Hydraulic force	metric tons	8	16
Hydraulic force	US tons	9	18
Rolling speed	ft/min	15	13
Motor power	HP	2.0	3.0
Dimensions L × W × H	in	39 × 30 × 63	59 × 35 × 67
Weight	lb	1,124	2,006

HPK 65 · HPK 80

HYDRAULIC SECTION & PIPE BENDING MACHINES

MODEL **HPK 80**

MODEL **HPK 65**

STANDARD FEATURES

- Steel welded construction frame
- All 3 rolls driven
- Hardened and ground high-tensile special-steel shafts
- Hardened and ground rolls
- Horizontal and vertical working position
- Mobile control panel
- Mechanical lateral angle guide rolls
- Brake motor for precision bending
- 2 digital readouts
- Bottom rolls hydraulic up/down

OPTIONAL EQUIPMENT

- Pipe, tube and profile bending rolls
- 2-axis hydraulic lateral guide rolls
- Automation with NC control
- Crane system for spiral rolling
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		HPK 65	HPK 80
Top roll shaft Ø	in	2.36	3.15
Bottom roll shafts Ø	in	1.97	2.76
Standard roll Ø	in	7.1	9.6
Rolling speed	ft/min	20	23
Motor power	HP	5.0	6.4
Dimensions L × W × H	in	47 × 33 × 47	59 × 39 × 55
Weight	lb	2,161	3,627

Rolled cab frame

Pipe rolls

HPK 100 · HPK 120

HYDRAULIC SECTION & PIPE BENDING MACHINES

HPK 100

Single gearbox with hydromotor drives 3 rolls

HPK 120

Optional NC control · DRO standard

STANDARD FEATURES

- Steel welded construction frame
- Single gearbox with hydromotor drives 3 rolls by gear system (HPK 100)
- Horizontal and vertical working position
- Mobile control panel
- Hardened standard rolls
- Hardened and ground shafts
- 2 digital readouts
- 3-axis mechanical lateral angle guide rolls (manual)
- Bottom rolls hydraulic up/down

OPTIONAL EQUIPMENT

- Pipe, tube and profile bending rolls
- 3-axis hydraulic lateral guide rollers
- Infinitely variable speed
- Automation with NC control
- Crane system for spiral rolling
- Half-pipe bending attachment
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		HPK 100	HPK 120
Roll shaft Ø	in	3.94	4.72
Standard roll Ø	in	12.4	15.4
Rolling speed	ft/min	23	6.6 – 25
Motor power	HP	10	20
Dimensions L × W × H	in	79 × 57 × 67	79 × 65 × 75
Weight	lb	7,055	9,811

Coiled tank jacket

Speed and pressure adjustment valves

HPK 100 · HPK 120 · OPTIONAL

HPK OPTIONS & SPECIAL MACHINES

OPTION HPK 100 with NC & lateral guides

Corrugated sheet bending machine

STANDARD FEATURES — HPK 120

- Steel construction welded frame
- Each of the 3 rolls driven by its own planetary gearbox and hydromotor
- Hardened and ground high-tensile special-steel shafts
- Hardened standard rolls
- Mobile control panel
- Horizontal and vertical working position
- 2 digital readouts
- Hydraulic lateral angle guide rolls
- Infinitely variable speed
- Bottom rolls hydraulic up/down

OPTIONAL EQUIPMENT

- All types of pipe, tube, profile rolls and IPN / UPN beam attachments on request
- Automation with NC control
- Crane system for spiral rolling
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Half-pipe bending attachment

Pipe bending with NC

Profile rolls

Tube rolls

HPK 160 · 180 · 200 · 240 · 300 · 360 DP

HEAVY-DUTY HYDRAULIC SECTION & BEAM BENDING MACHINES

Each roll driven by its own planetary gearbox and hydromotor — for heavy beams and sections

MODEL **HPK DP**

DETAIL **Roll set**

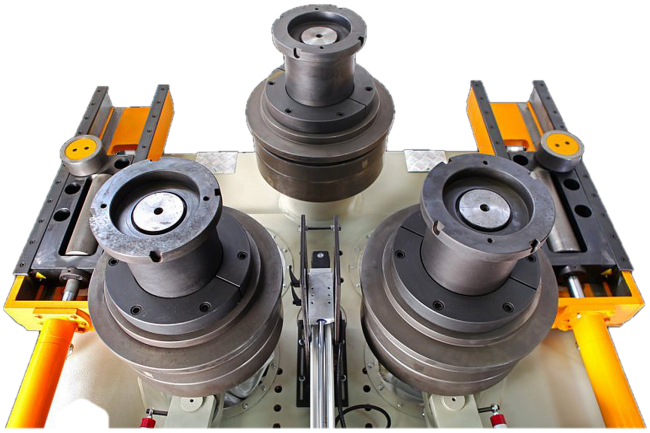

STANDARD FEATURES

- Steel construction welded frame
- Each of the 3 rolls driven by its own planetary gearbox and hydromotor
- Hardened and ground high-tensile special-steel shafts
- Hardened standard rolls
- Mobile control panel
- Horizontal working position only
- Two-speed working system
- 2 digital readouts (DRO standard)
- Hydraulic lateral angle guide rolls
- Lateral rolls hydraulic up/down

OPTIONAL EQUIPMENT

- All types of pipe, tube, profile rolls and HEB / IPN / UPN beam attachments on request
- Automation with NC control
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		HPK 160 DP	HPK 180 DP	HPK 200 DP	HPK 240 DP	HPK 300 DP	HPK 360 DP
Roll shaft Ø	in	6.30	7.09	7.87	9.45	11.81	14.17
Standard roll Ø	in	18.9	22.8	22.8	24.4	29.9	31.5
Rolling speed	ft/min	9.8 – 20	9.8 – 20	6.6 – 16	6.6 – 13	6.6 – 13	6.6 – 13
Motor power	HP	30	40	40	63	98	103
Dimensions L × W × H	in	98 × 87 × 91	109 × 91 × 106	118 × 91 × 122	122 × 94 × 126	197 × 167 × 148	197 × 167 × 148
Weight	lb	21,605	31,747	36,376	43,652	84,878	121,254

TC-42 NC · COIL BENDING JOBS

NC TUBE COILING MACHINE

Variable-pitch spiral coils with elbows at start and finish — in a single pass by automation

MODEL TC-42 NC

Spiral coil

Coil with straight ends

Variable-pitch coil

STANDARD FEATURES

- Steel welded construction frame
- Single gearbox with hydromotor drives 3 rolls by gear system
- Rolls hardened and ground in the bore
- Horizontal working position
- Mobile control panel
- Hydraulic lateral supports with roller
- NC control panel (standard)
- Manual lateral supports
- Hydraulic top support
- Infinitely variable speed
- Material support stand
- Bottom rolls hydraulic up/down

OPTIONAL EQUIPMENT

- Pipe, tube and profile bending rolls
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		TC-42 NC
Top roll shaft Ø	in	2.56
Bottom roll shafts Ø	in	2.56
Standard roll Ø	in	6.5
Min. tube wall		12 ga
Rolling speed	ft/min	16
Motor power	HP	10
Dimensions L × W × H	in	131 × 83 × 55
Weight	lb	6,724

Coiling rolls

BENDING CAPACITY CHART

PK 30 · PK 35 · HPK 40 · HPK 50 · HPK 60

Profile	PK 30		PK 35		HPK 40		HPK 50		HPK 60	
	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.
Flat bar — easy way STD	2 × 3/8″ 13/16 × 1/4″	71″ 12″	2-3/8 × 3/8″ 1-5/8 × 3/8″	20″ 16″	1-3/8 × 5/16″	12″	2-3/8 × 3/8″* 13/16 × 3/8″	24″ 12″	3-1/8 × 13/16″ 1-5/8 × 3/8″	47″ 16″
Flat bar — hard way STD	3-1/8 × 9/16″* 1-1/8 × 1/4″	28″ 16″	3-7/8 × 9/16″* 2-3/8 × 3/8″	18″ 14″	2 × 1/2″	16″	3-1/8 × 9/16″* 2 × 3/8″	24″ 12″	4-3/4 × 1″* 2 × 3/8″	24″ 16″
Square bar STD	1-1/8 × 1-1/8″ 3/8 × 3/8″	35″ 8″	1-3/8 × 1-3/8″ 13/16 × 13/16″	35″ 12″	11/16 × 11/16″	10″	1-3/8 × 1-3/8″ 9/16 × 9/16″	24″ 12″	2 × 2″ 13/16 × 13/16″	31″ 16″
Round bar OPT	Ø1-1/8″ Ø3/8″	35″ 8″	Ø1-3/8″ Ø1-1/8″	24″ 16″	Ø7/8″	8″	Ø1-3/8″ Ø13/16″	24″ 12″	Ø2″ Ø13/16″	31″ 16″
Round tube OPT	Ø2-3/8″ × 16 ga Ø1″ × 16 ga	39″ 24″	Ø2-3/4″ × 14 ga Ø1-1/8″ × 14 ga	39″ 20″	Ø1-5/8″ × 16 ga	20″	Ø2-3/4″ × 14 ga Ø1″ × 16 ga	47″ 16″	Ø3-7/8″ × 14 ga Ø2-3/8″ × 14 ga	63″ 20″
Pipe (NPS) OPT	NPS 1-1/2 × .114″ NPS 1/4 × .071″	24″ 12″	NPS 2 × .114″ NPS 1 × .091″	39″ 14″	NPS 1 × .091″	18″	NPS 2 × .114″ NPS 1/2 × .091″	39″ 12″	NPS 3 × .126″ NPS 1 × .102″	63″ 20″
Rectangular tube OPT	2 × 1-1/8″ × 11 ga 1-5/8 × 13/16″ × 14 ga	47″ 31″	2-3/4 × 1-1/8″ × 14 ga 2 × 1-5/8″ × 11 ga	47″ 47″	1-1/8 × 9/16″ × 12 ga	20″	2-3/4 × 1-1/8″ × 11 ga 1-1/8 × 9/16″ × 14 ga	59″ 16″	3-1/8 × 1-5/8″ × 11 ga 1-5/8 × 13/16″ × 14 ga	55″ 20″
Square tube OPT	□1-5/8″ × 11 ga □1-1/8″ × 14 ga	47″ 31″	□2″ × 11 ga □1-5/8″ × 11 ga	67″ 24″	□1″ × 14 ga	18″	□2″ × 11 ga □13/16″ × 14 ga	63″ 16″	□2-3/4″ × 11 ga □1-5/8″ × 14 ga	63″ 20″
Angle — leg out OPT	L 1-5/8 × 1-5/8 × 3/16″ L 1-1/8 × 1-1/8 × 3/16″	24″ 12″	L 2 × 2 × 3/16″ L 1-5/8 × 1-5/8 × 3/16″	31″ 24″	L 1-3/8 × 1-3/8 × 3/16″	16″	L 2 × 2 × 1/4″ L 1-1/8 × 1-1/8 × 1/8″	24″ 16″	L 2-3/4 × 2-3/4 × 1/4″ L 1-5/8 × 1-5/8 × 3/16″	39″ 20″
Angle — leg in OPT	L 1-3/8 × 1-3/8 × 3/16″ L 1-1/8 × 1-1/8 × 3/16″	24″ 16″	L 2 × 2 × 1/4″ L 1-1/8 × 1-1/8 × 1/8″	39″ 20″	L 1-1/8 × 1-1/8 × 3/16″	22″	L 2 × 2 × 1/4″ L 1-1/8 × 1-1/8 × 1/8″	35″ 24″	L 2-3/4 × 2-3/4 × 1/4″ L 1-5/8 × 1-5/8 × 3/16″	47″ 24″
Tee — stem out STD	T 2 × 1/4″ T 13/16 × 1/8″	24″ 16″	T 2-3/8 × 1/4″* T 1-1/8 × 3/16″	28″ 16″	T 1-1/8 × 1-1/8 × 3/16″	12″	T 2-3/8 × 1/4″* T 1-1/8 × 3/16″	24″ 16″	T 3-1/8 × 3/8″* T 1-5/8 × 3/16″*	39″ 16″
Tee — stem in STD	T 2 × 1/4″ T 13/16 × 1/8″	24″ 16″	T 2-3/8 × 1/4″* T 1-1/8 × 3/16″	31″ 20″	T 1-3/8 × 1-3/8 × 3/16″	14″	T 2-3/8 × 1/4″* T 1-1/8 × 3/16″	28″ 16″	T 3-1/8 × 3/8″* T 1-5/8 × 3/16″*	47″ 20″
Tee — flange out STD	T 2 × 1/4″ T 13/16 × 1/8″	24″ 16″	T 2-3/8 × 1/4″ T 1-1/8 × 3/16″	28″ 20″	T 1-3/8 × 1-3/8 × 3/16″	12″	T 2-3/8 × 1/4″ T 1-1/8 × 3/16″	28″ 16″	T 3-1/8 × 3/8″ T 1-5/8 × 3/16″	39″ 16″
Channel — flanges out OPT*	—		UPN 80 (3-1/8″) UPN 30 (1-1/8″)	39″ 20″	UPN 40×20 (1-5/8 × 13/16″)	14″	UPN 80 (3-1/8″)* UPN 30 (1-1/8″)	31″ 16″	UPN 100 (3-7/8″) UPN 60 (2-3/8″)	31″ 20″
 Channel — flanges in STD*	—		UPN 80 (3-1/8″) UPN 30 (1-1/8″)	47″ 31″	UPN 35×18 (1-3/8 × 11/16″)	20″	UPN 80 (3-1/8″)* UPN 30 (1-1/8″)	47″ 24″	UPN 100 (3-7/8″) UPN 60 (2-3/8″)	47″ 24″

*STD = can be rolled with standard dies · OPT = can be rolled with optional dies. Each cell: maximum section size → Min. Rolling Dia. (outside). * special spacer may be needed · ** only with special beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with nominal depth in inches. Based on 37,700 psi (260 N/mm²) yield-strength material.*

BENDING CAPACITY CHART HPK 65 · HPK 80 · HPK 100 · HPK 120

Profile	HPK 65		HPK 80		HPK 100		HPK 120	
	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.
Flat bar — easy way STD	2-3/8 × 3/8″ 13/16 × 3/16″	20″ 10″	3-7/8 × 13/16″* 3-1/8 × 13/16″ 1-1/8 × 3/8″	79″ 31″ 12″	3-7/8 × 13/16″ 1-1/8 × 3/8″	31″ 16″	4-7/8 × 1″ 1-1/8 × 3/8″	47″ 20″
Flat bar — hard way STD	3-1/8 × 13/16″ 2 × 3/16″	20″ 10″	4-7/8 × 1″ 2-3/8 × 3/16″	24″ 12″	7-7/8 × 1-1/8″ 6-1/4 × 1-3/8″ 3-1/8 × 3/16″	47″ 31″ 16″	7-7/8 × 2″ 3-7/8 × 3/8″	39″ 20″
Square bar STD	1-1/4 × 1-1/4″ 1/2 × 1/2″	16″ 10″	1-3/4 × 1-3/4″ 9/16 × 9/16″	20″ 15″	2-3/8 × 2-3/8″ 9/16 × 9/16″	30″ 16″	2-1/2 × 2-1/2″ 13/16 × 13/16″	30″ 20″
Round bar OPT	Ø1-3/8″ Ø3/8″	14″ 10″	Ø2″ Ø9/16″	20″ 15″	Ø3″ Ø9/16″	31″ 18″	Ø3-1/8″ Ø13/16″	33″ 20″
Round tube OPT	Ø2-3/8″ × 14 ga Ø9/16″ × 16 ga	24″ 8″	Ø3-7/8″ × 12 ga Ø9/16″ × 20 ga	47″ 15″	Ø4-7/8″ × 12 ga Ø9/16″ × 20 ga	55″ 18″	Ø6-1/4″ × 8 ga Ø5-1/2″ × 11 ga Ø2″ × 14 ga	110″ 59″ 20″
Pipe (NPS) OPT	NPS 2 × .154″ NPS 1/2 × .109″	16″ 8″	NPS 3 × .216″ NPS 1/2 × .109″	31″ 15″	NPS 4 × .177″ NPS 1/2 × .109″	98″ 18″	NPS 5 × .250″ NPS 3/4 × .113″	59″ 20″
Rectangular tube OPT	2 × 1″ × 11 ga 13/16 × 9/16″ × 14 ga	18″ 10″	3-1/8 × 1″ × 11 ga 1 × 9/16″ × 14 ga	31″ 14″	3-7/8 × 1-5/8″ × 8 ga 1 × 9/16″ × 14 ga	51″ 18″	4-3/4 × 1-5/8″ × 8 ga 1-1/8 × 13/16″ × 11 ga	71″ 20″
Square tube OPT	□1-3/4″ × 11 ga □13/16″ × 14 ga	24″ 12″	□2-3/4″ × 11 ga □1″ × 14 ga	51″ 14″	□3-1/8″ × 3/16″ □1″ × 14 ga	59″ 18″	□3-1/2″ × 3/16″ □1-1/8″ × 11 ga	71″ 20″
Angle — leg out OPT	L 2-3/8 × 2-3/8 × 1/4″ L 1-1/8 × 1-1/8 × 3/16″	26″ 14″	L 3-1/8 × 3-1/8 × 5/16″ L 1-1/8 × 1-1/8 × 1/8″	31″ 16″	L 3-7/8 × 3-7/8 × 1/2″ L 1-5/8 × 1-5/8 × 3/16″	39″ 28″	L 4-3/4 × 4-3/4 × 1/2″ L 1-5/8 × 1-5/8 × 3/16″	47″ 24″
Angle — leg in OPT	L 2 × 2 × 3/16″ L 1-1/8 × 1-1/8 × 3/16″	22″ 14″	L 2-3/4 × 2-3/4 × 1/4″ L 1-1/8 × 1-1/8 × 1/8″	28″ 18″	L 3-7/8 × 3-7/8 × 3/8″ L 1-5/8 × 1-5/8 × 3/16″	59″ 22″	L 3-7/8 × 3-7/8 × 3/8″ L 1-5/8 × 1-5/8 × 3/16″	47″ 24″
Tee — stem out STD	T 2-3/8 × 1/4″ T 13/16 × 1/8″	22″ 10″	T 3-1/8 × 3/8″ T 1 × 1/8″	31″ 18″	T 3-7/8 × 7/16″ T 1-1/8 × 3/16″	39″ 16″	T 3-7/8 × 7/16″ T 1-1/8 × 3/16″	31″ 20″
Tee — stem in STD	T 2 × 1/4″ T 13/16 × 1/8″	20″ 10″	T 2-3/4 × 5/16″ T 1 × 1/8″	31″ 11″	T 3-1/2 × 3/8″ T 1-1/8 × 3/16″	39″ 16″	T 3-7/8 × 7/16″ T 1-1/8 × 3/16″	39″ 20″
Tee — flange out OPT	T 2-3/8 × 1/4″ T 13/16 × 1/8″	20″ 10″	T 3-1/8 × 3/8″ T 1-1/8 × 3/16″	31″ 11″	T 3-7/8 × 7/16″ T 1-1/8 × 3/16″	39″ 16″	T 3-7/8 × 7/16″ T 1-1/8 × 3/16″	31″ 20″
Channel — flanges out STD*	UPN 80 (3-1/8″) UPN 30 (1-1/8″)	24″ 10″	UPN 140 (5-1/2″) UPN 120 (4-3/4″) UPN 100 (3-7/8″)	63″ 35″ 31″	UPN 180 (7-1/8″) UPN 30 (1-1/8″)	35″ 16″	UPN 220 (8-5/8″) UPN 180 (7-1/8″) UPN 40 (1-5/8″)	39″ 31″ 20″
Channel — flanges in STD*	UPN 65 (2-1/2″) UPN 30 (1-1/8″)	24″ 10″	UPN 140 (5-1/2″) UPN 120 (4-3/4″) UPN 100 (3-7/8″)	63″ 39″ 31″	UPN 180 (7-1/8″) UPN 30 (1-1/8″)	39″ 16″	UPN 220 (8-5/8″) UPN 180 (7-1/8″) UPN 40 (1-5/8″)	47″ 35″ 24″
I-beam — hard way STD*	IPN 80 (3-1/8″)	24″	IPN 120 (4-3/4″) IPN 80 (3-1/8″)	24″ 16″	IPN 180 (7-1/8″) IPN 80 (3-1/8″)	39″ 16″	IPN 220 (8-5/8″) IPN 80 (3-1/8″)	39″ 20″
H-beam — hard way STD*	–		–		HEA 120 (4-3/4″) HEB 100 (3-7/8″)	39″ 47″	HEA 140 (5-1/2″) HEB 120 (4-3/4″)	47″ 47″
Channel — easy way OPT**	–		–		–		UPN 120 (4-3/4″) UPN 100 (3-7/8″)	32.8 FT 24.6 FT
I-beam — easy way OPT**	–		–		–		IPN 160 (6-1/4″) IPN 140 (5-1/2″) IPN 100 (3-7/8″)	16.4 FT 13.1 FT 79″
H-beam — easy way OPT**	–		–		–		HEA 120 (4-3/4″) HEB 100 (3-7/8″)	13.1 FT 63″

STD *= can be rolled with standard dies ·* ***OPT*** *= can be rolled with optional dies. Each cell: maximum section size → Min. Rolling Dia. (outside). * special spacer may be needed · ** only with special beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with nominal depth in inches. Based on 37,700 psi (260 N/mm²) yield-strength material.*

BENDING CAPACITY CHART

HPK 160 DP · HPK 180 DP · HPK 200 DP · HPK 240 DP · HPK 300 DP · HPK 360 DP

Profile	HPK 160 DP		HPK 180 DP		HPK 200 DP		HPK 240 DP		HPK 300 DP		HPK 360 DP	
	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.	Max. size	Min. Rolling Dia.
Flat bar — easy way STD	5-7/8 × 1-3/8"	98"	7-1/8 × 1-1/8"	98"	7-7/8 × 2"	11.5 FT	7-7/8 × 2-3/4"	12.5 FT	9-7/8 × 3-7/8"	118"	11-3/4 × 3-7/8"	118"
Flat bar — hard way STD	10-3/4 × 2"	59"	11 × 2-3/8"	79"	13-3/4 × 3-1/8"	98"	15 × 3-1/8"	98"	19-3/4 × 3-7/8"	98"	21-3/4 × 4-3/4"	118"
Square bar STD	3-1/2 × 3-1/2"	59"	4-3/8 × 4-3/8"	79"	4-3/4 × 4-3/4"	118"	5-1/8 × 5-1/8"	98"	7-1/8 × 7-1/8"	98"	7-7/8 × 7-7/8"	118"
Round bar OPT	Ø3-1/2"	71"	Ø4-3/8"	79"	Ø4-3/4"	118"	Ø5-7/8"	118"	Ø7-7/8"	16.4 FT	Ø8-7/8"	19.7 FT
Round tube OPT	Ø5-7/8" × 8 ga	19.7 FT	Ø8-5/8" × 8 ga	26.2 FT	Ø10-3/4" × 1/4"	32.8 FT	Ø11-3/4" × 1/4"	29.5 FT	Ø13-3/4" × 1/4"	32.8 FT	Ø18-3/4" × 5/16"	49.2 FT
Pipe (NPS) OPT	NPS 6 × .280"	11.5 FT	NPS 8 × .322"	13.1 FT	NPS 9 × .248"	13.1 FT	NPS 10 × .365"	16.4 FT	NPS 12 × .562"	26.2 FT	NPS 16 × .500"	39.4 FT
Rectangular tube OPT	5-7/8 × 2" × 3/16"	14.8 FT	7-7/8 × 3-7/8" × 5/16"	16.4 FT	8-5/8 × 3-1/8" × 1/4"	23 FT	11-3/4 × 3-7/8" × 3/8"	26.2 FT	15-3/4 × 7-7/8" × 3/8"	32.8 FT	19-3/4 × 9-7/8" × 9/16"	–
Square tube OPT	□4-3/4" × 1/4"	13.1 FT	□5-7/8" × 5/16"	14.8 FT	□7-1/8" × 3/8"	18 FT	□7-7/8" × 3/8"	19.7 FT	□10-1/4" × 9/16"	26.2 FT	□11-3/4" × 9/16"	32.8 FT
Angle — leg out OPT	L 5-7/8 × 5-7/8 × 11/16"	13.1 FT	L 6-1/4 × 6-1/4 × 9/16"	98"	L 7-1/8 × 7-1/8 × 5/8"	118"	L 7-7/8 × 7-7/8 × 13/16"	118"	L 7-7/8 × 7-7/8 × 1-1/8"	13.1 FT	L 7-7/8 × 7-7/8 × 1-1/8"	13.1 FT
Angle — leg in OPT	L 5-1/2 × 5-1/2 × 9/16"	16.4 FT	L 5-7/8 × 5-7/8 × 11/16"	13.1 FT	L 6-1/4 × 6-1/4 × 9/16"	19.7 FT	L 7-1/8 × 7-1/8 × 11/16"	19.7 FT	L 7-7/8 × 7-7/8 × 13/16"	19.7 FT	L 7-7/8 × 7-7/8 × 1-1/8"	23 FT
Tee — stem out STD	T 5-7/8 × 9/16"	79"	T 6-1/4 × 13/16"	98"	T 7-7/8 × 13/16"	11.5 FT	T 7-7/8 × 1-1/8"	118"	T 9-1/2 × 1-1/8"	118"	T 9-7/8 × 1"*	13.1 FT
Tee — stem in STD	T 5-1/8 × 9/16"	98"	T 5-7/8 × 13/16"	118"	T 7-7/8 × 13/16"	11.5 FT	T 7-7/8 × 13/16"	11.5 FT	T 8-5/8 × 7/8"	13.1 FT	T 9-7/8 × 1"*	16.4 FT
Tee — flange out OPT	T 5-7/8 × 9/16"	79"	T 6-1/4 × 13/16"	98"	T 7-1/8 × 3/8"	19.7 FT	T 7-1/8 × 11/16"	19.7 FT	T 7-7/8 × 13/16"	19.7 FT	T 7-7/8 × 1-1/8"	19.7 FT
Channel — flanges out STD*	UPN 280	79"	UPN 350	98"	UPN 380	118"	UPN 450	118"	UPN 550	11.5 FT	UPN 600	13.1 FT
Channel — flanges in STD*	UPN 280	118"	UPN 350	118"	UPN 380	11.5 FT	UPN 450	11.5 FT	UPN 550	13.1 FT	UPN 600	14.8 FT
I-beam — hard way STD*	IPN 300	118"	IPN 360	118"	IPN 360	11.5 FT	IPN 450	11.5 FT	IPN 550	13.1 FT	IPN 600	16.4 FT
H-beam — hard way STD*	HEB 180	118"	HEB 200	98"	HEB 240	118"	HEB 300	13.1 FT	HEB 500	16.4 FT	HEB 600	19.7 FT
Channel — easy way OPT**	UPN 180	32.8 FT	UPN 220	32.8 FT	UPN 260	39.4 FT	UPN 300	39.4 FT	UPN 340	49.2 FT	UPN 400	65.6 FT
I-beam — easy way OPT**	IPN 180	14.8 FT	IPN 220	16.4 FT	IPN 260	32.8 FT	IPN 300	39.4 FT	IPN 360	32.8 FT	IPN 400	65.6 FT
H-beam — easy way OPT**	HEA 160 HEB 120	19.7 FT 13.1 FT	HEB 160	16.4 FT	HEB 180	19.7 FT	HEB 200	23 FT	HEB 280	32.8 FT	HEB 340	39.4 FT

***STD** = can be rolled with standard dies · **OPT** = can be rolled with optional dies. Each cell: maximum section size → Min. Rolling Dia. (outside). * special spacer may be needed · ** only with special beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with nominal depth in inches. Based on 37,700 psi (260 N/mm²) yield-strength material.*

HKM SERIES · STANDARD WORK STATIONS

HYDRAULIC STEELWORKERS

Punch, shear bar, angle and flat, and notch — all on one machine

HKM Standard work stations with LED lighting

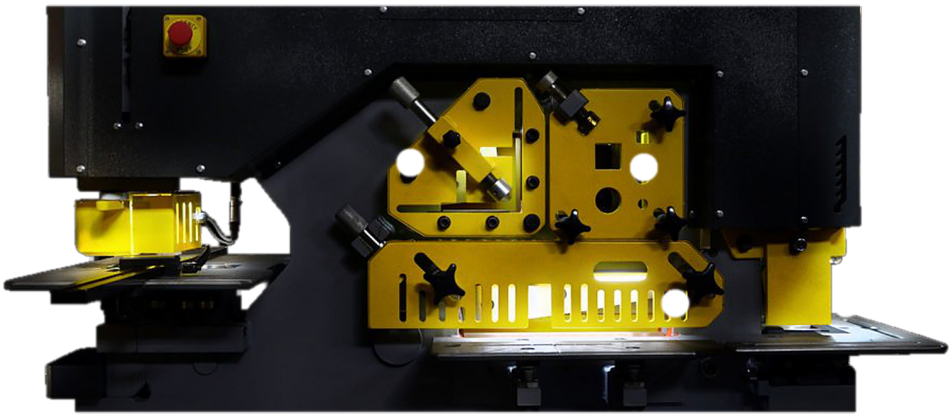

1 · PUNCHING
Punches Ø1/4" up to Ø2-1/4" (max. 1-1/4" thick, depending on model). Punches and dies change quickly; special punches at short notice.

2 · SOLID-BAR SHEAR
Cuts square bar up to 2-1/8" and round bar up to 2-1/2". With other blades it also cuts U, I and T sections.

3 · ANGLE SHEAR
Special blades cut angle sections at 90° and 45°.

4 · SHEET / FLAT-BAR SHEAR
Long blade for everyday sheet and flat-bar cutting.

5 · NOTCHING
Rectangular notching tool supplied; special notching tools available.

PUNCH RANGE
All HKM models punch up to Ø1-1/2" as standard — see the capacity table.

Punching station

Round bar station

Square bar station

Angle station

Flat-bar station


U-notching station

45° angle cutting

Central lubrication pump

Electrical back gauge (double-piston models)

LED lighting

HKM SERIES

OPTIONAL WORK STATIONS & TOOLING

LARGE-HOLE PUNCHING
Punches from Ø1-1/2" (5/16" thick) up to Ø4-7/8" (3/16" thick). Tool sets for Ø1-1/4–1-1/2", 1-1/2–2-1/4", 2-1/4–3-3/8" and 3-3/8–4-3/8".

SECTION PUNCHING
Punch IPN, UPN, flat-bar and angle sections in any shape and size.

SECTION BLADES
Cut UPN, IPN and T sections by changing blades.

V-NOTCHING BLADE
Adds 90° V-notches to the rectangular notching station.

PRESS-BRAKE TOOL
Adds a small press brake on the punching station for everyday sheet bending.

Large-hole punching tool

IPN/UPN punching tool


V-notching blade

Press brake die

IPN punching tool

Hydraulic stripper

Flat-bar radius tool

Louvre punching tool

Punches and dies

Custom-made punches

Louvre sample

Punching diameter and material size and thickness change according to the machine model — see the capacity tables.

HKM 40 · HKM 45 · HKM 60 · HKM 65 V

HYDRAULIC STEELWORKERS — SINGLE PISTON

HKM 40

4 work stations · no notching station

HKM 45 · HKM 60

5 work stations

HKM 65 V

Vertical single piston · 5 stations

STANDARD FEATURES

- Adjustable piston stroke for higher productivity
- Central lubrication system
- LED lighting on all work stations
- Ø7/8" punch & die and standard punching tools
- Round and square solid-bar cutting blade set
- Angle cutting blade set
- Sheet-metal / flat-bar shear
- U-notching blade set (not on HKM 40)
- Electrical back gauge (HKM 65 V)
- Spot lubrication (HKM 65 V)

OPTIONAL EQUIPMENT

- Large-hole punching
- Section punching
- Section blades
- V-notching blade
- Press-brake tool
- Hydraulic stripper
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SINGLE-PISTON DESIGN
One cylinder serves all stations — compact and economical.

HKM 65 V
Vertical piston layout for vertical punching and cutting of material.

HKM 55 · 65 · 85 · 115 · 175

HYDRAULIC STEELWORKERS — DOUBLE PISTON

Two separate hydraulic cylinders and foot pedals — two operators can work at the same time

MODEL **HKM 55 · 65 · 85**

MODEL **HKM 115**

HKM 175 **Two operators at once**

HKM series — ideal for cutting all ranges of angle, I-beam and U-section. Multi-station work enables punching, cutting and notching on the same machine; double-piston models let two operators work at the same time (punching + another station).

STANDARD FEATURES

- 2 separate hydraulic cylinders and foot pedals — 2 operators work at the same time
- Electrical back gauge
- Ø1" punch & die on HKM 115
- Adjustable piston stroke for higher productivity
- Central lubrication system
- LED lighting on all work stations
- Round and square solid-bar cutting blade set
- Angle cutting blade set
- Sheet-metal / flat-bar shear
- U-notching blade set
- Oil cooling system (HKM 175)

OPTIONAL EQUIPMENT

- Large-hole punching
- Section punching
- Section blades
- V-notching blade
- Press-brake tool
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

TECHNICAL SPECIFICATIONS HKM SINGLE PISTON

Model		HKM 40	HKM 45	HKM 60	HKM 65 V
Punching — Ø × max. thickness		Ø13/16 × 9/16″	Ø7/8 × 9/16″	Ø1-1/8 × 9/16″	Ø7/8 × 13/16″
Ø × thickness		Ø1-1/8 × 3/8″	Ø1-1/2 × 5/16″*	Ø1-1/2 × 7/16″*	—
Max. Ø × thickness		Ø1-1/2 × 5/16″*	Ø3-7/8 × 1/8″**	Ø4-3/8 × 1/8″**	Ø1-1/2 × 7/16″*
Stroke	in	1.2	2.1	2.2	1.6
Strokes / min (0.8″ stroke)		20	25	25	22 (5/8″ stroke)
Throat depth	in	6.7	8.7	8.7	9.4
Bar shear — round · square		Ø1-1/8″ · □1″	Ø1-3/8″ · □1-1/8″	Ø1-5/8″ · □1-3/8″	Ø1-5/8″ · □1-1/2″
Angle shear 90°		L 3-1/8 × 3-1/8 × 5/16″	L 3-7/8 × 3-7/8 × 3/8″	L 4-3/4 × 4-3/4 × 1/2″	L 3-7/8 × 3-7/8 × 3/8″
Angle shear 45°		L 2 × 1/4″	L 2-3/4 × 1/4″	L 3-1/8 × 5/16″	—
Flat-bar shear — width × thick		7-7/8″ × 1/2″	7-7/8″ × 9/16″	7-7/8″ × 13/16″	13-3/4″ × 9/16″
Flat-bar shear (wide)		11-3/4″ × 1/4″	11-3/4″ × 1/2″	11-3/4″ × 9/16″	9-7/8″ × 3/4″
Blade length	in	13.9	12.5	12.5	13.9
Notching — thickness		—	5/16″	3/8″	5/16″
Notch width × depth	in	—	1.7 × 3.9	1.7 × 3.9	2.0 × 3.5
Opt. UPN / IPN blades		3 × 1-1/2″	3-1/8 × 1-3/4″	3-1/8 × 1-3/4″	3-7/8 × 2″
Opt. Tee blades		1-3/8 × 3/16″	1-5/8 × 3/16″	3-1/8 × 3/8″	—
Opt. V-notching blade		—	3-7/8 × 3-7/8 × 5/16″	3-7/8 × 3-7/8 × 3/8″	3-1/2 × 3-1/2 × 5/16″
Opt. press brake — bar		—	3-7/8″ × 1/2″	3-7/8″ × 1/2″	4-3/8″ × 5/16″
Opt. press brake — sheet		—	—	—	9-7/8″ × 1/4″
Punching force	metric tons	40	45	60	65
Punching force	US tons	44	50	66	72
Motor power	HP	4.0	5.4	5.4	7.4
Dimensions L × W × H	in	43 × 33 × 60	59 × 37 × 66	60 × 37 × 70	46 × 37 × 76
Weight	lb	1,279	3,086	3,175	2,679

*Capacities based on material with 65,300 psi (450 N/mm²) tensile strength. * punch holder required · ** large-hole punching tools required. Flat-bar and sheet thickness in gauge / fraction.*

TECHNICAL SPECIFICATIONS HKM DOUBLE PISTON

Model		HKM 55	HKM 65	HKM 85	HKM 115	HKM 175
Punching — Ø × max. thickness		Ø13/16 × 13/16″	Ø1 × 13/16″	Ø1-1/4 × 13/16″*	Ø1-3/8 × 1″	Ø1-5/8 × 1-1/4″
Ø × thickness		Ø1-5/8 × 3/8″**	Ø2-1/8 × 3/8″**	Ø2-1/8 × 1/2″**	Ø2-1/8 × 5/8″*	Ø2-1/4 × 7/8″
Max. Ø × thickness		Ø3-7/8 × 1/8″**	Ø4-3/8 × 1/8″**	Ø4-3/8 × 3/16″**	Ø4-3/8 × 3/16″**	Ø4-7/8 × 3/16″**
Stroke	in	2.4	2.2	3.1	3.1	3.1
Strokes / min (0.8″ stroke)		25	25	25	25	22
Throat depth	in	12.0	12.0	14.0	14.0	24.6
Bar shear — round · square		Ø1-5/8″ · □1-5/8″	Ø1-3/4″ · □1-3/4″	Ø2″ · □2″	Ø2-1/8″ · □2″	Ø2-1/2″ · □2-1/8″
Angle shear 90°		L 4-3/4 × 4-3/4 × 1/2″	L 4-3/4 × 4-3/4 × 1/2″	L 5-7/8 × 5-7/8 × 9/16″	L 5-7/8 × 5-7/8 × 5/8″	L 7-7/8 × 7-7/8 × 13/16″
Angle shear 45°		L 2-3/4 × 3/8″	L 2-3/4 × 3/8″	L 3-1/8 × 5/16″	L 3-1/8 × 3/8″	L 3-1/8 × 3/8″
Flat-bar shear — width × thick		7-7/8″ × 13/16″	11-3/4″ × 13/16″	15″ × 13/16″	15″ × 1″	15″ × 1-1/8″
Flat-bar shear (wide)		11-3/4″ × 9/16″	14-3/4″ × 9/16″	19″ × 9/16″	23-1/2″ × 9/16″	23-1/2″ × 13/16″
Blade length	in	15.0	15.0	19.0	24.0	24.0
Notching — thickness		3/8″	3/8″	1/2″	1/2″	5/8″
Notch width × depth	in	1.8 × 3.5	1.8 × 3.5	2.0 × 3.9	2.4 × 3.9	2.4 × 3.9
Opt. UPN / IPN blades		4-3/4 × 2-1/4″	4-3/4 × 2-1/4″	6-1/4 × 2-7/8″	7-7/8 × 3-1/2″	11-3/4 × 4-7/8″
Opt. Tee blades		3-1/8 × 3/8″	3-1/2 × 7/16″	3-7/8 × 7/16″	4-3/4 × 1/2″	5-7/8 × 9/16″
Opt. V-notching blade		3-7/8 × 3-7/8 × 3/8″	3-7/8 × 3-7/8 × 3/8″	3-7/8 × 3-7/8 × 1/2″	3-7/8 × 3-7/8 × 1/2″	3-7/8 × 3-7/8 × 5/8″
Opt. press brake — bar		9-7/8″ × 1/2″	9-7/8″ × 9/16″	9-7/8″ × 13/16″	9-7/8″ × 7/8″	9-7/8″ × 1″
Opt. press brake — sheet		19-3/4″ × 11 ga	19-3/4″ × 11 ga	19-3/4″ × 8 ga	27-1/2″ × 11 ga	27-1/2″ × 8 ga
Punching force	metric tons	55	65	85	115	175
Punching force	US tons	61	72	94	127	193
Motor power	HP	7.4	7.4	10	15	15
Dimensions L × W × H	in	67 × 37 × 74	68 × 37 × 74	76 × 37 × 80	80 × 37 × 86	107 × 45 × 90
Weight	lb	3,417	3,494	5,115	6,482	13,228

*Capacities based on material with 65,300 psi (450 N/mm²) tensile strength. * punch holder required · ** large-hole punching tools required. Flat-bar and sheet thickness in gauge / fraction.*

HPM 30 · 40 · 65 · 85 · 115 · 175

HYDRAULIC PUNCHING MACHINES

Holes and shapes from Ø1/4" up to Ø2-1/4" (max. 1-1/4" thick)

MODEL **HPM 65**

HPM 85 NC table system

STANDARD FEATURES

- Punch & die Ø7/8" (HPM 65 / 85) or Ø1" (HPM 115 / 175)
- Punch holder
- LED light on work station
- C-spanner

OPTIONAL EQUIPMENT

- Punching tools from Ø1/4" up to Ø2-1/4" (max. 1-1/4" thick); punches and dies interchangeable — special tools on request
- Special tools
- Hydraulic stripper
- NC table system
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Punches and dies

Special punches

Punch holder

Optional tools

HPM 65 · 85 · 115 · 175 DP

DOUBLE-HEAD HYDRAULIC PUNCHING MACHINES

Two punching heads, double motor and double foot-pedal control

MODEL HPM 115 DP

MODEL HPM 85 DP

OPTION Hydraulic stripper

Model		HPM 65 DP	HPM 85 DP	HPM 115 DP	HPM 175 DP
Punching force	metric tons	2 × 65	2 × 85	2 × 115	2 × 175
Punching force	US tons	2 × 72	2 × 94	2 × 127	2 × 193
Dimensions L × W × H	in	79 × 35 × 71	89 × 37 × 76	89 × 37 × 78	110 × 43 × 85
Weight	lb	7,099	8,157	10,251	14,881

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

HPM 85 · 115 · 175 CNC

CNC HYDRAULIC PUNCHING MACHINES

Ideal for bolted steel-construction work — perfectly matched holes in series punching

MODEL **HPM 115 CNC**

MODEL **HPM CNC**

STANDARD FEATURES

- Punch & die Ø7/8" (HPM 85) or Ø1" (HPM 115 / 175)
- Punch holder
- LED light on work station
- Mobile CNC control panel (Siemens)
- Divisible separate table
- Material holder with hydraulic clamps
- C-spanner
- Automatic lubrication system

CNC TABLE
120 × 20" table · X 63" / Y 23.6" travel · 550 lb max. carriage load

MATERIAL
14 ga to 1" thick · positioning accuracy ±0.004"

SPEED
79 ft/min on one axis, 98 ft/min on two axes

SOFTWARE
Free software · manual punching (MDI) · CAM program entry · min. 1-3/4" edge distance

Optional 3-head punching (115 / 175 only)

Siemens CNC control



Hydraulic clamps



Typical punched parts

HPM / HKM 65 · 85 · 115 · 175 NC

SPECIAL PUNCHING & CUTTING LINES WITH FEEDING SYSTEM

Automatic punching of angles, flat bar, IPN and UPN sections

MODEL **HPM 85 NC line**

STANDARD FEATURES

- Punch & die Ø7/8" (65 / 85) or Ø1" (115 / 175)
- Punch holder
- LED light on work station
- Mobile NC control panel
- Divisible separate table
- Material holder with manual adjustment clamps
- Mechanical holders and feeders
- C-spanner

PUNCHING
Clean holes up to Ø2-1/4" in 7/8" material, copied by NC

TABLES
307 × 31" NC table · 201 × 16" long loading table · X travel 244"

MATERIAL
14 ga – 13/16" thick · positioning accuracy ±0.004"

SOFTWARE
Free software · manual punching and copy system · program by technical values

NC punching head

Feeding line


Angle punching tooling


Roller conveyor

TECHNICAL SPECIFICATIONS HPM PUNCHING MACHINES

Model		HPM 30	HPM 40	HPM 65	HPM 85	HPM 115	HPM 175
Punching — Ø × max. thickness		Ø7/8 × 3/8"	Ø13/16 × 9/16"	Ø1 × 13/16"	Ø1-1/4 × 13/16"**	Ø1-3/8 × 1"	Ø1-5/8 × 1-1/4"
Ø × thickness		Ø1-1/8 × 1/4"	Ø1-1/8 × 3/8"	Ø2-1/4 × 3/8"**	Ø2-1/4 × 1/2"**	Ø2-1/8 × 5/8"*	Ø2-1/4 × 7/8"
Max. Ø × thickness		Ø1-1/2 × 3/16"*	Ø1-1/2 × 5/16"*	Ø4-3/8 × 1/8"**	Ø4-3/8 × 3/16"**	Ø4-3/8 × 3/16"**	Ø4-7/8 × 3/16"**
Stroke	in	1.8	1.8	2.2	3.1	3.1	3.1
Strokes / min (0.8" stroke)		23	22	22	21	21	21
Throat depth	in	11.8	11.8	24.6	24.6	24.6	24.6
Working height	in	40.9	40.9	37.4	37.4	37.4	37.4
Opt. press brake — bar		—	—	9-7/8" × 9/16"	9-7/8" × 13/16"	9-7/8" × 7/8"	9-7/8" × 1"
Opt. press brake — sheet		—	—	19-3/4" × 11 ga	19-3/4" × 11 ga	27-1/2" × 11 ga	27-1/2" × 8 ga
Punching force	metric tons	30	40	65	85	115	175
Punching force	US tons	33	44	72	94	127	193
Motor power	HP	4.0	4.0	7.4	10	15	15
Dimensions L × W × H	in	46 × 35 × 67	46 × 35 × 67	64 × 35 × 71	73 × 37 × 76	79 × 37 × 78	83 × 39 × 83
Weight	lb	1,653	1,653	5,258	7,066	8,289	11,464

*Capacities based on material with 65,300 psi (450 N/mm²) tensile strength. * punch holder required · ** large-hole punching tools required. Flat-bar and sheet thickness in gauge / fraction.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

MODEL HPM 85 NC

SDK 6 · SDK 8

CIRCULAR SHEET CUTTING & FLANGING MACHINES

Cut and flange dished and flat heads up to Ø15 FT on the same head

MODEL SDK 8

STANDARD FEATURES

- One set of flanging rolls included (R1")
- One set of cutting blades included
- Two-speed part carrier
- Bottom and top flanging rolls driven by hydromotor (SDK 8) or electric motor (SDK 6) through planetary gearbox
- Hydraulic up/down adjustable carrier
- Cutting and flanging on the same head
- Hydraulic-cylinder lateral supports
- LCD touchscreen operator panel

OPTIONAL EQUIPMENT

- Flanging rolls
- Japanese-hat (top-hat) attachment
- Small-Ø cutting / flanging attachment (Ø17.7")
- Blade set for cutting stainless steel
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SDK 6 · SDK 8 DETAILS & SPECIFICATIONS

MODEL SDK cutting & flanging line

Optional Japanese-hat attachment

Optional Japanese-hat attachment

Model		SDK 6	SDK 8
Max. flanging plate Ø	in	149.6	177.2
Min. flanging plate Ø	in	21.7	28.3
Min. flanging Ø with small-Ø attachment	in	15.7	17.7
Max. cutting plate Ø	in	151.6	179.1
Min. cutting plate Ø	in	23.6	31.1
Min. cutting Ø with small-Ø attachment	in	15.7	24.4
Max. flanging height (optional rolls)	in	3.3 (R2.8) · 1.4 (R1.0)	3.7 (R3.1) · 1.4 (R1.0)
Flanging radius (min. – max.)	in	R0.4 – R2.8	R0.4 – R3.1
Max. plate thickness — mild steel		¼"	5/16"
Max. plate thickness — stainless 304/316		8 ga	3/16"
Motor power	HP	12	15
Dimensions L × W × H	in	169 × 43 × 85	193 × 67 × 106
Weight	lb	6,504	10,031

Mild-steel capacities based on 37,000 psi yield strength (26 kg/mm²).

Hydraulic lateral supports

Dished head

Cutting blades

Flanging dies

EFM 6

ELLIPTICAL CUTTING & FLANGING MACHINE

Round and elliptical heads — flanged and cut on the same head

MODEL EFM 6

STANDARD FEATURES

- Flanging head tilts 90° to both sides for elliptical flanging
- One set of flanging rolls included (R3/8")
- One set of cutting blades included
- Bottom and top flanging rolls driven by planetary gearbox and gear system
- Flanges flat, crowned and elliptical bottoms
- Moving, changeable bottom template for flat and elliptical sheets
- Round and elliptical flanging and cutting on the same head
- Copy template (1 pc.)

OPTIONAL EQUIPMENT

- Vacuum system
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

Flanging head

Elliptical head

Model		EFM 6
Max. plate cutting Ø	in	118.1
Min. plate cutting Ø	in	29.5
Max. flanging height	in	1.6
Max. flanging radius	in	11.8
Plate thickness — mild steel		11 ga – ¼"
Plate thickness — stainless 304/316		14 ga – 8 ga
Motor power	HP	10
Dimensions L × W × H	in	220 × 53 × 62
Weight	lb	4,453

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

DK-S 200 · 300 · 400

3-AXIS MOVING STRAIGHTENING PRESSES

X-Y-Z motorized gantry press for straightening large plates, profiles, beams and round bar

MODEL DK-S

STANDARD FEATURES

- Steel welded frame
- Pendant-style control panel
- X-Y-Z axis movement motorized by gear drive
- For straightening large plates and profiles, beams and round steel
- Press safety cage
- Pressure gauge
- Very easy to operate
- Stops at any position

OPTIONAL EQUIPMENT

- Table
- Material lifting system
- Remote control
- Digital readout for cylinder stroke
- Bridge and work-table options in different widths
- Side-tank arrangement
- LED lights
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

DK-S OPTIONS & SPECIFICATIONS

MODEL **DK-S 200**

MODEL **DK-S 400**

Standard press safety cage

Optional cylinder-stroke DRO



Optional material-lifting table

Optional remote control

Model		DK-S 200/2550	DK-S 300/2550	DK-S 400/2550
Press force	metric tons	200	300	400
Press force	US tons	220	331	441
Max. working pressure	psi	4,100	4,280	4,190
Stroke	in	11.8	11.8	11.8
Cylinder Ø	in	11.8	14.2	16.5
Advance speed	in/s	0.59	0.63	0.47
Working speed	in/s	0.20	0.20	0.16
Motor power	HP	20	30	30
Weight	lb	31,195	37,831	46,297

DPM SERIES · 30 – 200 METRIC TONS (33 – 220 US TONS)

HYDRAULIC SHOP PRESSES

MODEL DPM

MODEL DPM 1070-100

STANDARD FEATURES

- Easy to operate
- Steel construction welded frame
- Stops at any position
- Pressure gauge
- Relief valve against overload
- Two-speed joystick control
- Height-adjustable bottom tables
- Table up/down movement attachment
- A pair of V-blocks

OPTIONAL EQUIPMENT

- Hand pump
- Foot-pedal control
- Limit switch + foot pedal

TECHNICAL SPECIFICATIONS DPM

Model		DPM 775-30	DPM 1040-60	DPM 1040-80	DPM 1070-100	DPM 1570-100
Press force	metric tons	30	60	80	100	100
Press force	US tons	33	66	88	110	110
Max. working pressure	psi	3,540	3,420	3,700	3,810	3,810
Stroke	in	7.9	9.8	9.8	11.8	11.8
Cylinder Ø (bore × rod)	in	4.9 × 3.1	7.1 × 4.7	7.9 × 4.7	8.7 × 6.3	8.7 × 6.3
Advance / working / return speed	in/s	0.28 / 0.20 / 0.39	0.31 / 0.16 / 0.39	0.31 / 0.20 / 0.39	0.31 / 0.20 / 0.39	0.31 / 0.20 / 0.39
Motor power	HP	4.0	5.4	5.4	7.4	7.4
Bed-hole spacing (A)	in	6.5	6.5	6.5	7.5	7.5
Working width (B)	in	30.5	40.9	40.9	42.1	61.8
Depth (C)	in	7.5	10.2	10.2	9.8	9.8
Dimensions L × W × H	in	59 × 28 × 80	71 × 28 × 83	71 × 30 × 83	83 × 39 × 90	103 × 39 × 90
Weight	lb	926	1,764	1,841	3,131	3,483

TECHNICAL SPECIFICATIONS DPM (CONT.)

Model		DPM 1070-150	DPM 1570-150	DPM 1070-200	DPM 1570-200
Press force	metric tons	150	150	200	200
Press force	US tons	165	165	220	220
Max. working pressure	psi	3,540	3,540	4,100	4,100
Stroke	in	11.8	11.8	11.8	11.8
Cylinder Ø (bore × rod)	in	11.0 × 7.9	11.0 × 7.9	11.8 × 8.3	11.8 × 8.3
Advance / working / return speed	in/s	0.35 / 0.20 / 0.39	0.35 / 0.20 / 0.39	— / 0.26 / 0.79	— / 0.26 / 0.79
Motor power	HP	15	15	20	20
Bed-hole spacing (A)	in	7.5	7.5	9.8	9.8
Working width (B)	in	42.1	61.8	42.1	61.8
Depth (C)	in	11.4	11.4	17.3	17.3
Dimensions L × W × H	in	83 × 39 × 92	103 × 39 × 92	71 × 65 × 113	91 × 65 × 113
Weight	lb	4,189	4,850	8,929	9,921

DPM-K · DK

HYDRAULIC SHOP PRESS WITH MOBILE CYLINDER

Cylinder head travels across the frame — geared movement by hand wheel

MODEL **DPM-K**

MODEL **DK**

STANDARD FEATURES

- Easy to operate
- Steel construction welded frame
- Stops at any position
- Pressure gauge
- Relief valve against overload
- Two-speed joystick control (except 200 metric ton / 220 US ton)
- Height-adjustable bottom tables
- Table up/down movement attachment
- A pair of V-blocks

OPTIONAL EQUIPMENT

- Hand pump
- Foot-pedal control
- Limit switch + foot pedal

TECHNICAL SPECIFICATIONS DPM-K

Model		DPM-K 775-30	DPM-K 1040-60	DPM-K 1040-80	DPM-K 1070-100
Press force	metric tons	30	60	80	100
Press force	US tons	33	66	88	110
Max. working pressure	psi	3,540	3,420	3,700	3,810
Stroke	in	7.9	9.8	9.8	11.8
Cylinder Ø (bore × rod)	in	4.9 × 3.1	7.1 × 4.7	7.9 × 4.7	8.7 × 6.3
Advance / working / return speed	in/s	0.30 / 0.20 / 0.39	0.31 / 0.16 / 0.39	0.31 / 0.20 / 0.39	0.31 / 0.20 / 0.39
Motor power	HP	4.0	5.4	5.4	7.4
Bed-hole spacing (A)	in	6.5	6.5	6.5	7.5
Working width (B)	in	30.5	40.9	40.9	42.1
Depth (C)	in	7.5	10.2	10.2	9.8
Dimensions L × W × H	in	59 × 28 × 80	71 × 28 × 83	71 × 30 × 83	83 × 39 × 96
Weight	lb	926	1,764	1,841	3,307

Model		DPM-K 1570-100	DPM-K 1070-150	DPM-K 1570-150
Press force	metric tons	100	150	150
Press force	US tons	110	165	165
Max. working pressure	psi	3,810	3,540	3,540
Stroke	in	11.8	11.8	11.8
Cylinder Ø (bore × rod)	in	8.7 × 6.3	11.0 × 7.9	11.0 × 7.9
Advance / working / return speed	in/s	0.31 / 0.20 / 0.39	0.35 / 0.20 / 0.39	0.35 / 0.20 / 0.39
Motor power	HP	7.4	15	15
Bed-hole spacing (A)	in	7.5	7.5	7.5
Working width (B)	in	61.8	42.1	61.8
Depth (C)	in	9.8	11.4	11.4
Dimensions L × W × H	in	103 × 39 × 96	83 × 39 × 98	103 × 39 × 98
Weight	lb	3,715	4,123	5,071

TECHNICAL SPECIFICATIONS DK

Model		DK 1570-100	DK 1570-150	DK 1900-200
Press force	metric tons	100	150	200
Press force	US tons	110	165	220
Max. working pressure	psi	3,810	3,540	4,100
Stroke	in	11.8	11.8	11.8
Cylinder Ø (bore × rod)	in	8.7 × 6.3	11.0 × 7.9	11.8 × 8.3
Advance / working / return speed	in/s	0.31 / 0.20 / 0.39	0.35 / 0.20 / 0.39	— / 0.26 / 0.79
Motor power	HP	7.4	15	20
Bed-hole spacing (A)	in	7.5	7.5	9.8
Working width (B)	in	61.8	61.8	74.8
Depth (C)	in	12.4	14.2	17.3
Dimensions L × W × H	in	103 × 39 × 103	103 × 39 × 103	104 × 66 × 113
Weight	lb	3,946	5,291	10,582

AT SERIES · 100 – 150 METRIC TONS (110 – 165 US TONS)

UNIVERSAL T-SLOT HYDRAULIC PRESS

T-slot top and bottom tables for die work

MODEL **AT**

STANDARD FEATURES

- T-slot top and bottom tables
- Steel construction welded frame
- Two guide cylinders, one each side
- Height-adjustable bottom table
- Table up/down movement attachment
- Adjustable pressure valve
- Pressure gauge
- Stepless stroke adjustment (limit switch)
- Two-hand control

OPTIONAL EQUIPMENT

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

Model		AT 1020-100	AT 1520-100	AT 1020-150	AT 1520-150
Press force	metric tons	100	100	150	150
Press force	US tons	110	110	165	165
Max. working pressure	psi	3,810	3,810	3,540	3,540
Stroke	in	11.8	11.8	11.8	11.8
Daylight (table to table)	in	26.8	26.8	24.0	24.0
Advance / working / return speed	in/s	0.31 / 0.20 / 0.39	0.31 / 0.20 / 0.39	0.35 / 0.20 / 0.39	0.35 / 0.20 / 0.39
Bottom table	in	19.7 × 40.2	19.7 × 59.8	23.6 × 40.2	23.6 × 59.8
Table center-hole Ø	in	3.9	3.9	3.9	3.9
Motor power	HP	10	10	15	15
Bed-hole spacing (A)	in	7.5	7.5	7.5	7.5
Working width (B)	in	40.2	59.8	40.2	59.8
Dimensions L × W × H	in	83 × 39 × 93	103 × 39 × 93	83 × 39 × 96	103 × 39 × 96
Weight	lb	4,376	5,214	5,732	7,055

AP SERIES · 100 – 150 METRIC TONS (110 – 165 US TONS)

GARAGE-TYPE HYDRAULIC PRESS BRAKE

Hydraulic press with press-brake tooling for heavy plate

MODEL AP

STANDARD FEATURES

- Hardened blades
- Steel construction welded frame
- 5-face prism (bottom die)
- Bottom table with T-slot
- Stepless stroke adjustment
- Pressure gauge
- Height-adjustable bottom table
- Table up/down movement attachment
- Adjustable pressure valve
- Large workspace for big sheets
- Two-hand control

OPTIONAL EQUIPMENT

- 29.5″ (750 mm) manual back gauge
- 39.4″ (1000 mm) manual back gauge
- Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Model		AP 1020-100	AP 1520-100	AP 1020-150	AP 1520-150
Press force	metric tons	100	100	150	150
Press force	US tons	110	110	165	165
Max. working pressure	psi	3,810	3,810	3,540	3,540
Stroke	in	11.8	11.8	11.8	11.8
Bending capacity (mild steel)		¼″	¼″	⅜″	⅜″
Advance / working / return speed	in/s	0.35 / 0.20 / 0.39	0.35 / 0.20 / 0.39	0.35 / 0.20 / 0.39	0.35 / 0.20 / 0.39
Bottom table	in	19.7 × 40.2	19.7 × 59.8	23.6 × 40.2	23.6 × 59.8
Table center-hole Ø	in	3.9	3.9	3.9	3.9
Motor power	HP	10	10	15	15
Bed-hole spacing (A)	in	7.5	7.5	7.5	7.5
Working width (B)	in	40.2	59.8	40.2	59.8
Dimensions L × W × H	in	83 × 39 × 89	103 × 39 × 89	83 × 39 × 95	103 × 39 × 95
Weight	lb	4,586	5,512	5,291	7,385

HNM 6V (VARIABLE ANGLE) · HNM 6F · HNM 4F (FIXED 90°)

HYDRAULIC CORNER NOTCHERS

HNM 6V

Variable angle 30° – 140°

HNM 6F · 4F

Fixed 90° angle

HNM 6V — STANDARD

- Strong frame with statically and dynamically rigid steel table and top beam
- T-slot top table for precise cuts
- Automatic blade-gap adjustment — no realignment for different sheet thicknesses
- 4 hydraulic hold-down cylinders for repeatable cutting
- Max. 1/4" cutting capacity
- Foot-pedal control

HNM 6F · 4F — STANDARD

- Fixed 90° notching angle with high notching speed
- Compact structure, small footprint and convenient operation
- Foot-pedal control

Model		HNM 4F	HNM 6F	HNM 6V
Cutting capacity — steel		3⁄16"	1⁄4"	1⁄4" – 8 ga
Cutting capacity — stainless		14 ga	11 ga	11 ga – 14 ga
Table size	in	27.6 × 27.2	31.9 × 29.5	35.4 × 39.4
Cutting angle	°	90 fixed	90 fixed	30 – 140 variable
Blade length	in	7.8 × 7.8	9.8 × 9.8	7.9 × 7.9
Oil tank	L	80	80	80
Max. working pressure	psi	1,740	1,740	2,900
Motor power	HP	4.0	5.4	5.4
Max. cuts per minute		20	25	30
Dimensions L × W × H	in	35 × 37 × 44	37 × 31 × 44	35 × 45 × 49
Weight	lb	1,213	1,290	2,535

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase*

**240 V single-phase depends on the machine's motor power and is not available on all models.*

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in Turkey with European components
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and sections in common fractions (1/2, 1/4, 1/8, 1/16). Plate-roll capacities are for 37,700 psi (260 N/mm²) yield-strength steel unless noted. Model numbers are manufacturer designations. Photos may show optional equipment.