
NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

SENFENG LASER · MADE IN CHINA · SOLD & SERVICED IN CANADA BY NOVOTECH

TUBE LASER CUTTING MACHINES

SENFENG T, PLUS, GT, NT, ST AND HT TUBE AND PROFILE FIBER LASERS · Ø0.5″ TO 25″ · 20 TO 49 FT · 1.5 TO 20 KW

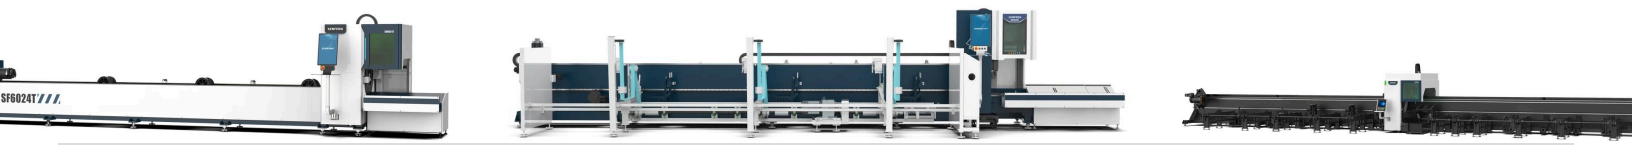

China
MADE IN CHINA

3
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

SENFENG TUBE LASERS

CONTENTS

TWO-CHUCK TUBE LASERS

T series two-chuck tube lasers, Ø0.5 – 14″, 20 – 40 ft, 1.5 – 6 kW — SF6012T – SF12035T · SF7012T – SF7524T · 15 models — 04

PLUS high-speed and GPLUS / GT bevel-cutting tube lasers, Ø0.5 – 14″, 20 – 23 ft — SF6012PLUS – SF7012PLUS · SF6012GPLUS · SF6024GT · SF6035GT · 7 models — 06

THREE- AND FOUR-CHUCK TUBE LASERS

NT / ST / HT three- and four-chuck tube lasers to Ø25″ and 49 ft, and the SF1500CH profile line — SF6024NT – SF12035NT · SF9035ST – SF12065ST · SF12035HT – SF15056HT · SF1500CH · 18 models — 08

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR SENFENG TUBE LASERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SENFENG LASER · JINAN, CHINA


ROUND, SQUARE AND PROFILE TUBE CUT TO LENGTH WITH EVERY HOLE, COPE AND NOTCH IN ONE PASS

A tube laser cuts round, square, rectangular and open profiles to length and cuts the holes, copes, slots and notches in them in one pass, straight from the 3D model — no saw, no drill, no notcher, no layout. The T series two-chuck machines cover Ø0.5 to 14″ and 20 to 39 ft with 1.5 to 6 kW; the PLUS series runs to 492 ft/min on small tube and the GPLUS / GT add a 45° bevel head; the NT three-chuck machines cut the last part without a tail; and the ST and HT three- and four-chuck machines carry tube to Ø25″ and 6,600 lb over 29 to 49 ft with 6 to 20 kW sources, for structural steel, towers and trailers. Automatic bundle loaders and unloading conveyors are available for every model.

Senfeng Laser has built fiber laser machines in Jinan, Shandong, since 2004: a 1.8 million ft² campus, its own laser sources, cutting heads and welding guns, around 15,000 machines a year, 20 overseas branches and Senfeng Laser USA with a warehouse and service team. CE, FDA and ETL certified and CSA approved. NovoTech sells, installs and supports the machines in Canada from Mississauga, ON, Canada — layout for your building, installation, operator training, a CSA-approved panel, a 1-year warranty and parts and technical support in Canada.

SF6012T – SF12035T · SF7012T – SF7524T · 15 MODELS

T SERIES TWO-CHUCK TUBE LASERS, Ø0.5 – 14", 20 – 40 FT, 1.5 – 6 KW

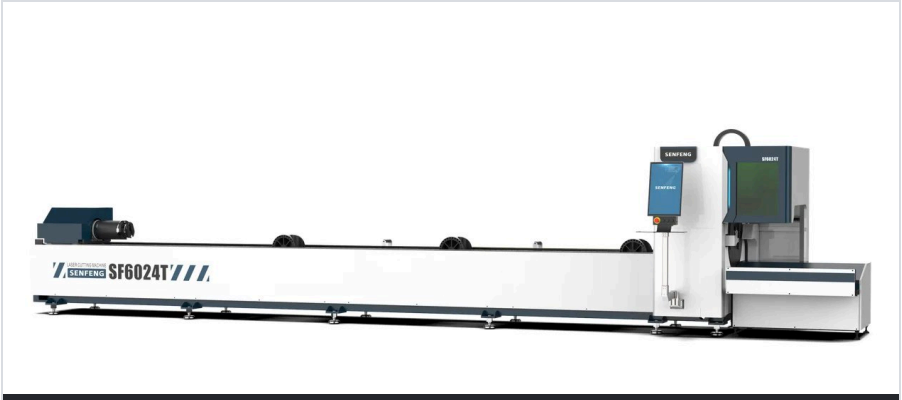

MODEL T · SENFENG SF6024T TWO-CHUCK TUBE FIBER LASER — Ø0.7 – 9" TUBE, 20 FT, 1.5 – 6 KW



Senfeng SF6024T two-chuck tube laser — side view along the 20 ft bed



T series tube laser with the optional automatic bundle loader

The tube laser most shops start with: two pneumatic self-centring chucks, following supports, a 1.5 to 6 kW source and a CNC with tube nesting that imports 3D files, cutting round, square, rectangular and profile tube to 14" and 40 ft. Fifteen models in two bed lengths — the 7 m / 7.5 m beds take 23 and 24.6 ft stock, the 6, 9 and 12 m beds 20, 29.5 and 40 ft — with chucks for Ø4.7, 6.6, 9 and 14". An automatic bundle loader and an unloading conveyor turn it into an unattended cell.

STANDARD FEATURES

- ✓ Ø0.5 – 14.1" round, □0.5 – 14.1" square; 20 – 40 ft; 1.5 – 6 kW; to 492 ft/min, 180 rpm
- ✓ Pneumatic self-centring chucks; following supports along the bed; automatic tube length measuring
- ✓ Fiber laser source 1.5 – 20 kW with autofocus head; bus-based CNC with tube nesting software and 3D import
- ✓ Safety fencing and light curtains; chip and part collection
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- \+ Automatic bundle loader and unloading conveyor
- \+ 45° bevel head (GPLUS / GT, ST / HT)
- \+ Higher laser power; nitrogen generator; dust collector
- \+ Custom voltage transformer

T SERIES TWO-CHUCK TUBE LASERS · 20 – 40 FT — TECHNICAL SPECIFICATIONS

Model	SF6012T	SF6016T	SF6024T	SF6035T	SF9024T	SF9035T	SF12035T
Tube length	**3.3 – 21.3 ft (1 – 6.5 m)**	**3.3 – 21.3 ft (1 – 6.5 m)**	**6.6 – 21.3 ft (2 – 6.5 m)**	**6.6 – 20.3 ft (2 – 6.2 m)**	**6.6 – 30 ft (2 – 9.1 m)**	**6.6 – 30 ft (2 – 9.1 m)**	**6.6 – 40 ft (2 – 12.2 m)**
Round tube	Ø0.5 – 4.7" (Ø13 – 119 mm)	Ø0.5 – 6.6" (Ø13 – 168 mm)	Ø0.7 – 9" (Ø18 – 229 mm)	Ø0.7 – 14.1" (Ø18 – 358 mm)	Ø0.7 – 9" (Ø18 – 229 mm)	Ø0.7 – 14.1" (Ø18 – 358 mm)	Ø1.9 – 13.7" (Ø48 – 348 mm)
Square tube	□0.5 – 4.7" (□13 – 119 mm)	□0.5 – 6.6" (□13 – 168 mm)	□0.7 – 9" (□18 – 229 mm)	□0.7 – 14.1" (□18 – 358 mm)	□0.7 – 9" (□18 – 229 mm)	□0.7 – 14.1" (□18 – 358 mm)	□1.9 – 13.7" (□48 – 348 mm)
Laser power	1.5 – 3 kW	1.5 – 3 kW	1.5 – 6 kW	1.5 – 6 kW	1.5 – 6 kW	1.5 – 6 kW	1.5 – 6 kW
Max. tube weight	265 lb (120 kg)	353 lb (160 kg)	573 lb (260 kg)	1,102 lb (500 kg)	573 lb (260 kg)	1,102 lb (500 kg)	1,102 lb (500 kg)
Max. no-load speed	492 ft/min (150 m/min)	361 ft/min (110 m/min)	328 ft/min (100 m/min)	197 ft/min (60 m/min)	328 ft/min (100 m/min)	197 ft/min (60 m/min)	197 ft/min (60 m/min)
Max. chuck speed	180 rpm	140 rpm	100 rpm	60 rpm	100 rpm	60 rpm	60 rpm
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)
Dimensions L × W × H	358 × 71 × 83" (9,100 × 1,800 × 2,100 mm)	358 × 71 × 83" (9,100 × 1,800 × 2,100 mm)	375 × 77 × 87" (9,530 × 1,950 × 2,200 mm)	374 × 81 × 100" (9,500 × 2,050 × 2,550 mm)	493 × 77 × 87" (12,530 × 1,950 × 2,200 mm)	485 × 81 × 100" (12,320 × 2,050 × 2,550 mm)	604 × 81 × 100" (15,330 × 2,050 × 2,550 mm)

TECHNICAL SPECIFICATIONS

T SERIES TWO-CHUCK TUBE LASERS, Ø0.5 – 14", 20 – 40 FT, 1.5 – 6 KW

T SERIES TWO-CHUCK TUBE LASERS · 23 – 24.6 FT

8 models · Ø0.6 – 9.1" · 1.5 – 6 kW

Model	SF7012T	SF7016T	SF7020T	SF7024T	SF7512T	SF7516T	SF7520T	SF7524T
Tube length	**3.3 – 23 ft (1 – 7 m)**	**3.3 – 23 ft (1 – 7 m)**	**6.6 – 23 ft (2 – 7 m)**	**6.6 – 23 ft (2 – 7 m)**	**3.3 – 24.6 ft (1 – 7.5 m)**	**3.3 – 24.6 ft (1 – 7.5 m)**	**6.6 – 24.6 ft (2 – 7.5 m)**	**6.6 – 24.6 ft (2 – 7.5 m)**
Round tube	Ø0.59 – 4.72" (Ø15 – 120 mm)	Ø0.59 – 6.69" (Ø15 – 170 mm)	Ø0.79 – 8.66" (Ø20 – 220 mm)	Ø0.79 – 9.06" (Ø20 – 230 mm)	Ø0.59 – 4.72" (Ø15 – 120 mm)	Ø0.59 – 6.69" (Ø15 – 170 mm)	Ø0.79 – 8.66" (Ø20 – 220 mm)	Ø0.79 – 9.06" (Ø20 – 230 mm)
Square tube	□0.59 – 4.72" (□15 – 120 mm)	□0.59 – 6.69" (□15 – 170 mm)	□0.79 – 5.91" (□20 – 150 mm)	□0.79 – 9.06" (□20 – 230 mm)	□0.59 – 4.72" (□15 – 120 mm)	□0.59 – 6.69" (□15 – 170 mm)	□0.79 – 5.91" (□20 – 150 mm)	□0.79 – 9.06" (□20 – 230 mm)
Laser power	1.5 – 3 kW	1.5 – 3 kW	1.5 – 6 kW	1.5 – 6 kW	1.5 – 3 kW	1.5 – 3 kW	1.5 – 6 kW	1.5 – 6 kW
Max. tube weight	265 lb (120 kg)	353 lb (160 kg)	441 lb (200 kg)	573 lb (260 kg)	265 lb (120 kg)	353 lb (160 kg)	441 lb (200 kg)	573 lb (260 kg)
Max. no-load speed	492 ft/min (150 m/min)	361 ft/min (110 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)	492 ft/min (150 m/min)	361 ft/min (110 m/min)	328 ft/min (100 m/min)	328 ft/min (100 m/min)
Max. chuck speed	180 rpm	140 rpm	100 rpm	100 rpm	180 rpm	140 rpm	100 rpm	100 rpm
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)
Dimensions L × W × H	33.1 × 5.9 × 6.9 ft (10.1 × 1.8 × 2.1 m)	33.1 × 5.9 × 6.9 ft (10.1 × 1.8 × 2.1 m)	34.5 × 6.4 × 7.2 ft (10.5 × 2.0 × 2.2 m)	34.5 × 6.4 × 7.2 ft (10.5 × 2.0 × 2.2 m)	34.8 × 5.9 × 6.9 ft (10.6 × 1.8 × 2.1 m)	34.8 × 5.9 × 6.9 ft (10.6 × 1.8 × 2.1 m)	36.2 × 6.4 × 7.2 ft (11.0 × 2.0 × 2.2 m)	36.2 × 6.4 × 7.2 ft (11.0 × 2.0 × 2.2 m)

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF6012PLUS – SF7012PLUS · SF6012GPLUS · SF6024GT · SF6035GT · 7 MODELS

PLUS HIGH-SPEED AND GPLUS / GT BEVEL-CUTTING TUBE LASERS, Ø0.5 – 14", 20 – 23 FT

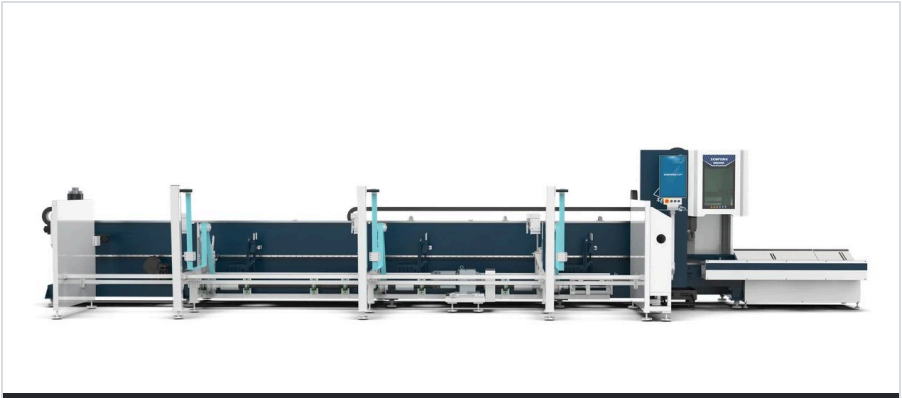

MODEL PLUS · GT · SENFENG SF6024PLUS HIGH-SPEED TUBE LASER — Ø0.7 – 9.4", 20 FT, 3 – 6 KW



Senfeng SF6012GPLUS bevel tube laser — Ø0.6 – 4.7" at 240 rpm



Senfeng SF6024GT bevel tube laser with loader — Ø2.3 – 9", 45° bevels

The PLUS series is built for speed on small and medium tube: 394 to 492 ft/min, 180 rpm chucks and a 3 to 6 kW source for furniture, fitness equipment and racking. The GPLUS and GT machines add a 45° bevel head that cuts weld preparations and mitred corners on all four sides of the tube — the GPLUS for Ø0.6 to 4.7" at 240 rpm, the GT for Ø2.3 to 14.1" with a bundle loader.

STANDARD FEATURES

- ✓ PLUS: Ø0.5 – 9.4", to 492 ft/min; GPLUS / GT: ±45° bevel, Ø0.6 – 14.1"; 1.5 – 6 kW
- ✓ Pneumatic self-centring chucks; following supports along the bed; automatic tube length measuring
- ✓ Fiber laser source 1.5 – 20 kW with autofocus head; bus-based CNC with tube nesting software and 3D import
- ✓ Safety fencing and light curtains; chip and part collection
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Automatic bundle loader and unloading conveyor
- + 45° bevel head (GPLUS / GT, ST / HT)
- + Higher laser power; nitrogen generator; dust collector
- + Custom voltage transformer

PLUS SERIES HIGH-SPEED TUBE LASERS — TECHNICAL SPECIFICATIONS

Model	SF6012PLUS	SF6016PLUS	SF6024PLUS	SF7012PLUS
Tube length	**3.3 – 21.3 ft (1 – 6.5 m)**	**3.3 – 21.3 ft (1 – 6.5 m)**	**3.3 – 21.3 ft (1 – 6.5 m)**	**3.3 – 23 ft (1 – 7 m)**
Round tube	Ø0.5 – 4.7" (Ø13 – 119 mm)	Ø0.5 – 6.6" (Ø13 – 168 mm)	Ø0.7 – 9.4" (Ø18 – 239 mm)	Ø0.5 – 4.7" (Ø13 – 119 mm)
Square tube	□0.5 – 4.7" (□13 – 119 mm)	□0.5 – 6.6" (□13 – 168 mm)	□0.7 – 9.4" (□18 – 239 mm)	□0.5 – 4.7" (□13 – 119 mm)
Laser power	3 – 6 kW	3 – 6 kW	3 – 6 kW	3 – 6 kW
Max. tube weight	265 lb (120 kg)	331 lb (150 kg)	661 lb (300 kg)	265 lb (120 kg)
Max. no-load speed	394 ft/min (120 m/min)	394 ft/min (120 m/min)	492 ft/min (150 m/min)	394 ft/min (120 m/min)
Max. chuck speed	180 rpm	180 rpm	90 rpm	180 rpm
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)
Dimensions L × W × H	29.8 × 7.3 × 7.5 ft (9.1 × 2.2 × 2.3 m)	29.8 × 7.3 × 7.5 ft (9.1 × 2.2 × 2.3 m)	30.5 × 10.1 × 8.2 ft (9.3 × 3.1 × 2.5 m)	31.4 × 7.3 × 7.5 ft (9.6 × 2.2 × 2.3 m)

TECHNICAL SPECIFICATIONS

PLUS HIGH-SPEED AND GPLUS / GT BEVEL-CUTTING TUBE LASERS, Ø0.5 – 14", 20 – 23 FT

GPLUS / GT BEVEL-CUTTING TUBE LASERS · 45°

3 models · Ø0.6 – 14.1" · 20 ft · 1.5 – 6 kW

Model	SF6012GPLUS	SF6024GT	SF6035GT
Tube length	**3.3 – 21.3 ft (1 – 6.5 m)**	**6.6 – 21.3 ft (2 – 6.5 m)**	**6.6 – 21 ft (2 – 6.4 m)**
Round tube	Ø0.6 – 4.7" (Ø15 – 119 mm)	Ø2.3 – 9" (Ø58 – 229 mm)	Ø3.1 – 14.1" (Ø79 – 358 mm)
Square tube	□0.6 – 4.7" (□15 – 119 mm)	□2.3 – 9" (□58 – 229 mm)	□3.1 – 14.1" (□79 – 358 mm)
Laser power	1.5 – 3 kW	3 – 6 kW	3 – 6 kW
Max. tube weight	265 lb (120 kg)	573 lb (260 kg)	1,102 lb (500 kg)
Max. no-load speed	492 ft/min (150 m/min)	328 ft/min (100 m/min)	197 ft/min (60 m/min)
Max. chuck speed	240 rpm	100 rpm	60 rpm
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)
Dimensions L × W × H	358 × 88 × 91" (9,100 × 2,230 × 2,300 mm)	402 × 90 × 100" (10,200 × 2,280 × 2,530 mm)	401 × 89 × 100" (10,180 × 2,260 × 2,530 mm)
Bevel cutting	±45° on all four sides	±45° on all four sides	±45° on all four sides

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

SF6024NT – SF12035NT · SF9035ST – SF12065ST · SF12035HT – SF15056HT · SF1500CH · 18 MODELS

NT / ST / HT THREE- AND FOUR-CHUCK TUBE LASERS TO Ø25" AND 49 FT, AND THE SF1500CH PROFILE LINE

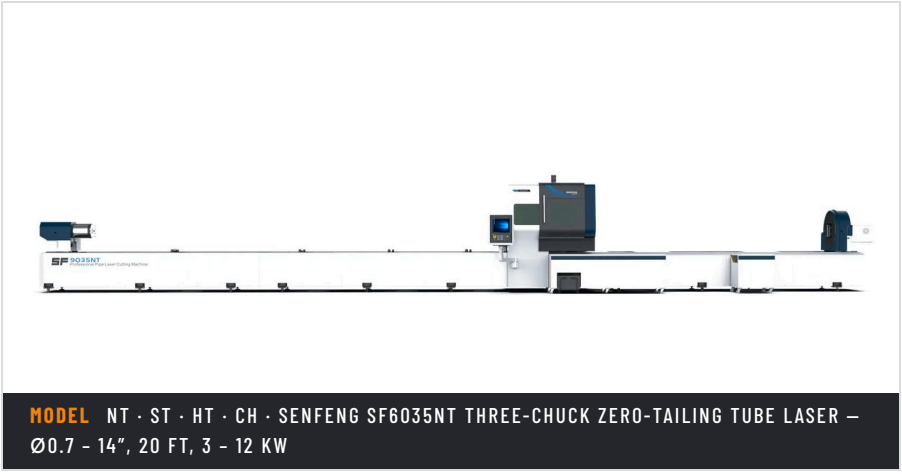

MODEL NT · ST · HT · CH · SENFENG SF6035NT THREE-CHUCK ZERO-TAILING TUBE LASER — Ø0.7 – 14", 20 FT, 3 – 12 KW



Senfeng ST series three-chuck heavy-duty tube laser — Ø1.9 – 25", 29 – 39 ft, 6 – 20 kW



Senfeng HT series four-chuck tube laser — Ø1.9 – 25", 39 – 49 ft tubes to 6,600 lb

For long and heavy tube: the NT series puts a third chuck in the middle so the last piece is cut without a tail — zero waste on 20 to 40 ft stock to Ø14". The ST three-chuck and HT four-chuck machines carry tube to Ø25" and 6,600 lb over 29 to 49 ft with 6 to 20 kW sources, bevel heads and automatic loaders, for structural steel, towers, cranes and trailers. The SF1500CH is the profile line for H-beams to 39 × 16 ft section, channels and angles, with visual scanning of each beam before cutting.

STANDARD FEATURES

- ✓ NT: zero-tailing, Ø0.7 – 14.1"; ST / HT: Ø1.9 – 25.1", 6 – 20 kW, to 6,600 lb; CH: H-beams to 1.9" web
- ✓ Pneumatic self-centring chucks; following supports along the bed; automatic tube length measuring
- ✓ Fiber laser source 1.5 – 20 kW with autofocus head; bus-based CNC with tube nesting software and 3D import
- ✓ Safety fencing and light curtains; chip and part collection
- ✓ CE, FDA and ETL certified and CSA approved; 208 / 240 / 480 / 600 V 3-phase 60 Hz (transformer supplied); single-phase not available

OPTIONAL EQUIPMENT

- + Automatic bundle loader and unloading conveyor
- + 45° bevel head (GPLUS / GT, ST / HT)
- + Higher laser power; nitrogen generator; dust collector
- + Custom voltage transformer

NT SERIES THREE-CHUCK ZERO-TAILING TUBE LASERS — TECHNICAL SPECIFICATIONS

Model	SF6024NT	SF6035NT	SF9024NT	SF9035NT	SF12035NT
Tube length	**9.8 – 21.3 ft (3 – 6.5 m)**	**9.8 – 20.3 ft (3 – 6.2 m)**	**9.8 – 30 ft (3 – 9.1 m)**	**9.8 – 30 ft (3 – 9.1 m)**	**9.8 – 40 ft (3 – 12.2 m)**
Round tube	Ø0.7 – 9" (Ø18 – 229 mm)	Ø0.7 – 14.1" (Ø18 – 358 mm)	Ø0.7 – 9" (Ø18 – 229 mm)	Ø0.7 – 14.1" (Ø18 – 358 mm)	Ø1.9 – 14.1" (Ø48 – 358 mm)
Square tube	□0.7 – 9" (□18 – 229 mm)	□0.7 – 14.1" (□18 – 358 mm)	□0.7 – 9" (□18 – 229 mm)	□0.7 – 14.1" (□18 – 358 mm)	□1.9 – 14.1" (□48 – 358 mm)
Laser power	3 – 12 kW	3 – 6 kW	3 – 6 kW	3 – 6 kW	3 – 6 kW
Max. tube weight	573 lb (260 kg)	1,543 lb (700 kg)	573 lb (260 kg)	1,543 lb (700 kg)	1,543 lb (700 kg)
Max. no-load speed	246 ft/min (75 m/min)	197 ft/min (60 m/min)	246 ft/min (75 m/min)	197 ft/min (60 m/min)	197 ft/min (60 m/min)
Max. chuck speed	100 rpm	60 rpm	100 rpm	60 rpm	60 rpm
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)
Dimensions L × W × H	543 × 108 × 124" (13,800 × 2,750 × 3,150 mm)	543 × 108 × 132" (13,800 × 2,750 × 3,350 mm)	663 × 108 × 124" (16,850 × 2,750 × 3,150 mm)	663 × 108 × 132" (16,850 × 2,750 × 3,350 mm)	780 × 108 × 132" (19,800 × 2,750 × 3,350 mm)

TECHNICAL SPECIFICATIONS · 1 / 2

NT / ST / HT THREE- AND FOUR-CHUCK TUBE LASERS TO Ø25" AND 49 FT, AND THE SF1500CH PROFILE LINE

ST SERIES THREE-CHUCK HEAVY-DUTY TUBE LASERS

7 models · Ø1.9 – 25.1" · 30 – 40 ft · 6 – 20 kW

Model	SF9035ST	SF9050ST	SF9056ST	SF12035ST	SF12050ST	SF12056ST	SF12065ST
Tube length	20 – 30 ft (6.1 – 9.1 m)	20 – 30 ft (6.1 – 9.1 m)	20 – 30 ft (6.1 – 9.1 m)	20 – 40 ft (6.1 – 12.2 m)	20 – 40 ft (6.1 – 12.2 m)	20 – 40 ft (6.1 – 12.2 m)	20 – 40 ft (6.1 – 12.2 m)
Round tube	Ø1.9 – 14.1" (Ø48 – 358 mm)	Ø1.9 – 19.6" (Ø48 – 498 mm)	Ø1.9 – 22" (Ø48 – 559 mm)	Ø1.9 – 14.1" (Ø48 – 358 mm)	Ø1.9 – 19.6" (Ø48 – 498 mm)	Ø1.9 – 22" (Ø48 – 559 mm)	Ø1.9 – 25.1" (Ø48 – 638 mm)
Square tube	□1.9 – 14.1" (□48 – 358 mm)	□1.9 – 19.6" (□48 – 498 mm)	□1.9 – 15.7" (□48 – 399 mm)	□1.9 – 14.1" (□48 – 358 mm)	□1.9 – 19.6" (□48 – 498 mm)	□1.9 – 15.7" (□48 – 399 mm)	□1.9 – 25.1" (□48 – 638 mm)
Laser power	6 – 20 kW	6 – 20 kW	6 – 20 kW	6 – 20 kW	6 – 20 kW	6 – 20 kW	6 – 20 kW
Max. tube weight	2,205 lb (1,000 kg)	4,409 lb (2,000 kg)	3,968 lb (1,800 kg)	2,205 lb (1,000 kg)	4,409 lb (2,000 kg)	3,968 lb (1,800 kg)	6,614 lb (3,000 kg)
Max. no-load speed	197 ft/min (60 m/min)	131 ft/min (40 m/min)	98 ft/min (30 m/min)	197 ft/min (60 m/min)	131 ft/min (40 m/min)	98 ft/min (30 m/min)	98 ft/min (30 m/min)
Max. chuck speed	60 rpm	40 rpm	30 rpm	60 rpm	40 rpm	30 rpm	30 rpm
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)
Dimensions L × W × H	60.7 × 21.3 × 14.7 ft (18.5 × 6.5 × 4.5 m)	62.3 × 23.6 × 13.7 ft (19.0 × 7.2 × 4.2 m)	62.3 × 23.6 × 13.7 ft (19.0 × 7.2 × 4.2 m)	70.5 × 21.3 × 14.7 ft (21.5 × 6.5 × 4.5 m)	72.1 × 23.6 × 13.7 ft (22.0 × 7.2 × 4.2 m)	72.1 × 23.6 × 13.7 ft (22.0 × 7.2 × 4.2 m)	72.1 × 23.6 × 13.7 ft (22.0 × 7.2 × 4.2 m)

HT SERIES FOUR-CHUCK TUBE LASERS

5 models · Ø1.9 – 25.1" · 39 – 49 ft · 6 – 20 kW

Model	SF12035HT	SF12050HT	SF12056HT	SF12065HT	SF15056HT
Tube length	20 – 40 ft (6.1 – 12.2 m)	20 – 40 ft (6.1 – 12.2 m)	20 – 40 ft (6.1 – 12.2 m)	20 – 40 ft (6.1 – 12.2 m)	20 – 49.2 ft (6.1 – 15 m)
Round tube	Ø1.9 – 14.1" (Ø48 – 358 mm)	Ø1.9 – 19.6" (Ø48 – 498 mm)	Ø1.9 – 22" (Ø48 – 559 mm)	Ø1.9 – 25.1" (Ø48 – 638 mm)	Ø1.9 – 22" (Ø48 – 559 mm)
Square tube	□1.9 – 14.1" (□48 – 358 mm)	□1.9 – 19.6" (□48 – 498 mm)	□1.9 – 15.7" (□48 – 399 mm)	□1.9 – 25.1" (□48 – 638 mm)	□1.9 – 15.7" (□48 – 399 mm)
Laser power	6 – 20 kW	6 – 20 kW	6 – 20 kW	6 – 20 kW	6 – 20 kW
Max. tube weight	2,646 lb (1,200 kg)	4,409 lb (2,000 kg)	3,968 lb (1,800 kg)	6,614 lb (3,000 kg)	3,968 lb (1,800 kg)
Max. no-load speed	197 ft/min (60 m/min)	131 ft/min (40 m/min)	98 ft/min (30 m/min)	98 ft/min (30 m/min)	98 ft/min (30 m/min)
Max. chuck speed	60 rpm	40 rpm	30 rpm	30 rpm	30 rpm
Positioning accuracy	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)	±0.002" (±0.05 mm) · repeat ±0.001" (±0.03 mm)
Dimensions L × W × H	93.5 × 21.3 × 14.7 ft (28.5 × 6.5 × 4.5 m)	95.1 × 23.6 × 13.7 ft (29.0 × 7.2 × 4.2 m)	95.1 × 23.6 × 13.7 ft (29.0 × 7.2 × 4.2 m)	95.1 × 23.6 × 13.7 ft (29.0 × 7.2 × 4.2 m)	118.1 × 23.6 × 13.7 ft (36.0 × 7.2 × 4.2 m)

TECHNICAL SPECIFICATIONS · 2 / 2

NT / ST / HT THREE- AND FOUR-CHUCK TUBE LASERS TO Ø25" AND 49 FT, AND THE SF1500CH PROFILE LINE

SF1500CH PROFILE LASER LINE FOR STRUCTURAL STEEL

1 model · H-beams to 39 × 16 ft section, channels, angles · 12 – 30 kW

Model	SF1500CH
Max. H-beam width · height	472" (12,000 mm) · 197" (5,000 mm)
Max. thickness	1.9" (48 mm) straight · 1.3" (32 mm) flange bevel
Laser power	12 – 30 kW
Positioning accuracy	±0.004" (±0.1 mm) · repeat ±0.002"
Max. speed	164 ft/min (50 m/min)
Features	visual scanning of the beam, flange and web cutting, bevels, marking

Laser source power is chosen at order (IPG, Raycus or Max sources); the model number is the metric working area (3015 = 3,000 × 1,500 mm) or, on tube lasers, the metric tube length × maximum diameter (6024 = 6 m × Ø240 mm). Speeds and accelerations are no-load values; platform loads are per table.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.