
ULE-3015 · 6,000 W · DOUBLE TABLE FIBER LASER CUTTING MACHINE

ULE FIBER LASER TECHNICAL SPECIFICATION

BUILT IN CHINA TO NORTH AMERICAN STANDARDS











10 × 5 ft	6,000 W	492 ft/min	1.5 G
CUTTING RANGE	RAYCUS FIBER LASER	MAX. MOVING SPEED	MAX. ACCELERATION

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

FULL TECHNICAL SPECIFICATION · ULE-3015 · 6,000 W

CONTENTS

Company profile 03
Equipment 04
Mechanical bed · crossbeam · control system 05
Cutting head · laser source · servo motor 06
Gear, rack, linear guide · gearbox · automatic lubrication 07
Water chiller · air cooler · electric components 08
Optional: Precitec head · IPG laser · aluminum crossbeam 09
Specifications · configuration 10
Cutting parameters — carbon steel, oxygen 11
Cutting parameters — stainless steel, nitrogen 12
Cutting parameters — aluminum, nitrogen 13
Cutting parameters — copper, nitrogen 14
Conditions for on-site installation · consumables 15
Quality control · delivery 16
Service 17

INCLUDED WITH EVERY NOVOTECH MACHINE


- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

SOLD & SERVICED IN CANADA
by NovoTech Machine Tools — Mississauga, ON

COMPANY PROFILE

OUR MANUFACTURING PARTNER

The ULE is built for NovoTech in China, to North American standards, by NovoTech's value-line manufacturing partner — and sold, installed and serviced in Canada by NovoTech.

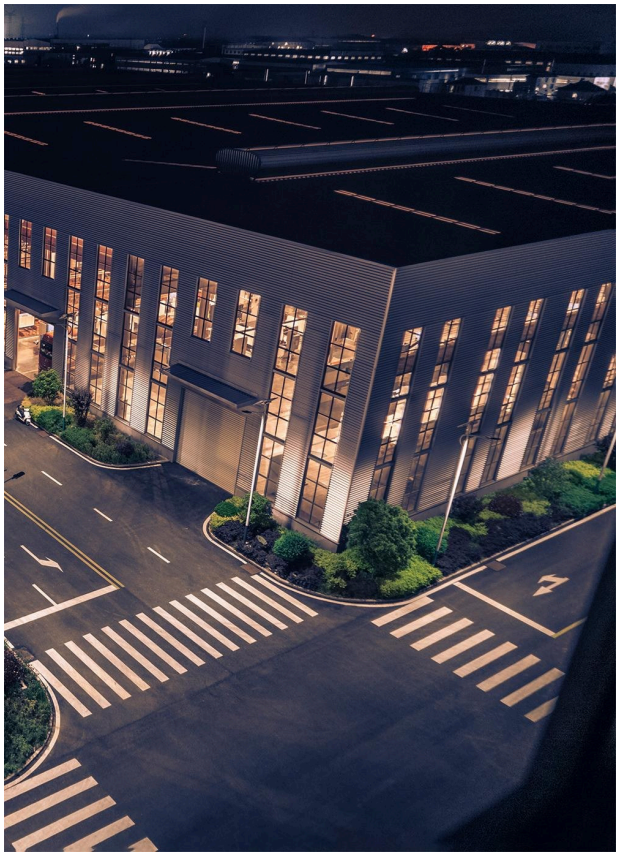

2002
Founded in March 2002

5000 +
Annual production capacity of 5000+ sets

120 +
More than 120 R&D personnel

100 +
Exported to over 100 countries

MISSION
Dedicated to research and development and to better product and service quality, in order to establish a globally renowned hub for sheet metal manufacturing machinery.

VISION
To be a respected provider of sheet metal support services, earning the trust of its customers and the pride of its staff.

VALUES
Innovation, Lean, Integrity, Win-Win.

Since its establishment the company has gone through 20 years of development. Through the joint efforts of two generations it has become the largest local machine tool manufacturer — its strength speaks for itself.

An enterprise that does not prioritize technology and R&D cannot sustain continuous development. Its leadership places technology first, allowing its machines to stay highly competitive in the current market environment — this sets it apart from many competitors in the industry.

It has always prioritized giving customers the highest-quality machines. Customers feel excitement when they receive a machine of excellent quality, as it helps them in production and achieves career success — this is also its success.

EQUIPMENT

FACTORY EQUIPMENT

Machining, welding and assembly equipment in the factory where the ULE is built.




PRODUCT DETAILS

BED · CROSSBEAM · CONTROL


MECHANICAL BED

- High-quality steel structural materials and meticulous welding, tempering and aging treatments maintain the machine tool bed's undistorted rigidity, stability and long-term accuracy.
- Dust funnel structure with separate chambers, a tracking dust removal system and precision processing on imported large-scale CNC equipment ensure superior precision exceeding design standards, improving the working environment and the life of consumables.

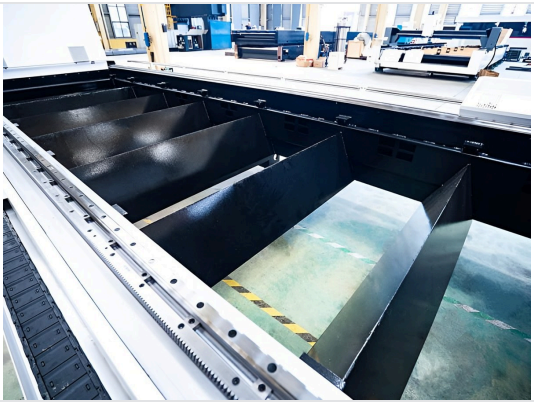

CROSSBEAM

- The crossbeam undergoes annealing treatment and is machined as a whole in the machining center for long-term stability during high-speed operation.
- The crossbeam structure is lightweight yet impact-resistant, with high rigidity optimized by finite element methods and precision machining, minimizing the load on the gantry for optimal dynamic performance.

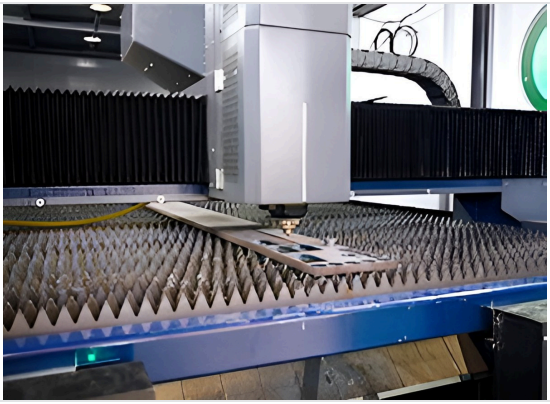

CONTROL SYSTEM

- It stands out for its user-friendly features, including easy installation, simple calibration and adjustable speed control through power settings, enhancing operational efficiency.
- The software provides advanced customization options, such as individual adjustments for imported linear speed, and a comprehensive cutting process database, ensuring precise and optimized cutting operations.



PRODUCT DETAILS

CUTTING HEAD · LASER SOURCE · SERVO MOTOR


CUTTING HEAD

- Auto-focusing laser cutting head adjusts the focus to the material thickness, reducing cutting time and enhancing cutting quality.
- Patented anti-collision protection structure and micro-joints in waste cutting prevent plate warping, ensuring high-speed and stable cutting operations.




LASER SOURCE

- The laser allows direct control of all functions and supports synchronized laser source control, enhancing cutting capabilities and efficiency while delivering maintenance cost savings of 15% to 20%.
- With an independently developed core light source, this fiber laser offers convenient maintenance, lower procurement costs and reliable operation — a cost-effective, top-performing solution for industrial applications.

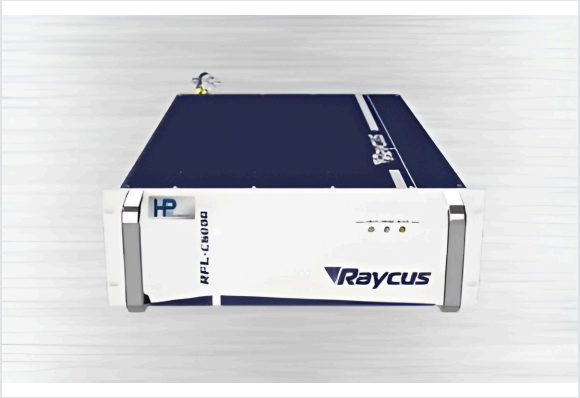

SERVO MOTOR

- The machine features Delta servo motors from Taiwan, renowned for their high speed, precision, feedback and inertia capabilities, ensuring optimal performance in high-quality, high-productivity operation.
- The imported high-inertia servo system and amplifier offer exceptional responsiveness, significantly cutting down tuning time and enabling rapid acceleration and deceleration for improved mechanical stability.

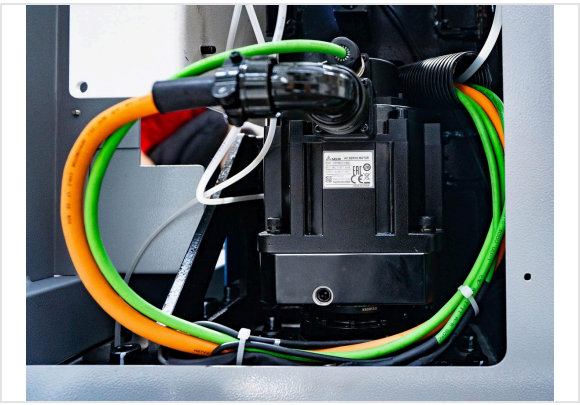

PRODUCT DETAILS

GEAR, RACK, LINEAR GUIDE · GEARBOX · LUBRICATION


GEAR, RACK, LINEAR GUIDE

- The precision-ground gear and rack transmission system of this machine goes beyond the vibration limits of screw-driven systems, ensuring high-speed, high-precision transmission over long distances.
- The YYC gear and rack transmission system, an original imported component, guarantees accuracy and long life even under the intense high-speed operation of a 10 kW-class laser.



GEARBOX

- The machine features DESBOER gearboxes from Japan, known for high torque, precision, stability and durability, ensuring reliable performance.
- The innovative technology integrated into the gearboxes enhances their performance and sets them apart in the market for quality and longevity.

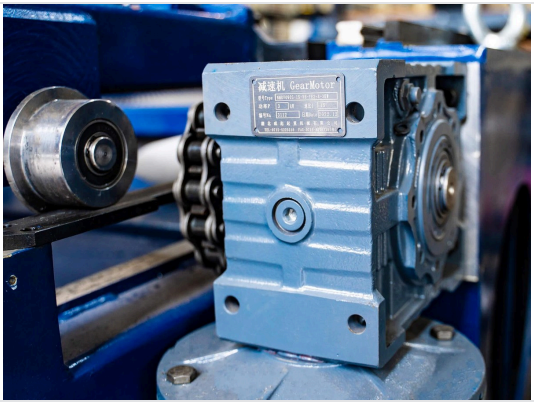

AUTOMATIC LUBRICATION

- The timed automatic lubrication system starts and dispenses lubricating oil according to the machine's running time, ensuring swift and efficient service.
- By precisely timing the lubrication cycles, the system optimizes equipment performance and prolongs its life, saving maintenance costs and improving operational efficiency.



PRODUCT DETAILS

WATER CHILLER · AIR COOLER · ELECTRIC COMPONENTS

WATER CHILLER

- The water chiller comes with over-temperature alarms, flow protection, water level protection and further safety alarms to ensure operational safety and prevent potential hazards.
- These safety features provide comprehensive protection against overheating, flow issues and water level fluctuations, enhancing the reliability and life of the water chiller.




AIR COOLER

- Air coolers regulate the temperature inside the electrical cabinet to ensure optimal performance of the components.
- Stable temperatures held by the air coolers prevent overheating and potential damage to electronic equipment.
- Effective cooling enhances the overall efficiency and life of the electrical cabinet systems.



ELECTRIC COMPONENTS

- The machine is designed to meet European electrical standards and incorporates Schneider Electric components.

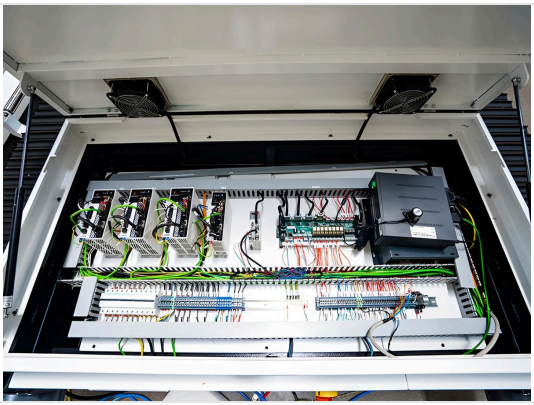

OPTIONAL

PRECITEC HEAD · IPG LASER · ALUMINUM CROSSBEAM

PRECITEC CUTTING HEAD — GERMANY OPTION

- The PROCUTTER high-power fiber cutting head from PRECITEC, imported from Germany, offers stable and reliable performance thanks to its electric focus position adjustment, making automated machine setup and piercing easier.
- Its compact and slim design, with fast acceleration and cutting speed, enhances efficiency in a wide range of cutting applications.



IPG LASER OPTION

- With a photoelectric conversion rate above 30%, the fiber laser operates at temperatures between 50 and 104 °F (10 – 40 °C), with optional temperature control by air conditioning.
- With a wavelength range of 1070 – 1090 nm, high beam quality in TEM00 mode and an M^2 value below 1.4, it ensures precise cutting of highly reflective materials such as aluminum and copper.



ALUMINUM CROSSBEAM OPTION

- Die-cast integrated aluminum crossbeam made from aerospace-grade aluminum alloy.
- CNC high-temperature annealing treatment for a lightweight design and resistance to deformation.
- Faster dynamic response and higher cutting accuracy thanks to minimal deformation, lower weight and higher strength.



SPECIFICATIONS

SPECIFICATIONS · CONFIGURATION

SPECIFICATIONS	ULE
Model	ULE (ULE-3015)
Laser power	6,000 W
Cutting range	10 × 5 ft (3,000 × 1,500 mm)
Maximum moving speed	492 ft/min (150 m/min)
Maximum acceleration	1.5 G
Positioning accuracy	±0.002" (±0.05 mm)
Repeated positioning accuracy	±0.0008" (±0.02 mm)
Operating voltage	380 V / 50 Hz — factory standard; supplied with a CSA-approved panel for 600 V 3-phase in Canada
Cooling method	Water-cooled

CONFIGURATION

COMPONENT FUNCTION	BRAND / MANUFACTURER
Bed	NovoTech (built in-house)
Control system	CypCut 4000E
Laser	Raycus
Cutting head	BOCI BLT421
Servo motor	Delta
Gearbox	DESBOER
Gear, rack	YYC
Linear guide	Hiwin
Water chiller	Hanli
Electrical components	NovoTech (built in-house)
Automatic lubrication device	NovoTech (built in-house)

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

COMPARISON TABLE OF CUTTING PARAMETERS · 1 OF 4

CARBON STEEL · OXYGEN

Cutting speed by laser source power, in inches per minute; the metres per minute of the factory's table are given below each value. Carbon steel, oxygen assist gas. "—" = not cut at that power.

Thickness	1,000 W	1,500 W	2,000 W	3,000 W	4,000 W	6,000 W	8,000 W	10,000 W
0.039" 1 mm	315 – 394 8.0 – 10	591 – 1,024 15 – 26	945 – 1,181 24 – 30	1,181 – 1,575 30 – 40	1,299 – 1,693 33 – 43	1,378 – 1,732 35 – 44	1,378 – 1,654 35 – 42	1,378 – 1,654 35 – 42
0.079" 2 mm	157 – 256 4.0 – 6.5	177 – 256 4.5 – 6.5	185 – 256 4.7 – 6.5	189 – 295 4.8 – 7.5	591 – 984 15 – 25	787 – 1,102 20 – 28	244 – 394 6.2 – 10	276 – 472 7.0 – 12
0.118" 3 mm	94 – 118 2.4 – 3.0	102 – 157 2.6 – 4.0	118 – 189 3.0 – 4.8	130 – 197 3.3 – 5.0	276 – 472 7.0 – 12	512 – 669 13 – 17	157 – 276 4.0 – 7.0	165 – 295 4.2 – 7.5
0.157" 4 mm	79 – 94 2.0 – 2.4	98 – 118 2.5 – 3.0	110 – 138 2.8 – 3.5	118 – 165 3.0 – 4.2	118 – 157 3.0 – 4.0	118 – 177 3.0 – 4.5	138 – 217 3.5 – 5.5	138 – 217 3.5 – 5.5
0.197" 5 mm	59 – 79 1.5 – 2.0	79 – 98 2.0 – 2.5	87 – 118 2.2 – 3.0	102 – 138 2.6 – 3.5	106 – 142 2.7 – 3.6	118 – 165 3.0 – 4.2	130 – 177 3.3 – 4.5	130 – 177 3.3 – 4.5
0.236" 6 mm	55 – 63 1.4 – 1.6	63 – 87 1.6 – 2.2	71 – 102 1.8 – 2.6	91 – 126 2.3 – 3.2	98 – 134 2.5 – 3.4	98 – 138 2.5 – 3.5	118 – 165 3.0 – 4.2	118 – 165 3.0 – 4.2
0.315" 8 mm	31 – 47 0.8 – 1.2	39 – 55 1.0 – 1.4	47 – 71 1.2 – 1.8	71 – 102 1.8 – 2.6	79 – 118 2.0 – 3.0	87 – 126 2.2 – 3.2	98 – 138 2.5 – 3.5	98 – 138 2.5 – 3.5
0.394" 10 mm	24 – 39 0.6 – 1.0	31 – 43 0.8 – 1.1	43 – 51 1.1 – 1.3	47 – 79 1.2 – 2.0	59 – 94 1.5 – 2.4	71 – 98 1.8 – 2.5	87 – 106 2.2 – 2.7	87 – 106 2.2 – 2.7
0.472" 12 mm	20 – 31 0.5 – 0.8	28 – 39 0.7 – 1.0	35 – 47 0.9 – 1.2	39 – 63 1.0 – 1.6	47 – 71 1.2 – 1.8	47 – 79 1.2 – 2.0	47 – 83 1.2 – 2.1	47 – 83 1.2 – 2.1
0.551" 14 mm	—	20 – 28 0.5 – 0.7	28 – 31 0.7 – 0.8	35 – 55 0.9 – 1.4	35 – 47 0.9 – 1.2	47 – 71 1.2 – 1.8	67 – 75 1.7 – 1.9	67 – 75 1.7 – 1.9
0.630" 16 mm	—	—	24 – 28 0.6 – 0.7	28 – 39 0.7 – 1.0	31 – 39 0.8 – 1.0	31 – 51 0.8 – 1.3	35 – 67 0.9 – 1.7	35 – 67 0.9 – 1.7
0.709" 18 mm	—	—	16 – 24 0.4 – 0.6	24 – 31 0.6 – 0.8	24 – 35 0.6 – 0.9	24 – 35 0.6 – 0.9	26 – 35 0.65 – 0.9	26 – 35 0.65 – 0.9
0.787" 20 mm	—	—	—	20 – 31 0.5 – 0.8	20 – 31 0.5 – 0.8	20 – 31 0.5 – 0.8	24 – 35 0.6 – 0.9	24 – 35 0.6 – 0.9
0.866" 22 mm	—	—	—	—	16 – 31 0.4 – 0.8	16 – 31 0.4 – 0.8	20 – 31 0.5 – 0.8	20 – 31 0.5 – 0.8
0.984" 25 mm	—	—	—	—	—	12 – 22 0.3 – 0.55	12 – 28 0.3 – 0.7	12 – 28 0.3 – 0.7

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

COMPARISON TABLE OF CUTTING PARAMETERS · 2 OF 4

STAINLESS STEEL · NITROGEN

Cutting speed by laser source power, in inches per minute; the metres per minute of the factory's table are given below each value. Stainless steel, nitrogen assist gas. "—" = not cut at that power.

Thickness	1,000 W	1,500 W	2,000 W	3,000 W	4,000 W	6,000 W	8,000 W	10,000 W
0.039" 1 mm	591 – 984 15 – 25	787 – 1,063 20 – 27	945 – 1,181 24 – 30	1,181 – 1,378 30 – 35	1,260 – 1,772 32 – 45	1,654 – 2,047 42 – 52	1,969 – 2,598 50 – 66	2,362 – 2,953 60 – 75
0.079" 2 mm	197 – 295 5 – 7.5	315 – 472 8.0 – 12	354 – 591 9.0 – 15	512 – 827 13 – 21	630 – 1,102 16 – 28	787 – 1,299 20 – 33	1,181 – 1,654 30 – 42	1,575 – 2,165 40 – 55
0.118" 3 mm	71 – 98 1.8 – 2.5	118 – 197 3.0 – 5.0	157 – 256 4.0 – 6.5	236 – 394 6.0 – 10	276 – 591 7.0 – 15	591 – 866 15 – 22	787 – 1,181 20 – 30	1,063 – 1,496 27 – 38
0.157" 4 mm	47 – 51 1.2 – 1.3	59 – 94 1.5 – 2.4	118 – 177 3.0 – 4.5	157 – 236 4.0 – 6.0	197 – 315 5.0 – 8.0	394 – 591 10.0 – 15.0	551 – 827 14 – 21	709 – 984 18 – 25
0.197" 5 mm	24 – 28 0.6 – 0.7	28 – 51 0.7 – 1.3	71 – 98 1.8 – 2.5	118 – 197 3.0 – 5.0	138 – 197 3.5 – 5.0	315 – 472 8.0 – 12	472 – 669 12 – 17	591 – 866 15 – 22
0.236" 6 mm	—	28 – 39 0.7 – 1.0	47 – 79 1.2 – 2.0	79 – 157 2.0 – 4.0	98 – 177 2.5 – 4.5	189 – 315 4.8 – 8.0	315 – 551 8.0 – 14.0	472 – 591 12 – 15
0.315" 8 mm	—	—	28 – 39 0.7 – 1.0	59 – 79 1.5 – 2.0	47 – 79 1.2 – 2.0	118 – 157 3.0 – 4.0	236 – 315 6.0 – 8.0	315 – 472 8.0 – 12.0
0.394" 10 mm	—	—	—	24 – 31 0.6 – 0.8	31 – 47 0.8 – 1.2	63 – 98 1.6 – 2.5	118 – 197 3.0 – 5.0	236 – 315 6.0 – 8.0
0.472" 12 mm	—	—	—	16 – 24 0.4 – 0.6	20 – 31 0.5 – 0.8	31 – 59 0.8 – 1.5	71 – 118 1.8 – 3.0	118 – 197 3.0 – 5.0
0.551" 14 mm	—	—	—	—	16 – 24 0.4 – 0.6	24 – 31 0.6 – 0.8	47 – 71 1.2 – 1.8	71 – 118 1.8 – 3.0
0.787" 20 mm	—	—	—	—	—	12 – 22 0.3 – 0.55	24 – 28 0.6 – 0.7	47 – 71 1.2 – 1.8
0.984" 25 mm	—	—	—	—	—	8 – 16 0.2 – 0.4	20 – 24 0.5 – 0.6	24 – 28 0.6 – 0.7

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

COMPARISON TABLE OF CUTTING PARAMETERS · 3 OF 4

ALUMINUM SHEET · NITROGEN

Cutting speed by laser source power, in inches per minute; the metres per minute of the factory's table are given below each value. Aluminum sheet, nitrogen assist gas. "—" = not cut at that power.

Thickness	1,000 W	1,500 W	2,000 W	3,000 W	4,000 W	6,000 W	8,000 W	10,000 W
0.039" 1 mm	236 – 394 6.0 – 10.0	394 – 787 10.0 – 20.0	591 – 984 15 – 25	984 – 1,496 25 – 38	1,378 – 1,772 35 – 45	1,654 – 2,165 42 – 55	1,969 – 2,559 50 – 65	2,362 – 2,953 60 – 75
0.079" 2 mm	110 – 138 2.8 – 3.5	197 – 276 5.0 – 7.0	276 – 394 7 – 10.0	394 – 709 10.0 – 18.0	512 – 945 13 – 24	787 – 1,575 20 – 40	984 – 1,496 25 – 38	1,299 – 1,772 33 – 45
0.118" 3 mm	28 – 59 0.7 – 1.5	79 – 157 2.0 – 4.0	157 – 236 4.0 – 6.0	256 – 315 6.5 – 8.0	276 – 512 7.0 – 13	591 – 984 15 – 25	787 – 1,181 20 – 30	984 – 1,378 25 – 35
0.157" 4 mm	–	39 – 59 1.0 – 1.5	79 – 118 2.0 – 3.0	138 – 197 3.5 – 5.0	157 – 217 4.0 – 5.5	374 – 472 9.5 – 12.0	512 – 709 13 – 18	827 – 1,181 21 – 30
0.197" 5 mm	–	28 – 39 0.7 – 1.0	47 – 71 1.2 – 1.8	98 – 138 2.5 – 3.5	118 – 177 3.0 – 4.5	197 – 315 5.0 – 8.0	354 – 472 9.0 – 12	512 – 787 13 – 20
0.236" 6 mm	–	–	28 – 39 0.7 – 1.0	59 – 98 1.5 – 2.5	79 – 138 2.0 – 3.5	150 – 197 3.8 – 5.0	177 – 315 4.5 – 8.0	354 – 472 9.0 – 12
0.315" 8 mm	–	–	24 – 31 0.6 – 0.8	28 – 39 0.7 – 1.0	35 – 63 0.9 – 1.6	79 – 98 2.0 – 2.5	157 – 236 4.0 – 6.0	177 – 315 4.5 – 8.0
0.394" 10 mm	–	–	–	16 – 28 0.4 – 0.7	24 – 47 0.6 – 1.2	39 – 59 1.0 – 1.5	87 – 118 2.2 – 3.0	157 – 236 4.0 – 6.0
0.472" 12 mm	–	–	–	12 – 18 0.3 – 0.45	16 – 24 0.4 – 0.6	31 – 39 0.8 – 1.0	59 – 79 1.5 – 2.0	87 – 118 2.2 – 3.0
0.630" 16 mm	–	–	–	–	12 – 16 0.3 – 0.4	20 – 31 0.5 – 0.8	39 – 63 1.0 – 1.6	59 – 79 1.5 – 2.0
0.787" 20 mm	–	–	–	–	–	20 – 28 0.5 – 0.7	28 – 39 0.7 – 1.0	39 – 63 1.0 – 1.6
0.984" 25 mm	–	–	–	–	–	12 – 20 0.3 – 0.5	20 – 28 0.5 – 0.7	28 – 39 0.7 – 1.0
1.181" 30 mm	–	–	–	–	–	–	–	20 – 28 0.5 – 0.7
1.575" 40 mm	–	–	–	–	–	–	–	–
1.969" 50 mm	–	–	–	–	–	–	–	–

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

COMPARISON TABLE OF CUTTING PARAMETERS · 4 OF 4

COPPER SHEET · NITROGEN

Cutting speed by laser source power, in inches per minute; the metres per minute of the factory's table are given below each value. Copper sheet, nitrogen assist gas. "—" = not cut at that power.

Thickness	1,000 W	1,500 W	2,000 W	3,000 W	4,000 W	6,000 W	8,000 W	10,000 W
0.039" 1 mm	236 – 394 6.0 – 10.0	315 – 512 8.0 – 13	394 – 630 10.0 – 16.0	787 – 1,378 20 – 35	984 – 1,378 25 – 35	1,378 – 1,772 35 – 45	2,165 – 2,559 55 – 65	2,559 – 2,953 65 – 75
0.079" 2 mm	110 – 142 2.8 – 3.6	118 – 177 3.0 – 4.5	177 – 295 4.5 – 7.5	236 – 394 6.0 – 10	315 – 472 8.0 – 12	787 – 1,181 20 – 30	1,181 – 1,575 30 – 40	1,299 – 1,772 33 – 45
0.118" 3 mm	20 – 39 0.5 – 1.0	59 – 98 1.5 – 2.5	98 – 157 2.5 – 4.0	157 – 236 4.0 – 6.0	197 – 315 5.0 – 8.0	472 – 709 12 – 18	787 – 1,181 20 – 30	984 – 1,575 25 – 40
0.157" 4 mm	—	39 – 63 1.0 – 1.6	59 – 79 1.5 – 2.0	118 – 197 3.0 – 5.0	126 – 217 3.2 – 5.5	197 – 315 5.0 – 8.0	394 – 709 10 – 18	551 – 945 14 – 24
0.197" 5 mm	—	20 – 28 0.5 – 0.7	35 – 47 0.9 – 1.2	59 – 79 1.5 – 2.0	79 – 118 2.0 – 3.0	177 – 236 4.5 – 6.0	276 – 354 7.0 – 9.0	354 – 591 9.0 – 15
0.236" 6 mm	—	—	16 – 28 0.4 – 0.7	39 – 71 1.0 – 1.8	55 – 79 1.4 – 2.0	118 – 177 3.0 – 4.5	177 – 256 4.5 – 6.5	276 – 354 7.0 – 9.0
0.315" 8 mm	—	—	—	20 – 28 0.5 – 0.7	28 – 47 0.7 – 1.2	63 – 87 1.6 – 2.2	94 – 157 2.4 – 4.0	177 – 256 4.5 – 6.5
0.394" 10 mm	—	—	—	—	8 – 20 0.2 – 0.5	31 – 47 0.8 – 1.2	59 – 87 1.5 – 2.2	94 – 157 2.4 – 4.0
0.472" 12 mm	—	—	—	—	—	12 – 20 0.3 – 0.5	31 – 59 0.8 – 1.5	59 – 87 1.5 – 2.2

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

INSTALLATION

CONDITIONS FOR ON-SITE INSTALLATION


NO.	CONTENT	REQUIREMENTS
1	**Power supply capacity**	• Not less than 120 kVA
2	**Power supply quality**	• Three-phase voltage instability ≤ ±5% • Three-phase power imbalance ≤ 2.5% • Grounding resistance ≤ 3 ohms; the power supply voltage must not cut off suddenly
3	**Compressed air**	• For high-pressure air cutting, the pressure should be ≥ 185 psi (13 kgf/cm^2) and the flow rate ≥ 53 cfm (1.5 m^3/min) • The dew point temperature must stay low — the limit is not given in the factory's sheet; NovoTech confirms it for your air dryer • Oil content ≤ 0.01 ppm; solid particles ≤ 0.01 μm
4	**Auxiliary gases**	• The purity of oxygen and nitrogen should be ≥ 99.96%
5	**Cutting material**	• Smooth, flat, rust-free and uniformly rolled, meeting ISO standards
6	**Foundation requirements**	• The installation foundation must have no settlement and be built to the foundation drawings provided by NovoTech
7	**On-site conditions**	• The working environment should have a stable temperature of 41 – 86 °F (5 – 30 °C) • Humidity below 70% • After installation and commissioning, the laser should be isolated and an air conditioner installed
8	**Operators**	• Personnel with basic skills in electrical work, mechatronics and CNC machine tool operation
9	**Other supporting equipment**	• A computer for programming and monitoring the laser operation • The cables needed for on-site installation of the equipment

CONSUMABLE SUPPLIES

NAME	LIFESPAN	RECOMMENDED STOCK QUANTITY
Focusing protective lens	40 hours	3 – 5 pieces
Collimating protective lens	500 hours	1 – 3 pieces
Focusing lens	Approx. 3,000 hours	2 sets
Collimating lens	Approx. 3,000 hours	1 set
Nozzle	120 hours	3 – 10 of each model needed, depending on the variety of sheet metal you cut

QUALITY · DELIVERY

QUALITY CONTROL · DELIVERY

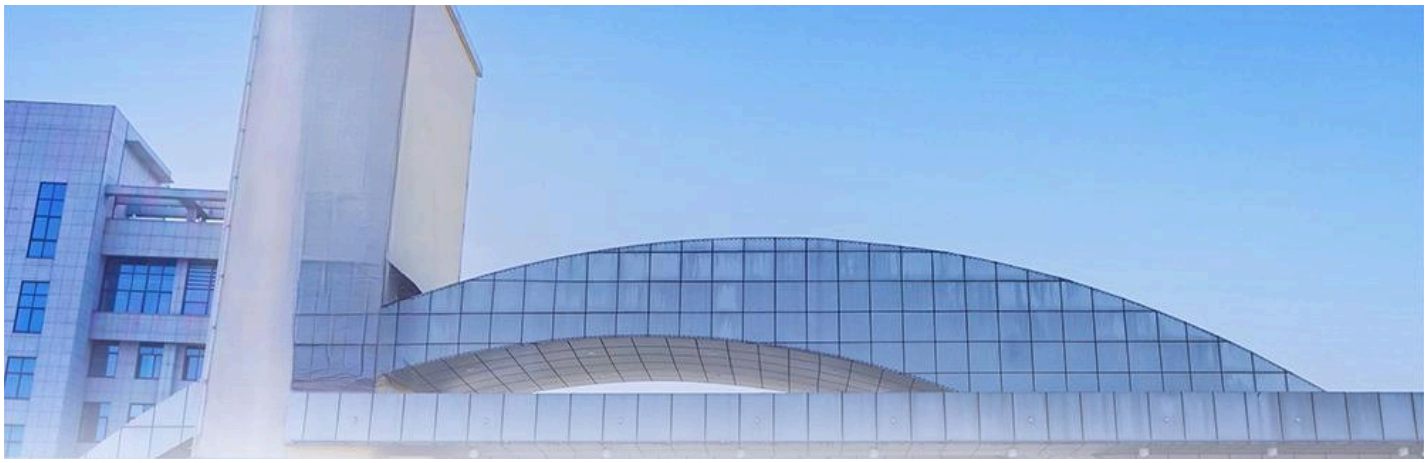



Testing center



Container loading

QUALITY CONTROL

- The factory's press brake manufacturing leads the industry in China, setting benchmarks for quality and performance.
- Its quality inspection rigorously follows industry standards, ensuring the reliability of the machines.
- Testing machines run continuously, so every product meets the highest standards before it is dispatched.

DELIVERY PACKAGING

- Customizable packaging, including wooden cases, for sea transportation keeps the machine intact on delivery.
- Standard machines are ready to ship from the factory within 20 days.
- An advanced fixing method keeps the machine stable and free of vibration in container transport.


SERVICE

SERVICE




Pre sale

- Custom-tailored selection of press brakes and tooling to match each customer's processing needs, optimizing bending quality and operational efficiency.
- A comprehensive engineering review recommends the most cost-effective solution for the user.
- A finalized, engineer-approved solution that best fits the user's requirements.

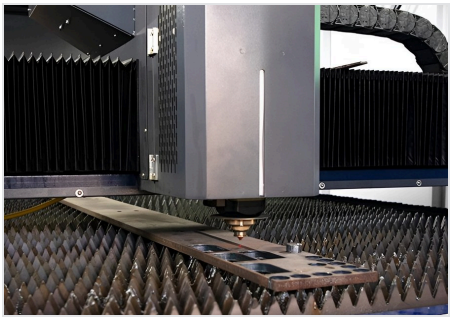


On sale

- Commitment to customer satisfaction through strict adherence to the contract terms.
- Rigorous quality assurance for all equipment delivered.
- Continuous, proactive communication keeps the customer informed throughout the sale.

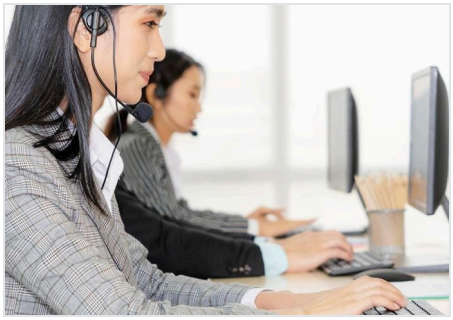

After sales

- NovoTech's 1-year warranty with complimentary part replacements ensures long-term reliability and user satisfaction.
- Professional remote assistance and on-site service, for personalized and convenient support.
- Tracking services and a service file for each user streamline maintenance for regular customers.

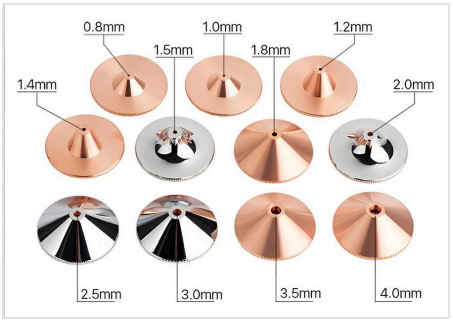

Parts

- Prompt delivery of custom accessories to meet specific customer requirements.
- Focused on minimizing downtime and keeping the machine running.

Generality

- Components from globally recognized brands make replacement parts easy to find worldwide.
- Identical parts can be sourced locally, which makes maintenance and repair convenient.



Customization

- We specialize in tailored machinery and tooling solutions designed for the unique specifications of each customer's workpieces.
- Customization ensures optimal compatibility and efficiency for a wide range of workpieces.

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT FIBER LASER FOR YOUR SHOP.

Call or visit us for quotes, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com


ADDRESS

1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada


INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**







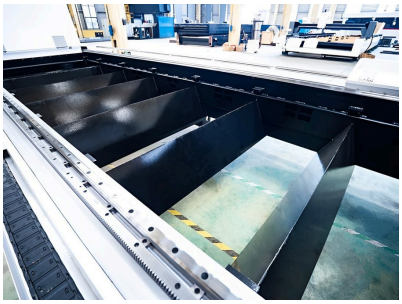

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: sheet thicknesses in decimal inches, cutting speeds in inches per minute. Model numbers are manufacturer designations. Photos may show optional equipment.