
NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

HYDRAULIC PRESSES AND RIVETING MACHINES

BENCH AND WORKSHOP PRESSES · FOUR-COLUMN PRESSES · C-FRAME PRESSES · PRESSES WITH SLIDING TABLE · ORBITAL RIVETING MACHINES

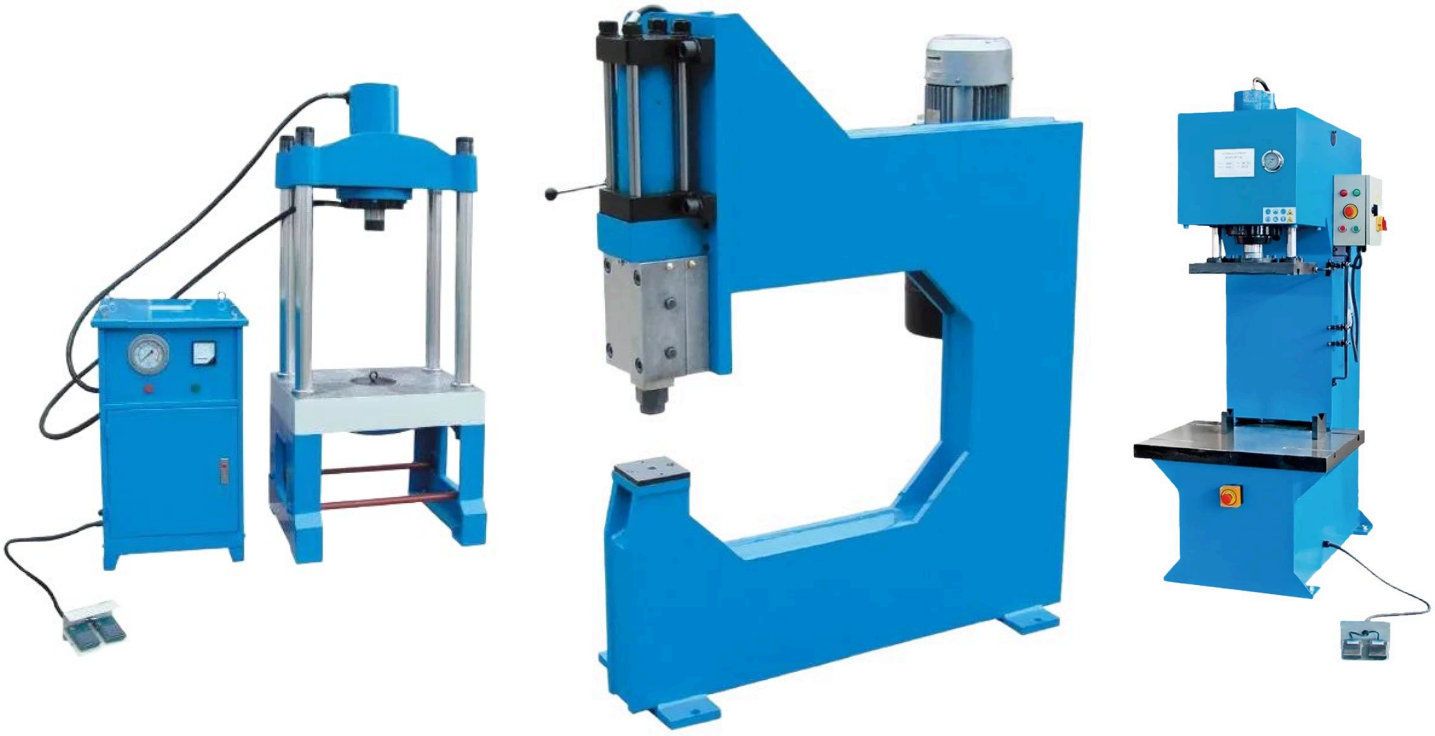

China
MADE IN CHINA

9
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE PRESSES AND RIVETING MACHINES

CONTENTS

BENCH AND WORKSHOP PRESSES

EBP-10T hydraulic bench press for sheet-metal tooling, 10 tons, 25″ throat EBP-10T · 1 model 04

EBP-25T motorized workshop press, 28 US tons EBP-25T · 1 model 05

HPB presses with brake function, 33 – 331 US tons — single and twin cylinder HPB-580 – HPB-3000D · 11 models 06

HP-30 – HP-500 motorized H-frame hydraulic presses, 33 – 551 US tons HP-30 – HP-500 · 10 models 09

HPP-60 · HPP-100 · HPP-160 motorized workshop presses, 66 – 176 US tons HPP-60 · HPP-100 · HPP-160 · 3 models 11

FOUR-COLUMN PRESSES

HP-F four-column hydraulic presses, 55 – 347 US tons, and HP-F1/PLC presses with touch-screen control HP-50F – HP-315F1/PLC · 13 models 12

C-FRAME PRESSES

HP-C C-frame hydraulic presses, 22 – 110 US tons HP-20C – HP-100C · 5 models 14

PRESSES WITH SLIDING TABLE

HP-M1 hydraulic presses with sliding table, 22 – 220 US tons HP-20M1 – HP-200M1 · 6 models 15

ORBITAL RIVETING MACHINES

XM orbital riveting machines, rivets Ø3/16 – 1-3/16″ XM-5 – XM-30 · 6 models 16

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE HYDRAULIC PRESSES AND RIVETING MACHINES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

PRESSES FOR THE REPAIR SHOP AND LIGHT PRODUCTION

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.

A hydraulic press presses bearings and bushings, straightens shafts and bends flat bar one part at a time, or runs dies cycle after cycle: bench presses for sheet-metal tooling, workshop and H-frame presses with a brake function, four-column and C-frame presses for dies, presses with a sliding table for straightening, and orbital riveting machines that form rivet heads with a tenth of a press's force.

EBP-10T · 1 MODEL

EBP-10T HYDRAULIC BENCH PRESS FOR SHEET-METAL TOOLING, 10 TONS, 25" THROAT



MODEL EBP-10T · EBP-10T HYDRAULIC BENCH PRESS WITH 25" THROAT



Louver punches for the bench press

10 tons, 25" throat

A 10-ton hydraulic bench press for the sheet-metal and HVAC shop: a 25" throat and a 6" tool opening take the industry-standard bench and louver press tooling — punch round, square and oblong holes, punch and flare or punch and bead, cut louvers, notch corners, bend 90° in 3/8" mild steel and shear 16 ga — and it works as a hydraulic arbor press as well.

STANDARD FEATURES

- ✓ 10 tons hydraulic; 4" stroke; 25" throat; 6" tool opening
- ✓ Takes all standard bench press and louver press tooling
- ✓ Tooling: shear 16 ga, 90° bend 3/8", corner punch 16 ga, louver punches 1 – 5", punch & flare and punch & bead 1 – 3"

OPTIONAL EQUIPMENT

- + Shear kit
- + 90° bend kit
- + Corner punch and corner radius punch
- + Louver punches
- + Punch & flare and punch & bead kits
- + Universal tool stand

EBP-10T — TECHNICAL SPECIFICATIONS


Model	EBP-10T
Capacity	**10 tons, hydraulic, 4" stroke**
Throat depth	**25"**
Tool opening	6"
Tooling	**All BP-3T bench and louver press tooling; adaptor and die plate included**
Packing size L × W × H	53 × 45 × 25" (135 × 115 × 63 cm)
Weight	**739 lb (335 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

EBP-25T · 1 MODEL

EBP-25T MOTORIZED WORKSHOP PRESS, 28 US TONS

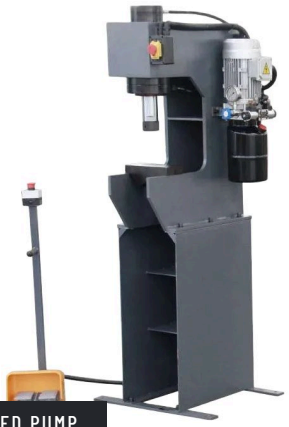

MODEL EBP-25T · EBP-25T WORKSHOP PRESS WITH MOTORIZED PUMP

28 US tons

A compact workshop press with a motorized pump and infinitely variable pressure and speed — pressing bearings, bushings and shafts, and straightening on the two V-blocks — for the garage, the farm and the maintenance shop.

STANDARD FEATURES

- ✓ 28 US tons (250 kN); 7.9″ (200 mm) stroke
- ✓ Motorized pump; infinitely variable pressure and speed; pressure gauge
- ✓ Two V-blocks for straightening

OPTIONAL EQUIPMENT

EBP-25T — TECHNICAL SPECIFICATIONS

Model	EBP-25T
Force	**28 US tons (250 kN)**
Stroke	7.9″ (200 mm)
Pump	**Motorized pump, infinitely variable pressure and speed: 0.35 in/s (8.8 mm/s)**
Return speed	0.49 in/s (12.5 mm/s)
Oil reservoir	1.3 US gal (5 L)
Packing size L × W × H	39 × 38 × 43″ (98 × 96 × 108 cm)
Weight	**534 lb (242 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HPB-580 – HPB-3000D · 11 MODELS

HPB PRESSES WITH BRAKE FUNCTION, 33 – 331 US TONS — SINGLE AND TWIN CYLINDER



MODEL HPB · HPB-1500 PRESS WITH BRAKE FUNCTION — V-BLOCK AND SUPPORT TABLE



HPB-1500D two-cylinder hydraulic press brake



HPB-580D two-cylinder press with brake function and safety fence

33 – 331 US tons

H-frame presses set up as press brakes: replaceable top tools, a V-block and a support table with stops, a worktable lifted by a chain from the main cylinder, on a torsion-proof steel weldment. The HPB models have one cylinder; the D models two cylinders for bending widths of 47 – 71", with a synchronizing device as an option and fine adjustment of the angle.

STANDARD FEATURES

- ✓ 33 – 220 US tons single cylinder; 33 – 331 US tons twin cylinder (D)
- ✓ Tables 11.8 × 15.7" to 70.9 × 27.6"
- ✓ Replaceable top tools, V-block, support table with stops
- ✓ Angle fine adjustment; synchronizing device optional (D models)

OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS

HPB PRESSES WITH BRAKE FUNCTION, 33 – 331 US TONS — SINGLE AND TWIN CYLINDER



HPB-580 press with brake function

TECHNICAL SPECIFICATIONS

HPB PRESSES WITH BRAKE FUNCTION, 33 – 331 US TONS — SINGLE AND TWIN CYLINDER

HPB-580 – HPB-2000 · HPB-580D – HPB-3000D

H-frame presses with brake function — single cylinder or two cylinders (D) for wide bending

Model	HPB-580	HPB-790	HPB-1010	HPB-1500	HPB-2000	HPB-580D	HPB-790D	HPB-1000D	HPB-1500D	HPB-2000D	HPB-3000D
Force	33 US tons (300 kN)	55 US tons (500 kN)	110 US tons (1,000 kN)	165 US tons (1,500 kN)	220 US tons (2,000 kN)	33 US tons (300 kN)	55 US tons (500 kN)	110 US tons (1,000 kN)	165 US tons (1,500 kN)	220 US tons (2,000 kN)	331 US tons (3,000 kN)
Pressure	3,626 psi (25 MPa)	3,626 psi (25 MPa)	4,351 psi (30 MPa)	4,351 psi (30 MPa)	4,351 psi (30 MPa)	3,626 psi (25 MPa)	3,626 psi (25 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)
Travel	11.8 + 10.6" (300 + 270 mm)	8.7 + 15.9" (220 + 405 mm)	9.8 + 15.9" (250 + 405 mm)	9.8 + 15.9" (250 + 405 mm)	11.8 + 15.9" (300 + 405 mm)	8.7" (220 mm)	8.7" (220 mm)	9.8" (250 mm)	9.8" (250 mm)	11.8" (300 mm)	11.8" (300 mm)
Table	11.8 × 15.7" (300 × 400 mm)	15.7 × 31.5" (400 × 800 mm)	18.1 × 38.6" (460 × 980 mm)	18.1 × 38.6" (460 × 980 mm)	19.7 × 39.4" (500 × 1,000 mm)	47.2 × 11.8" (1,200 × 300 mm)	51.2 × 14.2" (1,300 × 360 mm)	59.1 × 17.3" (1,500 × 440 mm)	59.1 × 17.3" (1,500 × 440 mm)	63 × 19.7" (1,600 × 500 mm)	70.9 × 27.6" (1,800 × 700 mm)
Machine size L × W × H	47 × 22 × 66" (120 × 55 × 168 cm)	56 × 26 × 78" (143 × 65 × 197 cm)	69 × 30 × 87" (175 × 75 × 220 cm)	69 × 28 × 87" (175 × 72 × 220 cm)	72 × 31 × 89" (184 × 80 × 225 cm)	73 × 22 × 67" (186 × 55 × 170 cm)	79 × 25 × 79" (200 × 64 × 200 cm)	94 × 30 × 87" (240 × 75 × 220 cm)	94 × 30 × 87" (240 × 75 × 220 cm)	106 × 33 × 87" (270 × 85 × 220 cm)	116 × 43 × 98" (295 × 110 × 250 cm)
Weight	624 lb (283 kg)	1,274 lb (578 kg)	2,818 lb (1,278 kg)	3,395 lb (1,540 kg)	4,480 lb (2,032 kg)	1,676 lb (760 kg)	2,425 lb (1,100 kg)	3,770 lb (1,710 kg)	4,299 lb (1,950 kg)	5,732 lb (2,600 kg)	9,083 lb (4,120 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HP-30 – HP-500 · 10 MODELS

HP-30 – HP-500 MOTORIZED H-FRAME HYDRAULIC PRESSES, 33 – 551 US TONS

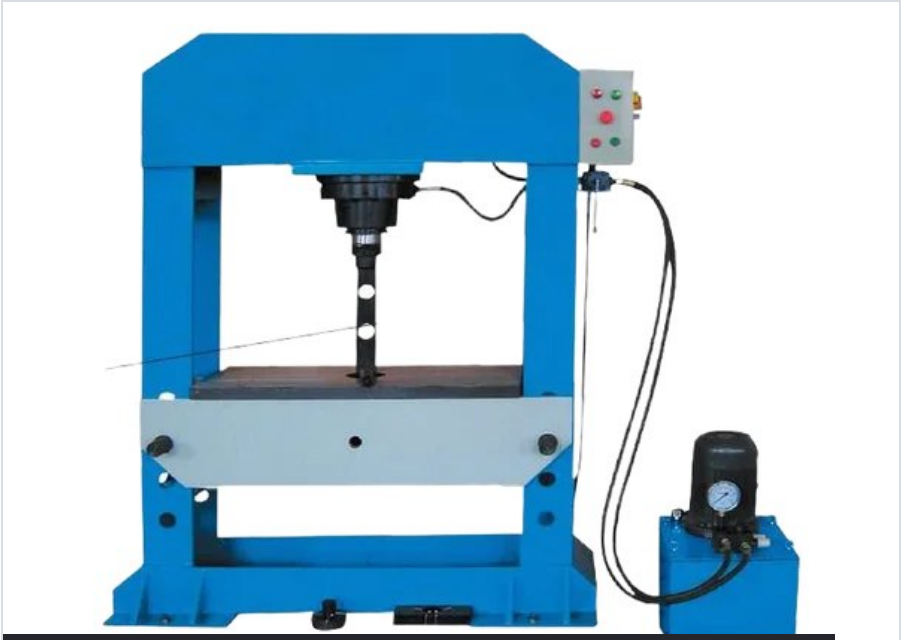

MODEL HP · HP-100 H-FRAME HYDRAULIC PRESS WITH SEPARATE HYDRAULIC STATION



HP-30 motorized H-frame hydraulic press

33 – 551 US tons

Motorized H-frame hydraulic presses for production pressing, forming, straightening and assembly, from 33 to 551 US tons: a piston stroke of 7.9 – 11.8" plus 10.6 – 25.6" of table travel, tables up to 35.4 × 47.2", the hydraulic unit built on to 88 US tons and a separate hydraulic station from 110 US tons up. CE equipment, complete guarding, a foot pedal and travel limit switches are available.

STANDARD FEATURES

- ✓ 33, 55, 69, 88, 110, 165, 220, 331, 441 and 551 US tons
- ✓ Pressure 3,626 – 4,569 psi (25 – 31.5 MPa)
- ✓ Tables 11.8 × 15.7" to 35.4 × 47.2"
- ✓ Hydraulic unit built on (HP-30 – HP-80) or separate (HP-100 and up)

OPTIONAL EQUIPMENT

- + CE equipment
- + Complete guarding
- + Foot pedal switch
- + Travel limit switch
- + Table lift device (HP-30, 50, 63, 80)

TECHNICAL SPECIFICATIONS

HP-30 – HP-500 MOTORIZED H-FRAME HYDRAULIC PRESSES, 33 – 551 US TONS

HP-30 – HP-500

Motorized H-frame hydraulic presses, 33 – 551 US tons

Model	HP-30	HP-50	HP-63	HP-80	HP-100	HP-150	HP-200	HP-300	HP-400	HP-500
Force	**33 US tons (300 kN)**	**55 US tons (500 kN)**	**69 US tons (630 kN)**	**88 US tons (800 kN)**	**110 US tons (1,000 kN)**	**165 US tons (1,500 kN)**	**220 US tons (2,000 kN)**	**331 US tons (3,000 kN)**	**441 US tons (4,000 kN)**	**551 US tons (5,000 kN)**
Pressure	3,626 psi (25 MPa)	3,626 psi (25 MPa)	3,626 psi (25 MPa)	4,351 psi (30 MPa)	4,351 psi (30 MPa)	4,351 psi (30 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)
Piston travel + table travel	**7.9 + 10.6" (200 + 270 mm)**	**8.7 + 15.9" (220 + 405 mm)**	**8.7 + 15.9" (220 + 405 mm)**	**10.2 + 25.6" (260 + 650 mm)**	**9.8 + 15.9" (250 + 405 mm)**	**9.8 + 15.9" (250 + 405 mm)**	**11.8 + 15.9" (300 + 405 mm)**	**11.8 + 15.9" (300 + 405 mm)**	**11.8 + 15.9" (300 + 405 mm)**	**11.8 + 15.9" (300 + 405 mm)**
Table	**11.8 × 15.7" (300 × 400 mm)**	**13.8 × 18.9" (350 × 480 mm)**	**13.8 × 18.9" (350 × 480 mm)**	**15.7 × 30.7" (400 × 780 mm)**	**18.1 × 38.6" (460 × 980 mm)**	**18.1 × 38.6" (460 × 980 mm)**	**19.7 × 39.4" (500 × 1,000 mm)**	**27.6 × 47.2" (700 × 1,200 mm)**	**31.5 × 47.2" (800 × 1,200 mm)**	**35.4 × 47.2" (900 × 1,200 mm)**
Machine size L × W × H	48 × 22 × 66" (123 × 55 × 168 cm)	58 × 25 × 79" (148 × 64 × 200 cm)	59 × 26 × 77" (150 × 65 × 195 cm)	67 × 26 × 79" (170 × 65 × 200 cm)	69 × 30 × 87" (175 × 75 × 220 cm)	70 × 28 × 87" (179 × 72 × 220 cm)	76 × 31 × 89" (194 × 80 × 225 cm)	83 × 37 × 106" (210 × 95 × 270 cm)	91 × 39 × 114" (230 × 100 × 290 cm)	91 × 39 × 114" (230 × 100 × 290 cm)
Hydraulic station	Built on	Built on	Built on	Built on	Separate, 29 × 25 × 38" (73 × 63 × 96 cm)	Separate, 29 × 25 × 38" (73 × 63 × 96 cm)	Separate, 35 × 31 × 42" (90 × 80 × 106 cm)	Separate, 43 × 47 × 53" (110 × 120 × 135 cm)	Separate, 43 × 47 × 53" (110 × 120 × 135 cm)	Separate, 43 × 47 × 53" (110 × 120 × 135 cm)
Weight	**926 lb (420 kg)**	**1,146 lb (520 kg)**	**1,367 lb (620 kg)**	**2,194 lb (995 kg)**	**2,249 lb (1,020 kg)**	**2,998 lb (1,360 kg)**	**3,823 lb (1,734 kg)**	**9,259 lb (4,200 kg)**	**12,125 lb (5,500 kg)**	**14,330 lb (6,500 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPP-60 · HPP-100 · HPP-160 · 3 MODELS

HPP-60 · HPP-100 · HPP-160 MOTORIZED WORKSHOP PRESSES, 66 – 176 US TONS



MODEL HPP · HPP-100 MOTORIZED WORKSHOP PRESS WITH MOVING CYLINDER

66 – 176 US tons

Motorized H-frame workshop presses for repair, assembly and straightening: a two-step hydraulic unit with a 3 – 4 HP motor and a double-acting hand pump for fine positioning, a cylinder that moves across the frame, V-block worktables and 16" of stroke, from 66 to 176 US tons with working widths to 43.3".

STANDARD FEATURES

- ✓ HPP-60 / 100 / 160: 66, 110 and 176 US tons
- ✓ 3 – 4 HP; two-step hydraulic unit; 16.1" (410 mm) stroke
- ✓ Cylinder moves across the frame; V-block worktable
- ✓ Working width 29.5 – 43.3" (750 – 1,100 mm)

OPTIONAL EQUIPMENT

HPP-60 · HPP-100 · HPP-160 — TECHNICAL SPECIFICATIONS

Model	HPP-60	HPP-100	HPP-160
Force	**66 US tons (600 kN)**	**110 US tons (1,000 kN)**	**176 US tons (1,600 kN)**
Pressure, max	3,408 psi (23.5 MPa)	3,916 psi (27 MPa)	4,496 psi (31 MPa)
Stroke	**16.1" (410 mm)**	**16.1" (410 mm)**	**16.1" (410 mm)**
Working width, max	**29.5" (750 mm)**	**36.2" (920 mm)**	**43.3" (1,100 mm)**
Speeds: approach / press / return	0.36 / 0.09 / 0.5 in/s (9.2 / 2.2 / 12.7 mm/s)	0.36 / 0.11 / 0.48 in/s (9.2 / 2.7 / 12.3 mm/s)	0.36 / 0.09 / 0.47 in/s (9.2 / 2.3 / 12 mm/s)
Motor	**3 HP (2.2 kW)**	**4 HP (3 kW)**	**4 HP (3 kW)**
Oil tank	7.9 US gal (30 L)	7.9 US gal (30 L)	7.9 US gal (30 L)
Packing size L × W × H	67 × 39 × 83" (170 × 100 × 210 cm)	74 × 39 × 98" (187 × 100 × 248 cm)	85 × 47 × 102" (215 × 120 × 258 cm)
Weight	**1,852 lb (840 kg)**	**2,954 lb (1,340 kg)**	**4,189 lb (1,900 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HP-50F – HP-315F1/PLC · 13 MODELS

HP-F FOUR-COLUMN HYDRAULIC PRESSES, 55 – 347 US TONS, AND HP-F1/PLC PRESSES WITH TOUCH-SCREEN CONTROL



MODEL HP-F · HP-315FK FOUR-COLUMN HYDRAULIC PRESS WITH PLC CONTROL



HP-150F1/PLC four-column hydraulic press with PLC cabinet



HP-50F four-column hydraulic press with separate pump unit

55 – 347 US tons

Four-column presses for forming and pressing with an evenly guided slide: 55 to 220 US tons on the HP-F, the heavier F1 models to 347 US tons with tables up to 42.9 × 31.5″, and the HP-F1/PLC presses from 110 to 347 US tons with a PLC touch-screen cabinet, a foot pedal and a separate hydraulic station; the HP-315FK has a PLC touch-screen control cabinet too.

STANDARD FEATURES

- ✓ 55 – 347 US tons
- ✓ Tables 15.7 × 23.6″ to 42.9 × 31.5″
- ✓ Stroke 11.8 – 15.7″
- ✓ HP-F1/PLC: PLC touch screen, foot pedal and separate hydraulic station, 110 – 347 US tons
- ✓ Separate pump unit; PLC touch screen on the HP-315FK

OPTIONAL EQUIPMENT

HP-50F – HP-315FK — TECHNICAL SPECIFICATIONS

Model	HP-50F	HP-100F	HP-150F	HP-200F	HP-150F1	HP-200F1	HP-315F1	HP-315FK
Force	55 US tons (500 kN)	110 US tons (1,000 kN)	165 US tons (1,500 kN)	220 US tons (2,000 kN)	165 US tons (1,500 kN)	220 US tons (2,000 kN)	347 US tons (3,150 kN)	347 US tons (3,150 kN)
Pressure	7,252 psi (50 MPa)	7,252 psi (50 MPa)	8,702 psi (60 MPa)	8,702 psi (60 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)	4,641 psi (32 MPa)	4,641 psi (32 MPa)
Stroke	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	15.7″ (400 mm)	15.7″ (400 mm)
Table	15.7 × 23.6″ (400 × 600 mm)	19.7 × 27.6″ (500 × 700 mm)	21.7 × 33.5″ (550 × 850 mm)	21.7 × 33.5″ (550 × 850 mm)	34.3 × 26.4″ (870 × 670 mm)	38.2 × 27.6″ (970 × 700 mm)	42.9 × 31.5″ (1,090 × 800 mm)	42.9 × 31.5″ (1,090 × 800 mm)
Control	Separate pump unit	Separate pump unit	Separate pump unit	Separate pump unit	Separate pump unit	Separate pump unit	Separate pump unit	PLC touch-screen cabinet and pump unit
Weight	2,161 lb (980 kg)	2,690 lb (1,220 kg)	3,527 lb (1,600 kg)	4,321 lb (1,960 kg)	7,055 lb (3,200 kg)	9,259 lb (4,200 kg)	18,960 lb (8,600 kg)	19,621 lb (8,900 kg)

TECHNICAL SPECIFICATIONS

HP-F FOUR-COLUMN HYDRAULIC PRESSES, 55 – 347 US TONS, AND HP-F1/PLC PRESSES WITH TOUCH-SCREEN CONTROL

HP-100F1/PLC – HP-315F1/PLC

Four-column hydraulic presses with PLC touch-screen control, 110 – 347 US tons

Model	HP-100F1/PLC	HP-150F1/PLC	HP-200F1/PLC	HP-250F1/PLC	HP-315F1/PLC
Force	**110 US tons (1,000 kN)**	**165 US tons (1,500 kN)**	**220 US tons (2,000 kN)**	**276 US tons (2,500 kN)**	**347 US tons (3,150 kN)**
Pressure	4,496 psi (31 MPa)	4,496 psi (31 MPa)	4,496 psi (31 MPa)	4,496 psi (31 MPa)	4,496 psi (31 MPa)
Stroke	**11.8" (300 mm)**	**11.8" (300 mm)**	**11.8" (300 mm)**	**11.8" (300 mm)**	**11.8" (300 mm)**
Daylight, max	25.6" (650 mm)	25.6" (650 mm)	27.6" (700 mm)	27.6" (700 mm)	31.5" (800 mm)
Table	**23.6 × 23.6" (600 × 600 mm)**	**23.6 × 23.6" (600 × 600 mm)**	**27.6 × 27.6" (700 × 700 mm)**	**27.6 × 27.6" (700 × 700 mm)**	**31.5 × 31.5" (800 × 800 mm)**
Control	PLC touch-screen cabinet, foot pedal; separate hydraulic station	PLC touch-screen cabinet, foot pedal; separate hydraulic station	PLC touch-screen cabinet, foot pedal; separate hydraulic station	PLC touch-screen cabinet, foot pedal; separate hydraulic station	PLC touch-screen cabinet, foot pedal; separate hydraulic station
Dimensions L × W × H	43 × 31 × 93" (110 × 80 × 235 cm)	43 × 31 × 93" (110 × 80 × 235 cm)	102 × 35 × 55" (260 × 90 × 140 cm)	106 × 35 × 59" (270 × 90 × 150 cm)	118 × 39 × 83" (300 × 100 × 210 cm)
Hydraulic station L × W × H	39 × 35 × 55" (100 × 90 × 140 cm)	39 × 35 × 55" (100 × 90 × 140 cm)	39 × 35 × 55" (100 × 90 × 140 cm)	39 × 35 × 55" (100 × 90 × 140 cm)	43 × 39 × 59" (110 × 100 × 150 cm)
Weight	**3,616 lb (1,640 kg)**	**4,057 lb (1,840 kg)**	**5,291 lb (2,400 kg)**	**6,261 lb (2,840 kg)**	**8,311 lb (3,770 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HP-20C – HP-100C · 5 MODELS

HP-C C-FRAME HYDRAULIC PRESSES, 22 – 110 US TONS



MODEL HP-C · HP-63C C-FRAME HYDRAULIC PRESS WITH GUARD DOORS



HP-30C C-frame hydraulic press with foot pedal

22 – 110 US tons

Open C-frame presses with access from three sides, for assembling and dismantling complex structures and large parts: 22 to 110 US tons, 11.8 – 15.7″ stroke, tables to 31.5 × 23.6″.

STANDARD FEATURES

- ✓ 22, 33, 55, 69 and 110 US tons
- ✓ Open on three sides
- ✓ Tables 15.7 × 11.8″ to 31.5 × 23.6″
- ✓ Stroke 11.8 – 15.7″

OPTIONAL EQUIPMENT

HP-20C – HP-100C — TECHNICAL SPECIFICATIONS

Model	HP-20C	HP-30C	HP-50C	HP-63C	HP-100C
Force	22 US tons (200 kN)	33 US tons (300 kN)	55 US tons (500 kN)	69 US tons (630 kN)	110 US tons (1,000 kN)
Pressure	3,626 psi (25 MPa)	3,626 psi (25 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)	4,569 psi (31.5 MPa)
Stroke	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)	15.7″ (400 mm)
Table	15.7 × 11.8″ (400 × 300 mm)	15.7 × 11.8″ (400 × 300 mm)	23.6 × 15.7″ (600 × 400 mm)	27.6 × 19.7″ (700 × 500 mm)	31.5 × 23.6″ (800 × 600 mm)
Machine size L × W × H	39 × 24 × 63″ (100 × 60 × 160 cm)	43 × 24 × 63″ (110 × 60 × 160 cm)	55 × 31 × 79″ (140 × 80 × 200 cm)	59 × 31 × 87″ (150 × 80 × 220 cm)	75 × 39 × 98″ (190 × 100 × 250 cm)
Weight	1,455 lb (660 kg)	2,557 lb (1,160 kg)	6,173 lb (2,800 kg)	7,055 lb (3,200 kg)	10,582 lb (4,800 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HP-20M1 – HP-200M1 · 6 MODELS

HP-M1 HYDRAULIC PRESSES WITH SLIDING TABLE, 22 – 220 US TONS



MODEL HP-M1 · HP-150M1 HYDRAULIC PRESS WITH SLIDING TABLE



HP-200M1 hydraulic press with sliding table



HP-20M1 hydraulic press with sliding table

22 – 220 US tons

Two-column presses whose table slides out of the frame — load and unload large, heavy parts outside the press and roll them in for press-fitting or dismantling. 22 to 220 US tons, 11.8 – 15.7″ stroke, tables to 31.5 × 27.6″ with 23.6″ of travel.

STANDARD FEATURES

- 22, 44, 69, 110, 165 and 220 US tons
- Table slides 23.6″ (600 mm) out of the frame
- Daylight 27.6 – 43.3″
- Stroke 11.8 – 15.7″

OPTIONAL EQUIPMENT

HP-20M1 – HP-200M1 — TECHNICAL SPECIFICATIONS

Model	HP-20M1	HP-40M1	HP-63M1	HP-100M1	HP-150M1	HP-200M1
Force	**22 US tons (200 kN)**	**44 US tons (400 kN)**	**69 US tons (630 kN)**	**110 US tons (1,000 kN)**	**165 US tons (1,500 kN)**	**220 US tons (2,000 kN)**
Pressure	3,626 psi (25 MPa)	3,626 psi (25 MPa)	3,626 psi (25 MPa)	4,351 psi (30 MPa)	4,351 psi (30 MPa)	4,351 psi (30 MPa)
Stroke	**11.8″ (300 mm)**	**11.8″ (300 mm)**	**11.8″ (300 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**	**15.7″ (400 mm)**
Daylight, max	27.6″ (700 mm)	27.6″ (700 mm)	31.5″ (800 mm)	35.4″ (900 mm)	35.4″ (900 mm)	43.3″ (1,100 mm)
Table / table travel	**19.7 × 19.7″ (500 × 500 mm) / 23.6″ (600 mm)**	**19.7 × 19.7″ (500 × 500 mm) / 23.6″ (600 mm)**	**27.6 × 23.6″ (700 × 600 mm) / 23.6″ (600 mm)**	**31.5 × 27.6″ (800 × 700 mm) / 23.6″ (600 mm)**	**31.5 × 27.6″ (800 × 700 mm) / 23.6″ (600 mm)**	**31.5 × 27.6″ (800 × 700 mm) / 23.6″ (600 mm)**
Packing size L × W × H	55 × 47 × 79″ (140 × 120 × 200 cm)	59 × 55 × 83″ (150 × 140 × 210 cm)	63 × 63 × 87″ (160 × 160 × 220 cm)	67 × 67 × 93″ (170 × 170 × 235 cm)	67 × 67 × 93″ (170 × 170 × 235 cm)	102 × 75 × 71″ (260 × 190 × 180 cm)
Weight	**1,433 lb (650 kg)**	**2,161 lb (980 kg)**	**2,249 lb (1,020 kg)**	**3,351 lb (1,520 kg)**	**3,858 lb (1,750 kg)**	**4,982 lb (2,260 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

XM-5 – XM-30 · 6 MODELS

XM ORBITAL RIVETING MACHINES, RIVETS Ø3/16 – 1-3/16″



MODEL XM · XM-8 HYDRAULIC ORBITAL RIVETER

Rivets to 1-3/16″

Hydraulic orbital (rolling) riveters: the riveting head rolls the rivet end into shape instead of hammering it, with about a tenth of the force of punch riveting — the part keeps its fit, the head comes out smooth, without vibration or noise. Six sizes for solid rivets from 3/16 to 1-3/16″; with other tools the machine works as a normal press. Hinges, chain links, brake parts, appliances and hardware.

STANDARD FEATURES

- Rivets Ø3/16 – 1-3/16″ (5 – 30 mm); 1,911 – 22,481 lbf
- 11 rivet head forms
- Tables Ø4.7″ to 19.7 × 14″
- Low noise, no vibration; replaces hammering, punching and hot riveting

OPTIONAL EQUIPMENT

XM-5 – XM-30 — TECHNICAL SPECIFICATIONS

Model	XM-5	XM-8	XM-10	XM-16	XM-20	XM-30
Rivet diameter, max	**3/16″ (5 mm)**	**5/16″ (8 mm)**	**3/8″ (10 mm)**	**5/8″ (16 mm)**	**13/16″ (20 mm)**	**1-3/16″ (30 mm)**
Force	**1,911 lbf (8.5 kN)**	**2,923 lbf (13 kN)**	**4,271 lbf (19 kN)**	**7,644 lbf (34 kN)**	**14,613 lbf (65 kN)**	**22,481 lbf (100 kN)**
Spindle travel	0.8″ (20 mm)	1.2″ (30 mm)	1.2″ (30 mm)	2″ (50 mm)	1.2″ (30 mm)	1.2″ (30 mm)
Head to table, max	4.7″ (120 mm)	10.8″ (275 mm)	10.8″ (275 mm)	8.7″ (220 mm)	9.8″ (250 mm)	11.8″ (300 mm)
Table	Ø4.7″ (120 mm)	9.8 × 7.9″ (250 × 200 mm)	9.8 × 7.9″ (250 × 200 mm)	13.8 × 9.8″ (350 × 250 mm)	16.5 × 11.8″ (420 × 300 mm)	19.7 × 14″ (500 × 355 mm)
Machine size L × W × H	17 × 13 × 32″ (440 × 320 × 822 mm)	33 × 24 × 69″ (850 × 600 × 1,750 mm)	28 × 20 × 59″ (700 × 500 × 1,500 mm)	31 × 23 × 73″ (800 × 585 × 1,850 mm)	42 × 20 × 76″ (1,070 × 500 × 1,930 mm)	51 × 23 × 87″ (1,300 × 580 × 2,200 mm)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.