NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH PREMIUM LINE · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

ANGLE ROLLS AND SECTION BENDERS

PK MOTORIZED BENDERS · HPK 40 – 120 HYDRAULIC SECTION AND PIPE BENDERS · HPK DP HEAVY-DUTY BEAM BENDERS TO HEB 600 · TC-42 NC COILER







Turkey
MADE IN TURKEY

7
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

ANGLE ROLLS AND SECTION BENDERS

CONTENTS

MOTORIZED SECTION BENDERS

PK 30 · PK 35 motorized section and pipe benders — PK 30 · PK 35 · Ø1.18″ and 1.97″ shafts 04

HYDRAULIC SECTION AND PIPE BENDERS

HPK 40 hydraulic section and pipe bender — HPK 40 · Ø1.38″ shafts · 2 HP 07

HPK 50 · HPK 60 hydraulic section and pipe benders — HPK 50 (9 US tons) · HPK 60 (18 US tons) 11

HPK 65 · HPK 80 hydraulic section and pipe benders — HPK 65 · HPK 80 · Ø2.36″ and 3.15″ top shafts 15

HPK 100 · HPK 120 hydraulic section and pipe benders — HPK 100 (10 HP) · HPK 120 (20 HP, hydraulic guides standard) 19

HEAVY-DUTY BEAM BENDERS AND COILERS

HPK 160 – 360 DP heavy-duty hydraulic section and beam benders — HPK 160 DP · 180 DP · 200 DP · 240 DP · 300 DP · 360 DP 23

TC-42 NC tube coiling machine — TC-42 NC · Ø2.56″ shafts · 10 HP 28

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR ANGLE ROLLS AND SECTION BENDERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH PREMIUM LINE · MADE IN TURKEY

ANGLE, PIPE, TUBE AND BEAM BENT INTO RINGS, ARCS AND SPIRALS

The machines in this catalogue are NovoTech's premium line: built in Turkey to NovoTech's specification by a CE-certified metal-forming plant with more than 40 years of machine building and exports to over 100 countries, with European hydraulic and electrical components, inspected before shipping, and sold under NovoTech's name with a CSA-approved panel, a 1-year warranty and spare parts and technical support from NovoTech in Mississauga, Ontario, Canada.

An angle roll pushes a bar, angle, pipe, tube or beam between three rolls to bend it into an arc, a ring or a spiral. The PK 30 and PK 35 are the motorized benders for small flat bar, angle and tube; the hydraulic HPK 40 to HPK 120 add digital readouts, hydraulic guide rolls and optional NC control for section and pipe to 6" Schedule 40; the HPK DP heavy-duty benders roll channel, I-beam and H-beam up to HEB 600; and the TC-42 NC coiling machine winds tube into variable-pitch coils. Every machine rolls horizontally or vertically and ships with a standard roll set; pipe, tube, angle and special profile rolls are available for all of them.

PK 30 · PK 35 · Ø1.18" AND 1.97" SHAFTS

PK 30 · PK 35 MOTORIZED SECTION AND PIPE BENDERS



MODEL PK · PK 35 MOTORIZED SECTION AND PIPE BENDER



PK 30 motorized section and pipe bender



PK 35 with the foot pedal and the adjustable guide rolls

Flat bar to 2-3/8 × 3/8" · square bar to 1-3/8" · pipe to NPS 2 · angle to L 2 × 2 × 1/4"

Compact motorized angle rolls for flat bar, angle, square bar, tube and pipe — the first roll bender of the railing, furniture and ornamental shop. The PK 30 drives its two bottom rolls by gear directly from the gearbox with an idle top roll and a two-speed motor; the PK 35 drives two rolls through a hardened gear train, runs horizontally or vertically and takes a bar-twist or C & S scroll-forming attachment. Hardened rolls on hardened and ground special-steel shafts, adjustable guide rolls and a standard roll set are included; pipe, angle and special profile rolls are optional.

STANDARD FEATURES

- ✓ PK 30: two bottom rolls driven by gear system directly from the gearbox, idle top roll, two-speed motor
- ✓ PK 35: two rolls direct-driven by gear system, roll shafts in bearings, horizontal and vertical working position
- ✓ Hardened rolls; roll shafts of special steel, hardened and ground; steel frame
- ✓ Standard rolls and adjustable guide rolls included

OPTIONAL EQUIPMENT

- + Pipe / tube bending rolls; angle bending rolls; special profile rolls
- + Digital readout; special lateral angle guides
- + Bar-twist attachment and C & S forming attachment (PK 35); two-speed motor (PK 35)
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

PK 30 · PK 35 — TECHNICAL SPECIFICATIONS


Model	PK 30	PK 35
Roll shaft Ø	1.18" (30 mm)	1.97" (50 mm)
Top roll Ø	5.8" (148 mm)	6.1" (155 mm)
Bottom rolls Ø	4.6" (118 mm)	6.1" (155 mm)
Rolling speed	6.6 – 13 ft/min (2 – 4 m/min)	15 ft/min (4.5 m/min)
Motor power	0.9 – 1.1 HP (0.7 – 0.85 kW)	2 HP (1.5 kW)
Dimensions L × W × H	24 × 28 × 53" (610 × 710 × 1,350 mm)	39 × 30 × 55" (990 × 760 × 1,400 mm)
Weight	474 lb (215 kg)	882 lb (400 kg)

TECHNICAL SPECIFICATIONS · 1 / 2

PK 30 · PK 35 MOTORIZED SECTION AND PIPE BENDERS

PK 30 · PK 35 — SECTION BENDING CAPACITIES

largest section → minimum rolling diameter (outside)

Model	PK 30	PK 35
 **Flat bar — on edge (hard way)** standard rolls	2 × 3/8″ → Ø71″ · 13/16 × 1/4″ → Ø12″	2-3/8 × 3/8″ → Ø20″ · 1-5/8 × 3/8″ → Ø16″
 **Flat bar — flat (easy way)** standard rolls	3-1/8 × 9/16″* → Ø28″ · 1-1/8 × 1/4″ → Ø16″	3-7/8 × 9/16″* → Ø18″ · 2-3/8 × 3/8″ → Ø14″
 **Square bar** standard rolls	1-1/8 × 1-1/8″ → Ø35″ · 3/8 × 3/8″ → Ø8″	1-3/8 × 1-3/8″ → Ø35″ · 13/16 × 13/16″ → Ø12″
 **Round bar** optional rolls	Ø1-1/8″ → Ø35″ · Ø3/8″ → Ø8″	Ø1-3/8″ → Ø24″ · Ø1-1/8″ → Ø16″
 **Round tube** optional rolls	Ø2-3/8″ × 16 ga → Ø39″ · Ø1″ × 16 ga → Ø24″	Ø2-3/4″ × 14 ga → Ø39″ · Ø1-1/8″ × 14 ga → Ø20″
 **Pipe (NPS)** optional rolls	NPS 1-1/2 × .114″ → Ø24″ · NPS 1/4 × .071″ → Ø12″	NPS 2 × .114″ → Ø39″ · NPS 1 × .091″ → Ø14″
 **Rectangular tube** optional rolls	2 × 1-1/8″ × 11 ga → Ø47″ · 1-5/8 × 13/16″ × 14 ga → Ø31″	2-3/4 × 1-1/8″ × 14 ga → Ø47″ · 2 × 1-5/8″ × 11 ga → Ø47″
 **Square tube** optional rolls	□1-5/8″ × 11 ga → Ø47″ · □1-1/8″ × 14 ga → Ø31″	□2″ × 11 ga → Ø67″ · □1-5/8″ × 11 ga → Ø24″
 **Angle — leg out** optional rolls	L 1-5/8 × 1-5/8 × 3/16″ → Ø24″ · L 1-1/8 × 1-1/8 × 3/16″ → Ø12″	L 2 × 2 × 3/16″ → Ø31″ · L 1-5/8 × 1-5/8 × 3/16″ → Ø24″
 **Angle — leg in** optional rolls	L 1-3/8 × 1-3/8 × 3/16″ → Ø24″ · L 1-1/8 × 1-1/8 × 3/16″ → Ø16″	L 2 × 2 × 1/4″ → Ø39″ · L 1-1/8 × 1-1/8 × 1/8″ → Ø20″
 **Tee — stem out** standard rolls	T 2 × 1/4″ → Ø24″ · T 13/16 × 1/8″ → Ø16″	T 2-3/8 × 1/4″* → Ø28″ · T 1-1/8 × 3/16″ → Ø16″
 **Tee — stem in** standard rolls	T 2 × 1/4″ → Ø24″ · T 13/16 × 1/8″ → Ø16″	T 2-3/8 × 1/4″* → Ø31″ · T 1-1/8 × 3/16″ → Ø20″

TECHNICAL SPECIFICATIONS · 2 / 2

PK 30 · PK 35 MOTORIZED SECTION AND PIPE BENDERS

PK 30 · PK 35 — SECTION BENDING CAPACITIES (CONTINUED)

largest section → minimum rolling diameter (outside)

Model	PK 30	PK 35
 **Tee — flange flat** standard rolls	T 2 × 1/4″ → Ø24″ · T 13/16 × 1/8″ → Ø16″	T 2-3/8 × 1/4″ → Ø28″ · T 1-1/8 × 3/16″ → Ø20″
 **Channel — flanges out** optional rolls*	—	UPN 80 (3-1/8″) → Ø39″ · UPN 30 (1-1/8″) → Ø20″
 **Channel — flanges in** standard rolls*	—	UPN 80 (3-1/8″) → Ø47″ · UPN 30 (1-1/8″) → Ø31″

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H. Capacity chart: each cell gives the largest section the machine rolls and, after the arrow, the minimum rolling diameter (outside) for it; a second value is a smaller section with its tighter minimum diameter. 'Standard rolls' profiles are rolled with the rolls supplied; 'optional rolls' need the matching roll set. * a special spacer may be needed · ** only with the beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with the nominal depth in inches. Based on 37,700 psi (260 N/mm^2) yield-strength material; sizes are converted from the manufacturer's metric chart.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPK 40 · Ø1.38″ SHAFTS · 2 HP

HPK 40 HYDRAULIC SECTION AND PIPE BENDER



MODEL HPK · HPK 40 HYDRAULIC SECTION AND PIPE BENDER WITH THE MOBILE CONTROL PANEL



HPK 40 NC hydraulic section and pipe bender with the NC console



HPK 40 — spiral bending with the optional crane

Flat bar to 2 × 1/2″ · square bar to 11/16″ · pipe to NPS 1 · angle to L 1-3/8 × 1-3/8 × 3/16″

The smallest hydraulic angle roll in the range, on a stable cast-steel frame: motor-driven rolls, hydraulic up/down bottom rolls with two digital readouts, horizontal and vertical working position and lateral side supports. Made for tight inner radii — rings from flat bar, small-diameter tube and angle — with NC control, spiral-bending crane and pipe rolls as options.

STANDARD FEATURES

- ✓ Stable cast-steel frame; rolls motor-driven; special hardened and polished rolls
- ✓ Bottom rolls hydraulic up/down with two digital readouts
- ✓ Horizontal and vertical working position; lateral side supports
- ✓ Brake motor for precision bending; mobile control panel

OPTIONAL EQUIPMENT

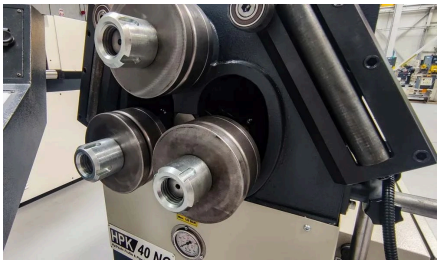
- \+ NC control
- \+ Spiral bending crane
- \+ Pipe / tube bending rolls; special profile rolls
- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HPK 40 — TECHNICAL SPECIFICATIONS

Model	HPK 40
Top roll shaft Ø	1.38″ (35 mm)
Bottom roll shafts Ø	1.38″ (35 mm)
Standard roll Ø	5.4″ (137 mm)
Rolling speed	23 ft/min (7 m/min)
Motor power	2 HP (1.5 kW)
Dimensions L × W × H	41 × 28 × 49″ (1,050 × 710 × 1,250 mm)
Weight	915 lb (415 kg)

DETAILS, COMPONENTS AND OPTIONS

HPK 40 HYDRAULIC SECTION AND PIPE BENDER



HPK 40 rolls with the side guide rolls




HPK 40 tipped over to bend horizontally

TECHNICAL SPECIFICATIONS · 1 / 2

HPK 40 HYDRAULIC SECTION AND PIPE BENDER

HPK 40 — SECTION BENDING CAPACITIES

largest section → minimum rolling diameter (outside)

Model	HPK 40
 **Flat bar — on edge (hard way)** standard rolls	1-3/8 × 5/16″ → Ø12″
 **Flat bar — flat (easy way)** standard rolls	2 × 1/2″ → Ø16″
 **Square bar** standard rolls	11/16 × 11/16″ → Ø10″
 **Round bar** optional rolls	Ø7/8″ → Ø8″
 **Round tube** optional rolls	Ø1-5/8″ × 16 ga → Ø20″
 **Pipe (NPS)** optional rolls	NPS 1 × .091″ → Ø18″
 **Rectangular tube** optional rolls	1-1/8 × 9/16″ × 12 ga → Ø20″
 **Square tube** optional rolls	□1″ × 14 ga → Ø18″
 **Angle — leg out** optional rolls	L 1-3/8 × 1-3/8 × 3/16″ → Ø16″
 **Angle — leg in** optional rolls	L 1-1/8 × 1-1/8 × 3/16″ → Ø22″
 **Tee — stem out** standard rolls	T 1-1/8 × 1-1/8 × 3/16″ → Ø12″
 **Tee — stem in** standard rolls	T 1-3/8 × 1-3/8 × 3/16″ → Ø14″

TECHNICAL SPECIFICATIONS · 2 / 2

HPK 40 HYDRAULIC SECTION AND PIPE BENDER

HPK 40 — SECTION BENDING CAPACITIES (CONTINUED)

largest section → minimum rolling diameter (outside)

Model	HPK 40
 **Tee — flange flat** standard rolls	T 1-3/8 × 1-3/8 × 3/16″ → Ø12″
 **Channel — flanges out** optional rolls*	UPN 40×20 (1-5/8 × 13/16″) → Ø14″
 **Channel — flanges in** standard rolls*	UPN 35×18 (1-3/8 × 11/16″) → Ø20″

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H. Capacity chart: each cell gives the largest section the machine rolls and, after the arrow, the minimum rolling diameter (outside) for it; a second value is a smaller section with its tighter minimum diameter. 'Standard rolls' profiles are rolled with the rolls supplied; 'optional rolls' need the matching roll set. * a special spacer may be needed · ** only with the beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with the nominal depth in inches. Based on 37,700 psi (260 N/mm^2) yield-strength material; sizes are converted from the manufacturer's metric chart.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPK 50 (9 US TONS) · HPK 60 (18 US TONS)

HPK 50 · HPK 60 HYDRAULIC SECTION AND PIPE BENDERS



MODEL HPK · HPK 60 HYDRAULIC SECTION AND PIPE BENDER, 16 T HYDRAULIC FORCE



HPK 50 hydraulic section and pipe bender, 8 t hydraulic force



HPK 60 NC with the NC console

Angle to L 2-3/4 × 2-3/4 × 1/4" · pipe to NPS 3 · square tube to 2-3/4" · flat bar to 4-3/4 × 1"

The most popular NovoTech premium line angle rolls in Canada: welded steel frame, all three rolls motor-driven with a brake motor for precise stops, hydraulic up/down top roll and horizontal or vertical working position. The HPK 50 bends with 9 US tons of hydraulic force — angle to L 2 × 2 × 1/4", pipe to NPS 2; the HPK 60 with 18 US tons takes L 2-3/4 × 2-3/4 × 1/4" angle, NPS 3 pipe and 2-3/4" square tube. Digital readout, NC control, lateral angle guides, stairway attachment and Delrin rolls for aluminum and stainless are the usual options.

STANDARD FEATURES

- ✓ Steel welded construction frame; all 3 rolls motor-driven; hardened shafts of special steel
- ✓ Top roll hydraulic up/down; 9 / 18 US tons hydraulic force
- ✓ Horizontal and vertical working position; standard rolls and guide rolls
- ✓ Brake motor for precision bending; mobile control panel

OPTIONAL EQUIPMENT

- \+ Pipe / tube bending rolls; profile rolls; angle bending rolls
- \+ Digital readout; NC control
- \+ Lateral angle guides; stairway bending attachment
- \+ Special Delrin rolls for aluminum and stainless steel
- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HPK 50 · HPK 60 — TECHNICAL SPECIFICATIONS

Model	HPK 50	HPK 60
Roll shaft Ø	1.97" (50 mm)	2.36" (60 mm)
Top roll Ø	7.6" (192 mm)	8.5" (215 mm)
Bottom rolls Ø	6.4" (162 mm)	8.5" (215 mm)
Hydraulic force	**9 US tons (8 t)**	**18 US tons (16 t)**
Rolling speed	15 ft/min (4.5 m/min)	13 ft/min (4 m/min)
Motor power	2 HP (1.5 kW)	3 HP (2.25 kW)
Dimensions L × W × H	39 × 30 × 63" (990 × 760 × 1,600 mm)	59 × 35 × 67" (1,500 × 890 × 1,700 mm)
Weight	1,124 lb (510 kg)	2,006 lb (910 kg)

DETAILS, COMPONENTS AND OPTIONS

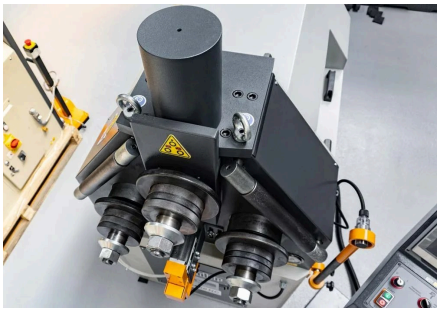
HPK 50 · HPK 60 HYDRAULIC SECTION AND PIPE BENDERS



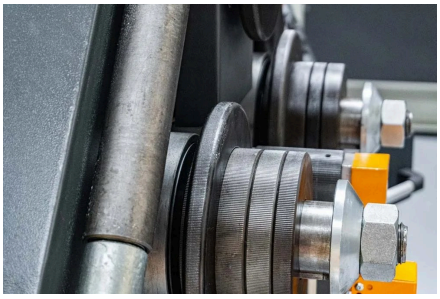
HPK 50 hydraulic section and pipe bender with the foot pedal



HPK 50 NC with the NC console



HPK 60 from above: the hydraulic cylinder of the top roll



HPK 60 rolls and the side guide roll




NC control of the HPK 50 and 60: the roll positions on the touch screen

TECHNICAL SPECIFICATIONS · 1 / 2

HPK 50 · HPK 60 HYDRAULIC SECTION AND PIPE BENDERS

HPK 50 · HPK 60 — SECTION BENDING CAPACITIES

largest section → minimum rolling diameter (outside)

Model	HPK 50	HPK 60
 **Flat bar — on edge (hard way)** standard rolls	2-3/8 × 3/8″* → Ø24″ · 13/16 × 3/8″ → Ø12″	3-1/8 × 13/16″ → Ø47″ · 1-5/8 × 3/8″ → Ø16″
 **Flat bar — flat (easy way)** standard rolls	3-1/8 × 9/16″* → Ø24″ · 2 × 3/8″ → Ø12″	4-3/4 × 1″* → Ø24″ · 2 × 3/8″ → Ø16″
 **Square bar** standard rolls	1-3/8 × 1-3/8″ → Ø24″ · 9/16 × 9/16″ → Ø12″	2 × 2″ → Ø31″ · 13/16 × 13/16″ → Ø16″
 **Round bar** optional rolls	Ø1-3/8″ → Ø24″ · Ø13/16″ → Ø12″	Ø2″ → Ø31″ · Ø13/16″ → Ø16″
 **Round tube** optional rolls	Ø2-3/4″ × 14 ga → Ø47″ · Ø1″ × 16 ga → Ø16″	Ø3-7/8″ × 14 ga → Ø63″ · Ø2-3/8″ × 14 ga → Ø20″
 **Pipe (NPS)** optional rolls	NPS 2 × .114″ → Ø39″ · NPS 1/2 × .091″ → Ø12″	NPS 3 × .126″ → Ø63″ · NPS 1 × .102″ → Ø20″
 **Rectangular tube** optional rolls	2-3/4 × 1-1/8″ × 11 ga → Ø59″ · 1-1/8 × 9/16″ × 14 ga → Ø16″	3-1/8 × 1-5/8″ × 11 ga → Ø55″ · 1-5/8 × 13/16″ × 14 ga → Ø20″
 **Square tube** optional rolls	□2″ × 11 ga → Ø63″ · □13/16″ × 14 ga → Ø16″	□2-3/4″ × 11 ga → Ø63″ · □1-5/8″ × 14 ga → Ø20″
 **Angle — leg out** optional rolls	L 2 × 2 × 1/4″ → Ø24″ · L 1-1/8 × 1-1/8 × 1/8″ → Ø16″	L 2-3/4 × 2-3/4 × 1/4″ → Ø39″ · L 1-5/8 × 1-5/8 × 3/16″ → Ø20″
 **Angle — leg in** optional rolls	L 2 × 2 × 1/4″ → Ø35″ · L 1-1/8 × 1-1/8 × 1/8″ → Ø24″	L 2-3/4 × 2-3/4 × 1/4″ → Ø47″ · L 1-5/8 × 1-5/8 × 3/16″ → Ø24″
 **Tee — stem out** standard rolls	T 2-3/8 × 1/4″* → Ø24″ · T 1-1/8 × 3/16″ → Ø16″	T 3-1/8 × 3/8″* → Ø39″ · T 1-5/8 × 3/16″* → Ø16″
 **Tee — stem in** standard rolls	T 2-3/8 × 1/4″* → Ø28″ · T 1-1/8 × 3/16″ → Ø16″	T 3-1/8 × 3/8″* → Ø47″ · T 1-5/8 × 3/16″* → Ø20″

TECHNICAL SPECIFICATIONS · 2 / 2

HPK 50 · HPK 60 HYDRAULIC SECTION AND PIPE BENDERS

HPK 50 · HPK 60 — SECTION BENDING CAPACITIES (CONTINUED)

largest section → minimum rolling diameter (outside)

Model	HPK 50	HPK 60
 **Tee — flange flat** standard rolls	T 2-3/8 × 1/4″ → Ø28″ · T 1-1/8 × 3/16″ → Ø16″	T 3-1/8 × 3/8″ → Ø39″ · T 1-5/8 × 3/16″ → Ø16″
 **Channel — flanges out** optional rolls*	UPN 80 (3-1/8″)* → Ø31″ · UPN 30 (1-1/8″) → Ø16″	UPN 100 (3-7/8″) → Ø31″ · UPN 60 (2-3/8″) → Ø20″
 **Channel — flanges in** standard rolls*	UPN 80 (3-1/8″)* → Ø47″ · UPN 30 (1-1/8″) → Ø24″	UPN 100 (3-7/8″) → Ø47″ · UPN 60 (2-3/8″) → Ø24″

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H. Capacity chart: each cell gives the largest section the machine rolls and, after the arrow, the minimum rolling diameter (outside) for it; a second value is a smaller section with its tighter minimum diameter. 'Standard rolls' profiles are rolled with the rolls supplied; 'optional rolls' need the matching roll set. * a special spacer may be needed · ** only with the beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with the nominal depth in inches. Based on 37,700 psi (260 N/mm^2) yield-strength material; sizes are converted from the manufacturer's metric chart.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPK 65 · HPK 80 · Ø2.36" AND 3.15" TOP SHAFTS

HPK 65 · HPK 80 HYDRAULIC SECTION AND PIPE BENDERS



MODEL HPK · HPK 80 HYDRAULIC SECTION AND PIPE BENDER WITH THE CONTROL CONSOLE



HPK 65 hydraulic section and pipe bender with the control console



HPK 80 NC hydraulic section and pipe bender with the NC console

Angle to L 3-1/8 × 3-1/8 × 5/16" · pipe to NPS 3 · channel to UPN 140 · flat bar to 4-7/8 × 1"

Double-pinch angle rolls with hydraulic bottom rolls and two digital readouts: all three rolls are driven, the shafts are hardened and ground high-tensile special steel and the machine works horizontally or vertically. The HPK 65 rolls L 2-3/8 × 2-3/8 × 1/4" angle and NPS 2 pipe; the HPK 80 goes to L 3-1/8 × 3-1/8 × 5/16", NPS 3 pipe and UPN 140 channel. 2-axis hydraulic lateral guide rolls, NC control and a spiral-rolling crane are optional.

STANDARD FEATURES

- ✓ Steel welded construction frame; all 3 rolls driven
- ✓ Hardened and ground high-tensile special-steel shafts; hardened and ground rolls
- ✓ Bottom rolls hydraulic up/down; 2 digital readouts
- ✓ Horizontal and vertical working position; brake motor; mobile control panel

OPTIONAL EQUIPMENT

- + Pipe, tube and profile bending rolls
- + 2-axis hydraulic lateral guide rolls
- + Automation with NC control
- + Crane system for spiral rolling
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HPK 65 · HPK 80 — TECHNICAL SPECIFICATIONS

Model	HPK 65	HPK 80
Top roll shaft Ø	2.36" (60 mm)	3.15" (80 mm)
Bottom roll shafts Ø	1.97" (50 mm)	2.76" (70 mm)
Standard roll Ø	7.1" (180 mm)	9.6" (245 mm)
Rolling speed	20 ft/min (6 m/min)	23 ft/min (7 m/min)
Motor power	5 HP (3.75 kW)	6.4 HP (4.75 kW)
Dimensions L × W × H	47 × 33 × 47" (1,200 × 840 × 1,200 mm)	59 × 39 × 55" (1,500 × 990 × 1,400 mm)
Weight	2,161 lb (980 kg)	3,627 lb (1,645 kg)

DETAILS, COMPONENTS AND OPTIONS

HPK 65 · HPK 80 HYDRAULIC SECTION AND PIPE BENDERS



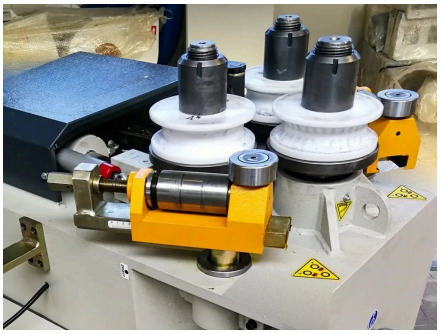
HPK 65 in the horizontal working position



HPK — hydraulic lateral guide roll with scale



HPK — mobile control console with two digital readouts



HPK 65 with polyamide rolls, for stainless and aluminum profiles that must not be marked



Spiral rolled from bar on the HPK 65




HPK 80 rolls bending horizontally, with the side guide roll

TECHNICAL SPECIFICATIONS · 1 / 2

HPK 65 · HPK 80 HYDRAULIC SECTION AND PIPE BENDERS

HPK 65 · HPK 80 — SECTION BENDING CAPACITIES

largest section → minimum rolling diameter (outside)


Model	HPK 65	HPK 80
 **Flat bar — on edge (hard way)** standard rolls	2-3/8 × 3/8″ → Ø20″ · 13/16 × 3/16″ → Ø10″	3-7/8 × 13/16″* → Ø79″ · 3-1/8 × 13/16″ → Ø31″ · 1-1/8 × 3/8″ → Ø12″
 **Flat bar — flat (easy way)** standard rolls	3-1/8 × 13/16″ → Ø20″ · 2 × 3/16″ → Ø10″	4-7/8 × 1″ → Ø24″ · 2-3/8 × 3/16″ → Ø12″
 **Square bar** standard rolls	1-1/4 × 1-1/4″ → Ø16″ · 1/2 × 1/2″ → Ø10″	1-3/4 × 1-3/4″ → Ø20″ · 9/16 × 9/16″ → Ø15″
 **Round bar** optional rolls	Ø1-3/8″ → Ø14″ · Ø3/8″ → Ø10″	Ø2″ → Ø20″ · Ø9/16″ → Ø15″
 **Round tube** optional rolls	Ø2-3/8″ × 14 ga → Ø24″ · Ø9/16″ × 16 ga → Ø8″	Ø3-7/8″ × 12 ga → Ø47″ · Ø9/16″ × 20 ga → Ø15″
 **Pipe (NPS)** optional rolls	NPS 2 × .154″ → Ø16″ · NPS 1/2 × .109″ → Ø8″	NPS 3 × .216″ → Ø31″ · NPS 1/2 × .109″ → Ø15″
 **Rectangular tube** optional rolls	2 × 1″ × 11 ga → Ø18″ · 13/16 × 9/16″ × 14 ga → Ø10″	3-1/8 × 1″ × 11 ga → Ø31″ · 1 × 9/16″ × 14 ga → Ø14″
 **Square tube** optional rolls	□1-3/4″ × 11 ga → Ø24″ · □13/16″ × 14 ga → Ø12″	□2-3/4″ × 11 ga → Ø51″ · □1″ × 14 ga → Ø14″
 **Angle — leg out** optional rolls	L 2-3/8 × 2-3/8 × 1/4″ → Ø26″ · L 1-1/8 × 1-1/8 × 3/16″ → Ø14″	L 3-1/8 × 3-1/8 × 5/16″ → Ø31″ · L 1-1/8 × 1-1/8 × 1/8″ → Ø16″
 **Angle — leg in** optional rolls	L 2 × 2 × 3/16″ → Ø22″ · L 1-1/8 × 1-1/8 × 3/16″ → Ø14″	L 2-3/4 × 2-3/4 × 1/4″ → Ø28″ · L 1-1/8 × 1-1/8 × 1/8″ → Ø18″
 **Tee — stem out** standard rolls	T 2-3/8 × 1/4″ → Ø22″ · T 13/16 × 1/8″ → Ø10″	T 3-1/8 × 3/8″ → Ø31″ · T 1 × 1/8″ → Ø18″
 **Tee — stem in** standard rolls	T 2 × 1/4″ → Ø20″ · T 13/16 × 1/8″ → Ø10″	T 2-3/4 × 5/16″ → Ø31″ · T 1 × 1/8″ → Ø11″

TECHNICAL SPECIFICATIONS · 2 / 2

HPK 65 · HPK 80 HYDRAULIC SECTION AND PIPE BENDERS

HPK 65 · HPK 80 — SECTION BENDING CAPACITIES (CONTINUED)

largest section → minimum rolling diameter (outside)

Model	HPK 65	HPK 80
 **Tee — flange flat** optional rolls	T 2-3/8 × 1/4″ → Ø20″ · T 13/16 × 1/8″ → Ø10″	T 3-1/8 × 3/8″ → Ø31″ · T 1-1/8 × 3/16″ → Ø11″
 **Channel — flanges out** standard rolls*	UPN 80 (3-1/8″) → Ø24″ · UPN 30 (1-1/8″) → Ø10″	UPN 140 (5-1/2″) → Ø63″ · UPN 120 (4-3/4″) → Ø35″ · UPN 100 (3-7/8″) → Ø31″
 **Channel — flanges in** standard rolls*	UPN 65 (2-1/2″) → Ø24″ · UPN 30 (1-1/8″) → Ø10″	UPN 140 (5-1/2″) → Ø63″ · UPN 120 (4-3/4″) → Ø39″ · UPN 100 (3-7/8″) → Ø31″
 **I-beam — easy way** standard rolls*	IPN 80 (3-1/8″) → Ø24″	IPN 120 (4-3/4″) → Ø24″ · IPN 80 (3-1/8″) → Ø16″
 **H-beam — easy way** standard rolls*	—	—
 **Channel — web flat (hard way)** optional rolls**	—	—
 **I-beam — hard way** optional rolls**	—	—
 **H-beam — hard way** optional rolls**	—	—

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H. Capacity chart: each cell gives the largest section the machine rolls and, after the arrow, the minimum rolling diameter (outside) for it; a second value is a smaller section with its tighter minimum diameter. 'Standard rolls' profiles are rolled with the rolls supplied; 'optional rolls' need the matching roll set. * a special spacer may be needed · ** only with the beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with the nominal depth in inches. Based on 37,700 psi (260 N/mm^2) yield-strength material; sizes are converted from the manufacturer's metric chart.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPK 100 (10 HP) · HPK 120 (20 HP, HYDRAULIC GUIDES STANDARD)

HPK 100 · HPK 120 HYDRAULIC SECTION AND PIPE BENDERS



MODEL HPK · HPK 100 HYDRAULIC SECTION AND PIPE BENDER WITH THE CONTROL CONSOLE



HPK 120 NC hydraulic section and pipe bender with hydraulic lateral guides and NC console



HPK 100 NC with the NC console

Angle to L 4-3/4 × 4-3/4 × 1/2" · pipe to NPS 5 · channel to UPN 220 · beams to IPN 220 / HEB 120

Heavy angle rolls for the structural and tank shop. The HPK 100 drives its three rolls from a single gearbox and hydromotor on Ø3.94" shafts and rolls L 3-7/8 × 3-7/8 × 1/2" angle, NPS 4 pipe and IPN 180 beams; the HPK 120 gives each roll its own planetary gearbox and hydromotor, has hydraulic lateral angle guides and infinitely variable speed as standard, and rolls NPS 5 pipe, UPN 220 channel and 4-3/4 × 1-5/8" rectangular tube. Both work horizontally and vertically; 3-axis hydraulic guides, NC control, spiral crane and the half-pipe bending attachment are optional.

STANDARD FEATURES

- ✓ HPK 100: single gearbox with hydromotor drives 3 rolls by gear system; HPK 120: each roll driven by its own planetary gearbox and hydromotor
- ✓ Hardened and ground high-tensile special-steel shafts; hardened standard rolls
- ✓ Bottom rolls hydraulic up/down; 2 digital readouts
- ✓ HPK 120: hydraulic lateral angle guide rolls and infinitely variable speed standard
- ✓ Horizontal and vertical working position; mobile control panel

OPTIONAL EQUIPMENT

- + Pipe, tube and profile bending rolls; IPN / UPN beam attachments
- + 3-axis hydraulic lateral guide rollers
- + Infinitely variable speed (HPK 100)
- + Automation with NC control
- + Crane system for spiral rolling
- + Half-pipe bending attachment
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HPK 100 · HPK 120 — TECHNICAL SPECIFICATIONS

Model	HPK 100	HPK 120
Roll shaft Ø	3.94" (100 mm)	4.72" (120 mm)
Standard roll Ø	12.4" (315 mm)	15.4" (390 mm)
Rolling speed	23 ft/min (7 m/min)	6.6 – 25 ft/min (2 – 7.5 m/min)
Motor power	10 HP (7.5 kW)	20 HP (15 kW)
Dimensions L × W × H	79 × 57 × 67" (2,000 × 1,450 × 1,700 mm)	79 × 65 × 75" (2,000 × 1,650 × 1,900 mm)
Weight	7,055 lb (3,200 kg)	9,811 lb (4,450 kg)

DETAILS, COMPONENTS AND OPTIONS

HPK 100 · HPK 120 HYDRAULIC SECTION AND PIPE BENDERS



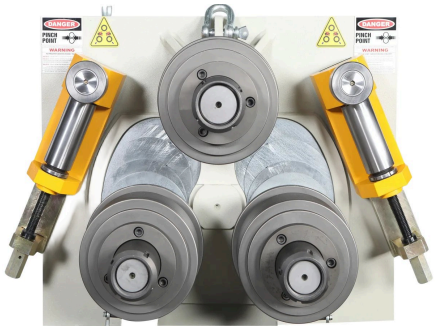
HPK 120 with its hydraulic side guides and the console



HPK 120 from the side, with the console



HPK 120 from the rear: the electrical cabinet and the hydraulic unit



HPK 100 — three driven rolls and hydraulic lateral guides



HPK 100 — hydraulic lateral guide roll



HPK 100 — manual lateral guide and hand wheel



HPK 100 in the horizontal working position



HPK 120 — hydraulic speed and pressure adjustment valves




HPK — optional half-pipe bending attachment

TECHNICAL SPECIFICATIONS · 1 / 2

HPK 100 · HPK 120 HYDRAULIC SECTION AND PIPE BENDERS

HPK 100 · HPK 120 — SECTION BENDING CAPACITIES

largest section → minimum rolling diameter (outside)


Model	HPK 100	HPK 120
 **Flat bar — on edge (hard way)** standard rolls	3-7/8 × 13/16″ → Ø31″ · 1-1/8 × 3/8″ → Ø16″	4-7/8 × 1″ → Ø47″ · 1-1/8 × 3/8″ → Ø20″
 **Flat bar — flat (easy way)** standard rolls	7-7/8 × 1-1/8″ → Ø47″ · 6-1/4 × 1-3/8″ → Ø31″ · 3-1/8 × 3/16″ → Ø16″	7-7/8 × 2″ → Ø39″ · 3-7/8 × 3/8″ → Ø20″
 **Square bar** standard rolls	2-3/8 × 2-3/8″ → Ø30″ · 9/16 × 9/16″ → Ø16″	2-1/2 × 2-1/2″ → Ø30″ · 13/16 × 13/16″ → Ø20″
 **Round bar** optional rolls	Ø3″ → Ø31″ · Ø9/16″ → Ø18″	Ø3-1/8″ → Ø33″ · Ø13/16″ → Ø20″
 **Round tube** optional rolls	Ø4-7/8″ × 12 ga → Ø55″ · Ø9/16″ × 20 ga → Ø18″	Ø6-1/4″ × 8 ga → Ø110″ · Ø5-1/2″ × 11 ga → Ø59″ · Ø2″ × 14 ga → Ø20″
 **Pipe (NPS)** optional rolls	NPS 4 × .177″ → Ø98″ · NPS 1/2 × .109″ → Ø18″	NPS 5 × .250″ → Ø59″ · NPS 3/4 × .113″ → Ø20″
 **Rectangular tube** optional rolls	3-7/8 × 1-5/8″ × 8 ga → Ø51″ · 1 × 9/16″ × 14 ga → Ø18″	4-3/4 × 1-5/8″ × 8 ga → Ø71″ · 1-1/8 × 13/16″ × 11 ga → Ø20″
 **Square tube** optional rolls	□3-1/8″ × 3/16″ → Ø59″ · □1″ × 14 ga → Ø18″	□3-1/2″ × 3/16″ → Ø71″ · □1-1/8″ × 11 ga → Ø20″
 **Angle — leg out** optional rolls	L 3-7/8 × 3-7/8 × 1/2″ → Ø39″ · L 1-5/8 × 1-5/8 × 3/16″ → Ø28″	L 4-3/4 × 4-3/4 × 1/2″ → Ø47″ · L 1-5/8 × 1-5/8 × 3/16″ → Ø24″
 **Angle — leg in** optional rolls	L 3-7/8 × 3-7/8 × 3/8″ → Ø59″ · L 1-5/8 × 1-5/8 × 3/16″ → Ø22″	L 3-7/8 × 3-7/8 × 3/8″ → Ø47″ · L 1-5/8 × 1-5/8 × 3/16″ → Ø24″
 **Tee — stem out** standard rolls	T 3-7/8 × 7/16″ → Ø39″ · T 1-1/8 × 3/16″ → Ø16″	T 3-7/8 × 7/16″ → Ø31″ · T 1-1/8 × 3/16″ → Ø20″
 **Tee — stem in** standard rolls	T 3-1/2 × 3/8″ → Ø39″ · T 1-1/8 × 3/16″ → Ø16″	T 3-7/8 × 7/16″ → Ø39″ · T 1-1/8 × 3/16″ → Ø20″

TECHNICAL SPECIFICATIONS · 2 / 2

HPK 100 · HPK 120 HYDRAULIC SECTION AND PIPE BENDERS

HPK 100 · HPK 120 — SECTION BENDING CAPACITIES (CONTINUED)

largest section → minimum rolling diameter (outside)

Model	HPK 100	HPK 120
 **Tee — flange flat** optional rolls	T 3-7/8 × 7/16″ → Ø39″ · T 1-1/8 × 3/16″ → Ø16″	T 3-7/8 × 7/16″ → Ø31″ · T 1-1/8 × 3/16″ → Ø20″
 **Channel — flanges out** standard rolls*	UPN 180 (7-1/8″) → Ø35″ · UPN 30 (1-1/8″) → Ø16″	UPN 220 (8-5/8″) → Ø39″ · UPN 180 (7-1/8″) → Ø31″ · UPN 40 (1-5/8″) → Ø20″
 **Channel — flanges in** standard rolls*	UPN 180 (7-1/8″) → Ø39″ · UPN 30 (1-1/8″) → Ø16″	UPN 220 (8-5/8″) → Ø47″ · UPN 180 (7-1/8″) → Ø35″ · UPN 40 (1-5/8″) → Ø24″
 **I-beam — easy way** standard rolls*	IPN 180 (7-1/8″) → Ø39″ · IPN 80 (3-1/8″) → Ø16″	IPN 220 (8-5/8″) → Ø39″ · IPN 80 (3-1/8″) → Ø20″
 **H-beam — easy way** standard rolls*	HEA 120 (4-3/4″) → Ø39″ · HEB 100 (3-7/8″) → Ø47″	HEA 140 (5-1/2″) → Ø47″ · HEB 120 (4-3/4″) → Ø47″
 **Channel — web flat (hard way)** optional rolls**	—	UPN 120 (4-3/4″) → Ø32.8 ft · UPN 100 (3-7/8″) → Ø24.6 ft
 **I-beam — hard way** optional rolls**	—	IPN 160 (6-1/4″) → Ø16.4 ft · IPN 140 (5-1/2″) → Ø13.1 ft · IPN 100 (3-7/8″) → Ø79″
 **H-beam — hard way** optional rolls**	—	HEA 120 (4-3/4″) → Ø13.1 ft · HEB 100 (3-7/8″) → Ø63″

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H. Capacity chart: each cell gives the largest section the machine rolls and, after the arrow, the minimum rolling diameter (outside) for it; a second value is a smaller section with its tighter minimum diameter. 'Standard rolls' profiles are rolled with the rolls supplied; 'optional rolls' need the matching roll set. * a special spacer may be needed · ** only with the beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with the nominal depth in inches. Based on 37,700 psi (260 N/mm^2) yield-strength material; sizes are converted from the manufacturer's metric chart.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HPK 160 DP · 180 DP · 200 DP · 240 DP · 300 DP · 360 DP

HPK 160 – 360 DP HEAVY-DUTY HYDRAULIC SECTION AND BEAM BENDERS



MODEL HPK · HPK 160 DP NC HEAVY-DUTY SECTION AND BEAM BENDER WITH THE NC CONSOLE



HPK 240 DP heavy-duty section and beam bender



HPK 160 bending an I-beam vertically between its hydraulic side guides

Beams to HEB 600 · channel to UPN 600 · pipe to NPS 16 · angle to L 7-7/8 × 7-7/8 × 1-1/8"

Heavy-duty double-pinch section benders in which each of the three rolls is driven by its own planetary gearbox and hydromotor, on shafts from Ø6.3" to Ø14.2". Built for structural beams and heavy sections — from UPN 280 channel, IPN 300 and HEB 180 beams on the HPK 160 DP up to UPN 600, IPN 600 and HEB 600 on the HPK 360 DP, pipe to NPS 16 and angle to L 7-7/8 × 7-7/8 × 1-1/8". Hydraulic lateral angle guide rolls, two-speed working and two digital readouts are standard; NC control and HEB / IPN / UPN beam attachments are optional.

STANDARD FEATURES

- ✓ Each of the 3 rolls driven by its own planetary gearbox and hydromotor
- ✓ Hardened and ground high-tensile special-steel shafts; hardened standard rolls
- ✓ Hydraulic lateral angle guide rolls; lateral rolls hydraulic up/down
- ✓ Two-speed working system; 2 digital readouts standard
- ✓ Horizontal working position; steel construction welded frame

OPTIONAL EQUIPMENT

- + All types of pipe, tube and profile rolls; HEB / IPN / UPN beam attachments
- + Automation with NC control
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

HPK DP — TECHNICAL SPECIFICATIONS

Model	HPK 160 DP	HPK 180 DP	HPK 200 DP	HPK 240 DP	HPK 300 DP	HPK 360 DP
Roll shaft Ø	6.3" (160 mm)	7.09" (180 mm)	7.87" (200 mm)	9.45" (240 mm)	11.81" (300 mm)	14.17" (360 mm)
Standard roll Ø	18.9" (480 mm)	22.8" (580 mm)	22.8" (580 mm)	24.4" (620 mm)	29.9" (760 mm)	31.5" (800 mm)
Rolling speed	9.8 – 20 ft/min (3 – 6 m/min)	9.8 – 20 ft/min (3 – 6 m/min)	6.6 – 16 ft/min (2 – 5 m/min)	6.6 – 13 ft/min (2 – 4 m/min)	6.6 – 13 ft/min (2 – 4 m/min)	6.6 – 13 ft/min (2 – 4 m/min)
Motor power	30 HP (22 kW)	40 HP (30 kW)	40 HP (30 kW)	63 HP (47 kW)	98 HP (73 kW)	103 HP (77 kW)
Dimensions L × W × H	98 × 87 × 91" (2,500 × 2,200 × 2,300 mm)	109 × 91 × 106" (2,750 × 2,300 × 2,700 mm)	118 × 91 × 122" (3,000 × 2,300 × 3,100 mm)	122 × 94 × 126" (3,100 × 2,400 × 3,200 mm)	197 × 167 × 148" (5,000 × 4,250 × 3,750 mm)	197 × 167 × 148" (5,000 × 4,250 × 3,750 mm)
Weight	21,605 lb (9,800 kg)	31,747 lb (14,400 kg)	36,376 lb (16,500 kg)	43,652 lb (19,800 kg)	84,878 lb (38,500 kg)	121,254 lb (55,000 kg)

DETAILS, COMPONENTS AND OPTIONS

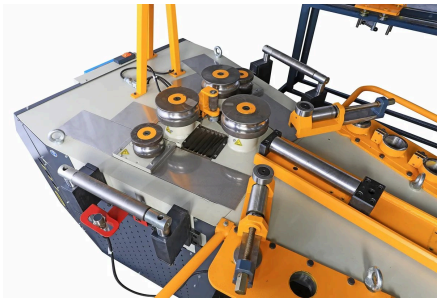
HPK 160 – 360 DP HEAVY-DUTY HYDRAULIC SECTION AND BEAM BENDERS



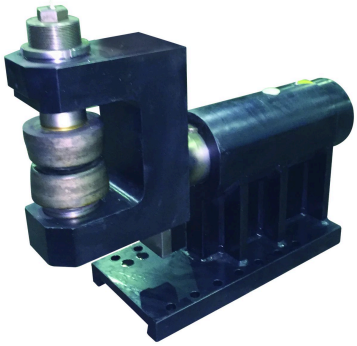
HPK 200 heavy-duty section and beam bender



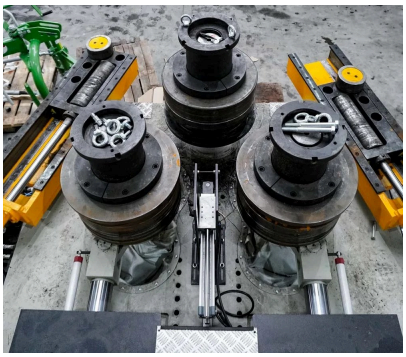
HPK 360 heavy-duty section and beam bender



HPK DP — rolls and hydraulic lateral guide rolls seen from above



HPK DP — IPN / UPN beam bending attachment



HPK 160 from above: the three rolls and the hydraulic side guides

TECHNICAL SPECIFICATIONS · 1 / 3

HPK 160 – 360 DP HEAVY-DUTY HYDRAULIC SECTION AND BEAM BENDERS

HPK DP — SECTION AND BEAM BENDING CAPACITIES

largest section → minimum rolling diameter (outside)




Model	HPK 160 DP	HPK 180 DP	HPK 200 DP	HPK 240 DP	HPK 300 DP	HPK 360 DP
 **Flat bar — on edge (hard way)** standard rolls	5-7/8 × 1-3/8″ → Ø98″	7-1/8 × 1-1/8″ → Ø98″	7-7/8 × 2″ → Ø11.5 ft	7-7/8 × 2-3/4″ → Ø12.5 ft	9-7/8 × 3-7/8″ → Ø118″	11-3/4 × 3-7/8″ → Ø118″
 **Flat bar — flat (easy way)** standard rolls	10-3/4 × 2″ → Ø59″	11 × 2-3/8″ → Ø79″	13-3/4 × 3-1/8″ → Ø98″	15 × 3-1/8″ → Ø98″	19-3/4 × 3-7/8″ → Ø98″	21-3/4 × 4-3/4″ → Ø118″
 **Square bar** standard rolls	3-1/2 × 3-1/2″ → Ø59″	4-3/8 × 4-3/8″ → Ø79″	4-3/4 × 4-3/4″ → Ø118″	5-1/8 × 5-1/8″ → Ø98″	7-1/8 × 7-1/8″ → Ø98″	7-7/8 × 7-7/8″ → Ø118″
 **Round bar** optional rolls	Ø3-1/2″ → Ø71″	Ø4-3/8″ → Ø79″	Ø4-3/4″ → Ø118″	Ø5-7/8″ → Ø118″	Ø7-7/8″ → Ø16.4 ft	Ø8-7/8″ → Ø19.7 ft
 **Round tube** optional rolls	Ø5-7/8″ × 8 ga → Ø19.7 ft	Ø8-5/8″ × 8 ga → Ø26.2 ft	Ø10-3/4″ × 1/4″ → Ø32.8 ft	Ø11-3/4″ × 1/4″ → Ø29.5 ft	Ø13-3/4″ × 1/4″ → Ø32.8 ft	Ø18-3/4″ × 5/16″ → Ø49.2 ft
 **Pipe (NPS)** optional rolls	NPS 6 × .280″ → Ø11.5 ft	NPS 8 × .322″ → Ø13.1 ft	NPS 9 × .248″ → Ø13.1 ft	NPS 10 × .365″ → Ø16.4 ft	NPS 12 × .562″ → Ø26.2 ft	NPS 16 × .500″ → Ø39.4 ft
 **Rectangular tube** optional rolls	5-7/8 × 2″ × 3/16″ → Ø14.8 ft	7-7/8 × 3-7/8″ × 5/16″ → Ø16.4 ft	8-5/8 × 3-1/8″ × 1/4″ → Ø23 ft	11-3/4 × 3-7/8″ × 3/8″ → Ø26.2 ft	15-3/4 × 7-7/8″ × 3/8″ → Ø32.8 ft	19-3/4 × 9-7/8″ × 9/16″ —

TECHNICAL SPECIFICATIONS · 2 / 3

HPK 160 – 360 DP HEAVY-DUTY HYDRAULIC SECTION AND BEAM BENDERS

HPK DP — SECTION AND BEAM BENDING CAPACITIES (CONTINUED)

largest section → minimum rolling diameter (outside)



Model	HPK 160 DP	HPK 180 DP	HPK 200 DP	HPK 240 DP	HPK 300 DP	HPK 360 DP
 **Square tube** optional rolls	□4-3/4″ × 1/4″ → Ø13.1 ft	□5-7/8″ × 5/16″ → Ø14.8 ft	□7-1/8″ × 3/8″ → Ø18 ft	□7-7/8″ × 3/8″ → Ø19.7 ft	□10-1/4″ × 9/16″ → Ø26.2 ft	□11-3/4″ × 9/16″ → Ø32.8 ft
 **Angle — leg out** optional rolls	L 5-7/8 × 5-7/8 × 11/16″ → Ø13.1 ft	L 6-1/4 × 6-1/4 × 9/16″ → Ø98″	L 7-1/8 × 7-1/8 × 5/8″ → Ø118″	L 7-7/8 × 7-7/8 × 13/16″ → Ø118″	L 7-7/8 × 7-7/8 × 1-1/8″ → Ø13.1 ft	L 7-7/8 × 7-7/8 × 1-1/8″ → Ø13.1 ft
 **Angle — leg in** optional rolls	L 5-1/2 × 5-1/2 × 9/16″ → Ø16.4 ft	L 5-7/8 × 5-7/8 × 11/16″ → Ø13.1 ft	L 6-1/4 × 6-1/4 × 9/16″ → Ø19.7 ft	L 7-1/8 × 7-1/8 × 11/16″ → Ø19.7 ft	L 7-7/8 × 7-7/8 × 13/16″ → Ø19.7 ft	L 7-7/8 × 7-7/8 × 1-1/8″ → Ø23 ft
 **Tee — stem out** standard rolls	T 5-7/8 × 9/16″ → Ø79″	T 6-1/4 × 13/16″ → Ø98″	T 7-7/8 × 13/16″ → Ø11.5 ft	T 7-7/8 × 1-1/8″ → Ø118″	T 9-1/2 × 1-1/8″ → Ø118″	T 9-7/8 × 1″* → Ø13.1 ft
 **Tee — stem in** standard rolls	T 5-1/8 × 9/16″ → Ø98″	T 5-7/8 × 13/16″ → Ø118″	T 7-7/8 × 13/16″ → Ø11.5 ft	T 7-7/8 × 13/16″ → Ø11.5 ft	T 8-5/8 × 7/8″ → Ø13.1 ft	T 9-7/8 × 1″* → Ø16.4 ft
 **Tee — flange flat** optional rolls	T 5-7/8 × 9/16″ → Ø79″	T 6-1/4 × 13/16″ → Ø98″	T 7-1/8 × 3/8″ → Ø19.7 ft	T 7-1/8 × 11/16″ → Ø19.7 ft	T 7-7/8 × 13/16″ → Ø19.7 ft	T 7-7/8 × 1-1/8″ → Ø19.7 ft
 **Channel — flanges out** standard rolls*	UPN 280 → Ø79″	UPN 350 → Ø98″	UPN 380 → Ø118″	UPN 450 → Ø118″	UPN 550 → Ø11.5 ft	UPN 600 → Ø13.1 ft

TECHNICAL SPECIFICATIONS · 3 / 3

HPK 160 – 360 DP HEAVY-DUTY HYDRAULIC SECTION AND BEAM BENDERS

HPK DP — SECTION AND BEAM BENDING CAPACITIES (CONTINUED)

largest section → minimum rolling diameter (outside)

Model	HPK 160 DP	HPK 180 DP	HPK 200 DP	HPK 240 DP	HPK 300 DP	HPK 360 DP
 **Channel — flanges in** standard rolls*	UPN 280 → Ø118″	UPN 350 → Ø118″	UPN 380 → Ø11.5 ft	UPN 450 → Ø11.5 ft	UPN 550 → Ø13.1 ft	UPN 600 → Ø14.8 ft
 **I-beam — easy way** standard rolls*	IPN 300 → Ø118″	IPN 360 → Ø118″	IPN 360 → Ø11.5 ft	IPN 450 → Ø11.5 ft	IPN 550 → Ø13.1 ft	IPN 600 → Ø16.4 ft
 **H-beam — easy way** standard rolls*	HEB 180 → Ø118″	HEB 200 → Ø98″	HEB 240 → Ø118″	HEB 300 → Ø13.1 ft	HEB 500 → Ø16.4 ft	HEB 600 → Ø19.7 ft
 **Channel — web flat (hard way)** optional rolls**	UPN 180 → Ø32.8 ft	UPN 220 → Ø32.8 ft	UPN 260 → Ø39.4 ft	UPN 300 → Ø39.4 ft	UPN 340 → Ø49.2 ft	UPN 400 → Ø65.6 ft
 **I-beam — hard way** optional rolls**	IPN 180 → Ø14.8 ft	IPN 220 → Ø16.4 ft	IPN 260 → Ø32.8 ft	IPN 300 → Ø39.4 ft	IPN 360 → Ø32.8 ft	IPN 400 → Ø65.6 ft
 **H-beam — hard way** optional rolls**	HEA 160 → Ø19.7 ft · HEB 120 → Ø13.1 ft	HEB 160 → Ø16.4 ft	HEB 180 → Ø19.7 ft	HEB 200 → Ø23 ft	HEB 280 → Ø32.8 ft	HEB 340 → Ø39.4 ft

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H. Capacity chart: each cell gives the largest section the machine rolls and, after the arrow, the minimum rolling diameter (outside) for it; a second value is a smaller section with its tighter minimum diameter. 'Standard rolls' profiles are rolled with the rolls supplied; 'optional rolls' need the matching roll set. * a special spacer may be needed · ** only with the beam-bending attachment. Beam sizes are European UPN / IPN / HEA / HEB designations with the nominal depth in inches. Based on 37,700 psi (260 N/mm^2) yield-strength material; sizes are converted from the manufacturer's metric chart.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TC-42 NC · Ø2.56" SHAFTS · 10 HP

TC-42 NC TUBE COILING MACHINE



MODEL TC-42 · TC-42 NC TUBE COILING MACHINE ROLLING A SPIRAL COIL BETWEEN THE HYDRAULIC LATERAL SUPPORTS



TC-42 NC — variable-pitch spiral coil



TC-42 NC tube coiling machine with a coil, the NC console and the coil support

Spiral and variable-pitch tube coils · tube wall from 12 ga · NC control standard

An NC-controlled coil rolling machine for heating coils, heat-exchanger and tank jackets: it rolls variable-pitch spiral coils with straight elbows at the start and finish in a single pass by automation. Three rolls driven by one gearbox and hydromotor, hydraulic lateral supports with rollers, hydraulic top support, infinitely variable speed and a material support stand are standard; tube from 12 ga wall.

STANDARD FEATURES

- ✓ NC control panel standard — variable-pitch coils with elbows at start and finish in one pass
- ✓ Single gearbox with hydromotor drives 3 rolls; rolls hardened and ground in the bore
- ✓ Hydraulic lateral supports with roller; manual lateral supports; hydraulic top support
- ✓ Infinitely variable speed; bottom rolls hydraulic up/down; material support stand

OPTIONAL EQUIPMENT

- + Pipe, tube and profile bending rolls
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TC-42 NC — TECHNICAL SPECIFICATIONS

Model	TC-42 NC
Top roll shaft Ø	2.56" (65 mm)
Bottom roll shafts Ø	2.56" (65 mm)
Standard roll Ø	6.5" (165 mm)
Min. tube wall	**12 ga (2.5 mm)**
Rolling speed	16 ft/min (5 m/min)
Motor power	10 HP (7.5 kW)
Dimensions L × W × H	131 × 83 × 55" (3,350 × 2,100 × 1,400 mm)
Weight	6,724 lb (3,050 kg)

Capacities are for mild steel unless stated; metric values in brackets are the manufacturer's nominal figures. Dimensions are overall L × W × H.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

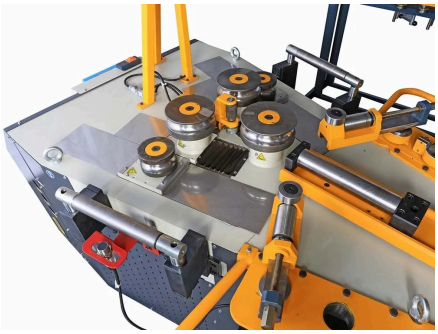
TC-42 NC TUBE COILING MACHINE



TC-42 NC from the side



TC-42 NC console



TC-42 rolls and the side supports



Bending rolls of the TC-42

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.