NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

CEVISA · MADE IN SPAIN · SOLD & SERVICED IN CANADA BY NOVOTECH

PLATE BEVELLING MACHINES

CEVISA CHP 7, CHP 12 AND CHP 12 INV · CHP 12G, CHP 21G AND CHP 21G INV ADJUSTABLE · CHP 12G REV AND CHP 21G REV REVERSIBLE · CHP 30G, CHP 60G, CHP 60G INV AND CHP 100G MILLING BEVELLERS







Spain
MADE IN SPAIN

4
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

CEVISA PLATE BEVELLERS

CONTENTS

SHEARING BEVELLERS

CHP 7 · CHP 12 · CHP 12 INV standard shearing bevellers, bevel to 11/16" CHP 7 · CHP 12 · CHP 12 INV · 3 models 04

CHP 12G · CHP 21G · CHP 21G INV adjustable-angle bevellers, bevel to 1-1/8" CHP 12G · CHP 21G · CHP 21G INV · 3 models 07

CHP 12G REV · CHP 21G REV reversible bevellers, bevel to 1-1/8" CHP 12G REV · CHP 21G REV · 2 models 10

MILLING BEVELLERS

CHP 30G · CHP 60G · CHP 60G INV · CHP 100G milling bevellers, bevel to 3-15/16" CHP 30G · CHP 60G · CHP 60G INV · CHP 100G · 4 models 13

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR CEVISA PLATE BEVELLERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Spain by Cevisa — ISO 9001
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CEVISA · VITORIA, SPAIN

COLD BEVELS FOR WELDING, FROM 1/8" TO 4-3/4" PLATE

CEVISA has designed and built self-feeding bevelling machines in Vitoria, Spain, since 1969, and exports 80 % of its production to more than 60 countries. Its shearing bevellers take the bevel off cold with a resharpenable cutter — V, X, K and Y bevels on plate, tube and discs up to 1-15/16" thick — and its milling bevellers machine bevels up to 3-15/16" wide in any material, from mild steel to Hardox, at 15° to 70°. Inverted and reversible models bevel the lower edge without turning the plate.

NovoTech sells, installs and supports Cevisa bevellers in Canada from Mississauga, Ontario, Canada — the machine and cutters chosen for your plates and bevels, a CSA-approved panel, operator training, a 1-year warranty and parts and technical support in Canada.

CHP 7 · CHP 12 · CHP 12 INV · 3 MODELS

CHP 7 · CHP 12 · CHP 12 INV STANDARD SHEARING BEVELLERS, BEVEL TO 11/16"



MODEL CHP · CEVISA CHP 12 PLATE AND TUBE BEVELLING MACHINE



Cevisa CHP 7 portable plate beveller with tube frame and handle



Cevisa CHP 12 INV inverted beveller on its stand, for lower bevels

Plate & tube 1/8" – 1-9/16" · bevel to 11/16" · 22.5° – 45° · self-feeding

The portable bevellers that do most of a fabrication shop's weld preparation: the machine sits on the plate edge, a shear cutter takes the bevel off cold in one or several runs, and the machine feeds itself along the edge — on the CHP 12 a 20 ft plate is bevelled in under three minutes. The 99 lb CHP 7 bevels plate, tube and aluminum from 1/8" to 5/8" thick to a 3/8" bevel; the CHP 12, Cevisa's best-known machine since 1972, takes 1/4" to 1-9/16" plate to an 11/16" bevel at 8.5 ft/min; the CHP 12 INV is the same machine working upside down on the lower edge, so an X bevel needs no plate turning. V, X, K and Y bevels at 22.5° to 45°; tube from Ø3-15/16" inside, bevelled inside or out.

STANDARD FEATURES

- ✓ Self-feeding along the plate edge — no pushing and no supervision while it bevels
- ✓ Cold shear cutting: no heat-affected zone, no slag, no grinding; cutters last about 3,300 ft (1,000 m) and are resharpened
- ✓ V, X, K and Y bevels on plate, on tube from Ø3-15/16" (100 mm) inside — inside or outside — and on discs from Ø13-3/4" (350 mm)
- ✓ Angle devices 22.5° – 45°; supplied with 3 cutters (1 on the machine), a 30° device, a tube device and spanners
- ✓ On the bench, on casters or on a crane hook; reversing switch, thermal-magnetic trip and emergency stop
- ✓ CHP 12 INV works upside down for lower bevels — under a CHP 12 it cuts the other half of an X bevel in the same pass
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Angle devices 22.5° – 45°; other angles on request
- + Parts for narrow plates, down to 13/16" (20 mm) wide
- + Trolley
- + Cutters for mild steel, stainless steel and aluminum
- + Plastic rollers that do not mark the material
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


CHP 7 · CHP 12 · CHP 12 INV STANDARD SHEARING BEVELLERS, BEVEL TO 11/16"



Plate edges bevelled cold for welding by a Cevisa shearing beveller



CHP 12 feeding itself along a plate edge

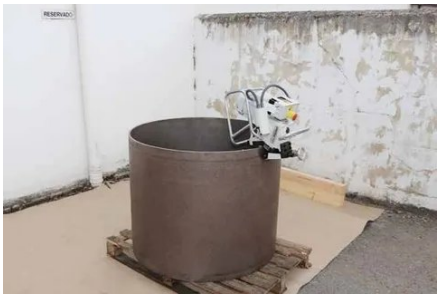

CHP 7 bevelling the edge of a rolled shell



CHP 12 bevelling a plate on the bench



CHP 12 hung from a crane hook to bevel large plates



Sharpenable shear cutter of the CHP shearing bevellers

TECHNICAL SPECIFICATIONS

CHP 7 · CHP 12 · CHP 12 INV STANDARD SHEARING BEVELLERS, BEVEL TO 11/16"

CHP 7 · CHP 12 · CHP 12 INV

Standard shearing bevellers

Model	CHP 7	CHP 12	CHP 12 INV
Max. bevel length, mild steel one run / several runs	**1/4" / 3/8" (6 / 10 mm)**	**1/2" / 11/16" (12 / 18 mm)**	**1/2" / 11/16" (12 / 18 mm)**
Max. bevel length, stainless one run / several runs	5/32" / 5/16" (4 / 8 mm)	5/16" / 5/8" (8 / 16 mm)	5/16" / 5/8" (8 / 16 mm)
Plate & tube thickness nominal range	**1/8" – 5/8" (3 – 16 mm)**	**1/4" – 1-9/16" (6 – 40 mm)**	**1/4" – 1-9/16" (6 – 40 mm)**
Max. recommended thickness	5/16" (8 mm)	13/16" (20 mm)	13/16" (20 mm)
Bevel angle	**22.5° – 45° with angle devices**	**22.5° – 45° with angle devices**	**22.5° – 45° with angle devices**
Bevel speed	5.2 ft/min (1.6 m/min)	8.5 ft/min (2.6 m/min)	8.5 ft/min (2.6 m/min)
Min. tube Ø inside	Ø3-15/16" (100 mm)	Ø3-15/16" (100 mm)	Ø3-15/16" (100 mm)
Motor power	**0.75 HP (0.55 kW)**	**3 HP (2.2 kW)**	**3 HP (2.2 kW)**
Weight	**99 lb (45 kg)**	**143 lb (65 kg)**	**143 lb (65 kg)**

Bevel length is the width of the bevel face; its depth is the length × cos (bevel angle) — an 11/16" bevel at 30° is about 5/8" deep. Capacities for mild steel of 58 ksi (400 MPa) tensile strength; stainless steel as given. Metric values in brackets are the manufacturer's figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Spain by Cevisa — ISO 9001
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CHP 12G · CHP 21G · CHP 21G INV · 3 MODELS

CHP 12G · CHP 21G · CHP 21G INV ADJUSTABLE-ANGLE BEVELLERS, BEVEL TO 1-1/8"



MODEL CHP · CEVISA CHP 21G HEAVY-DUTY ADJUSTABLE-ANGLE BEVELLER WITH BUILT-IN TROLLEY



Cevisa CHP 12G adjustable-angle beveller on its trolley



Cevisa CHP 21G INV inverted beveller for lower bevels on heavy plates

Plate 1/4" – 1-15/16" · bevel to 1-1/8" · angle 20° – 45° on the machine

Adjustable-angle bevellers for production weld preparation: the bevel angle is set anywhere from 20° to 45° on the machine itself, and the trolley holds machine and plate in the best working position, which steadies the cut and lengthens cutter life. The CHP 12G is the adjustable CHP 12 — 1/4" to 1-3/16" plate, an 11/16" bevel at 8.5 ft/min. The CHP 21G is built for round-the-clock work: 3/8" to 1-15/16" plate and a 1-1/8" bevel in several runs (13/16" in one) on a built-in trolley. The CHP 21G INV bevels the lower edge of heavy plate without turning it over, and side by side with a CHP 21G one operator bevels both edges.

STANDARD FEATURES

- ✓ Bevel angle adjustable from 20° to 45° on the machine — no angle devices to change
- ✓ Self-feeding at 8.5 ft/min (CHP 12G) or 5.6 ft/min (CHP 21G); V, X, K and Y bevels on plate and tube
- ✓ Trolley for a stable plate / machine position and longer cutter life — built in on the CHP 21G and 21G INV, working height 33-1/2" – 34-5/8" (850 – 880 mm)
- ✓ CHP 21G: heavy-duty frame for 24-hour production; plates from 2-3/4" (70 mm) wide
- ✓ CHP 21G INV: lower bevels on heavy plate without turning it; works in pair with a CHP 21G
- ✓ Electric box with reversing switch, thermal-magnetic trip and emergency stop; 3 cutters supplied (1 on the machine)
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Universal cutter for every material (CHP 21G, 21G INV)
- + Cutters for mild steel, stainless steel and aluminum
- + Plastic rollers that do not mark the material
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


CHP 12G · CHP 21G · CHP 21G INV ADJUSTABLE-ANGLE BEVELLERS, BEVEL TO 1-1/8”



V bevel on plate, cut cold — no heat-affected zone and no slag to grind

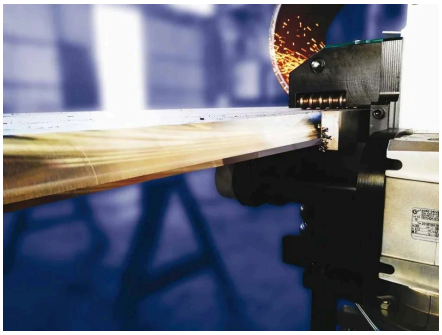

A Cevisa shearing beveller cutting a bevel along a plate edge

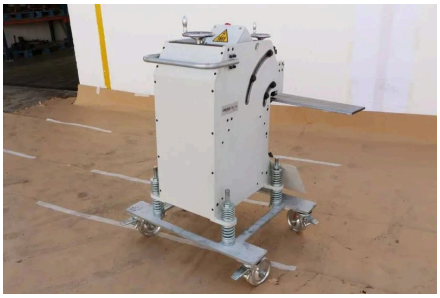

CHP 21G INV with its plate support

TECHNICAL SPECIFICATIONS

CHP 12G · CHP 21G · CHP 21G INV ADJUSTABLE-ANGLE BEVELLERS, BEVEL TO 1-1/8"

CHP 12G · CHP 21G · CHP 21G INV

Adjustable-angle shearing bevellers

Model	CHP 12G	CHP 21G	CHP 21G INV
Max. bevel length, mild steel one run / several runs	**1/2" / 11/16" (12 / 18 mm)**	**13/16" / 1-1/8" (20 / 28 mm)**	**13/16" / 1-1/8" (20 / 28 mm)**
Max. bevel length, stainless one run / several runs	5/16" / 5/8" (8 / 16 mm)	1/2" / 7/8" (13 / 23 mm)	1/2" / 7/8" (13 / 23 mm)
Plate & tube thickness nominal range	**1/4" – 1-3/16" (6 – 30 mm)**	**3/8" – 1-15/16" (9 – 50 mm)**	**3/8" – 1-15/16" (9 – 50 mm)**
Max. recommended thickness	13/16" (20 mm)	1-9/16" (40 mm)	1-9/16" (40 mm)
Bevel angle	**20° – 45°, adjustable**	**20° – 45°, adjustable**	**20° – 45°, adjustable**
Bevel speed	8.5 ft/min (2.6 m/min)	5.6 ft/min (1.7 m/min)	5.6 ft/min (1.7 m/min)
Min. tube Ø inside	Ø3-15/16" (100 mm)	Ø5-7/8" (150 mm)	Ø5-7/8" (150 mm)
Motor power	**3 HP (2.2 kW)**	**4 HP (3 kW)**	**4 HP (3 kW)**
Weight	**243 lb (110 kg)**	**992 lb (450 kg)**	**1,069 lb (485 kg)**

Bevel length is the width of the bevel face; its depth is the length × cos (bevel angle) — an 11/16" bevel at 30° is about 5/8" deep. Capacities for mild steel of 58 ksi (400 MPa) tensile strength; stainless steel as given. Metric values in brackets are the manufacturer's figures.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Spain by Cevisa — ISO 9001
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CHP 12G REV · CHP 21G REV · 2 MODELS


CHP 12G REV · CHP 21G REV REVERSIBLE BEVELLERS, BEVEL TO 1-1/8"

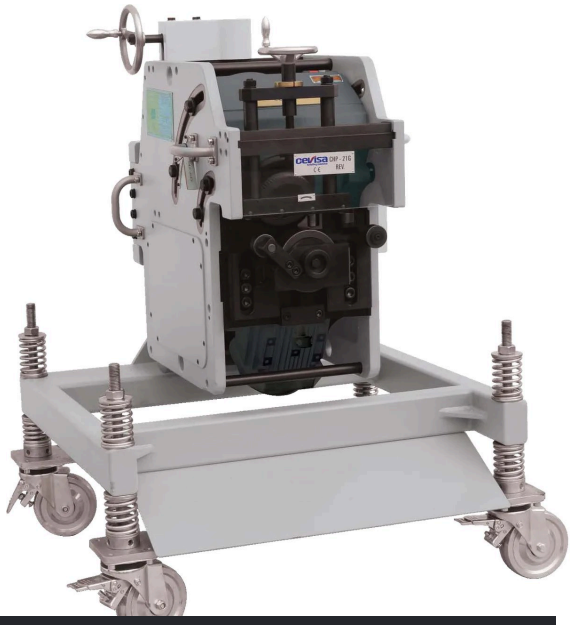

MODEL CHP · CEVISA CHP 21G REV REVERSIBLE BEVELLER ON ITS FRAME



Cevisa CHP 12G REV reversible beveller



CHP 21G REV turned over on its frame to bevel the lower edge

Upper and lower bevels with one machine · plate to 1-15/16" · bevel to 1-1/8"

Two bevellers in one: the head turns over on its frame in under a minute, so the same machine cuts the upper bevel and then the lower one without anyone turning the plate — X, K, V and Y bevels on large and heavy plate with one machine and one operator, and no crane work to flip the plate. The CHP 12G REV bevels 1/4" to 1-3/16" plate to an 11/16" bevel at 8.5 ft/min; the CHP 21G REV combines a CHP 21G and a CHP 21G INV for 3/8" to 1-15/16" plate and a 1-1/8" bevel. Bevel angle adjustable from 20° to 45° on both.

STANDARD FEATURES

- ✓ Turns over on its frame in under a minute for upper and lower bevels — the plate stays where it is
- ✓ Bevel angle adjustable 20° – 45°; self-feeding; no supervision needed while it bevels
- ✓ CHP 12G REV: 8.5 ft/min, 518 lb · CHP 21G REV: 5.6 ft/min, 1,385 lb, built-in trolley, working height 33-1/2" – 34-5/8"
- ✓ Plate and tube bevelling; electric box with reversing switch, thermal-magnetic trip and emergency stop
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Universal cutter for every material (CHP 21G REV)
- + Cutters for mild steel, stainless steel and aluminum
- + Plastic rollers that do not mark the material
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

CHP 12G REV · CHP 21G REV REVERSIBLE BEVELLERS, BEVEL TO 1-1/8"



CHP 21G REV with a plate in the bevelling head



Pivot and locking handle the CHP 12G REV turns over on

TECHNICAL SPECIFICATIONS

CHP 12G REV · CHP 21G REV REVERSIBLE BEVELLERS, BEVEL TO 1-1/8"

CHP 12G REV · CHP 21G REV

Reversible shearing bevellers

Model	CHP 12G REV	CHP 21G REV
Max. bevel length, mild steel one run / several runs	**1/2" / 11/16" (12 / 18 mm)**	**13/16" / 1-1/8" (20 / 28 mm)**
Max. bevel length, stainless one run / several runs	5/16" / 5/8" (8 / 16 mm)	1/2" / 7/8" (13 / 23 mm)
Plate & tube thickness nominal range	**1/4" – 1-3/16" (6 – 30 mm)**	**3/8" – 1-15/16" (9 – 50 mm)**
Max. recommended thickness	13/16" (20 mm)	1-9/16" (40 mm)
Bevel angle	**20° – 45°, adjustable**	**20° – 45°, adjustable**
Bevel speed	8.5 ft/min (2.6 m/min)	5.6 ft/min (1.7 m/min)
Min. tube Ø inside	Ø3-15/16" (100 mm)	Ø5-7/8" (150 mm)
Motor power	**3 HP (2.2 kW)**	**4 HP (3 kW)**
Weight	**518 lb (235 kg)**	**1,385 lb (628 kg)**

Bevel length is the width of the bevel face; its depth is the length × cos (bevel angle) — an 11/16" bevel at 30° is about 5/8" deep. Capacities for mild steel of 58 ksi (400 MPa) tensile strength; stainless steel as given. Metric values in brackets are the manufacturer's figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Spain by Cevisa — ISO 9001
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

CHP 30G · CHP 60G · CHP 60G INV · CHP 100G · 4 MODELS

CHP 30G · CHP 60G · CHP 60G INV · CHP 100G MILLING BEVELLERS, BEVEL TO 3-15/16″



MODEL CHP · CEVISA CHP 60G MILLING BEVELLER WITH PNEUMATIC HEIGHT ADJUSTMENT AND BUILT-IN TROLLEY



Cevisa CHP 30G milling beveller with control box and display



Cevisa CHP 60G INV inverted milling beveller for lower bevels

Plate 1/8″ – 4-3/4″ · bevel to 3-15/16″ · 15° – 70° · any material, machined finish

Portable milling machines that bevel: an insert milling head machines the bevel while feed rollers carry the machine along the plate and pneumatic clamps hold it down — a machined face with no heat and no grinding, in any material from mild steel to Hardox and duplex at the same capacity, at 15° to 70°, with transition and J bevels. CHP 30G: plate 1/8″ – 1-15/16″, bevel to 1-3/8″. CHP 60G: plate 3/8″ – 2-3/4″ (3-15/16″ in special configuration), bevel to 2-3/8″, and the CHP 60G INV for lower bevels. CHP 100G: plate to 4-3/4″, bevel to 3-15/16″.

STANDARD FEATURES

- ✓ Machined bevel face from an insert milling head — no grinding before welding and no change to the steel
- ✓ The same capacity in every material: mild and stainless steel, Hardox, Armox, duplex, super duplex, aluminum
- ✓ Bevel angle 15° – 70°; electronic display of bevel width; adjustable feed and spindle speed
- ✓ V, X, K, Y, transition (slope) and slope + bevel; J bevels with the J-bevel device (CHP 60G)
- ✓ Pneumatic clamping and feed rollers for a vibration-free cut; shop air 7 CFM (200 l/min)
- ✓ Built-in trolley; pneumatic working height 29-7/8″ – 37″ (CHP 60G); control pendant; chip drawer
- ✓ CHP 60G INV bevels the lower edge and works in parallel with a CHP 60G
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Indexable inserts
- + J-bevel device, 15° – 30° (CHP 60G)
- + Pneumatic working-height adjustment (CHP 30G)
- + Plate to 3-15/16″ (100 mm) in special configuration (CHP 60G)
- + Plastic rollers that do not mark the material
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

CHP 30G · CHP 60G · CHP 60G INV · CHP 100G MILLING BEVELLERS, BEVEL TO 3-15/16″



Cevisa CHP 100G heavy milling beveller for bevels to 3-15/16″



Machined bevel left by the CHP 60G milling head — no grinding needed before welding



CHP 30G bevelling a plate



CHP 100G milling a wide bevel — chips blown clear of the cut



CHP 60G control pendant, feed handwheel and 400 V supply



CHP 100G control cabinet



Milling head with indexable inserts of the CHP milling bevellers

TECHNICAL SPECIFICATIONS

CHP 30G · CHP 60G · CHP 60G INV · CHP 100G MILLING BEVELLERS, BEVEL TO 3-15/16"

CHP 30G · CHP 60G · CHP 60G INV · CHP 100G

Milling bevellers

Model	CHP 30G	CHP 60G	CHP 60G INV	CHP 100G
Max. bevel length, any material one run / several runs	**1" / 1-3/8" (25 / 35 mm)**	**1-9/16" / 2-3/8" (40 / 60 mm)**	**1-9/16" / 2-3/8" (40 / 60 mm)**	**3-7/16" / 3-15/16" (88 / 100 mm)**
Plate thickness nominal range	**1/8" – 1-15/16" (3 – 50 mm)**	**3/8" – 2-3/4" (10 – 70 mm) · to 3-15/16" (100 mm) in special configuration**	**3/8" – 2-3/4" (10 – 70 mm) · to 3-15/16" (100 mm) in special configuration**	**3/8" – 4-3/4" (10 – 120 mm)**
Max. recommended thickness	1-15/16" (50 mm)	2-3/4" (70 mm)	2-3/4" (70 mm)	4-3/4" (120 mm)
Bevel angle	**15° – 70°, adjustable**	**15° – 70°, adjustable**	**15° – 70°, adjustable**	**15° – 70°, adjustable**
Bevel speed	31.5 in/min (800 mm/min)	26.4 in/min (670 mm/min)	26.4 in/min (670 mm/min)	21.7 in/min (550 mm/min)
Motor power	**3 HP (2.2 kW)**	**5 HP (3.8 kW)**	**5 HP (3.8 kW)**	**15 HP (11 kW)**
Weight	**1,367 lb (620 kg)**	**1,786 lb (810 kg)**	**1,786 lb (810 kg)**	**8,047 lb (3,650 kg)**

Bevel length is the width of the bevel face; the milling bevellers have the same capacity in every material, from mild steel to Hardox. Metric values in brackets are the manufacturer's figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Spain by Cevisa — ISO 9001
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.