NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026


NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

HYDRAULIC SHEARING MACHINES

SWING BEAM SHEARS 5/32" – 3/4" × 8 – 20 FT · VARIABLE-RAKE GUILLOTINE SHEARS 1/4" – 1-9/16" × 8 – 26 FT





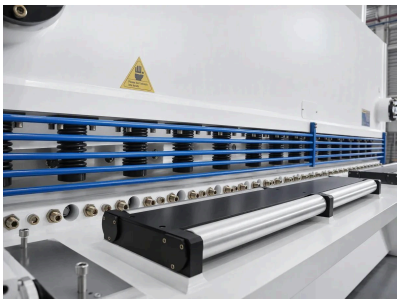

China
MADE IN CHINA

2
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE HYDRAULIC SHEARS

CONTENTS

HYDRAULIC SWING BEAM SHEARS

Hydraulic swing beam shears, 5/32″ – 3/4″ × 8 – 20 ft QC12K-4×2500 – QC12K-20×4000 · 32 models 04

HYDRAULIC GUILLOTINE SHEARS

Hydraulic guillotine shears, 1/4″ – 1-9/16″ × 8 – 26 ft, variable rake angle Q11K-6×2500 – Q11K-40×2500 · 34 models 09

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE HYDRAULIC SHEARS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH VALUE LINE

PLATE SHEARS FOR EVERY SHOP, 5/32" TO 1-9/16"

NovoTech's value line is our own brand: machines built in China to our specification with European and Japanese controls and hydraulics — Delem, Estun, Schneider, Siemens, NOK — inspected before they ship and sold under NovoTech's name with the same CSA-approved panel, 1-year warranty and parts and technical support from Mississauga, Ontario, Canada, as every machine we sell.


The swing beam shears cut the full length in one stroke with a beam on two cylinders, an Estun E21S control positioning the motorised back gauge and setting the cutting angle, and hydraulic hold-downs every 100 mm — 32 models from 5/32" × 8 ft to 3/4" × 13 ft. The guillotine shears carry the blade beam on linear rollers with a rake angle the control sets between 0.5° and 4°, so thin sheet is cut fast and flat and 1" plate with less twist — 34 models from 1/4" to 1-9/16" over 8 to 26 ft. Ball-transfer front tables, shadow-line light, squaring arm and light-barrier guards are standard on both.

QC12K-4×2500 – QC12K-20×4000 · 32 MODELS

HYDRAULIC SWING BEAM SHEARS, 5/32" – 3/4" × 8 – 20 FT



MODEL SWING · NOVOTECH QC12K HYDRAULIC SWING BEAM SHEAR — 10 FT × 1/4" WITH THE ESTUN E21S CONTROL

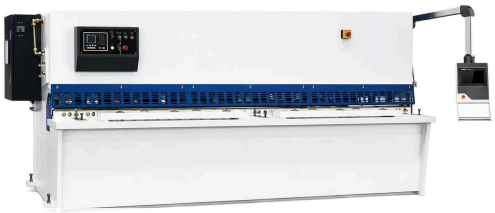

Hydraulic swing beam shear with the control on a swing arm and front ball-transfer tables



Swing beam shear from the rear — back gauge beam, hydraulic cylinders and the light-barrier guard

The hydraulic shear most shops buy: a swing beam on two cylinders cuts the full length in one stroke, the Estun E21S control positions the motorised back gauge and sets the cutting angle, and hydraulic hold-downs keep the sheet flat. Thirty-two models from 5/32" × 8 ft to 3/4" × 13 ft; the 1/4" × 8 ft and 1/4" × 10 ft machines (QC12K-6×2500 and 6×3200) are the sizes we quote most, with 17 strokes a minute, a 7.5 kW motor and 25.6" of back gauge. Ball-transfer front tables, shadow-line light, squaring arm and a light-barrier front guard are standard.

STANDARD FEATURES

- ✓ 5/32" to 3/4" (4 – 20 mm) mild steel; stainless about 60 % of that thickness
- ✓ Estun E21S NC control: motorised back gauge, cutting-angle and blade-gap setting, stroke counter, 40 programs × 25 steps, inches or millimetres
- ✓ Swing beam on two cylinders with accumulator return; hydraulic valve block with pressure gauge and overload protection
- ✓ Motorised back gauge on ball screws, 0.8 – 25.6" (20 – 650 mm), 31.5" (800 mm) on 13 ft and up, with support fingers and retract
- ✓ Hydraulic hold-downs every 100 mm; four-edge rectangular blades; manual single-point blade-gap adjustment
- ✓ Shadow-line light, ball-transfer front tables, squaring arm, front guard with light barrier, rear safety barrier
- ✓ Siemens or Wannan main motor; Schneider electrics; NOK seals
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Estun E200PS or Delem DAC-360T control with programmable blade gap
- + Pneumatic sheet support (return of the cut piece)
- + Longer front support arms; roller tables
- + Hydraulic oil cooler; automatic lubrication
- + Spare blade set
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

HYDRAULIC SWING BEAM SHEARS, 5/32" – 3/4" × 8 – 20 FT



Motorised back gauge on ball screws with the sheet support fingers




Hydraulic hold-down cylinders along the cutting line



Hold-downs and blade gap seen from the operator side



Estun E21S and E200PS NC shear controls — back gauge, cutting angle and blade clearance

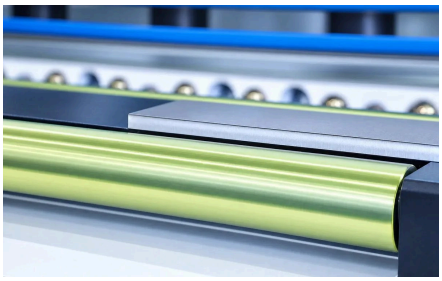


Roller sheet support in the front table



Swing beam shear — hydraulic cylinder and back gauge drive



Swing beam shear — main motor and pump on top of the oil tank

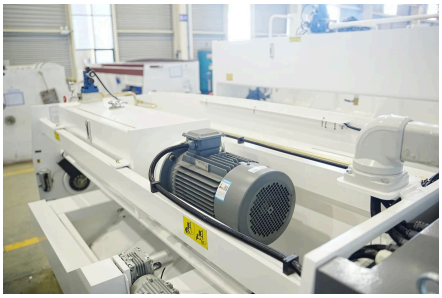

Swing beam shear — blade gap adjustment and hold-down manifold

TECHNICAL SPECIFICATIONS · 1 / 3

HYDRAULIC SWING BEAM SHEARS, 5/32" – 3/4" × 8 – 20 FT

SWING BEAM SHEARS · 5/32" AND 1/4"

10 models · 8 – 20 ft

Model	QC12K-4×2500	QC12K-4×3200	QC12K-4×4000	QC12K-4×5000	QC12K-4×6000	QC12K-6×2500	QC12K-6×3200	QC12K-6×4000	QC12K-6×5000	QC12K-6×6000
Cutting capacity, mild steel ≤ 450 N/mm² · 65,000 psi	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**5/32" (4 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**
Cutting length	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**
Strokes per minute	33	26	23	16	12	17	17	15	11	8
Cutting angle	1.5°	1.5°	1.5°	1.5°	1.5°	2°	1.5°	1.5°	1.5°	1.5°
Back gauge range	0.8 – 25.6" (20–650 mm)	0.8 – 25.6" (20–650 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 25.6" (20–650 mm)	0.8 – 25.6" (20–650 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)
Main motor	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	20.1 HP (15 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	20.1 HP (15 kW)	20.1 HP (15 kW)
Hydraulic oil tank	37 US gal (140 L)	50 US gal (190 L)	50 US gal (190 L)	85 US gal (320 L)	116 US gal (440 L)	50 US gal (190 L)	50 US gal (190 L)	50 US gal (190 L)	85 US gal (320 L)	116 US gal (440 L)
Dimensions L × W × H	119 × 62 × 68" (3,035 × 1,570 × 1,720 mm)	148 × 65 × 73" (3,750 × 1,640 × 1,850 mm)	179 × 75 × 75" (4,550 × 1,900 × 1,900 mm)	224 × 75 × 79" (5,700 × 1,900 × 2,000 mm)	256 × 97 × 89" (6,500 × 2,460 × 2,250 mm)	120 × 65 × 75" (3,050 × 1,650 × 1,900 mm)	148 × 65 × 75" (3,750 × 1,650 × 1,900 mm)	179 × 79 × 79" (4,550 × 2,000 × 2,000 mm)	224 × 96 × 91" (5,700 × 2,450 × 2,300 mm)	258 × 97 × 98" (6,550 × 2,470 × 2,500 mm)
Weight	7,716 lb (3,500 kg)	12,125 lb (5,500 kg)	16,535 lb (7,500 kg)	18,739 lb (8,500 kg)	37,479 lb (17,000 kg)	12,125 lb (5,500 kg)	14,330 lb (6,500 kg)	18,078 lb (8,200 kg)	27,778 lb (12,600 kg)	42,990 lb (19,500 kg)

TECHNICAL SPECIFICATIONS · 2 / 3

HYDRAULIC SWING BEAM SHEARS, 5/32" – 3/4" × 8 – 20 FT

SWING BEAM SHEARS · 5/16" TO 15/32"

14 models · 8 – 20 ft

Model	QC12K-8×2500	QC12K-8×3200	QC12K-8×4000	QC12K-8×5000	QC12K-8×6000	QC12K-10×2500	QC12K-10×3200	QC12K-10×4000	QC12K-10×6000	QC12K-12×2500	QC12K-12×3200	QC12K-12×4000	QC12K-12×5000	QC12K-12×6000
Cutting capacity, mild steel ≤ 450 N/mm² · 65,000 psi	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**3/8" (10 mm)**	**3/8" (10 mm)**	**3/8" (10 mm)**	**3/8" (10 mm)**	**15/32" (12 mm)**	**15/32" (12 mm)**	**15/32" (12 mm)**	**15/32" (12 mm)**	**15/32" (12 mm)**
Cutting length	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**
Strokes per minute	13	13	12	10	9	13	13	9	6	12	10	8	6	5
Cutting angle	2°	1.5°	1.5°	1.5°	1.5°	2°	1.5°	1.5°	1.5°	2°	2°	1.75°	2°	2°
Back gauge range	0.8 – 25.6" (20–650 mm)	0.8 – 25.6" (20–650 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)
Main motor	14.8 HP (11 kW)	14.8 HP (11 kW)	20.1 HP (15 kW)	24.8 HP (18.5 kW)	24.8 HP (18.5 kW)	20.1 HP (15 kW)	20.1 HP (15 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)
Hydraulic oil tank	50 US gal (190 L)	50 US gal (190 L)	50 US gal (190 L)	85 US gal (320 L)	116 US gal (440 L)	50 US gal (190 L)	50 US gal (190 L)	106 US gal (400 L)	116 US gal (440 L)	106 US gal (400 L)	106 US gal (400 L)	106 US gal (400 L)	116 US gal (440 L)	116 US gal (440 L)
Dimensions L × W × H	120 × 65 × 75" (3,060 × 1,650 × 1,900 mm)	148 × 65 × 75" (3,760 × 1,650 × 1,900 mm)	180 × 77 × 76" (4,560 × 1,960 × 1,920 mm)	220 × 93 × 86" (5,600 × 2,360 × 2,180 mm)	260 × 96 × 98" (6,600 × 2,450 × 2,500 mm)	120 × 79 × 76" (3,050 × 2,000 × 1,920 mm)	150 × 79 × 76" (3,800 × 2,000 × 1,920 mm)	185 × 83 × 87" (4,700 × 2,100 × 2,200 mm)	260 × 83 × 91" (6,600 × 2,100 × 2,300 mm)	125 × 85 × 86" (3,170 × 2,150 × 2,180 mm)	150 × 85 × 86" (3,800 × 2,150 × 2,180 mm)	185 × 90 × 87" (4,700 × 2,280 × 2,200 mm)	228 × 96 × 94" (5,800 × 2,450 × 2,400 mm)	260 × 102 × 106" (6,600 × 2,600 × 2,700 mm)
Weight	12,787 lb (5,800 kg)	14,991 lb (6,800 kg)	19,401 lb (8,800 kg)	28,219 lb (12,800 kg)	47,399 lb (21,500 kg)	15,432 lb (7,000 kg)	18,739 lb (8,500 kg)	26,015 lb (11,800 kg)	60,627 lb (27,500 kg)	21,605 lb (9,800 kg)	25,353 lb (11,500 kg)	30,424 lb (13,800 kg)	41,888 lb (19,000 kg)	68,343 lb (31,000 kg)

TECHNICAL SPECIFICATIONS · 3 / 3

HYDRAULIC SWING BEAM SHEARS, 5/32" – 3/4" × 8 – 20 FT

SWING BEAM SHEARS · 5/8" AND 3/4"

8 models · 8 – 20 ft

Model	QC12K-16×2500	QC12K-16×3200	QC12K-16×4000	QC12K-16×5000	QC12K-16×6000	QC12K-20×2500	QC12K-20×3200	QC12K-20×4000
Cutting capacity, mild steel ≤ 450 N/mm² · 65,000 psi	**5/8" (16 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**	**3/4" (20 mm)**	**3/4" (20 mm)**	**3/4" (20 mm)**
Cutting length	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**
Strokes per minute	13	10	9	7	5	8	7	5
Cutting angle	2.5°	2°	1.75°	2.5°	2.5°	2.5°	2.5°	2.5°
Back gauge range	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)
Main motor	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)	40.2 HP (30 kW)
Hydraulic oil tank	106 US gal (400 L)	106 US gal (400 L)	159 US gal (600 L)	159 US gal (600 L)	159 US gal (600 L)	132 US gal (500 L)	132 US gal (500 L)	145 US gal (550 L)
Dimensions L × W × H	128 × 91 × 87" (3,250 × 2,300 × 2,200 mm)	152 × 91 × 86" (3,870 × 2,300 × 2,180 mm)	185 × 101 × 87" (4,700 × 2,575 × 2,200 mm)	232 × 102 × 106" (5,900 × 2,600 × 2,700 mm)	260 × 106 × 114" (6,600 × 2,700 × 2,900 mm)	130 × 102 × 91" (3,300 × 2,580 × 2,300 mm)	163 × 102 × 98" (4,150 × 2,600 × 2,500 mm)	191 × 102 × 110" (4,850 × 2,600 × 2,800 mm)
Weight	24,251 lb (11,000 kg)	27,778 lb (12,600 kg)	37,479 lb (17,000 kg)	52,911 lb (24,000 kg)	81,130 lb (36,800 kg)	31,526 lb (14,300 kg)	35,274 lb (16,000 kg)	50,706 lb (23,000 kg)

Capacities are the supplier's ratings over the full blade length for mild steel of up to 65,000 psi (450 N/mm²); stainless steel runs about 60 % of the mild-steel thickness, aluminum about 150 %. The model number is the metric thickness × cutting length. Dimensions are overall L (along the blade) × W × H; weights are reference values.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

Q11K-6×2500 – Q11K-40×2500 · 34 MODELS

HYDRAULIC GUILLOTINE SHEARS, 1/4" – 1-9/16" × 8 – 26 FT, VARIABLE RAKE ANGLE



MODEL GUILLOTINE · NOVOTECH Q11K 6×2500 HYDRAULIC GUILLOTINE SHEAR — 8 FT × 1/4" WITH THE ESTUN CONTROL AND BALL-TRANSFER TABLES



Guillotine shear from the rear — the ball-screw back gauge and sheet support



Guillotine shear — rear view with the electrical cabinet and the back gauge motor

The production shear: a guillotine beam on linear rollers with a rake angle the control sets between 0.5° and 4°, so thin sheet is cut fast and flat and 1" plate is cut at the high angle with less twist and less force. The blade gap is adjusted from the Estun E21S control as well, with the back gauge and the stroke length. Thirty-four models from 1/4" × 8 ft to 1-9/16" × 8 ft and 5/8" × 26 ft, with 7.5 to 55 kW motors and twin pumps on the 20 mm × 20 ft machine.

STANDARD FEATURES

- ✓ 1/4" to 1-9/16" (6 – 40 mm) mild steel over 8 – 26 ft; up to 25 cuts a minute
- ✓ Estun E21S NC control: motorised back gauge, variable rake angle and blade gap set from the control, stroke counter, inches or millimetres
- ✓ Guillotine beam on linear rollers with a variable rake angle — thin sheet cut fast and flat at 0.5°, thick plate at the high angle with less distortion
- ✓ Motorised ball-screw back gauge to 31.5" (800 mm), 39.4" (1,000 mm) on the large machines, with sheet support
- ✓ Hydraulic hold-downs; four-edge blades; valve block with overload protection; accumulator return
- ✓ Shadow-line light, ball-transfer front tables, squaring arm, front guard with light barrier, rear safety barrier
- ✓ Siemens or Wannan main motor; Schneider electrics
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Delem DAC-360T or Estun E200PS control
- + Pneumatic sheet support; conveyor for cut strips
- + Longer front support arms; roller tables
- + Hydraulic oil cooler
- + Spare blade set
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS · 1 / 2

HYDRAULIC GUILLOTINE SHEARS, 1/4" – 1-9/16" × 8 – 26 FT, VARIABLE RAKE ANGLE




Estun E21S NC control and the optional Delem DAC-360T

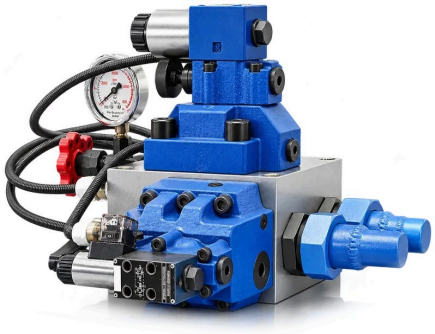

hydraulic valve block with pressure gauge




Checking the cut strip — straight, burr-free edges

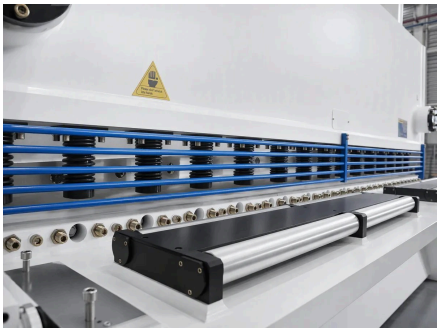


Feed opening with the hold-down cylinders and the roller table



Directional valve of the hydraulic system

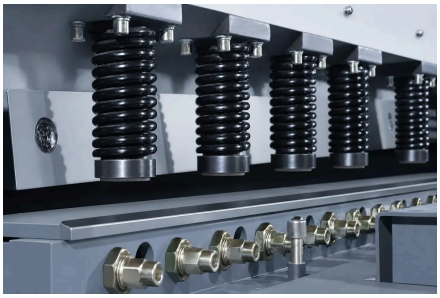

Hydraulic hold-down cylinders of the guillotine shear

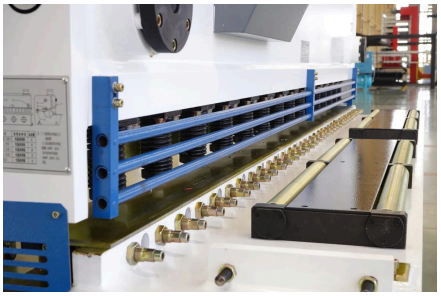

Guillotine shear — rake angle cylinders behind the blade beam




Guillotine shear — pressure gauge and manual valves




Guillotine shear — NC control panel

DETAILS, COMPONENTS AND OPTIONS · 2 / 2

HYDRAULIC GUILLOTINE SHEARS, 1/4" – 1-9/16" × 8 – 26 FT, VARIABLE RAKE ANGLE

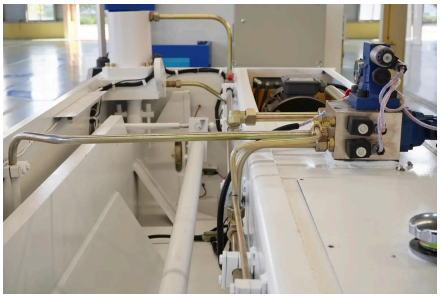

Guillotine shear — top of the frame with the main cylinder

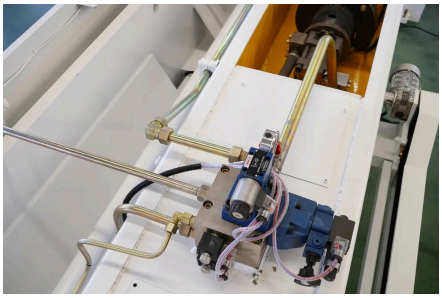

Guillotine shear — back gauge screw and support

TECHNICAL SPECIFICATIONS · 1 / 3

HYDRAULIC GUILLOTINE SHEARS, 1/4" – 1-9/16" × 8 – 26 FT, VARIABLE RAKE ANGLE

GUILLOTINE SHEARS · 1/4" AND 5/16"

10 models · 8 – 20 ft

Model	Q11K-6×2500	Q11K-6×3200	Q11K-6×4000	Q11K-6×5000	Q11K-6×6000	Q11K-8×2500	Q11K-8×3200	Q11K-8×4000	Q11K-8×5000	Q11K-8×6000
Cutting capacity, mild steel ≤ 450 N/mm² · 65,000 psi	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**1/4" (6 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**	**5/16" (8 mm)**
Cutting length	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**
Cuts per minute at max / min angle	16 – 25	14 – 20	12 – 17	8 – 14	7 – 12	13 – 20	11 – 18	9 – 16	8 – 15	7 – 14
Rake angle variable	0.5° – 1.5°	0.5° – 1.5°	0.5° – 1.5°	0.5° – 1.5°	0.5° – 1.5°	0.5° – 1.5°	0.5° – 1.5°	0.5° – 1.5°	0.5° – 1.5°	0.5° – 1.5°
Back gauge range	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)
Main motor	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	10.1 HP (7.5 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	14.8 HP (11 kW)	20.1 HP (15 kW)	20.1 HP (15 kW)	20.1 HP (15 kW)
Hydraulic oil tank	79 US gal (300 L)	79 US gal (300 L)	90 US gal (340 L)	90 US gal (340 L)	90 US gal (340 L)	79 US gal (300 L)	79 US gal (300 L)	90 US gal (340 L)	92 US gal (350 L)	153 US gal (580 L)
Dimensions L × W × H	126 × 77 × 81" (3,200 × 1,950 × 2,050 mm)	154 × 77 × 82" (3,900 × 1,950 × 2,075 mm)	183 × 79 × 83" (4,640 × 2,000 × 2,100 mm)	228 × 83 × 94" (5,780 × 2,100 × 2,380 mm)	266 × 87 × 98" (6,750 × 2,200 × 2,500 mm)	124 × 78 × 81" (3,150 × 1,970 × 2,055 mm)	152 × 81 × 83" (3,850 × 2,050 × 2,100 mm)	183 × 83 × 94" (4,650 × 2,100 × 2,400 mm)	224 × 77 × 102" (5,700 × 1,950 × 2,600 mm)	266 × 89 × 103" (6,750 × 2,250 × 2,615 mm)
Weight	12,566 lb (5,700 kg)	14,550 lb (6,600 kg)	17,416 lb (7,900 kg)	30,865 lb (14,000 kg)	40,785 lb (18,500 kg)	13,669 lb (6,200 kg)	16,314 lb (7,400 kg)	22,928 lb (10,400 kg)	34,172 lb (15,500 kg)	44,092 lb (20,000 kg)

TECHNICAL SPECIFICATIONS · 2 / 3

HYDRAULIC GUILLOTINE SHEARS, 1/4" – 1-9/16" × 8 – 26 FT, VARIABLE RAKE ANGLE

GUILLOTINE SHEARS · 3/8" TO 5/8"

13 models · 8 – 26 ft

Model	Q11K-10×3200	Q11K-10×4000	Q11K-13×2500	Q11K-13×3200	Q11K-13×4000	Q11K-13×5000	Q11K-13×6000	Q11K-16×2500	Q11K-16×3200	Q11K-16×4000	Q11K-16×5000	Q11K-16×6000	Q11K-16×8000
Cutting capacity, mild steel ≤ 450 N/mm² · 65,000 psi	**3/8" (10 mm)**	**3/8" (10 mm)**	**1/2" (13 mm)**	**1/2" (13 mm)**	**1/2" (13 mm)**	**1/2" (13 mm)**	**1/2" (13 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**	**5/8" (16 mm)**
Cutting length	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**16.4 ft · 196.9" (5,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**26.2 ft · 315.0" (8,000 mm)**
Cuts per minute at max / min angle	9 – 16	10 – 16	10 – 20	9 – 18	8 – 16	7 – 14	6 – 12	9 – 18	8 – 17	7 – 15	5 – 11	6 – 11	4 – 8
Rake angle variable	0.5° – 2.5°	0.5° – 2°	0.5° – 2°	0.5° – 2°	0.5° – 2°	0.5° – 2°	0.5° – 2°	0.5° – 2.5°	0.5° – 2.5°	0.5° – 2.5°	0.5° – 2.5°	0.5° – 2.5°	0.5° – 2.5°
Back gauge range	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 39.4" (20–1000 mm)	0.8 – 39.4" (20–1000 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 39.4" (20–1000 mm)	0.8 – 39.4" (20–1000 mm)
Main motor	20.1 HP (15 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	49.6 HP (37 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	29.5 HP (22 kW)	40.2 HP (30 kW)	49.6 HP (37 kW)	60.3 HP (45 kW)
Hydraulic oil tank	79 US gal (300 L)	107 US gal (405 L)	107 US gal (405 L)	107 US gal (405 L)	107 US gal (405 L)	133 US gal (505 L)	269 US gal (1020 L)	125 US gal (475 L)	125 US gal (475 L)	157 US gal (595 L)	157 US gal (595 L)	269 US gal (1020 L)	544 US gal (2060 L)
Dimensions L × W × H	152 × 68 × 88" (3,850 × 1,720 × 2,242 mm)	184 × 75 × 92" (4,680 × 1,895 × 2,335 mm)	128 × 77 × 83" (3,250 × 1,950 × 2,110 mm)	154 × 81 × 91" (3,900 × 2,070 × 2,315 mm)	189 × 85 × 97" (4,800 × 2,150 × 2,460 mm)	228 × 89 × 110" (5,800 × 2,270 × 2,800 mm)	274 × 96 × 120" (6,950 × 2,450 × 3,050 mm)	129 × 80 × 89" (3,280 × 2,020 × 2,270 mm)	156 × 85 × 96" (3,950 × 2,150 × 2,450 mm)	189 × 84 × 100" (4,800 × 2,130 × 2,550 mm)	229 × 92 × 109" (5,810 × 2,330 × 2,780 mm)	276 × 98 × 118" (7,000 × 2,500 × 3,000 mm)	356 × 125 × 138" (9,050 × 3,180 × 3,500 mm)
Weight	18,519 lb (8,400 kg)	26,676 lb (12,100 kg)	16,755 lb (7,600 kg)	22,708 lb (10,300 kg)	29,762 lb (13,500 kg)	48,502 lb (22,000 kg)	59,525 lb (27,000 kg)	20,503 lb (9,300 kg)	26,896 lb (12,200 kg)	33,069 lb (15,000 kg)	49,604 lb (22,500 kg)	71,650 lb (32,500 kg)	136,686 lb (62,000 kg)

TECHNICAL SPECIFICATIONS · 3 / 3

HYDRAULIC GUILLOTINE SHEARS, 1/4" – 1-9/16" × 8 – 26 FT, VARIABLE RAKE ANGLE

GUILLOTINE SHEARS · 3/4" TO 1-9/16"

11 models · 8 – 20 ft

Model	Q11K-20×2500	Q11K-20×3200	Q11K-20×4000	Q11K-20×6000	Q11K-25×2500	Q11K-25×3200	Q11K-25×4000	Q11K-30×2500	Q11K-30×3200	Q11K-30×4000	Q11K-40×2500
Cutting capacity, mild steel ≤ 450 N/mm² · 65,000 psi	**3/4" (20 mm)**	**3/4" (20 mm)**	**3/4" (20 mm)**	**3/4" (20 mm)**	**1" (25 mm)**	**1" (25 mm)**	**1" (25 mm)**	**1-3/16" (30 mm)**	**1-3/16" (30 mm)**	**1-3/16" (30 mm)**	**1-9/16" (40 mm)**
Cutting length	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**19.7 ft · 236.2" (6,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**	**10.5 ft · 126.0" (3,200 mm)**	**13.1 ft · 157.5" (4,000 mm)**	**8.2 ft · 98.4" (2,500 mm)**
Cuts per minute at max / min angle	7 – 16	6 – 15	6 – 14	5 – 11	5 – 14	5 – 10	5 – 8	5 – 12	4 – 10	3 – 7	4 – 8
Rake angle variable	0.5° – 3°	0.5° – 3°	0.5° – 3°	0.5° – 3°	0.5° – 3.5°	0.5° – 3.5°	0.5° – 3.5°	0.5° – 3°	0.5° – 3°	0.5° – 3.5°	0.5° – 4°
Back gauge range	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 39.4" (20–1000 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 31.5" (20–800 mm)	0.8 – 39.4" (20–1000 mm)	0.8 – 39.4" (20–1000 mm)	0.8 – 39.4" (20–1000 mm)	0.8 – 39.4" (20–1000 mm)
Main motor	40.2 HP (30 kW)	40.2 HP (30 kW)	49.6 HP (37 kW)	2 × 40.2 HP (30 kW)	49.6 HP (37 kW)	49.6 HP (37 kW)	60.3 HP (45 kW)	60.3 HP (45 kW)	60.3 HP (45 kW)	73.8 HP (55 kW)	73.8 HP (55 kW)
Hydraulic oil tank	135 US gal (510 L)	135 US gal (510 L)	169 US gal (640 L)	396 US gal (1500 L)	198 US gal (750 L)	217 US gal (820 L)	317 US gal (1200 L)	206 US gal (780 L)	264 US gal (1000 L)	370 US gal (1400 L)	362 US gal (1370 L)
Dimensions L × W × H	126 × 87 × 99" (3,200 × 2,220 × 2,520 mm)	156 × 85 × 102" (3,950 × 2,150 × 2,600 mm)	187 × 94 × 114" (4,750 × 2,400 × 2,900 mm)	276 × 112 × 132" (7,000 × 2,850 × 3,350 mm)	129 × 79 × 104" (3,270 × 2,000 × 2,650 mm)	156 × 87 × 105" (3,970 × 2,200 × 2,670 mm)	193 × 110 × 126" (4,900 × 2,800 × 3,190 mm)	136 × 98 × 114" (3,450 × 2,500 × 2,900 mm)	163 × 106 × 112" (4,150 × 2,700 × 2,850 mm)	205 × 102 × 132" (5,200 × 2,600 × 3,350 mm)	157 × 116 × 124" (4,000 × 2,950 × 3,150 mm)
Weight	27,558 lb (12,500 kg)	31,085 lb (14,100 kg)	45,636 lb (20,700 kg)	97,003 lb (44,000 kg)	33,069 lb (15,000 kg)	40,785 lb (18,500 kg)	57,320 lb (26,000 kg)	47,399 lb (21,500 kg)	59,525 lb (27,000 kg)	77,162 lb (35,000 kg)	80,469 lb (36,500 kg)

Capacities are the supplier's ratings over the full blade length for mild steel of up to 65,000 psi (450 N/mm²); stainless steel runs about 60 % of the mild-steel thickness, aluminum about 150 %. The model number is the metric thickness × cutting length. Dimensions are overall L (along the blade) × W × H; weights are reference values.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.