NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH PREMIUM LINE · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

# HYDRAULIC SHOP PRESSES

## DPM H-FRAME SHOP PRESSES 33 – 220 US TONS · DPM-K AND DK MOBILE-CYLINDER PRESSES · AT T-SLOT DIE PRESSES · AP GARAGE PRESS BRAKES · DK-S STRAIGHTENING PRESSES TO 441 US TONS







**Turkey**
MADE IN TURKEY

**5**
MACHINE FAMILIES

**1-year**
WARRANTY

**Canada**
PARTS & TECHNICAL SUPPORT

HYDRAULIC SHOP PRESSES

# CONTENTS

## H-FRAME SHOP PRESSES

DPM hydraulic shop presses, 33 – 220 US tons DPM 775-30 – DPM 1570-200 · 9 models ..... 04

DPM-K · DK hydraulic shop presses with mobile cylinder DPM-K 775-30 – DPM-K 1570-150 · DK 1570-100 – DK 1900-200 ..... 06

## DIE PRESSES, PRESS BRAKES AND STRAIGHTENING PRESSES

AT universal T-slot hydraulic presses, 110 – 165 US tons AT 1020-100 · 1520-100 · 1020-150 · 1520-150 ..... 09

AP garage-type hydraulic press brakes, 110 – 165 US tons AP 1020-100 · 1520-100 · 1020-150 · 1520-150 ..... 11

DK-S 3-axis moving straightening presses, 220 – 441 US tons DK-S 200/2550 · 300/2550 · 400/2550 ..... 13

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

# YOUR CANADIAN SOURCE FOR HYDRAULIC SHOP PRESSES

Sales, installation, parts and technical support across Canada.

**NovoTech Machine Tools Inc.** supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH PREMIUM LINE · MADE IN TURKEY

# THE PRESS EVERY REPAIR SHOP AND FABRICATOR REACHES FOR SEVERAL TIMES A DAY

The machines in this catalogue are NovoTech's premium line: built in Turkey to NovoTech's specification by a CE-certified metal-forming plant with more than 40 years of machine building and exports to over 100 countries, with European hydraulic and electrical components, inspected before shipping, and sold under NovoTech's name with a CSA-approved panel, a 1-year warranty and spare parts and technical support from NovoTech in Mississauga, Ontario, Canada.

A hydraulic shop press presses bearings, bushings and pins, straightens shafts and bar, bends flat bar and short plate and pushes a die for the odd forming job. The DPM series runs from 33 to 220 US tons with two-speed joystick control, a pressure gauge and relief valve; the DPM-K and DK carry a cylinder that slides across the frame so the ram meets the work instead of the work being shifted under the ram; the AT presses have T-slot tables for your own forming, blanking and coining dies; the AP garage-type press brake bends 1/4" and 3/8" plate over 40" and 60" with its prism die; and the DK-S 3-axis straightening presses from 220 to 441 US tons straighten plates, beams and bar under a moving ram.

DPM 775-30 – DPM 1570-200 · 9 MODELS

# DPM HYDRAULIC SHOP PRESSES, 33 – 220 US TONS



MODEL DPM · DPM HYDRAULIC SHOP PRESS



DPM 200 t hydraulic shop press

## 33 – 220 US tons (30 – 200 t) · working widths 30.5" to 61.8" · two-speed joystick control

H-frame hydraulic shop presses from 33 to 220 US tons on a welded steel frame: two-speed joystick control, a pressure gauge and relief valve against overload, height-adjustable bottom tables with a table up/down attachment and a pair of V-blocks. The cylinder stops at any position for straightening, pressing bearings and bushings, bending and assembly work; a hand pump, foot pedal and limit switch are optional. Model numbers give the working width in mm and the force in metric tons — a DPM 1040-60 is 40.9" between the columns at 66 US tons.

### STANDARD FEATURES

- ✓ Steel construction welded frame; stops at any position
- ✓ Two-speed joystick control; pressure gauge; relief valve against overload
- ✓ Height-adjustable bottom tables with table up/down movement attachment
- ✓ A pair of V-blocks included; easy to operate

### OPTIONAL EQUIPMENT

- + Hand pump
- + Foot-pedal control
- + Limit switch + foot pedal
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

### DPM 30 – 100 — TECHNICAL SPECIFICATIONS

| Model | DPM 775-30 | DPM 1040-60 | DPM 1040-80 | DPM 1070-100 | DPM 1570-100 |
|---|---|---|---|---|---|
| **Press force** | **33 US tons (30 t)** | **66 US tons (60 t)** | **88 US tons (80 t)** | **110 US tons (100 t)** | **110 US tons (100 t)** |
| **Max. working pressure** | 3,540 psi (245 bar) | 3,420 psi (235 bar) | 3,700 psi (255 bar) | 3,810 psi (265 bar) | 3,810 psi (265 bar) |
| **Stroke** | **7.9" (200 mm)** | **9.8" (250 mm)** | **9.8" (250 mm)** | **11.8" (300 mm)** | **11.8" (300 mm)** |
| **Cylinder Ø (bore × rod)** | 4.9" × 3.1" (125 × 80 mm) | 7.1" × 4.7" (180 × 120 mm) | 7.9" × 4.7" (200 × 120 mm) | 8.7" × 6.3" (220 × 160 mm) | 8.7" × 6.3" (220 × 160 mm) |
| **Advance / working / return speed** | 0.28 / 0.20 / 0.39 in/s (7 / 5 / 10 mm/s) | 0.31 / 0.16 / 0.39 in/s (8 / 4 / 10 mm/s) | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) |
| **Bed-hole spacing (A)** | 6.5" (165 mm) | 6.5" (165 mm) | 6.5" (165 mm) | 7.5" (190 mm) | 7.5" (190 mm) |
| **Working width (B)** between the columns | **30.5" (775 mm)** | **40.9" (1040 mm)** | **40.9" (1040 mm)** | **42.1" (1070 mm)** | **61.8" (1570 mm)** |
| **Depth (C)** | 7.5" (190 mm) | 10.2" (260 mm) | 10.2" (260 mm) | 9.8" (250 mm) | 9.8" (250 mm) |
| **Motor power** | 4 HP (3 kW) | 5.4 HP (4 kW) | 5.4 HP (4 kW) | 7.4 HP (5.5 kW) | 7.4 HP (5.5 kW) |
| **Dimensions L × W × H** | 59 × 28 × 80" (1,500 × 710 × 2,050 mm) | 71 × 28 × 83" (1,800 × 710 × 2,100 mm) | 71 × 30 × 83" (1,800 × 760 × 2,100 mm) | 83 × 39 × 90" (2,100 × 990 × 2,300 mm) | 103 × 39 × 90" (2,600 × 990 × 2,300 mm) |
| **Weight** | 926 lb (420 kg) | 1,764 lb (800 kg) | 1,841 lb (835 kg) | 3,131 lb (1,420 kg) | 3,483 lb (1,580 kg) |

TECHNICAL SPECIFICATIONS

# DPM HYDRAULIC SHOP PRESSES, 33 – 220 US TONS

## DPM 150 – 200

165 – 220 US tons

| Model | DPM 1070-150 | DPM 1570-150 | DPM 1070-200 | DPM 1570-200 |
|---|---|---|---|---|
| **Press force** | **165 US tons (150 t)** | **165 US tons (150 t)** | **220 US tons (200 t)** | **220 US tons (200 t)** |
| **Max. working pressure** | 3,540 psi (245 bar) | 3,540 psi (245 bar) | 4,100 psi (285 bar) | 4,100 psi (285 bar) |
| **Stroke** | **11.8″ (300 mm)** | **11.8″ (300 mm)** | **11.8″ (300 mm)** | **11.8″ (300 mm)** |
| **Cylinder Ø (bore × rod)** | 11″ × 7.9″ (280 × 200 mm) | 11″ × 7.9″ (280 × 200 mm) | 11.8″ × 8.3″ (300 × 210 mm) | 11.8″ × 8.3″ (300 × 210 mm) |
| **Advance / working / return speed** | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) | — / 0.26 / 0.79 in/s (— / 7 / 20 mm/s) | — / 0.26 / 0.79 in/s (— / 7 / 20 mm/s) |
| **Bed-hole spacing (A)** | 7.5″ (190 mm) | 7.5″ (190 mm) | 9.8″ (250 mm) | 9.8″ (250 mm) |
| **Working width (B)** between the columns | **42.1″ (1070 mm)** | **61.8″ (1570 mm)** | **42.1″ (1070 mm)** | **61.8″ (1570 mm)** |
| **Depth (C)** | 11.4″ (290 mm) | 11.4″ (290 mm) | 17.3″ (440 mm) | 17.3″ (440 mm) |
| **Motor power** | 15 HP (11 kW) | 15 HP (11 kW) | 20 HP (15 kW) | 20 HP (15 kW) |
| **Dimensions L × W × H** | 83 × 39 × 92″ (2,100 × 990 × 2,350 mm) | 103 × 39 × 92″ (2,600 × 990 × 2,350 mm) | 71 × 65 × 113″ (1,800 × 1,650 × 2,850 mm) | 91 × 65 × 113″ (2,300 × 1,650 × 2,850 mm) |
| **Weight** | 4,189 lb (1,900 kg) | 4,850 lb (2,200 kg) | 8,929 lb (4,050 kg) | 9,921 lb (4,500 kg) |

Dimensions are overall L × W × H; working width is the clear width between the columns. Metric values in brackets are the manufacturer's nominal figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DPM-K 775-30 – DPM-K 1570-150 · DK 1570-100 – DK 1900-200

# DPM-K · DK HYDRAULIC SHOP PRESSES WITH MOBILE CYLINDER



MODEL DPM-K · DPM-K HYDRAULIC SHOP PRESS WITH MOBILE CYLINDER



DK hydraulic shop press with mobile cylinder and hand wheel

## 33 – 220 US tons · cylinder travels across the frame · working widths 30.5" to 74.8"

The DPM press with a cylinder head that travels across the frame — geared movement by hand wheel — so the ram is positioned over the work instead of the work under the ram: long shafts, frames and plates are straightened without re-clamping. DPM-K from 33 to 165 US tons with the same two-speed joystick control, pressure gauge and relief valve, height-adjustable tables and V-blocks as the DPM; the DK series adds a wider 61.8" – 74.8" frame from 110 to 220 US tons.

### STANDARD FEATURES

- ✓ Cylinder head travels across the frame — geared movement by hand wheel
- ✓ Steel construction welded frame; stops at any position
- ✓ Two-speed joystick control (except 220 US ton model); pressure gauge; relief valve against overload
- ✓ Height-adjustable bottom tables with up/down attachment; a pair of V-blocks included

### OPTIONAL EQUIPMENT

- + Hand pump
- + Foot-pedal control
- + Limit switch + foot pedal
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

### DPM-K 30 – 100 — TECHNICAL SPECIFICATIONS

| Model | DPM-K 775-30 | DPM-K 1040-60 | DPM-K 1040-80 | DPM-K 1070-100 |
|---|---|---|---|---|
| **Press force** | **33 US tons (30 t)** | **66 US tons (60 t)** | **88 US tons (80 t)** | **110 US tons (100 t)** |
| **Max. working pressure** | 3,540 psi (245 bar) | 3,420 psi (235 bar) | 3,700 psi (255 bar) | 3,810 psi (265 bar) |
| **Stroke** | **7.9" (200 mm)** | **9.8" (250 mm)** | **9.8" (250 mm)** | **11.8" (300 mm)** |
| **Cylinder Ø (bore × rod)** | 4.9" × 3.1" (125 × 80 mm) | 7.1" × 4.7" (180 × 120 mm) | 7.9" × 4.7" (200 × 120 mm) | 8.7" × 6.3" (220 × 160 mm) |
| **Advance / working / return speed** | 0.30 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) | 0.31 / 0.16 / 0.39 in/s (8 / 4 / 10 mm/s) | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) |
| **Bed-hole spacing (A)** | 6.5" (165 mm) | 6.5" (165 mm) | 6.5" (165 mm) | 7.5" (190 mm) |
| **Working width (B)** between the columns | **30.5" (775 mm)** | **40.9" (1040 mm)** | **40.9" (1040 mm)** | **42.1" (1070 mm)** |
| **Depth (C)** | 7.5" (190 mm) | 10.2" (260 mm) | 10.2" (260 mm) | 9.8" (250 mm) |
| **Motor power** | 4 HP (3 kW) | 5.4 HP (4 kW) | 5.4 HP (4 kW) | 7.4 HP (5.5 kW) |
| **Dimensions L × W × H** | 59 × 28 × 80" (1,500 × 710 × 2,050 mm) | 71 × 28 × 83" (1,800 × 710 × 2,100 mm) | 71 × 30 × 83" (1,800 × 760 × 2,100 mm) | 83 × 39 × 96" (2,100 × 990 × 2,450 mm) |
| **Weight** | 926 lb (420 kg) | 1,764 lb (800 kg) | 1,841 lb (835 kg) | 3,307 lb (1,500 kg) |

TECHNICAL SPECIFICATIONS · 1 / 2

# DPM-K · DK HYDRAULIC SHOP PRESSES WITH MOBILE CYLINDER

## DPM-K 100 – 150

110 – 165 US tons

| Model | DPM-K 1570-100 | DPM-K 1070-150 | DPM-K 1570-150 |
|---|---|---|---|
| **Press force** | **110 US tons (100 t)** | **165 US tons (150 t)** | **165 US tons (150 t)** |
| **Max. working pressure** | 3,810 psi (265 bar) | 3,540 psi (245 bar) | 3,540 psi (245 bar) |
| **Stroke** | **11.8" (300 mm)** | **11.8" (300 mm)** | **11.8" (300 mm)** |
| **Cylinder Ø (bore × rod)** | 8.7" × 6.3" (220 × 160 mm) | 11" × 7.9" (280 × 200 mm) | 11" × 7.9" (280 × 200 mm) |
| **Advance / working / return speed** | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) |
| **Bed-hole spacing (A)** | 7.5" (190 mm) | 7.5" (190 mm) | 7.5" (190 mm) |
| **Working width (B)** between the columns | **61.8" (1570 mm)** | **42.1" (1070 mm)** | **61.8" (1570 mm)** |
| **Depth (C)** | 9.8" (250 mm) | 11.4" (290 mm) | 11.4" (290 mm) |
| **Motor power** | 7.4 HP (5.5 kW) | 15 HP (11 kW) | 15 HP (11 kW) |
| **Dimensions L × W × H** | 103 × 39 × 96" (2,600 × 990 × 2,450 mm) | 83 × 39 × 98" (2,100 × 990 × 2,500 mm) | 103 × 39 × 98" (2,600 × 990 × 2,500 mm) |
| **Weight** | 3,715 lb (1,685 kg) | 4,123 lb (1,870 kg) | 5,071 lb (2,300 kg) |

TECHNICAL SPECIFICATIONS · 2 / 2

# DPM-K · DK HYDRAULIC SHOP PRESSES WITH MOBILE CYLINDER

## DK 100 – 200

110 – 220 US tons · 61.8″ – 74.8″ wide

| Model | DK 1570-100 | DK 1570-150 | DK 1900-200 |
|---|---|---|---|
| **Press force** | **110 US tons (100 t)** | **165 US tons (150 t)** | **220 US tons (200 t)** |
| **Max. working pressure** | 3,810 psi (265 bar) | 3,540 psi (245 bar) | 4,100 psi (285 bar) |
| **Stroke** | **11.8″ (300 mm)** | **11.8″ (300 mm)** | **11.8″ (300 mm)** |
| **Cylinder Ø (bore × rod)** | 8.7″ × 6.3″ (220 × 160 mm) | 11″ × 7.9″ (280 × 200 mm) | 11.8″ × 8.3″ (300 × 210 mm) |
| **Advance / working / return speed** | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) | — / 0.26 / 0.79 in/s (— / 7 / 20 mm/s) |
| **Bed-hole spacing (A)** | 7.5″ (190 mm) | 7.5″ (190 mm) | 9.8″ (250 mm) |
| **Working width (B)** between the columns | **61.8″ (1570 mm)** | **61.8″ (1570 mm)** | **74.8″ (1900 mm)** |
| **Depth (C)** | 12.4″ (315 mm) | 14.2″ (360 mm) | 17.3″ (440 mm) |
| **Motor power** | 7.4 HP (5.5 kW) | 15 HP (11 kW) | 20 HP (15 kW) |
| **Dimensions L × W × H** | 103 × 39 × 103″ (2,600 × 990 × 2,600 mm) | 103 × 39 × 103″ (2,600 × 990 × 2,600 mm) | 104 × 66 × 113″ (2,650 × 1,700 × 2,850 mm) |
| **Weight** | 3,946 lb (1,790 kg) | 5,291 lb (2,400 kg) | 10,582 lb (4,800 kg) |

Dimensions are overall L × W × H; working width is the clear width between the columns. Metric values in brackets are the manufacturer's nominal figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

AT 1020-100 · 1520-100 · 1020-150 · 1520-150

# AT UNIVERSAL T-SLOT HYDRAULIC PRESSES, 110 – 165 US TONS



**MODEL** AT · AT UNIVERSAL T-SLOT HYDRAULIC PRESS

**110 – 165 US tons · T-slot tables 19.7 × 40.2" to 23.6 × 59.8" · daylight to 26.8"**

Hydraulic presses with T-slot top and bottom tables for die work — forming, blanking, coining and assembly tooling bolted straight to the tables. Two guide cylinders, one each side, keep the ram square; stepless stroke adjustment by limit switch, adjustable pressure valve, pressure gauge, height-adjustable bottom table with up/down attachment and two-hand control. 110 or 165 US tons with 40.2" or 59.8" between the columns and 24" – 26.8" daylight.

## STANDARD FEATURES

- ✓ T-slot top and bottom tables for die work; table centre hole Ø3.9"
- ✓ Two guide cylinders, one each side; stepless stroke adjustment (limit switch)
- ✓ Adjustable pressure valve; pressure gauge; two-hand control
- ✓ Height-adjustable bottom table with table up/down movement attachment; steel construction welded frame

## OPTIONAL EQUIPMENT

- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TECHNICAL SPECIFICATIONS

# AT UNIVERSAL T-SLOT HYDRAULIC PRESSES, 110 – 165 US TONS

## AT

universal T-slot hydraulic presses

| Model | AT 1020-100 | AT 1520-100 | AT 1020-150 | AT 1520-150 |
|---|---|---|---|---|
| **Press force** | **110 US tons (100 t)** | **110 US tons (100 t)** | **165 US tons (150 t)** | **165 US tons (150 t)** |
| **Max. working pressure** | 3,810 psi (265 bar) | 3,810 psi (265 bar) | 3,540 psi (245 bar) | 3,540 psi (245 bar) |
| **Stroke** | **11.8″ (300 mm)** | **11.8″ (300 mm)** | **11.8″ (300 mm)** | **11.8″ (300 mm)** |
| **Daylight (table to table)** | 26.8″ (680 mm) | 26.8″ (680 mm) | 24″ (610 mm) | 24″ (610 mm) |
| **Advance / working / return speed** | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) | 0.31 / 0.20 / 0.39 in/s (8 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) |
| **Bottom table** | 19.7 × 40.2″ (500 × 1,000 mm) | 19.7 × 59.8″ (500 × 1,500 mm) | 23.6 × 40.2″ (600 × 1,000 mm) | 23.6 × 59.8″ (600 × 1,500 mm) |
| **Table centre-hole Ø** | 3.9″ (100 mm) | 3.9″ (100 mm) | 3.9″ (100 mm) | 3.9″ (100 mm) |
| **Bed-hole spacing (A)** | 7.5″ (190 mm) | 7.5″ (190 mm) | 7.5″ (190 mm) | 7.5″ (190 mm) |
| **Working width (B)** between the columns | **40.2″ (1020 mm)** | **59.8″ (1520 mm)** | **40.2″ (1020 mm)** | **59.8″ (1520 mm)** |
| **Motor power** | 10 HP (7.5 kW) | 10 HP (7.5 kW) | 15 HP (11 kW) | 15 HP (11 kW) |
| **Dimensions L × W × H** | 83 × 39 × 93″ (2,100 × 990 × 2,350 mm) | 103 × 39 × 93″ (2,600 × 990 × 2,350 mm) | 83 × 39 × 96″ (2,100 × 990 × 2,450 mm) | 103 × 39 × 96″ (2,600 × 990 × 2,450 mm) |
| **Weight** | 4,376 lb (1,985 kg) | 5,214 lb (2,370 kg) | 5,732 lb (2,600 kg) | 7,055 lb (3,200 kg) |

Dimensions are overall L × W × H; working width is the clear width between the columns. Metric values in brackets are the manufacturer's nominal figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

AP 1020-100 · 1520-100 · 1020-150 · 1520-150

# AP GARAGE-TYPE HYDRAULIC PRESS BRAKES, 110 – 165 US TONS



MODEL AP · AP GARAGE-TYPE HYDRAULIC PRESS BRAKE

**110 – 165 US tons · bends 1/4" – 3/8" plate · 40.2" and 59.8" wide**

A hydraulic press fitted with press-brake tooling for heavy plate in short lengths: a 5-face prism bottom die and hardened blades bend 1/4" (100 t) or 3/8" (150 t) mild steel over 40.2" or 59.8", with a T-slot bottom table for other tooling. Stepless stroke adjustment, adjustable pressure valve, pressure gauge, height-adjustable bottom attachment, a large workspace for big sheets and two-hand control — the affordable press brake of the repair and trailer shop, with a 29.5" or 39.4" manual back gauge as an option.

## STANDARD FEATURES

- ✓ Hardened blades; 5-face prism bottom die; bottom table with T-slot
- ✓ Bends 1/4" (110 US tons) or 3/8" (165 US tons) mild steel
- ✓ Stepless stroke adjustment; adjustable pressure valve; pressure gauge
- ✓ Height-adjustable bottom attachment; large workspace for big sheets; two-hand control

## OPTIONAL EQUIPMENT

- \+ 29.5" (750 mm) or 39.4" (1000 mm) manual back gauge
- \+ Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

TECHNICAL SPECIFICATIONS

# AP GARAGE-TYPE HYDRAULIC PRESS BRAKES, 110 – 165 US TONS

## AP

garage-type hydraulic press brakes

| Model | AP 1020-100 | AP 1520-100 | AP 1020-150 | AP 1520-150 |
|---|---|---|---|---|
| **Press force** | **110 US tons (100 t)** | **110 US tons (100 t)** | **165 US tons (150 t)** | **165 US tons (150 t)** |
| **Max. working pressure** | 3,810 psi (265 bar) | 3,810 psi (265 bar) | 3,540 psi (245 bar) | 3,540 psi (245 bar) |
| **Stroke** | **11.8″ (300 mm)** | **11.8″ (300 mm)** | **11.8″ (300 mm)** | **11.8″ (300 mm)** |
| **Bending capacity** mild steel | **1/4″ (6 mm)** | **1/4″ (6 mm)** | **3/8″ (10 mm)** | **3/8″ (10 mm)** |
| **Advance / working / return speed** | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) | 0.35 / 0.20 / 0.39 in/s (9 / 5 / 10 mm/s) |
| **Bottom table** | 19.7 × 40.2″ (500 × 1,000 mm) | 19.7 × 59.8″ (500 × 1,500 mm) | 23.6 × 40.2″ (600 × 1,000 mm) | 23.6 × 59.8″ (600 × 1,500 mm) |
| **Table centre-hole Ø** | 3.9″ (100 mm) | 3.9″ (100 mm) | 3.9″ (100 mm) | 3.9″ (100 mm) |
| **Bed-hole spacing (A)** | 7.5″ (190 mm) | 7.5″ (190 mm) | 7.5″ (190 mm) | 7.5″ (190 mm) |
| **Working width (B)** between the columns | **40.2″ (1020 mm)** | **59.8″ (1520 mm)** | **40.2″ (1020 mm)** | **59.8″ (1520 mm)** |
| **Motor power** | 10 HP (7.5 kW) | 10 HP (7.5 kW) | 15 HP (11 kW) | 15 HP (11 kW) |
| **Dimensions L × W × H** | 83 × 39 × 89″ (2,100 × 990 × 2,250 mm) | 103 × 39 × 89″ (2,600 × 990 × 2,250 mm) | 83 × 39 × 95″ (2,100 × 990 × 2,400 mm) | 103 × 39 × 95″ (2,600 × 990 × 2,400 mm) |
| **Weight** | 4,586 lb (2,080 kg) | 5,512 lb (2,500 kg) | 5,291 lb (2,400 kg) | 7,385 lb (3,350 kg) |

Dimensions are overall L × W × H; working width is the clear width between the columns. Metric values in brackets are the manufacturer's nominal figures.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey to NovoTech's specification — CE-certified, European components
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

DK-S 200/2550 · 300/2550 · 400/2550

# DK-S 3-AXIS MOVING STRAIGHTENING PRESSES, 220 – 441 US TONS



MODEL DK-S · DK-S 400 3-AXIS MOVING STRAIGHTENING PRESS, 441 US TONS



DK-S 200 3-axis moving straightening press with safety rails



DK-S — optional remote control

## 220 – 441 US tons · cylinder moves on 3 axes over a 100" bed · 11.8" stroke

Gantry presses whose cylinder moves on X, Y and Z axes by motorized gear drive, so a large plate, beam, profile or round bar lies still on the bed while the ram is brought to each point that needs straightening. Pendant control, press safety cage, pressure gauge and stops at any position are standard on all three sizes — 220, 331 and 441 US tons with an 11.8" stroke; a work table, material lifting system, remote control, cylinder-stroke readout, LED lights and bridges in other widths are optional.

### STANDARD FEATURES

- ✓ X-Y-Z axis movement of the cylinder, motorized by gear drive
- ✓ For straightening large plates and profiles, beams and round steel
- ✓ Pendant-style control panel; press safety cage; pressure gauge; stops at any position
- ✓ Steel welded frame; very easy to operate

### OPTIONAL EQUIPMENT

- + Table; material lifting system
- + Remote control; digital readout for cylinder stroke
- + Bridge and work-table options in different widths; side-tank arrangement; LED lights
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase, or 240 V single-phase on models with a main motor of 2.2 kW (3 HP) or less

### DK-S — TECHNICAL SPECIFICATIONS

| Model | DK-S 200/2550 | DK-S 300/2550 | DK-S 400/2550 |
|---|---|---|---|
| **Press force** | **220 US tons (200 t)** | **331 US tons (300 t)** | **441 US tons (400 t)** |
| **Max. working pressure** | 4,100 psi (285 bar) | 4,280 psi (295 bar) | 4,190 psi (290 bar) |
| **Stroke** | **11.8" (300 mm)** | **11.8" (300 mm)** | **11.8" (300 mm)** |
| **Cylinder Ø** | 11.8" (300 mm) | 14.2" (360 mm) | 16.5" (420 mm) |
| **Advance speed** | 0.59 in/s (15 mm/s) | 0.63 in/s (16 mm/s) | 0.47 in/s (12 mm/s) |
| **Working speed** | 0.20 in/s (5 mm/s) | 0.20 in/s (5 mm/s) | 0.16 in/s (4 mm/s) |
| **Motor power** | 20 HP (15 kW) | 30 HP (22 kW) | 30 HP (22 kW) |
| **Weight** | 31,195 lb (14,150 kg) | 37,831 lb (17,160 kg) | 46,297 lb (21,000 kg) |

Dimensions are overall L × W × H; working width is the clear width between the columns. Metric values in brackets are the manufacturer's nominal figures.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

# DK-S 3-AXIS MOVING STRAIGHTENING PRESSES, 220 – 441 US TONS



DK-S from the side: the press head travels over the table

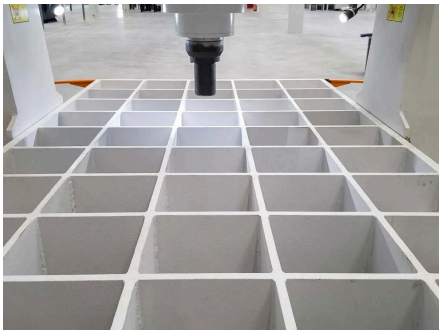

DK-S grid table under the press head



DK-S pressing tool

# LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.


**PHONE**

+1 647 526 5510

**WEB & EMAIL**

NovoTechMachineTools.com
info@NovoTechMachineTools.com

**ADDRESS**

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5


NT NovoTech MACHINE TOOLS Inc.


Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.