NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

CNC PANEL BENDERS

PB-M PRESS-ARM PANEL BENDERS 63 – 165″ · PB-A AUTOMATIC TOOL-CHANGE PANEL BENDERS 64 – 126″ · 0.2 S PER BEND







China
MADE IN CHINA

2
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE PANEL BENDERS

CONTENTS

PB-M PRESS-ARM PANEL BENDERS

PB-M press-arm panel benders, 63 – 165″ bend width — NovoTech value line PB-M1600 – PB-M4200 · 9 models · 15 servo axes 04

PB-A AUTOMATIC TOOL-CHANGE PANEL BENDERS

PB-A automatic tool-change panel benders, 64 – 126″ bend width — NovoTech value line PB-A1630 – PB-A3200 · 4 models · 26 – 28 servo axes 07

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE PANEL BENDERS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

FOUR-SIDE BENDING WITH NO TOOLING CHANGES

NovoTech's value line is our own brand: machines built in China to our specification with European and Japanese controls and hydraulics — Delem, Estun, Schneider, Siemens, NOK — inspected before they ship and sold under NovoTech's name with the same CSA-approved panel, 1-year warranty and parts and technical support from Mississauga, Ontario, Canada, as every machine we sell.


A panel bender clamps the blank once and forms every side — up, down, hems, box corners — in 0.2 s per bend while a manipulator turns the part: boxes, doors, enclosures, cabinets and HVAC panels in sheet to 14 ga, five to ten times faster than a press brake and without a skilled operator. The PB-M uses a patented press arm to feed and support the blank, with 15 servo axes, in nine sizes from 63 to 165"; the PB-A adds a 0.5 s automatic tool changer and 26 – 28 axes so parts with different flanges on every side run untouched, in four sizes to 126". Robot loading cells are available for both.

PB-M1600 – PB-M4200 · 9 MODELS · 15 SERVO AXES


PB-M PRESS-ARM PANEL BENDERS, 63 – 165″ BEND WIDTH — NOVOTECH VALUE LINE



MODEL PB-M · NOVOTECH PB-M PRESS-ARM CNC PANEL BENDER — THE PRESS ARM FEEDS AND TURNS THE BLANK, 63 – 165″ BEND WIDTHS

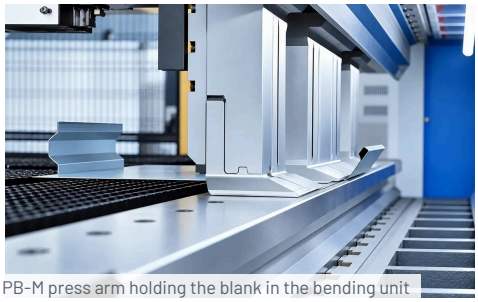

PB-M press arm holding the blank in the bending unit

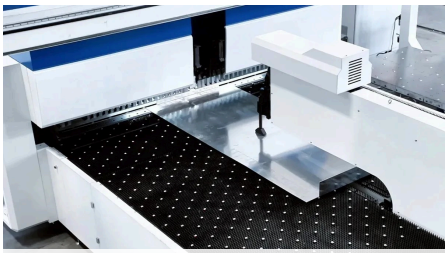

PB-M bending unit forming a flange — upper and lower blades and the blank-holder

The value-line panel bender: a fully servo-electric bending cell with 15 axes, a patented press arm that feeds and supports the blank and a suction-cup manipulator that turns it, forming every side of a panel — up, down, hems, box corners — at 0.2 s per bend. Mild steel to 14 ga, stainless to 16 ga, aluminum to 1/8″, bending heights of 7.9″ (11.8″ on the -300 models), blanks to 165 × 47″. Nine models from 63″ to 165″ bend width, with robot loading as an option.

STANDARD FEATURES

- ✓ Nine sizes, 63 – 165″ (1,600 – 4,200 mm) bend width; MH models take 55″-deep blanks
- ✓ 15 servo axes with 0.01° resolution: upper and lower bending blades, blank-holder, press arm and the sheet manipulator
- ✓ 0.2 s per bend; mild steel to 14 ga, stainless to 16 ga, aluminum to 1/8″; bending height 7.9″ (200 mm)
- ✓ Three-point Y positioning with suction-cup manipulator; the patented press arm feeds and supports the blank
- ✓ Cast QT500 / HT300 frame, stress-relieved and vibration-aged; automatic lubrication
- ✓ CNC with a 10,000-part process library and ESA control option; offline programming, remote monitoring
- ✓ Standard and hemming tools; perimeter guarding and light curtains
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Robot or gantry loading and unloading, sheet stacks and pallets
- + 300 mm bending height (-300 models); 1,400 mm deep blanks (MH models)
- + Extra bending and hemming tools
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


PB-M PRESS-ARM PANEL BENDERS, 63 – 165" BEND WIDTH — NOVOTECH VALUE LINE



Blank-holder and bending blade of the PB-M over the ball-transfer table

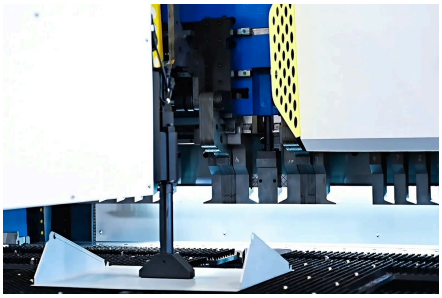

Bending blades forming a flange upward

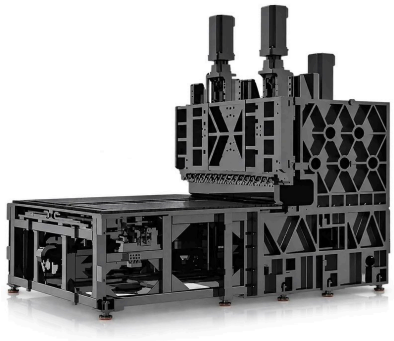

Welded, stress-relieved frame of the panel bender



Profiles, hems and channels bent on the PB-M

TECHNICAL SPECIFICATIONS

PB-M PRESS-ARM PANEL BENDERS, 63 – 165" BEND WIDTH — NOVOTECH VALUE LINE

PB-M PRESS-ARM PANEL BENDERS

9 models · 63 – 165" bend width · 14 ga mild steel

Model	PB-M1600	PB-M2100	PB-M2600	PB-M3200	PB-M4200	PB-M2100-300	PB-M2600-300	PB-MH2100	PB-MH2600
Max. bending width	63.0" (1,600 mm)	86.2" (2,190 mm)	102.8" (2,610 mm)	126.0" (3,200 mm)	165.4" (4,200 mm)	82.7" (2,100 mm)	102.4" (2,600 mm)	82.7" (2,100 mm)	102.4" (2,600 mm)
Max. blank size L × W	63 × 47" (1,600 × 1,200 mm)	86 × 47" (2,190 × 1,200 mm)	103 × 47" (2,610 × 1,200 mm)	126 × 47" (3,200 × 1,200 mm)	165 × 47" (4,200 × 1,200 mm)	83 × 47" (2,100 × 1,200 mm)	102 × 47" (2,600 × 1,200 mm)	83 × 55" (2,100 × 1,400 mm)	102 × 55" (2,600 × 1,400 mm)
Max. bending height	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	7.9" (200 mm)	11.8" (300 mm)	11.8" (300 mm)	7.9" (200 mm)	7.9" (200 mm)
Max. thickness, mild steel	14 ga (2.0 mm)	14 ga (2.0 mm)	14 ga (2.0 mm)	14 ga (2.0 mm)	14 ga (2.0 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)
Max. thickness, stainless steel	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	20 ga (1.0 mm)	20 ga (1.0 mm)	20 ga (1.0 mm)	20 ga (1.0 mm)
Max. thickness, aluminum	1/8" (3.0 mm)	1/8" (3.0 mm)	1/8" (3.0 mm)	1/8" (3.0 mm)	3/32" (2.5 mm)	14 ga (2.0 mm)	14 ga (2.0 mm)	14 ga (2.0 mm)	14 ga (2.0 mm)
Min. thickness	0.014" (0.35 mm)	0.014" (0.35 mm)	0.014" (0.35 mm)	0.014" (0.35 mm)	0.014" (0.35 mm)	0.014" (0.35 mm)	0.014" (0.35 mm)	0.014" (0.35 mm)	0.014" (0.35 mm)
Min. four-side box, inside	11.0 × 7.1" (280 × 180 mm)	11.0 × 7.1" (280 × 180 mm)	11.0 × 7.1" (280 × 180 mm)	11.0 × 7.1" (280 × 180 mm)	11.0 × 8.7" (280 × 220 mm)	11.0 × 7.1" (280 × 180 mm)	11.0 × 7.1" (280 × 180 mm)	11.0 × 7.1" (280 × 180 mm)	11.0 × 7.1" (280 × 180 mm)
Min. two-side box, inside	7.1" (180 mm)	7.1" (180 mm)	7.1" (180 mm)	7.1" (180 mm)	8.7" (220 mm)	7.1" (180 mm)	7.1" (180 mm)	7.1" (180 mm)	7.1" (180 mm)
Blank diagonal, max.	92.1" (2,340 mm)	112.4" (2,854 mm)	127.6" (3,240 mm)	149.4" (3,794 mm)	187.1" (4,752 mm)	119.5" (3,036 mm)	134.9" (3,426 mm)	112.4" (2,854 mm)	127.6" (3,240 mm)
Bending speed	0.2 s per bend	0.2 s per bend	0.2 s per bend	0.2 s per bend	0.2 s per bend	0.2 s per bend	0.2 s per bend	0.2 s per bend	0.2 s per bend
Servo axes	15	15	15	17	19	15	15	15	15
Installed power	51.0 HP (38 kW)	101.9 HP (76 kW)	144.8 HP (108 kW)	206.5 HP (154 kW)	244.1 HP (182 kW)	101.9 HP (76 kW)	144.8 HP (108 kW)	71.1 HP (53 kW)	88.5 HP (66 kW)
Noise	about 50 dB	about 50 dB	about 50 dB	about 50 dB	about 50 dB	about 50 dB	about 50 dB	about 50 dB	about 50 dB
Dimensions L × W × H	188 × 85 × 114" (4,780 × 2,150 × 2,900 mm)	222 × 108 × 126" (5,650 × 2,750 × 3,200 mm)	240 × 128 × 130" (6,100 × 3,250 × 3,300 mm)	272 × 161 × 138" (6,900 × 4,100 × 3,500 mm)	315 × 201 × 142" (8,000 × 5,100 × 3,600 mm)	228 × 102 × 138" (5,800 × 2,600 × 3,500 mm)	248 × 124 × 140" (6,300 × 3,150 × 3,550 mm)	222 × 104 × 126" (5,650 × 2,650 × 3,200 mm)	222 × 124 × 126" (5,650 × 3,150 × 3,200 mm)
Weight	about 26,455 lb (12,000 kg)	about 46,297 lb (21,000 kg)	about 52,911 lb (24,000 kg)	about 61,729 lb (28,000 kg)	about 79,366 lb (36,000 kg)	about 46,297 lb (21,000 kg)	about 55,115 lb (25,000 kg)	about 38,581 lb (17,500 kg)	about 46,297 lb (21,000 kg)

Capacities are the supplier's ratings; the model number is the metric bending width (-300: 300 mm bending height; MH: 1,400 mm deep blank). Minimum box sizes and blank sizes are approximate and depend on the tooling fitted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

PB-A1630 – PB-A3200 · 4 MODELS · 26 – 28 SERVO AXES


PB-A AUTOMATIC TOOL-CHANGE PANEL BENDERS, 64 – 126″ BEND WIDTH — NOVOTECH VALUE LINE



MODEL PB-A · NOVOTECH PB-A CNC PANEL BENDER WITH AUTOMATIC TOOL CHANGE — TOOL MAGAZINE ON TOP, 98″ BEND WIDTH



PB-A panel bender loaded and unloaded by two robots

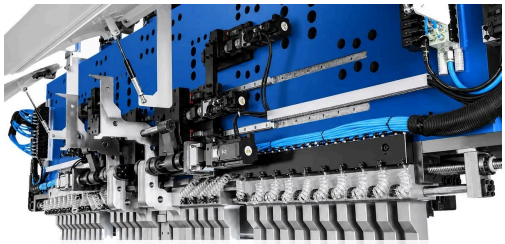

Bending unit — upper and lower blades, blank-holder and the sheet manipulator

The PB-A adds an automatic tool changer: the blank-holder tool set reconfigures itself in 0.5 s for every side and every notch of the part, so parts with different flange lengths on each side, cut-outs and narrow boxes run without an operator touching a tool. 26 – 28 servo axes, ± 0.1 mm thickness detection, 0.2 s per bend; the same capacities as the PB-M. Four sizes from 64″ to 126″.

STANDARD FEATURES


- ✓ Four sizes, 64 – 126″ (1,630 – 3,200 mm) bend width; minimum four-side box 14.6 × 7.1″
- ✓ Automatic tool change — 0.5 s per change, 24 – 28 servo axes: the tool set reconfigures itself for every side of the part
- ✓ 0.2 s per bend; mild steel to 14 ga, stainless to 16 ga, aluminum to 1/8″; ± 0.1 mm thickness detection
- ✓ Suction-cup manipulator with rotation; press-arm feeding
- ✓ Cast QT500 / HT300 frame, stress-relieved and vibration-aged; automatic lubrication
- ✓ CNC with process library, ESA control option, offline programming, cloud monitoring; robot interface
- ✓ Perimeter guarding and light curtains
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Robot or gantry loading and unloading, sheet stacks and pallets
- + 300 mm bending height (-300 models); 1,400 mm deep blanks (MH models)
- + Extra bending and hemming tools
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

PB-A AUTOMATIC TOOL-CHANGE PANEL BENDERS, 64 – 126" BEND WIDTH — NOVOTECH VALUE LINE

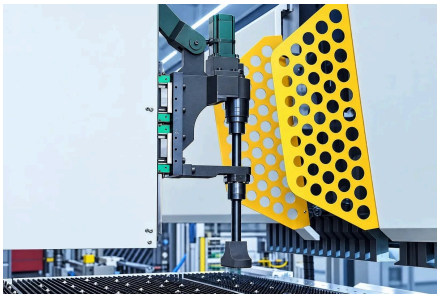


Automatic tool changer of the PB-A placing a tool segment

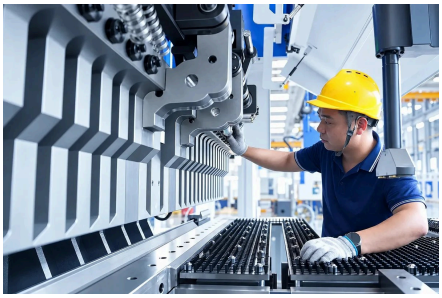

Automatic tool-change magazine of the PB-A



Operator at the tool magazine of the automatic tool-change panel bender

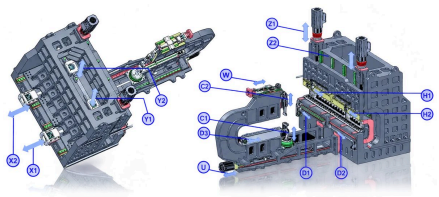

Tool-change diagram of the PB-A bending unit

TECHNICAL SPECIFICATIONS

PB-A AUTOMATIC TOOL-CHANGE PANEL BENDERS, 64 – 126″ BEND WIDTH — NOVOTECH VALUE LINE

PB-A AUTOMATIC TOOL-CHANGE PANEL BENDERS

4 models · 64 – 126″ bend width · 14 ga mild steel

Model	PB-A1630	PB-A2190	PB-A2610	PB-A3200
Max. bending width	64.2″ (1,630 mm)	86.2″ (2,190 mm)	102.8″ (2,610 mm)	126.0″ (3,200 mm)
Max. blank size L × W	63 × 47″ (1,600 × 1,200 mm)	86 × 47″ (2,190 × 1,200 mm)	103 × 49″ (2,610 × 1,250 mm)	126 × 49″ (3,200 × 1,250 mm)
Max. bending height	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)	7.9″ (200 mm)
Max. thickness, mild steel	14 ga (2.0 mm)	14 ga (2.0 mm)	14 ga (2.0 mm)	14 ga (2.0 mm)
Max. thickness, stainless steel	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)	16 ga (1.5 mm)
Max. thickness, aluminum	1/8″ (3.0 mm)	1/8″ (3.0 mm)	1/8″ (3.0 mm)	3/32″ (2.5 mm)
Min. thickness	0.014″ (0.35 mm)	0.014″ (0.35 mm)	0.014″ (0.35 mm)	0.014″ (0.35 mm)
Min. four-side box, inside	14.6 × 7.1″ (370 × 180 mm)	14.6 × 7.1″ (370 × 180 mm)	14.6 × 7.1″ (370 × 180 mm)	15.4 × 7.1″ (390 × 180 mm)
Min. two-side box, inside	7.1″ (180 mm)	7.1″ (180 mm)	7.1″ (180 mm)	7.1″ (180 mm)
Blank diagonal, max.	92.1″ (2,340 mm)	112.4″ (2,854 mm)	127.6″ (3,240 mm)	149.4″ (3,794 mm)
Bending speed	0.2 s per bend	0.2 s per bend	0.2 s per bend	0.2 s per bend
Servo axes	26	26	26	28
Installed power	59.0 HP (44 kW)	119.3 HP (89 kW)	158.2 HP (118 kW)	221.3 HP (165 kW)
Noise	about 50 dB	about 50 dB	about 50 dB	about 50 dB
Dimensions L × W × H	188 × 108 × 114″ (4,780 × 2,750 × 2,900 mm)	222 × 144 × 126″ (5,650 × 3,650 × 3,200 mm)	240 × 161 × 132″ (6,100 × 4,100 × 3,350 mm)	272 × 165 × 138″ (6,900 × 4,200 × 3,500 mm)
Weight	about 26,455 lb (12,000 kg)	about 46,297 lb (21,000 kg)	about 52,911 lb (24,000 kg)	about 61,729 lb (28,000 kg)

Capacities are the supplier's ratings; the model number is the metric bending width (-300: 300 mm bending height; MH: 1,400 mm deep blank). Minimum box sizes and blank sizes are approximate and depend on the tooling fitted.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.