NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

# CNC V-GROOVING MACHINES

## HORIZONTAL MACHINES 10.5 – 20 FT × 49 – 59" FOR SHEET TO 5/32" · VERTICAL MACHINES TO 13 FT FOR PLATE TO 1/4"







**China**
MADE IN CHINA

**2**
MACHINE FAMILIES

**1-year**
WARRANTY

**Canada**
PARTS & TECHNICAL SUPPORT

VALUE-LINE V-GROOVING MACHINES

# CONTENTS

## HORIZONTAL CNC V-GROOVING MACHINES

Horizontal CNC V-grooving machines, 10.5 – 20 ft × 49 – 59″, to 5/32″ stainless 3200 × 1250 – 6000 × 1500 · 7 models ..... 04

## VERTICAL CNC V-GROOVING MACHINES

Vertical CNC V-grooving machines, 10.5 – 13 ft × 49 – 59″, to 1/4″ 3200 × 1250 – 4000 × 1500 · 4 models ..... 07

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

# YOUR CANADIAN SOURCE FOR VALUE-LINE V-GROOVING MACHINES

Sales, installation, parts and technical support across Canada.

**NovoTech Machine Tools Inc.** supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH VALUE LINE

# SHARP, ZERO-RADIUS BENDS IN STAINLESS AND ALUMINUM

NovoTech's value line is our own brand: machines built in China to our specification with European and Japanese controls and hydraulics — Delem, Estun, Schneider, Siemens, NOK — inspected before they ship and sold under NovoTech's name with the same CSA-approved panel, 1-year warranty and parts and technical support from Mississauga, Ontario, Canada, as every machine we sell.

A V-grooving machine planes a V-shaped channel along the bend line so the sheet folds to a sharp outside corner with no springback and no damage to the finish — the way stainless elevator and door panels, column cladding, signage and architectural trim are made. The horizontal machines lay the sheet flat on a 10.5 to 20 ft table with a four-tool servo head at up to 295 ft/min; the vertical machines stand the sheet against a fixed beam in half the floor space and groove plate to 1/4". Taiwan CNC and servos, ± 0.01 mm positioning, hydraulic clamping that does not mark the sheet.

3200 × 1250 – 6000 × 1500 · 7 MODELS

# HORIZONTAL CNC V-GROOVING MACHINES, 10.5 – 20 FT × 49 – 59″, TO 5/32″ STAINLESS



**MODEL** HORIZONTAL · NOVOTECH HORIZONTAL CNC V-GROOVING MACHINE — 13 FT × 4 FT TABLE WITH THE FOUR-TOOL GROOVING HEAD



Horizontal machine — the grooving gantry runs on rails over the full-length table



Four-tool grooving head of the horizontal machine

V-grooving cuts a V-shaped channel along the bend line so the sheet folds to a sharp, zero-radius corner with no springback and no cracking of the finish — the way stainless elevator doors, column cladding, appliance panels and architectural trim are made. On the horizontal machine the sheet lies flat on a 49 or 59″ table, pneumatic clamps hold it and a four-tool head on ball screws planes the groove at up to 295 ft/min, ± 0.01 mm. Seven table sizes from 10.5 to 20 ft; sheet from 0.016″ to 5/32″. A rotary grooving head that turns 90° to groove both lengthwise and crosswise without turning the sheet is available as an option.

## STANDARD FEATURES


- ✓ Sheet 0.016″ – 5/32″ (0.4 – 4 mm); 10.5 – 20 ft table lengths; 5.5 kW servo
- ✓ 4-axis CNC with a 15″ touchscreen and Taiwan servo motors — program groove depth, pitch and position, the machine runs the sheet
- ✓ Four-tool grooving head on ball screws, 0.001 mm resolution, ± 0.01 mm positioning; alloy cutters, double-nozzle chip blowing
- ✓ Hydraulic blank holder (Yuken, Japan) that clamps without marking; rack-and-pinion and ball-screw drives
- ✓ 60 mm low-alloy steel beam and Q345 base, stress-relieved, ± 0.03 mm bed flatness
- ✓ Automatic lubrication; air-cooled servo cabinet
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

## OPTIONAL EQUIPMENT

- + Rotary grooving head: turns 90° to groove lengthwise and crosswise (horizontal and vertical lines) without turning the sheet
- + Table lengths to 20 ft (6 m), widths 49″ or 59″
- + Extra cutter sets; special profile cutters
- + Dust extraction
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

# HORIZONTAL CNC V-GROOVING MACHINES, 10.5 – 20 FT × 49 – 59", TO 5/32" STAINLESS

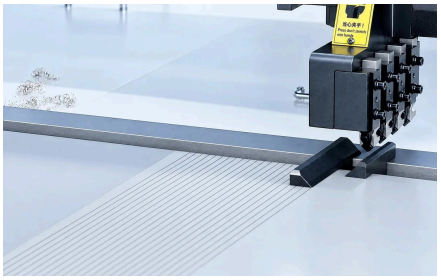

V-groove cut into stainless sheet before bending




Pneumatic sheet clamps along the table



Horizontal V-grooving machine — table and gantry




Control pendant with the CNC screen and push buttons

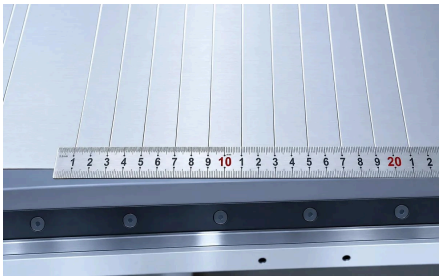

Scale along the clamping bar for positioning the sheet



Blowing the chips off the table and the clamps after grooving

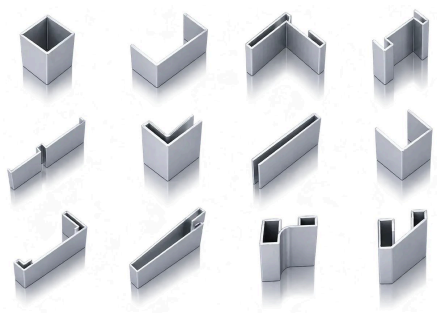

Parts bent after V-grooving — boxes, channels and angles with sharp outside corners

TECHNICAL SPECIFICATIONS

# HORIZONTAL CNC V-GROOVING MACHINES, 10.5 – 20 FT × 49 – 59″, TO 5/32″ STAINLESS

## HORIZONTAL CNC V-GROOVING MACHINES

7 models · 10.5 – 20 ft × 49 – 59″ · to 5/32″ stainless

| Model | 3200 × 1250 | 4000 × 1250 | 4000 × 1500 | 5000 × 1250 | 5000 × 1500 | 6000 × 1250 | 6000 × 1500 |
|---|---|---|---|---|---|---|---|
| **Max. grooving length** | 10.5 ft · 126.0″ (3,200 mm) | 13.1 ft · 157.5″ (4,000 mm) | 13.1 ft · 157.5″ (4,000 mm) | 16.4 ft · 196.9″ (5,000 mm) | 16.4 ft · 196.9″ (5,000 mm) | 19.7 ft · 236.2″ (6,000 mm) | 19.7 ft · 236.2″ (6,000 mm) |
| **Max. grooving width** sheet width | 49.2″ (1,250 mm) | 49.2″ (1,250 mm) | 59.1″ (1,500 mm) | 49.2″ (1,250 mm) | 59.1″ (1,500 mm) | 49.2″ (1,250 mm) | 59.1″ (1,500 mm) |
| **Sheet thickness** min – max | 0.016″ – 5/32″ (0.4 – 4 mm) | 0.016″ – 5/32″ (0.4 – 4 mm) | 0.016″ – 5/32″ (0.4 – 4 mm) | 0.016″ – 5/32″ (0.4 – 4 mm) | 0.016″ – 5/32″ (0.4 – 4 mm) | 0.016″ – 5/32″ (0.4 – 4 mm) | 0.016″ – 5/32″ (0.4 – 4 mm) |
| **Min. edge distance** | 0.3″ (8 mm) | 0.3″ (8 mm) | 0.3″ (8 mm) | 0.3″ (8 mm) | 0.3″ (8 mm) | 0.3″ (8 mm) | 0.3″ (8 mm) |
| **Grooving speed** | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) |
| **Return speed** | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) |
| **Positioning accuracy** X and Y | ± 0.0004″ (± 0.01 mm) · 0.001 mm resolution | ± 0.0004″ (± 0.01 mm) · 0.001 mm resolution | ± 0.0004″ (± 0.01 mm) · 0.001 mm resolution | ± 0.0004″ (± 0.01 mm) · 0.001 mm resolution | ± 0.0004″ (± 0.01 mm) · 0.001 mm resolution | ± 0.0004″ (± 0.01 mm) · 0.001 mm resolution | ± 0.0004″ (± 0.01 mm) · 0.001 mm resolution |
| **Main servo motor** | 7.4 HP (5.5 kW) | 7.4 HP (5.5 kW) | 7.4 HP (5.5 kW) | 7.4 HP (5.5 kW) | 7.4 HP (5.5 kW) | 7.4 HP (5.5 kW) | 7.4 HP (5.5 kW) |
| **Hydraulic clamping pressure** | 1,015 – 1,305 psi (7 – 9 MPa) | 1,015 – 1,305 psi (7 – 9 MPa) | 1,015 – 1,305 psi (7 – 9 MPa) | 1,015 – 1,305 psi (7 – 9 MPa) | 1,015 – 1,305 psi (7 – 9 MPa) | 1,015 – 1,305 psi (7 – 9 MPa) | 1,015 – 1,305 psi (7 – 9 MPa) |
| **Dimensions L × W × H** | 209 × 89 × 65″ (5,300 × 2,250 × 1,650 mm) | 228 × 89 × 65″ (5,800 × 2,250 × 1,650 mm) | 228 × 98 × 65″ (5,800 × 2,500 × 1,650 mm) | 268 × 89 × 65″ (6,800 × 2,250 × 1,650 mm) | 268 × 98 × 65″ (6,800 × 2,500 × 1,650 mm) | 307 × 89 × 65″ (7,800 × 2,250 × 1,650 mm) | 307 × 98 × 65″ (7,800 × 2,500 × 1,650 mm) |

The model number is the metric grooving length × width. Maximum thickness is for stainless steel; mild steel and aluminum to about the same thickness. The horizontal machine lays the sheet flat on the table (longest sheets, four-tool head); the vertical machine stands it against the clamping beam (smaller footprint, thicker plate).

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

3200 × 1250 – 4000 × 1500 · 4 MODELS

# VERTICAL CNC V-GROOVING MACHINES, 10.5 – 13 FT × 49 – 59″, TO 1/4″



**MODEL** VERTICAL · NOVOTECH VERTICAL CNC V-GROOVING MACHINE — THE SHEET STANDS AGAINST THE CLAMPS, 13 FT GROOVING LENGTH



Vertical V-grooving machine on the shop floor



Vertical machine from the rear — the roller frame that carries the sheet

The vertical machine stands the sheet against a fixed beam and feeds it from the rear, so the bed cannot sag and the groove depth holds ± 0.03 mm over the length; it takes half the floor space of the horizontal machine and grooves plate to 1/4″. The same Taiwan servo CNC, four-cutter head and hydraulic blank holder. Four sizes: 10.5 and 13 ft × 49 or 59″.

## STANDARD FEATURES

- ✓ Sheet 0.016″ – 1/4″ (0.4 – 6 mm); rear feeding with replaceable worktable; 4.4 kW servo
- ✓ 4-axis CNC with a 15″ touchscreen and Taiwan servo motors — program groove depth, pitch and position, the machine runs the sheet
- ✓ Four-tool grooving head on ball screws, 0.001 mm resolution, ± 0.01 mm positioning; alloy cutters, double-nozzle chip blowing
- ✓ Hydraulic blank holder (Yuken, Japan) that clamps without marking; rack-and-pinion and ball-screw drives
- ✓ 60 mm low-alloy steel beam and Q345 base, stress-relieved, ± 0.03 mm bed flatness
- ✓ Automatic lubrication; air-cooled servo cabinet
- ✓ CSA-approved electrical panel, 600 V 3-phase standard (208 / 240 / 480 V on request)

## OPTIONAL EQUIPMENT


- + Table lengths to 20 ft (6 m), widths 49″ or 59″
- + Extra cutter sets; special profile cutters
- + Dust extraction
- + Custom voltage: 208 V, 240 V or 480 V 3-phase

DETAILS, COMPONENTS AND OPTIONS

# VERTICAL CNC V-GROOVING MACHINES, 10.5 – 13 FT × 49 – 59", TO 1/4"



Grooving cutters of the vertical machine

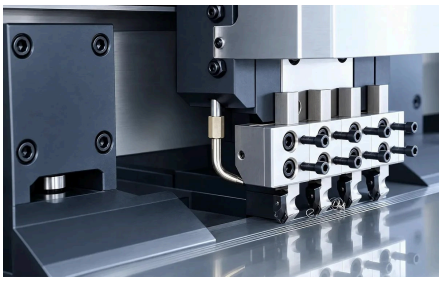

Vertical machine — four cutters in a row cut the groove progressively deeper in one pass



Vertical machine — the row of pneumatic clamps that hold the sheet while it is grooved



Touchscreen CNC control of the V-grooving machine



Blowing the chips out from under the clamps with an air gun

TECHNICAL SPECIFICATIONS

# VERTICAL CNC V-GROOVING MACHINES, 10.5 – 13 FT × 49 – 59", TO 1/4"

## VERTICAL CNC V-GROOVING MACHINES

4 models · 10.5 – 13 ft × 49 – 59" · to 1/4"

| Model | 3200 × 1250 | 3200 × 1500 | 4000 × 1250 | 4000 × 1500 |
|---|---|---|---|---|
| **Max. grooving length** | 10.5 ft · 126.0" (3,200 mm) | 10.5 ft · 126.0" (3,200 mm) | 13.1 ft · 157.5" (4,000 mm) | 13.1 ft · 157.5" (4,000 mm) |
| **Max. grooving width** sheet width | 49.2" (1,250 mm) | 59.1" (1,500 mm) | 49.2" (1,250 mm) | 59.1" (1,500 mm) |
| **Sheet thickness** min – max | 0.016" – 1/4" (0.4 – 6 mm) | 0.016" – 1/4" (0.4 – 6 mm) | 0.016" – 1/4" (0.4 – 6 mm) | 0.016" – 1/4" (0.4 – 6 mm) |
| **Min. edge distance** | 0.3" (8 mm) | 0.3" (8 mm) | 0.3" (8 mm) | 0.3" (8 mm) |
| **Grooving speed** | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) | up to 295 ft/min (90 m/min) |
| **Return speed** | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) | up to 394 ft/min (120 m/min) |
| **Positioning accuracy** X and Y | ± 0.0004" (± 0.01 mm) · 0.001 mm resolution | ± 0.0004" (± 0.01 mm) · 0.001 mm resolution | ± 0.0004" (± 0.01 mm) · 0.001 mm resolution | ± 0.0004" (± 0.01 mm) · 0.001 mm resolution |
| **Main servo motor** | 5.9 HP (4.4 kW) | 5.9 HP (4.4 kW) | 5.9 HP (4.4 kW) | 5.9 HP (4.4 kW) |
| **Hydraulic clamping pressure** | 870 – 1,160 psi (6 – 8 MPa) | 870 – 1,160 psi (6 – 8 MPa) | 870 – 1,160 psi (6 – 8 MPa) | 870 – 1,160 psi (6 – 8 MPa) |
| **Dimensions L × W × H** | 197 × 100 × 83" (5,000 × 2,550 × 2,100 mm) | 197 × 110 × 83" (5,000 × 2,800 × 2,100 mm) | 228 × 100 × 83" (5,800 × 2,550 × 2,100 mm) | 230 × 110 × 83" (5,850 × 2,800 × 2,100 mm) |

The model number is the metric grooving length × width. Maximum thickness is for stainless steel; mild steel and aluminum to about the same thickness. The horizontal machine lays the sheet flat on the table (longest sheets, four-tool head); the vertical machine stands it against the clamping beam (smaller footprint, thicker plate).

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

### INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

# LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.


**PHONE**

+1 647 526 5510

**WEB & EMAIL**

NovoTechMachineTools.com
info@NovoTechMachineTools.com

**ADDRESS**

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5


NT NovoTech MACHINE TOOLS Inc.


Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.