
NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

MILLING MACHINES

TURRET AND UNIVERSAL MILLING MACHINES, ISO40 AND ISO50 · DRILLING-MILLING MACHINES AND MINI MILLS · KEYSEATER AND SLOTTING MACHINE · CYLINDER HEAD RESURFACER

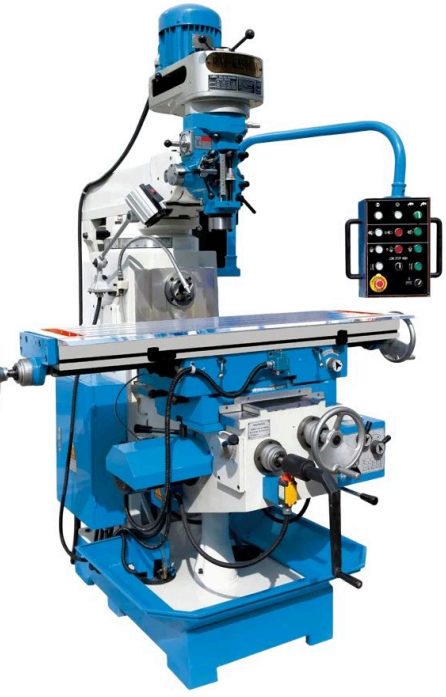





China
MADE IN CHINA

7
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE MILLING MACHINES

CONTENTS

TURRET MILLING MACHINES

Turret milling machines, ISO40, with horizontal spindle on the W models 4H – X6336WA · 5 models 04

UNIVERSAL MILLING MACHINES

XQ6226 · X6436 universal milling machines, ISO40 / ISO50 XQ6226A – X6436 · 4 models 07

LM-1450 · X5750 heavy universal milling machines, ISO50 LM-1450A – X5750A · 6 models 09

DRILLING-MILLING MACHINES AND MINI MILLS

ZX drilling and milling machines, 2" drilling ZX5325 – ZX6350Z · 6 models 12

TX-20 mini mill-drill and DM-20 radial drill-mill TX-20 · DM-20 · 2 models 16

KEYSEATERS AND SLOTTING MACHINES

B5012 keyseater and B5013 slotting machine B5012 · B5013 · 2 models 17

CYLINDER HEAD RESURFACING MACHINE

KSM-850 cylinder head and block resurfacing machine KSM-850 · 1 model 18

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE MILLING MACHINES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

NOVOTECH VALUE LINE

MILLING MACHINES FOR THE TOOLROOM AND THE FABRICATION SHOP

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.

Milling machines cut flat faces, slots, steps, pockets and keyways with rotating cutters while the table moves the work under them: knee-type turret mills with a horizontal spindle as well as the vertical head, universal mills with a head that swivels through 360°, heavy ISO50 universal mills with power feed and rapid traverse on all axes and tables up to 79″, drilling-milling machines that drill 2″, a mini mill-drill and a radial drill-mill, a keyseater and a slotting machine for keyways and splines, and the KSM-850 resurfacing machine for cylinder heads and blocks.

4H – X6336WA · 5 MODELS

TURRET MILLING MACHINES, ISO40, WITH HORIZONTAL SPINDLE ON THE W MODELS



MODEL TURRET · X6332WA VERTICAL AND HORIZONTAL TURRET MILLING MACHINE



4H turret milling machine with power feed and DRO



X6325W turret milling machine with horizontal spindle

Tables to 64 × 14″

Knee-type turret mills for the tool room and the maintenance shop: the 4H with a 50 × 10″ table, shown with power feed and a digital readout; the X6325W and X6332WA with a horizontal spindle as well as the vertical head, power feed on X and Y and a motorized knee; the X6336 with an NT40 head, a 63 × 14.2″ table, 51.2″ of X travel and power feed and rapid traverse on all three axes; and the X6336WA with a high-speed head (70 – 7,200 rpm), a horizontal spindle and power feed on all three axes. The head swivels ±45° front to back and ±90° left to right; on the WA models the table swivels ±45° too.

STANDARD FEATURES

- Tables 50 × 10″ to 64.2 × 14.2″; X travel 23.6 – 51.2″
- Vertical head 60 – 3,600, 80 – 5,440 or 70 – 7,200 rpm; horizontal spindle 40 – 1,800 rpm (W models)
- Power feed X, Y; motorized Z — or power feed on all three axes (X6336, X6336WA), with rapid traverse on the X6336
- 3 – 5.5 HP; quill travel 5″ (127 mm)
- Table swivel ±45° (X6332WA, X6336WA)

OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS

TURRET MILLING MACHINES, ISO40, WITH HORIZONTAL SPINDLE ON THE W MODELS




X6336 turret milling machine with horizontal spindle and power feed



X6336WA turret milling machine with horizontal ram, power feed and DRO



X6336 turret milling machine with power feed and digital readout

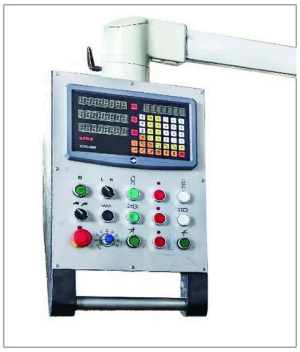

Three-axis digital readout and feed controls of the X6336

TECHNICAL SPECIFICATIONS

TURRET MILLING MACHINES, ISO40, WITH HORIZONTAL SPINDLE ON THE W MODELS

4H · X6325W · X6332WA · X6336 · X6336WA

Turret milling machines; the W models with a horizontal spindle too

Model	4H	X6325W	X6332WA	X6336	X6336WA
Spindle taper	—	NT30, R8	ISO40	NT40; head swivels 90°	ISO40 vertical, ISO50 horizontal
Spindle speeds	—	**Vertical 80 – 5,440 rpm, horizontal 40 – 1,300 rpm**	**Vertical 80 – 5,440 rpm, horizontal 40 – 1,300 rpm**	**Vertical 60 – 3,600 rpm, rated at 50 Hz**	**Vertical 70 – 7,200 rpm, horizontal 60 – 1,800 rpm**
Quill travel	5″ (127 mm)	5″ (127 mm)	5″ (127 mm)	—	5″ (127 mm)
Spindle nose to table	0 – 18.1″ (0 – 460 mm)	3.9 – 19.3″ (100 – 490 mm)	3.9 – 19.7″ (100 – 500 mm)	1.6 – 19.3″ (40 – 490 mm)	5.3 – 19.1″ (135 – 485 mm)
Spindle to column	—	3.9 – 22″ (100 – 560 mm)	3.9 – 22″ (100 – 560 mm)	6.3 – 26″ (160 – 660 mm)	5.9 – 29.5″ (150 – 750 mm)
Table	**50 × 10″ (1,270 × 254 mm)**	**50 × 10.2″ (1,270 × 260 mm)**	**49.2 × 12.6″ (1,250 × 320 mm), swivels ±45°**	**63 × 14.2″ (1,600 × 360 mm); 3 T-slots; 772 lb (350 kg) load**	**64.2 × 14.2″ (1,630 × 360 mm), swivels ±45°**
Travel X × Y (× Z)	**33.5 × 15.7″ (850 × 400 mm)**	**27.6 × 11″ (700 × 280 mm)**	**23.6 × 13.4″ (600 × 340 mm)**	**51.2 × 12.6 × 17.7″ (1,300 × 320 × 450 mm)**	**39.4 × 12.6 × 15.9″ (1,000 × 320 × 405 mm)**
Feeds	Ask for the configuration	Power feed X, Y; motorized Z	Power feed X, Y; motorized Z	Power feed X, Y 1 – 31.5 in/min (25 – 800 mm/min), Z 1.2 – 10.5 in/min (30 – 267 mm/min); rapid 39.4 / 39.4 / 13.2 in/min (1,000 / 1,000 / 335 mm/min)	Power feed X, Y, Z
Motor	**3 HP (2.2 kW)**	**3 HP (2.2 kW) vertical, 4 HP (3 kW) horizontal**	**3 HP (2.2 kW) vertical, 4 HP (3 kW) horizontal**	**—**	**5 / 2.7 HP (3.7 / 2 kW) vertical, 5.5 HP (4 kW) horizontal**
Packing size L × W × H	67 × 63 × 85″ (170 × 160 × 215 cm)	59 × 66 × 83″ (150 × 167 × 210 cm)	60 × 64 × 87″ (152 × 163 × 220 cm)	105 × 87 × 94″ (267 × 222 × 240 cm)	79 × 79 × 89″ (200 × 200 × 225 cm)
Weight	**2,646 lb (1,200 kg)**	**3,527 lb (1,600 kg)**	**3,417 lb (1,550 kg)**	**7,055 lb (3,200 kg)**	**5,842 lb (2,650 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

XQ6226A – X6436 · 4 MODELS

XQ6226 · X6436 UNIVERSAL MILLING MACHINES, ISO40 / ISO50



MODEL XQ6226 · XQ6226A UNIVERSAL MILLING MACHINE WITH SWIVEL HEAD



XQ6226B universal milling machine with power feed



XQ6226W universal milling machine

Tables 44 – 52"

Universal milling machines with a horizontal spindle and a vertical head that swivels through 360°: the XQ6226 range with a 44 – 50" table, hardened ways, an ISO40 spindle and power feed on X and Y (motorized knee on the B), and the X6436 with ISO40 vertical and ISO50 horizontal spindles, a 52" table and servo feeds with rapid traverse on all three axes.

STANDARD FEATURES

- Horizontal milling to Ø5" (125 mm); vertical milling to Ø1 – 1-1/8"
- XQ6226: 40 – 1,600 rpm; table 44 – 50"; power feed X, Y
- X6436: servo feed and rapid traverse X, Y, Z; 5.5 / 7.5 HP
- Hardened guideways; head swivels 360°

OPTIONAL EQUIPMENT

XQ6226A · XQ6226B · XQ6226W · X6436 — TECHNICAL SPECIFICATIONS

Model	XQ6226A	XQ6226B	XQ6226W	X6436
Spindle taper	ISO40	ISO40	ISO40	ISO40 vertical, ISO50 horizontal
Milling capacity	**Horizontal Ø5" (125 mm), vertical Ø1" (25 mm)**	**Horizontal Ø5" (125 mm), vertical Ø1" (25 mm)**	**Horizontal Ø5" (125 mm), vertical Ø1-1/8" (28 mm)**	**—**
Spindle speeds	**Vertical 40 – 1,600 rpm**	**Vertical 40 – 1,600 rpm, horizontal 40 – 1,300 rpm**	**Vertical 40 – 1,600 rpm, horizontal 40 – 1,300 rpm**	**Vertical 60 – 1,750 rpm, horizontal 60 – 1,800 rpm**
Spindle nose to table	3.1 – 19.7" (80 – 500 mm)	3.1 – 19.7" (80 – 500 mm)	3.1 – 22" (80 – 560 mm)	5.9 – 23.6" (150 – 600 mm)
Table	**44.1 × 10.2" (1,120 × 260 mm)**	**44.1 × 10.2" (1,120 × 260 mm)**	**50 × 10.2" (1,270 × 260 mm)**	**52.2 × 14.2" (1,325 × 360 mm); 63" (1,600 mm) option**
Travel X × Y (× Z)	**23.6 × 10.6" (600 × 270 mm)**	**23.6 × 10.6" (600 × 270 mm)**	**29.5 × 11.8" (750 × 300 mm)**	**43.3 (51.2) × 12.6 × 17.7" (1,100 (1,300) × 320 × 450 mm)**
Feeds	Power feed X, Y (Z optional)	Power feed X, Y; motorized Z	Power feed X, Y (Z optional)	Servo feed and rapid X, Y, Z
Motor	**3 HP (2.2 kW)**	**3 HP (2.2 kW)**	**4 HP (3 kW) horizontal, 4 HP (3 kW) vertical**	**5.5 HP (4 kW) vertical, 7.5 HP (5.5 kW) horizontal**
Packing size L × W × H	57 × 65 × 83" (145 × 165 × 210 cm)	57 × 65 × 83" (145 × 165 × 210 cm)	59 × 66 × 83" (150 × 167 × 210 cm)	71 × 83 × 79" (180 × 210 × 200 cm)
Weight	**3,307 lb (1,500 kg)**	**3,417 lb (1,550 kg)**	**3,638 lb (1,650 kg)**	**5,842 lb (2,650 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

DETAILS, COMPONENTS AND OPTIONS

XQ6226 · X6436 UNIVERSAL MILLING MACHINES, ISO40 / ISO50



X6436 universal milling machine with servo feeds

LM-1450A – X5750A · 6 MODELS

LM-1450 · X5750 HEAVY UNIVERSAL MILLING MACHINES, ISO50



MODEL LM-1450 · LM-1450A UNIVERSAL MILLING MACHINE, ISO50, WITH DRO



LM-1450B universal milling machine with servo feed



LM-1450C universal milling machine with DRO

Tables 63 – 79", ISO50

Heavy ISO50 universal mills for production and large parts: the LM-1450 range with power feed and rapid traverse on all three axes, a head that swivels 360°, hardened three-axis ways and a hardened and ground table — 64 to 79" long, with up to 15 HP on the horizontal spindle; the X5750 and X5750A with ball screws and three separate servo feed motors, a mechanical speed change in the head, an extra column supporting the table and central lubrication.

STANDARD FEATURES

- ✓ Tables 63 – 79" (1,600 – 2,000 mm); X travel 31.5 – 55.1"
- ✓ ISO50 spindles; horizontal 30 – 1,800 rpm, vertical 60 – 1,700 rpm
- ✓ Power feed and rapid traverse on X, Y, Z; servo feed on the LM-1450B; ball screws and servo motors on the X5750
- ✓ 5.5 – 15 HP; 5,842 – 9,921 lb
- ✓ Digital readout at extra cost

OPTIONAL EQUIPMENT

- \+ Digital readout (DRO)

DETAILS, COMPONENTS AND OPTIONS

LM-1450 · X5750 HEAVY UNIVERSAL MILLING MACHINES, ISO50



LM-1450D universal milling machine for production work



X5750 / X5750A universal milling machine with ball screws and three servo motors

TECHNICAL SPECIFICATIONS

LM-1450 · X5750 HEAVY UNIVERSAL MILLING MACHINES, ISO50

LM-1450A · B · C · D · X5750 · X5750A

Heavy universal milling machines, ISO50

Model	LM-1450A	LM-1450B	LM-1450C	LM-1450D	X5750	X5750A
Spindle taper	ISO50	ISO50	ISO50	ISO50	ISO50	ISO50
Spindle speeds	**Horizontal 60 – 1,800 rpm (12), vertical 60 – 1,700 rpm (12)**	**Horizontal 60 – 1,800 rpm (12), vertical 60 – 1,700 rpm (12)**	**Horizontal 30 – 1,500 rpm (18), vertical 60 – 1,700 rpm (12)**	**Horizontal 30 – 1,500 rpm (18), vertical 60 – 1,700 rpm (12)**	**30 – 2,050 rpm (27 speeds)**	**30 – 2,050 rpm (27 speeds)**
Spindle nose to table	5.9 – 21.7" (150 – 550 mm)	5.9 – 21.7" (150 – 550 mm)	5.9 – 22.4" (150 – 570 mm)	5.9 – 22.4" (150 – 570 mm)	2 – 21.7" (50 – 550 mm)	2 – 21.7" (50 – 550 mm)
Table	**64.2 × 14.2" (1,630 × 360 mm)**	**64.2 × 14.2" (1,630 × 360 mm)**	**64.2 × 12.6" (1,630 × 320 mm)**	**78.7 × 15.7" (2,000 × 400 mm)**	**63 × 19.7" (1,600 × 500 mm)**	**78.7 × 19.7" (2,000 × 500 mm)**
Travel X × Y × Z	**39.4 × 12.6 × 15.9" (1,000 × 320 × 405 mm)**	**47.2 × 11.8 × 15.4" (1,200 × 300 × 390 mm)**	**31.5 × 12.2 × 16.5" (800 × 310 × 420 mm)**	**47.2 × 12.4 × 15.2" (1,200 × 315 × 385 mm)**	**47.2 × 27.6 × 19.7" (1,200 × 700 × 500 mm)**	**55.1 × 27.6 × 19.7" (1,400 × 700 × 500 mm)**
T-slots (number / width / spacing)	3 / 18 / 80 mm	3 / 18 / 80 mm	3 / 18 / 70 mm	3 / 18 / 90 mm	5 / 18 / 80 mm	5 / 18 / 80 mm
Table swivel	±45°	±45°	±45°	±45° optional	—	—
Feeds	Power feed and rapid X, Y, Z	Servo power feed (variable) and rapid X, Y, Z	Power feed and rapid X, Y, Z	Power feed and rapid X, Y, Z	Three servo motors, ball screws on X, Y, Z	Three servo motors, ball screws on X, Y, Z
Motor	**5.5 HP (4 kW) vertical, 5.5 HP (4 kW) horizontal**	**5.5 HP (4 kW) vertical, 6.7 HP (5 kW) horizontal**	**5.5 HP (4 kW) vertical, 10 HP (7.5 kW) horizontal**	**5.5 HP (4 kW) vertical, 15 HP (11 kW) horizontal**	**10 HP (7.5 kW)**	**10 HP (7.5 kW)**
Packing size L × W × H	79 × 83 × 89" (200 × 210 × 225 cm)	83 × 83 × 89" (210 × 210 × 225 cm)	88 × 83 × 89" (223 × 210 × 225 cm)	113 × 87 × 83" (286 × 220 × 210 cm)	104 × 97 × 82" (263 × 246 × 208 cm)	104 × 113 × 82" (263 × 286 × 208 cm)
Weight	**5,842 lb (2,650 kg)**	**5,842 lb (2,650 kg)**	**7,716 lb (3,500 kg)**	**8,708 lb (3,950 kg)**	**9,480 lb (4,300 kg)**	**9,921 lb (4,500 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

ZX5325 – ZX6350Z · 6 MODELS

ZX DRILLING AND MILLING MACHINES, 2″ DRILLING



MODEL ZX · ZX5325C GEAR-HEAD DRILLING AND MILLING MACHINE WITH DRO



ZX7550C drilling and milling machine



ZX7550CW drilling and milling machine with vertical and horizontal spindles

2″ drilling

Drilling and milling machines that drill 2″ (50 mm), face-mill Ø4 – 5″ and tap M16 on one column: the ZX5325 with a rotary milling head and a table that swivels ±45°, belt drive (ZX5325) or gear head (ZX5325C); the ZX7550C, ZX7550CW, ZX6350C and ZX6350Z on a knee, the W and 6350 models with a horizontal spindle as well.

STANDARD FEATURES

- ✓ Drilling 2″ (50 mm); face milling Ø4 – 5″; tapping M16
- ✓ Tables 31.5 × 9.4″ to 49.2 × 12.6″
- ✓ Vertical spindle 90 – 2,400 rpm; horizontal spindle 38 – 1,335 rpm on the W and 6350 models
- ✓ 1.5 – 3 HP

OPTIONAL EQUIPMENT

- \+ Power feed on Y and Z
- \+ Digital readout (DRO)

DETAILS, COMPONENTS AND OPTIONS

ZX DRILLING AND MILLING MACHINES, 2" DRILLING



ZX6350C drilling and milling machine with vertical and horizontal spindles

TECHNICAL SPECIFICATIONS · 1 / 2

ZX DRILLING AND MILLING MACHINES, 2" DRILLING

ZX5325 · ZX5325C · ZX7550C · ZX7550CW

Drilling and milling machines, 2" drilling

Model	ZX5325	ZX5325C	ZX7550C	ZX7550CW
Drilling capacity	**1-15/16" (50 mm)**	**1-15/16" (50 mm)**	**1-15/16" (50 mm)**	**1-15/16" (50 mm)**
Milling capacity, face / end	**Ø4" (100 mm) / Ø1-1/4" (32 mm)**	**Ø4" (100 mm) / Ø1-1/4" (32 mm)**	**Ø4" (100 mm) / Ø1" (25 mm)**	**Ø4" (100 mm) / Ø1" (25 mm)**
Tapping capacity	M16	M16	M16	M16
Spindle taper	MT4 (ISO30, ISO40, R8 optional)	MT4 (ISO30, ISO40, R8 optional)	—	—
Spindle nose to table	—	—	2-3/4 – 16-1/2" (70 – 420 mm)	2-3/4 – 16-1/2" (70 – 420 mm)
Spindle speeds	**270 – 2,400 rpm**	**115 – 1,750 rpm**	**110 – 1,760 rpm**	**Vertical 110 – 1,760 rpm, horizontal 38 – 1,335 rpm**
Spindle travel	4-7/8" (125 mm)	4-7/8" (125 mm)	4-3/4" (120 mm)	4-3/4" (120 mm)
Table	**10.2 × 39.4" (260 × 1,000 mm)**	**10.2 × 39.4" (260 × 1,000 mm)**	**31.5 × 9.4" (800 × 240 mm)**	**31.5 × 9.4" (800 × 240 mm)**
Travel X × Y × Z	17.7 × 11 × 15" (450 × 280 × 380 mm)	17.7 × 11 × 15" (450 × 280 × 380 mm)	15.7 × 9.1" (400 × 230 mm)	15.7 × 9.1" (400 × 230 mm)
Head drive	Belt	Gear	Gear	Gear
Motor	**2 HP (1.5 kW)**	**1.1 / 2 HP (0.85 / 1.5 kW)**	**1.1 / 2 HP (0.85 / 1.5 kW)**	**1.1 / 2 HP (0.85 / 1.5 kW) vertical, 3 HP (2.2 kW) horizontal**
Packing size L × W × H	45 × 57 × 83" (114 × 145 × 210 cm)	45 × 45 × 87" (114 × 114 × 222 cm)	45 × 43 × 87" (114 × 110 × 222 cm)	45 × 48 × 87" (114 × 122 × 222 cm)
Weight	**1,874 lb (850 kg)**	**1,918 lb (870 kg)**	**1,389 lb (630 kg)**	**1,874 lb (850 kg)**

TECHNICAL SPECIFICATIONS · 2 / 2

ZX DRILLING AND MILLING MACHINES, 2" DRILLING

ZX6350C · ZX6350Z

Drilling and milling machines with vertical and horizontal spindles

Model	ZX6350C	ZX6350Z
Drilling capacity	**1-15/16" (50 mm)**	**1-15/16" (50 mm)**
Milling capacity, face / end	**Ø4" (100 mm) / Ø1" (25 mm)**	**Ø5" (125 mm) / Ø1" (25 mm)**
Tapping capacity	M16	M16
Spindle nose to table	3.5 – 15.7" (90 – 400 mm)	3.5 – 14.6" (90 – 370 mm)
Spindle speeds	**Vertical 110 – 1,760 rpm, horizontal 38 – 1,310 rpm**	**Vertical 90 – 2,000 rpm (8), horizontal 40 – 1,300 rpm (12)**
Spindle travel	4-3/4" (120 mm)	4-3/4" (120 mm)
Table	**44.1 × 11" (1,120 × 280 mm)**	**49.2 × 12.6" (1,250 × 320 mm)**
Travel X × Y	23.6 × 9.1" (600 × 230 mm)	23.6 × 11.8" (600 × 300 mm)
Motor	**1.1 / 2 HP (0.85 / 1.5 kW) vertical, 3 HP (2.2 kW) horizontal**	**3 HP (2.2 kW)**
Packing size L × W × H	63 × 55 × 87" (160 × 140 × 222 cm)	63 × 55 × 87" (160 × 140 × 222 cm)
Weight	**2,469 lb (1,120 kg)**	**2,469 lb (1,120 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

TX-20 · DM-20 · 2 MODELS

TX-20 MINI MILL-DRILL AND DM-20 RADIAL DRILL-MILL



MODEL TX-20 · TX-20 MINI MILL-DRILL ON CABINET STAND



DM-20 radial drill-mill with cross table and box table

3/4" drilling

Small machines for the bench and the repair shop: the TX-20 mill-drill with a 27.6 × 7.1" X-Y table and variable speed for recessing, surface and end milling, grooving and angled drilling; the DM-20 radial drill-mill with a 19.7" arm reach, a cross table and a box table, for 3/4" drilling and 5/8" end milling.

STANDARD FEATURES

- ✓ 3/4" (20 mm) drilling
- ✓ TX-20: variable 50 – 2,250 rpm, MT2, cabinet stand
- ✓ DM-20: 5 speeds 210 – 2,000 rpm, MT3 / R8, arm reach 19.7"
- ✓ DM-20 options: vise, coolant pump, milling chuck set, lamp

OPTIONAL EQUIPMENT

TX-20 · DM-20 — TECHNICAL SPECIFICATIONS

Model	TX-20	DM-20
Drilling capacity	**13/16" (20 mm)**	**13/16" (20 mm)**
Milling capacity	**–**	**End mill 5/8" (16 mm), face mill 2-1/2" (63 mm)**
Spindle taper	MT2	MT3 / R8
Spindle speeds	**Variable, 50 – 2,250 rpm**	**5 speeds, 210 – 2,000 rpm**
Spindle travel	–	3.5" (90 mm)
Table	27.6 × 7.1" (700 × 180 mm); X 11" (280 mm), Y 6.9" (175 mm)	Cross table and box table
Throat / reach	6.7" (170 mm) spindle to column; head travel 15" (380 mm)	Arm reach 19.7" (500 mm); arm rise and fall 14.6" (370 mm)
Motor	**0.8 HP (0.6 kW)**	**1 HP (750 W)**
Packing size L × W × H	54 × 28 × 41" (138 × 72 × 105 cm)	37 × 20 × 46" (93 × 51 × 117 cm)
Weight	**231 lb (105 kg)**	**780 lb (354 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

B5012 · B5013 · 2 MODELS

B5012 KEYSEATER AND B5013 SLOTTING MACHINE



MODEL KEYSEATER · B5013 SLOTTING MACHINE WITH SWIVEL HEAD FOR KEYWAYS AND SPLINES



B5012 keyseater for keyways in single and small-batch work

Keyways and splines

Machines for keyways and splines: the B5012 keyseater cuts keyways in single and small-batch work, especially in blind holes, and its column does not limit the size of the part; the B5013 slotting machine has a head that swivels 90° left and right, a 5″ stroke and 60 – 350 strokes a minute in six steps.

STANDARD FEATURES

- ✓ B5012: 4.7″ (120 mm) stroke; parts Ø16-1/2″ × 4-3/4″ on the table, larger parts beyond it
- ✓ B5013: 5″ (125 mm) stroke, 60 – 350 strokes/min, head swivels ±90°
- ✓ Heavy cast-iron construction

OPTIONAL EQUIPMENT

B5012 · B5013 — TECHNICAL SPECIFICATIONS

Model	B5012	B5013
Stroke, max	**4-3/4″ (120 mm)**	**4-7/8″ (125 mm)**
Workpiece capacity	**Ø16-1/2″ (420 mm) × 4-3/4″ (120 mm) high on the table; not limited by the column for large parts**	**—**
Strokes per minute	—	60 – 350, 6 steps
Table size	7.9 × 15.7″ (200 × 400 mm)	23.6 × 9.4″ (600 × 240 mm), 14 mm T-slots
Table travel, longitudinal × cross	4.7 × 9.4″ (120 × 240 mm)	5.1 × 13.4″ (130 × 340 mm)
Head swivel	—	90° left and right
Motor	**1.5 HP (1.1 kW)**	**1/3 HP (0.25 kW)**
Packing size L × W × H	38 × 21 × 36″ (96 × 54 × 91 cm)	33 × 30 × 43″ (83 × 76 × 109 cm)
Weight	**408 lb (185 kg)**	**529 lb (240 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

KSM-850 · 1 MODEL

KSM-850 CYLINDER HEAD AND BLOCK RESURFACING MACHINE



MODEL KSM-850 · KSM-850 CYLINDER HEAD AND BLOCK RESURFACING MACHINE



Control panel with variable head and table speeds

Heads to 33.5 × 13″

A surface milling machine for the engine rebuilder: a ball-screw table feeds the cylinder head or block under a Ø13″ cutter head with CBN and PCD inserts and leaves the gasket face flat and smooth, on heads and blocks up to 33.5″ long, 13″ wide and 17.3″ high. Head speed from 300 to 1,200 rpm and table feed up to 23.6 in/min are both variable, and the machine runs single passes or continuous working cycles.

STANDARD FEATURES

- Heads and blocks to 33.5 × 13″ (850 × 330 mm), 6.3 – 17.3″ (160 – 440 mm) high
- Ø13″ (330 mm) cutter head; 1/2″ CBN / PCD insert and holder standard
- Head 300 – 1,200 rpm and table feed 0 – 23.6 in/min, both variable; ball-screw table, 43.9″ (1,115 mm) travel
- Manual or continuous working cycles
- 2 HP head motor, 1 HP table motor; 1,874 lb (850 kg)

OPTIONAL EQUIPMENT

KSM-850 — TECHNICAL SPECIFICATIONS

Model	KSM-850
Workpiece, max L × W × H	**33.5 × 13 × 6.3 – 17.3″ (850 × 330 × 160 – 440 mm)**
Table travel	**43.9″ (1,115 mm)**
Cutter head, max	**Ø13″ (330 mm), 1/2″ CBN / PCD insert and holder standard**
Head speed	300 – 1,200 rpm, variable
Table feed	0 – 23.6 in/min (0 – 600 mm/min), variable, ball screw
Cycle	Manual or continuous working cycle programs
Motors	**2 HP (1.5 kW) head, 1 HP (0.75 kW) table**
Machine size L × W × H	64 × 43 × 66″ (163 × 110 × 168 cm)
Weight	**1,874 lb (850 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.