SOLD & SERVICED IN CANADA BY NOVOTECH

SAWING MACHINES

BAND SAWS, CIRCULAR SAWS & MATERIAL HANDLING

Canada
SALES & SERVICE

1-Year
WARRANTY

10% Down
0% DOWN FINANCING AVAILABLE

Parts
& TECHNICAL SUPPORT IN CANADA

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR SAWING MACHINES

Sales, installation, parts and technical support across Canada

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CONTENTS THIS CATALOGUE

5" Metal Cutting Band Saw 03
9" Metal Cutting Band Saw 07
Metal Cutting Band Saw 12
Double Column Horizontal Band Saw 16
Automatic Metal Cutting Band Saw 31
CNC Metal Cutting Band Saw 34
Circular Saw 40
Circular Saw for Aluminum 44
14" Chop Saw 47
Roller Conveyor with Digital Length Stop 50
7" Metal Cutting Band Saw 04
10" Metal Cutting Band Saw 10
Single Column Metal Cutting Band Saw 14
Hydraulic Hack Saw 24
Semi-CNC Metal Cutting Band Saw 33
Vertical Band Saw 38
Hydraulic Circular Saw 42
Cut-off Saw 46
Cutting Saw Blades 48
Roller Stand with Vertical Rollers 51

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions. Photos may show optional equipment.

BS-125 · COMPACT DIE-CAST BAND SAW, 0°–60° ANGLE CUTTING

5" METAL CUTTING BAND SAW

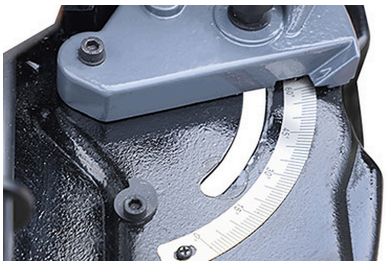

Angle cutting range 0° to 60°

MODEL **BS-125** Compact, portable metal cutting band saw

- Die-cast aluminum saw frame
- Compact design, easy to carry
- Variable speed for cutting different materials
- Standard 13 mm (1/2") wide blade for high-precision cutting

Model		BS-125
Capacity, round @ 90°		Ø4-7/8"
Capacity, rectangular @ 90°		4-7/8" × 4-7/8"
Capacity, round @ 60°		Ø1-3/4"
Capacity, rectangular @ 60°		1-3/4" × 2-3/8"
Capacity, round @ 45°		Ø3-1/8"
Capacity, rectangular @ 45°		3-1/8" × 3-7/8"
Blade speed	ft/min	115 – 262
Blade size	in	1/2 × 0.026 × 56-1/2
Input power	HP	0.74
Drive		Gear
Packing size	in	28 × 15 × 18
Net / gross weight	lb	53 / 57

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-712N · BS-712R

7" METAL CUTTING BAND SAW

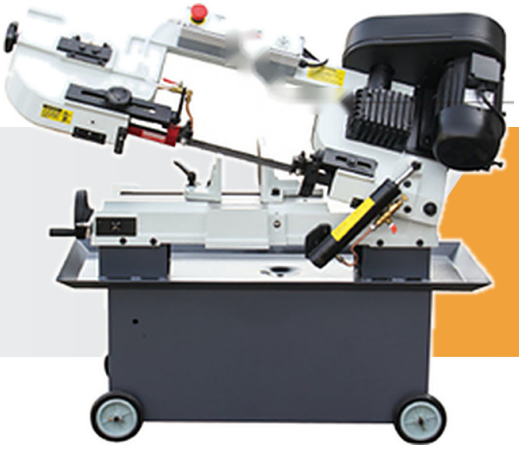

Compact finger-touch panel for BS-712N

MODEL **BS-712N** With compact finger-touch panel

BS-712N

Traditional and most universal model

BS-712R

The bow can be swivelled between 45° and 90°

Model		BS-712N	BS-712R
Capacity, round @ 90°		Ø7"	Ø7"
Capacity, rectangular @ 90°		7" × 12"	7" × 8-1/4"
Capacity, round @ 45°		Ø5"	Ø5"
Capacity, rectangular @ 45°		4-3/4" × 4-7/8"	3-3/8" × 5-1/2"
Blade speed @ 60 Hz	ft/min	89 / 135 / 194 / 256	89 / 135 / 194 / 256
Blade speed @ 50 Hz	ft/min	72 / 112 / 161 / 210	72 / 112 / 161 / 210
Blade size	in	3/4 × 0.035 × 93	3/4 × 0.035 × 93
Motor power, 3-phase	HP	1	1
Motor power, 1-phase	HP	1.5	1.5
Drive		Belt	Belt
Packing size	in	49 × 20 × 45	51 × 29 × 45
Net / gross weight	lb	309 / 397	408 / 525

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-712V · VARIABLE-FREQUENCY MOTOR, WORM GEAR REDUCER

7" METAL CUTTING BAND SAW

MODEL **BS-712V** Variable-frequency motor

- Updated design based on the basic model BS-712N
- Variable-frequency motor for variable blade speed
- Worm gear reducer eliminates the risk of gear damage during shifting

Model		BS-712V
Capacity, round @ 90°		Ø7"
Capacity, rectangular @ 90°		7" × 12"
Capacity, round @ 45°		Ø5"
Capacity, rectangular @ 45°		4-3/4" × 4-7/8"
Blade speed @ 60 Hz	ft/min	126 – 252
Blade speed @ 50 Hz	ft/min	105 – 210
Blade size	in	3/4 × 0.035 × 93
Motor power	HP	1
Drive		Gear
Packing size	in	49 × 20 × 45
Net / gross weight	lb	309 / 397

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-712G · BS-712GR · BS-712GDR · GEAR DRIVEN

7" METAL CUTTING BAND SAW

BS-712G

BS-712GR

- The bow can be swivelled between 45° and 90°
- Gear driven

BS-712GDR

- The bow can be swivelled between 45° and 90°
- Exclusive double-sided swivel design: ±45°
- Gear driven

Model		BS-712G	BS-712GR	BS-712GDR
Capacity, round @ 90°		Ø7"	Ø7"	Ø7"
Capacity, rectangular @ 90°		7" × 12"	7" × 8-1/4"	7" × 8-1/4"
Capacity, round @ 45°		Ø5"	Ø5"	Ø5"
Capacity, rectangular @ 45°		4-3/4" × 4-1/2"	3-3/8" × 5-1/2"	3-3/8" × 5-1/2"
Blade speed @ 60 Hz	ft/min	112 / 230 / 341	112 / 230 / 341	112 / 230 / 341
Blade speed @ 50 Hz	ft/min	95 / 194 / 285	95 / 194 / 285	95 / 194 / 285
Blade size	in	3/4 × 0.035 × 93	3/4 × 0.035 × 93	3/4 × 0.035 × 93
Motor power, 3-phase	HP	1	1	1
Motor power, 1-phase	HP	1.5	1.5	1.5
Drive		Gear	Gear	Gear
Packing size	in	53 × 20 × 43	52 × 30 × 49	54 × 29 × 54
Net / gross weight	lb	302 / 399	386 / 434	463 / 573

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-912B · BS-912G · BS-912GR · BS-912GDR

9" METAL CUTTING BAND SAW

3 speeds by gearbox control

MODEL **BS-912GR** Gear driven

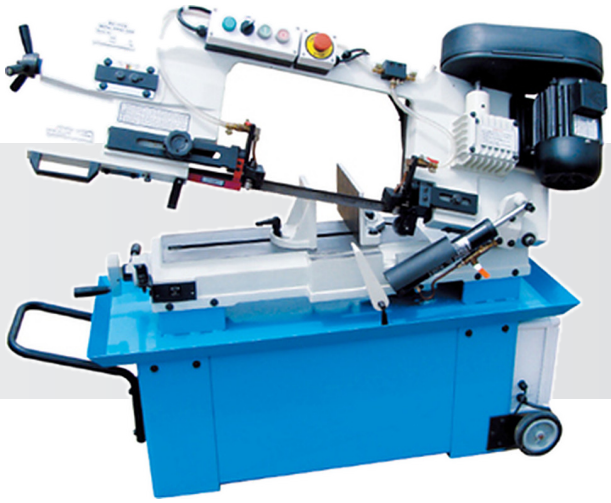

MODEL **BS-912B** Belt driven

Model		BS-912B	BS-912G	BS-912GR	BS-912GDR
Capacity, round @ 90°		Ø9"	Ø9"	Ø9"	Ø9"
Capacity, rectangular @ 90°		7" × 12"	7" × 12"	7" × 12"	7" × 12"
Capacity, round @ 45°		Ø5-⅞"	Ø5-⅞"	Ø5-⅞"	Ø5-⅞"
Capacity, rectangular @ 45°		5" × 5-⅞"	5" × 5-⅞"	5" × 5-⅞"	5" × 5-⅞"
Blade speed @ 60 Hz	ft/min	105 / 197 / 289 / 377	125 / 256 / 377	125 / 256 / 377	125 / 256 / 377
Blade speed @ 50 Hz	ft/min	85 / 164 / 240 / 312	102 / 213 / 312	102 / 213 / 312	102 / 213 / 312
Blade size	in	1-⅛ × 0.035 × 104-½	1-⅛ × 0.035 × 104-½	1-⅛ × 0.035 × 104-½	1-⅛ × 0.035 × 104-½
Motor power (3-phase or 1-phase)	HP	1.5	1.5	1.5	1.5
Drive		Belt	Gear	Gear	Gear
Packing size	in	61 × 23 × 45	61 × 24 × 45	61 × 29 × 48	58 × 29 × 52
Net / gross weight	lb	419 / 556	403 / 547	485 / 639	534 / 701

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BS-912G-JC · BS-912GR-JC · TOUCH PANEL, VARIABLE-FREQUENCY MOTOR

9" METAL CUTTING BAND SAW

MODEL **BS-912GR-JC** Touch panel control, stepless speed regulation

Touch control panel with speed display

- Touch panel control with simple, convenient speed adjustment
- Variable-frequency motor: speed adjustment changed from three fixed speeds to stepless speed regulation
- Worm gear reducer replaces the original three-speed gearbox, eliminating the risk of gear damage during shifting

Model		BS-912G-JC	BS-912GR-JC
Capacity, round @ 90°		Ø9"	Ø9"
Capacity, rectangular @ 90°		7" × 12"	7" × 12"
Capacity, round @ 45°		Ø5-⅞"	Ø5-⅞"
Capacity, rectangular @ 45°		5" × 5-⅞"	5" × 5-⅞"
Blade speed @ 50 Hz	ft/min	115 – 230	115 – 230
Blade speed @ 60 Hz	ft/min	115 – 230	115 – 230
Blade size	in	1-⅛ × 0.035 × 104-½	1-⅛ × 0.035 × 104-½
Motor power	HP	2	2
Packing size	in	61 × 24 × 51	61 × 29 × 54
Net / gross weight	lb	403 / 547	485 / 639

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-916V · BS-916VR · BS-916B · VARIABLE SPEED

9" METAL CUTTING BAND SAW

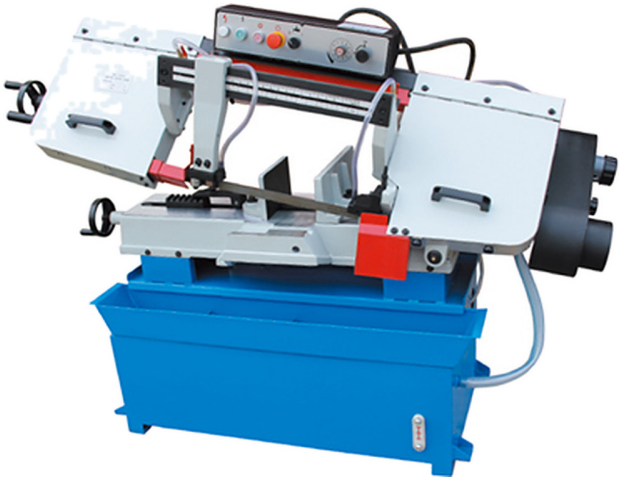

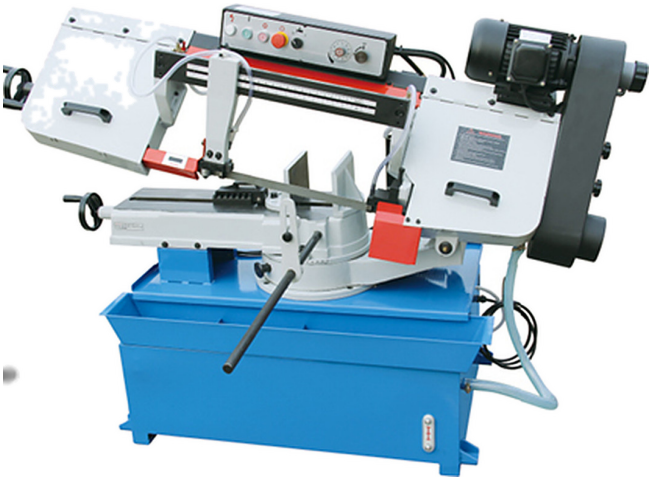

BS-916V

- Infinitely adjustable blade speed through PIV transmission
- Variable speed

BS-916VR

- Infinitely adjustable blade speed through PIV transmission
- Variable speed
- Swivelling bow

Model		BS-916VR	BS-916V	BS-916B
Capacity, round @ 90°		Ø9"	Ø9"	Ø9"
Capacity, rectangular @ 90°		5" × 16"	5" × 16"	5" × 16"
Capacity, round @ 45°		Ø5-⅞"	Ø5-⅞"	Ø9"
Capacity, rectangular @ 45°		5-⅞" × 7-½"	5-⅞" × 7-½"	5-⅞" × 7-½"
Blade speed @ 60 Hz	ft/min	72 – 400	72 – 400	114 / 196 / 288 / 377
Blade speed @ 50 Hz	ft/min	59 – 335	59 – 335	95 / 164 / 240 / 312
Blade size	in	1-⅛ × 0.035 × 126-½	1-⅛ × 0.035 × 119-½	1-⅛ × 0.035 × 121-¾
Motor power (3-phase)	HP	2	2	2
Drive		Belt	Belt	Belt
Packing size	in	74 × 31 × 54	71 × 31 × 48	68 × 33 × 45
Net / gross weight	lb	705 / 915	661 / 849	617 / 750

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-1018B · BS-1018M · HYDRAULIC DOWNFEED

10″ METAL CUTTING BAND SAW

BS-1018B

- Vertical force controlled through hydraulic cylinder
- Strong structure for big capacity cutting

BS-1018M

- Hydraulic downfeed
- Raising and swivelling saw frame manually
- Much larger capacity than the basic model BS-1018B

Model		BS-1018B	BS-1018M
Capacity, round @ 90°		Ø10″	Ø10-1/4″
Capacity, square @ 90°		–	□10-1/4″
Capacity, rectangular @ 90°		5″ × 18″	18″ × 4-7/8″
Capacity, round @ 45°		Ø5-7/8″	Ø9″
Capacity, square @ 45°		–	□8-5/8″
Capacity, rectangular @ 45°		5-7/8″ × 7-1/2″	9″ × 8-5/8″
Blade speed @ 60 Hz	ft/min	115 / 197 / 289 / 377	92 / 203 / 305 / 427
Blade speed @ 50 Hz	ft/min	95 / 164 / 240 / 312	79 / 171 / 256 / 358
Blade size	in	1-1/8 × 0.035 × 129-1/4	1-1/8 × 0.035 × 144
Motor power	HP	2	2
Drive		Belt	Belt
Packing size	in	72 × 33 × 46	84 × 34 × 49
Net / gross weight	lb	683 / 864	705 / 970

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-1018R · BS-1018RH · SWIVELLING BOW, HYDRAULIC CONTROL

10″ METAL CUTTING BAND SAW

BS-1018R

- Vertical force controlled through hydraulic cylinder
- The bow can be swivelled between 45° and 90°

BS-1018RH

- Gauge device
- Quick clamping vise
- Belt driven, with four cutting speeds
- Coolant system for extended blade life
- Both manual control and auto-cutting are available
- Hydraulic clamping vise — a more stable design for cutting
- Variable saw-arm descent speed, controlled by hydraulic cylinder

Model		BS-1018R	BS-1018RH
Capacity, round @ 90°		Ø10″	Ø10″
Capacity, rectangular @ 90°		6-¼″ × 16″	6-¼″ × 16″
Capacity, round @ 45°		Ø6-¾″	Ø6-¾″
Capacity, rectangular @ 45°		6-¼″ × 7-½″	6-¼″ × 7-½″
Blade speed @ 60 Hz	ft/min	115 / 197 / 289 / 377	115 / 197 / 289 / 377
Blade speed @ 50 Hz	ft/min	95 / 164 / 240 / 312	95 / 164 / 240 / 312
Blade size	in	1-⅛ × 0.035 × 126-½	1-⅛ × 0.035 × 126-½
Motor power (3-phase)	HP	2	2
Drive		Belt	Belt
Packing size	in	74 × 33 × 56	74 × 31 × 56
Net / gross weight	lb	750 / 970	926 / 1,175

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BS-1018T · BS-1018TA · BS-1018TH · 45°/60° MITRE CUTTING

METAL CUTTING BAND SAW

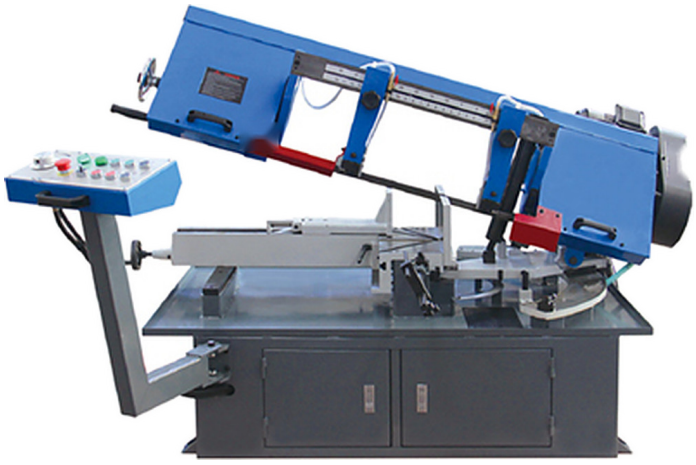

BS-1018T

- Raising and swivelling saw frame manually
- Hydraulic downfeed, variable speed
- Designed for 45°/60° cutting without moving the material

BS-1018TH

- Hydraulic downfeed, variable speed
- Saw frame moves up and down automatically
- Swivelling saw frame manually
- Movable control panel
- Designed for 45°/60° cutting

Model		BS-1018T	BS-1018TA	BS-1018TH
Capacity, round @ 90°		Ø10-1/4"	Ø10-1/4"	Ø10-1/4"
Capacity, rectangular @ 90°		10-1/4" × 17"	10-1/4" × 17"	10-1/4" × 17"
Capacity, round @ 60°		Ø6-1/8"	Ø6-1/8"	Ø6-1/8"
Capacity, rectangular @ 60°		4-7/8" × 4-7/8"	4-7/8" × 4-7/8"	4-7/8" × 4-7/8"
Capacity, round @ 45°		Ø10-1/4"	Ø10-1/4"	Ø10-1/4"
Capacity, rectangular @ 45°		Left: 10-1/4" × 5-1/8" Right: 11-3/4" × 7-7/8"	Left: 10-1/4" × 5-1/8" Right: 11-3/4" × 7-7/8"	Left: 10-1/4" × 5-1/8" Right: 11-3/4" × 7-7/8"
Blade speed @ 60 Hz	ft/min	92 / 203 / 305 / 427	92 / 203 / 305 / 427	92 / 203 / 305 / 427
Blade speed @ 50 Hz	ft/min	79 / 171 / 256 / 358	79 / 171 / 256 / 358	79 / 171 / 256 / 358
Blade size	in	1-1/8 × 0.035 × 144	1-1/8 × 0.035 × 144	1-1/8 × 0.035 × 144
Motor power	HP	2	2	2
Drive		Belt	Belt	Belt
Packing size	in	83 × 43 × 48	83 × 52 × 48	83 × 52 × 48
Net / gross weight	lb	1,027 / 1,146	1,041 / 1,246	1,135 / 1,440

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-2114T · BS-2114TH · MITRE CUTTING UP TO 60°

METAL CUTTING BAND SAW

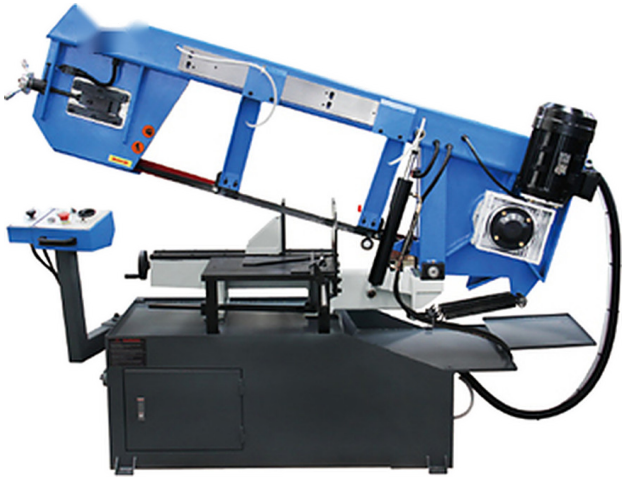

BS-2114T

- Precision and solidity put it at the forefront of band saws, with the possibility of cutting at any angle up to 60°
- Guides equipped with sintered carbides, which improve accuracy in series cuts
- Sliding vise with quick clamp, which makes replacing the workpiece really efficient
- Powerful cooling pump for extended blade life
- Stable, refined construction gives very high rigidity and stability when cutting, ensuring precise cutting and long trouble-free operation

BS-2114TH

- Saw frame moves up and down automatically
- Precision and solidity put it at the forefront of band saws, with the possibility of cutting at any angle up to 60°
- Guides equipped with sintered carbides, which improve accuracy in series cuts
- Sliding vise with quick clamp, which makes replacing the workpiece really efficient
- Powerful cooling pump for extended blade life
- Stable, refined construction gives very high rigidity and stability when cutting, ensuring precise cutting and long trouble-free operation

Model		BS-2114T	BS-2114TH
Capacity, round @ 90°		Ø15-3/4"	Ø15-3/4"
Capacity, rectangular @ 90°		21-3/4" × 14-1/4"	21-3/4" × 14-1/4"
Capacity, round @ 60°		Ø5-7/8"	Ø5-7/8"
Capacity, rectangular @ 60°		9-7/8" × 7-7/8"	9-7/8" × 7-7/8"
Capacity, round @ 45°		Ø13-1/2"	Ø13-1/2"
Capacity, rectangular @ 45°		15-3/4" × 13-1/2"	15-3/4" × 13-1/2"
Blade speed	ft/min	157 / 230	157 / 230
Blade size	in	1-3/8 × 0.043 × 173-1/2	1-3/8 × 0.043 × 173-1/2
Motor power	HP	3 / 3.8	3 / 3.8
Drive		Gear	Gear
Packing size	in	91 × 33 × 62	91 × 33 × 62
Net / gross weight	lb	1,279 / 1,565	1,389 / 1,676

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-5030 · PLC CONTROL WITH TOUCH SCREEN

SINGLE COLUMN METAL CUTTING BAND SAW

- Variable downfeed speed, controlled by hydraulic cylinder
- Hydraulic jaw clamping vise for more stable sawing
- Blade overload protection device
- Bearing and hard-alloy double guides extend blade life
- Work light available
- User-friendly graphical control system with finger-touch screen

MODEL **BS-5030** Single column, hydraulic clamping



Hydraulic clamping vise

PLC control with finger-touch screen

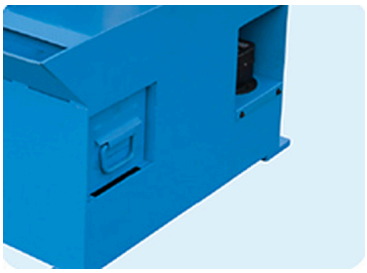

Chip box and powerful coolant system

Model		BS-5030
Capacity, round		Ø11-¾"
Capacity, rectangular		19-¾" × 11-¾"
Blade speed	ft/min	98 / 164 / 246 / 295
Blade size	in	1-⅜ × 0.043 × 164-½
Motor power	HP	4
Max. hydraulic pressure	psi	320
Drive		Belt
Packing size	in	89 × 52 × 67
Net / gross weight	lb	2,392 / 2,590

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-5040 · AUTO FEEDING WITH SHUTTLE VISE

SINGLE COLUMN METAL CUTTING BAND SAW

MODEL **BS-5040** Hydraulic auto feeding, 500 mm per stroke

- Variable downfeed speed, controlled by hydraulic cylinder
- Hydraulic jaw clamping vise for more stable sawing
- Blade overload protection device
- Bearing and hard-alloy double guides extend blade life
- Work light available
- User-friendly graphical control system with finger-touch screen
- Work light included for convenient operation
- Rapid descent until the blade touches the workpiece



Auto chip conveyor

Shuttle vise for auto feeding

Batch clamping device

Model		BS-5040
Capacity, round		Ø11-3/4"
Capacity, rectangular		19-3/4" × 11-3/4"
Blade speed	ft/min	98 / 164 / 246 / 295
Blade size	in	1-3/8 × 0.043 × 164-1/2
Motor power	HP	4
Max. hydraulic pressure	psi	360
Drive		Belt
Max. hydraulic feeding length	in	19.7
Packing size	in	89 × 84 × 70
Net / gross weight	lb	3,417 / 3,792

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

TGK-4220 · TBK-4220 · GEAR OR V-BELT DRIVE

DOUBLE COLUMN HORIZONTAL BAND SAW

Bow return position limit switch



V-belt transmission



Electric cabinet

MODEL **TBK-4220** Double column structure, high stability

- Hydraulic downfeed control with variable speed (TBK-4220)
- Gear driven (TGK-4220); V-belt driven with optional two speeds (TBK-4220)
- Optional: hydraulic clamping vise for TGK-4220 and TBK-4220
- Double column structure, high stability
- Standard accessories: work light, coolant system
- Standard support with roller

Model		TGK-4220	TBK-4220
Max. cutting capacity		Ø7-7/8" · 7-7/8" × 7-7/8"	Ø7-7/8" · 7-7/8" × 7-7/8"
Cutting speed	ft/min	92 / 148	92 / 148
Feed speed		Hydraulic, variable	Hydraulic, variable
Blade size	in	1-1/8 × 0.035 × 104-1/4	1-1/8 × 0.035 × 104-1/4
Workpiece clamping		Hydraulic	Hydraulic
Blade tensioning		Mechanical	Mechanical
Main motor power	HP	1.7 / 2.4	1.7 / 2.4
Hydraulic station	HP	0.7	0.7
Coolant pump motor power	HP	0.1	0.1
Drive		Gear	Belt
Packing size	in	66 × 38 × 51	65 × 39 × 50
Net / gross weight	lb	794 / 1,014	694 / 904

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

TBK-4228 · HYDRAULIC DOWNFEED AND CLAMPING

DOUBLE COLUMN HORIZONTAL BAND SAW

MODEL **TBK-4228** Double column structure, belt drive

Standard support with roller



Hydraulic clamping vise



Hand wheel feeding



V-belt transmission

- Hydraulic downfeed control with variable speed
- Auto shut-off when cutting is complete
- Bow return position can be preset
- Hydraulic clamping vise
- Manual handwheel feeding

Model		TBK-4228
Max. cutting capacity		11" × 11"
Cutting speed	ft/min	89 / 148 / 226
Feed speed		Hydraulic, variable
Blade size	in	1-⅛ × 0.035 × 138
Workpiece clamping		Hydraulic
Blade tensioning		Mechanical
Main motor power	HP	4
Oil pump motor power	HP	0.7
Drive		Belt
Packing size	in	86 × 52 × 63
Net / gross weight	lb	1,532 / 1,839

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TBK-4228A · 0°–45° ANGLE CUTTING

DOUBLE COLUMN HORIZONTAL BAND SAW

Swivel bow with precision guide



Swivel angle indicator



Hydraulic clamping vise

MODEL **TBK-4228A** 0°–45° angle cutting

- Hydraulic clamping vise
- Auto shut-off when cutting is complete
- Hydraulic downfeed control with variable speed
- Bow return position can be preset
- Standard accessories: work light, coolant system, standard support with roller

Model		TBK-4228A
Max. cutting capacity		90°: Ø11″ · 12-½″ × 11″ 45°: Ø6-¾″ · 6-¾″ × 11″ 30°: Ø10-¼″ · 10-¼″ × 11″
Cutting speed	ft/min	89 / 148 / 226
Feeding speed		Hydraulic, variable
Blade size	in	1-⅛ × 0.035 × 142-¾
Workpiece clamping		Hydraulic
Blade tensioning		Mechanical
Main motor power	HP	4
Oil pump motor power	HP	0.7
Drive		Belt
Packing size	in	85 × 51 × 63
Net / gross weight	lb	1,808 / 2,127

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

TBK-4228B · AUTO FEEDING AND CUTTING

DOUBLE COLUMN HORIZONTAL BAND SAW

Standard support with roller



Shuttle vise for auto feeding

Feeding limit switch

Electrical cabinet

MODEL **TBK-4228B** Auto feeding and cutting

- Hydraulic downfeed control with variable speed
- Hydraulic clamping vise
- V-belt driven, with 3 speeds
- Auto feeding by shuttle vise
- Auto shut-off when cutting is complete
- Bow return position can be preset
- Standard accessories: work light, coolant system, standard support with roller

Model		TBK-4228B
Max. cutting capacity		Ø11" · 11" × 11"
Cutting speed	ft/min	89 / 148 / 226
Feeding speed		Hydraulic, variable
Blade size	in	1-⅛ × 0.035 × 138
Workpiece clamping		Hydraulic
Blade tensioning		Mechanical
Main motor power	HP	4
Oil pump motor power	HP	0.7
Drive		Belt
Packing size	in	89 × 79 × 65
Net / gross weight	lb	2,183 / 2,557

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TBK-4228B (IMPROVED) · VARIABLE BLADE SPEED, AUTO CHIP CONVEYOR

DOUBLE COLUMN HORIZONTAL BAND SAW

MODEL **TBK-4228B (improved)** Variable blade speed, auto chip conveyor, new vise clamp design

Roller support stand

Variable speed



Auto chip conveyor



New vise clamp design

- Improved version of the TBK-4228B
- Variable blade speed
- Auto chip conveyor
- New vise clamp design
- Hydraulic, variably adjustable feed
- Hydraulic workpiece clamping

Model		TBK-4228B (improved)
Max. cutting capacity		Ø11" · 11" × 11"
Cutting speed	ft/min	0 – 200
Feeding speed		Hydraulic, variable
Blade size	in	1-⅛ × 0.035 × 138
Workpiece clamping		Hydraulic
Blade tensioning		Mechanical
Main motor power	HP	4
Oil pump motor power	HP	0.7
Drive		Belt
Packing size	in	89 × 79 × 65
Net / gross weight	lb	2,183 / 2,557

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

TGK-4235 · TGK-4240 · GEAR DRIVEN, VERTICAL LIFTING

DOUBLE COLUMN HORIZONTAL BAND SAW

MODEL **TGK-4240** Double column structure, vertical lifting

- Double column structure, vertical lifting, high stability
- Cutting speed with hydraulic control, variable
- Hydraulic clamping, easy to operate
- Optional: hydraulic clamping system with three positions

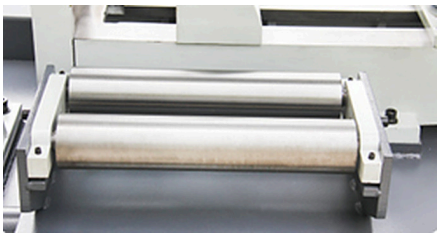

Back feed roller

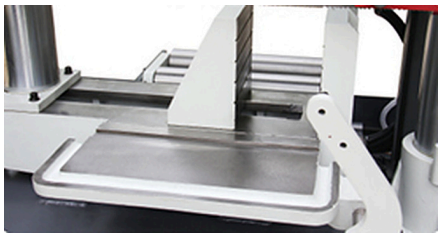

Fine milled table

Model		TGK-4235	TGK-4240
Max. cutting capacity		Ø13-3/4" · 13-3/4" × 13-3/4"	Ø15-3/4" · 15-3/4" × 15-3/4"
Cutting speed	ft/min	148 / 226	118 / 184
Feeding speed		Hydraulic, variable	Hydraulic, variable
Blade size	in	1-3/8 × 0.043 × 162	1-5/8 × 0.051 × 196-3/4
Workpiece clamping		Hydraulic	Hydraulic
Blade tensioning		Hydraulic	Hydraulic
Main motor power	HP	3 / 3.8	4 / 5.4
Oil pump motor power	HP	0.7	1
Coolant pump motor power	HP	0.1	1.2
Drive		Gear	Gear
Packing size	in	88 × 45 × 68	106 × 53 × 85
Net / gross weight	lb	1,940 / 2,183	2,921 / 3,494

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

GZ4250/70 · DOUBLE COLUMN GANTRY STRUCTURE

DOUBLE COLUMN HORIZONTAL BAND SAW

MODEL **GZ4250/70** Double column gantry band saw



Optional: electric or manual roller stand

- Double column gantry structure with large-diameter columns and extra-long sliding sleeves
- Two hydraulic cylinders control the cutting feed for great stability and high cutting efficiency
- Saw blade guided by hard-alloy blocks and rolling bearings, a design that effectively extends blade service life

Model		GZ4250/70
Capacity, round @ 90°		Ø19-¾"
Capacity, rectangular @ 90°		27-½" × 19-¾"
Blade speed	ft/min	131 – 262
Blade size (W×T)	in	1-⅝ × 0.051
Workpiece clamping		Hydraulic
Blade tensioning		Manual
Main motor power	HP	7.4
Hydraulic motor power	HP	2
Coolant pump motor power	HP	0.1
Drive		Belt
Packing size	in	140 × 59 × 86
Net / gross weight	lb	5,710 / 6,526

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

GZ4260/120 · BATCH SAWING OF TUBES, BARS, PROFILES AND PLATES

DOUBLE COLUMN HORIZONTAL BAND SAW

MODEL **GZ4260/120** Heavy-duty gantry band saw with roller table

Electric roller stand

- Hydraulic clamping vise, hydraulic blade tensioning
- Standard: manual roller stand, 1 m (3.3 ft)
- Optional: chip conveyor, electric brush, electric roller stand
- Mainly used for batch sawing of carbon steel tubes, bars, profiles and plates
- High cutting efficiency, energy saving, narrow kerf, material saving and simple operation

Model		GZ4260/120
Capacity, round @ 90°		Ø23-½"
Capacity, rectangular @ 90° (W×H)		47-¼" × 23-½"
Blade speed	ft/min	66 – 262
Blade size	in	2-⅝ × 0.051 × 346-½
Workpiece clamping		Hydraulic
Blade tensioning		Hydraulic
Main motor power	HP	15
Hydraulic motor power	HP	3
Coolant pump motor power	HP	0.2
Packing size	in	167 × 69 × 93
Net / gross weight	lb	11,155 / 11,729

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

HS7125 · HS7132 · HS7140 · HS7150

HYDRAULIC HACK SAW

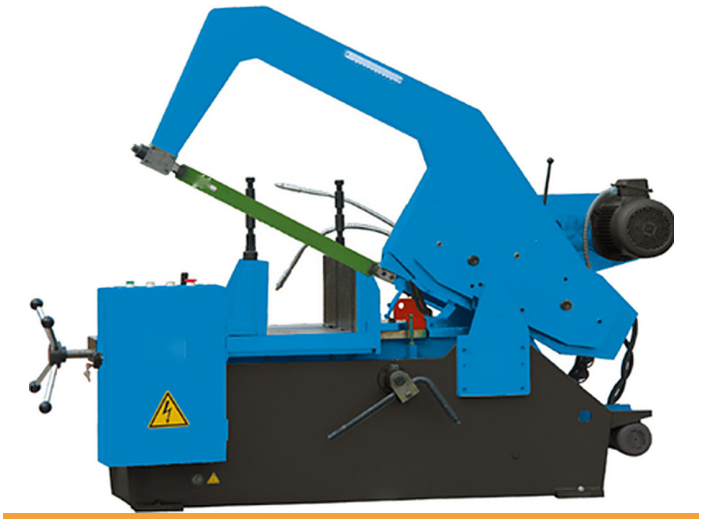

HS7150 / HS7140 / HS7132

Heavy-duty hydraulic hack saw

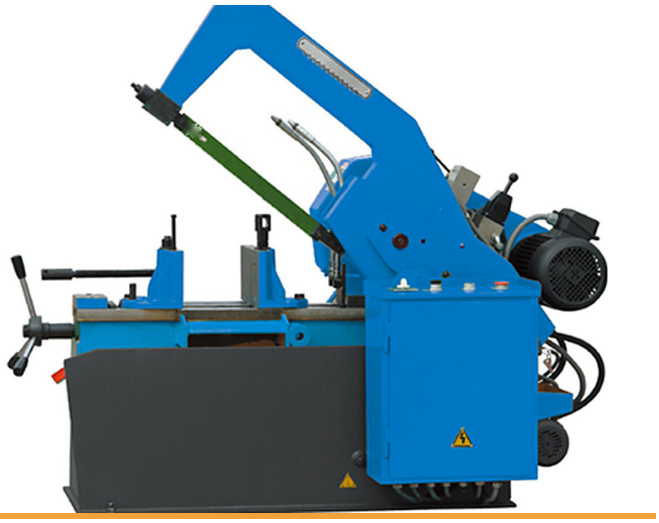

HS7125

Compact hydraulic hack saw

Roller stand

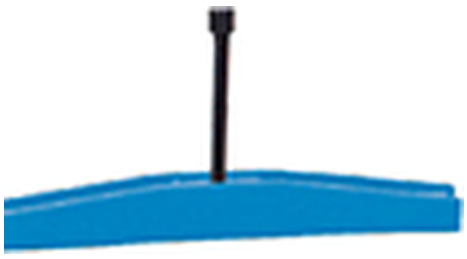

Material support

Roller support stand

Model		HS7125	HS7132	HS7140	HS7150
Capacity, round bar		Ø9-7/8"	Ø12-1/2"	Ø15-3/4"	Ø19-3/4"
Capacity, square bar		□8-5/8"	□11-1/2"	□13"	□15-3/4"
Oblique cutting	°	45	45	45	45
Sawing speed	strokes/min	39 / 49 / 63 / 78 / 98 / 126	39 / 60 / 70	39 / 60 / 70	39 / 60 / 70
Blade length	in	17.7	23.6	25.6	29.5
Blade width	in	1.8	2	2.2	2.5
Blade thickness	in	0.089	0.098	0.098	0.098
Main motor	HP	3.2 / 4	4	4	4
Coolant pump motor (2-pole)	HP	0.1	0.1	0.1	0.1
Blade rapid-descent motor (4-pole)	HP	0.3	0.3	0.3	0.3
Packing size	in	75 × 35 × 49	96 × 36 × 60	96 × 36 × 60	106 × 39 × 63
Net / gross weight	lb	1,318 / 1,521	2,502 / 2,811	2,646 / 3,197	3,009 / 3,395

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

EUROPEAN DESIGN SERIES · BS-170G · BS-180G · BS-260G

METAL CUTTING BAND SAW

BS-170G
BS-170GA: with optional electric cabinet

BS-180G
Mobile base with wheels

BS-260G
BS-260GA: with optional electric cabinet

EUROPEAN DESIGN SERIES

- Rigid cast-iron design with steel base serving as utility shelf
- Two speeds for optimum cutting of metal
- Coolant pump ensures longer service life of the saw blade
- Scale on the vise allows easy adjustment for angle cuts
- Quick-adjusting vise for angle cuts — the saw frame swivels, not the material

Optional electric cabinet for "A" models

Model		BS-170G / BS-170GA	BS-180G	BS-260G / BS-260GA
Capacity, round @ 90°		Ø6-3/4"	Ø7-1/8"	Ø8-7/8"
Capacity, rectangular @ 90°		7-7/8" × 6-3/4"	10-1/4" × 7-1/8"	10-1/4" × 7-7/8"
Capacity, round @ 60°		Ø2-3/4"	–	Ø3-1/2"
Capacity, rectangular @ 60°		2-3/8" × 2-3/8"	–	3-3/8" × 3-3/8"
Capacity, round @ 45°		Ø4-3/4"	Ø4-1/8"	Ø5-7/8"
Capacity, rectangular @ 45°		4-3/8" × 4-3/8"	4-3/4" × 4-1/8"	5-7/8" × 4-7/8"
Blade speed @ 50 Hz	ft/min	138 / 276	112 / 180 / 217	112 / 223
Blade speed @ 60 Hz	ft/min	164 / 328	128 / 217 / 269	135 / 266
Blade size	in	13/16 × 0.035 × 82	13/16 × 0.035 × 93	1-1/8 × 0.035 × 96-3/4
Motor power, 3-phase	HP	1 / 1.5	1	1 / 1.5
Motor power, 1-phase	HP	–	1.5	–
Drive		Gear	Gear	Gear
Packing size	in	48 × 28 × 39	55 × 24 × 44	57 × 28 × 40
Net / gross weight	lb	381 / 496	386 / 489	485 / 606

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

EUROPEAN DESIGN SERIES · BS-215G · BS-280G

METAL CUTTING BAND SAW

BS-215G

Gear driven, two speeds

BS-280G

Gear driven, two speeds

EUROPEAN DESIGN SERIES

- Downfeed system controlled by electric valve, European design
- Quick-adjusting vise for angle cuts — the saw frame swivels, not the material
- Coolant pump ensures longer service life of the saw blade
- Scale on the vise allows easy adjustment for angle cutting

Model		BS-215G	BS-280G
Capacity, round @ 90°		Ø5-7/8"	Ø8-5/8"
Capacity, rectangular @ 90°		7-7/8" × 4-3/4"	9-7/8" × 6-1/8"
Capacity, round @ 60°		—	Ø3-7/8"
Capacity, rectangular @ 60°		—	3-1/8" × 3-3/4"
Capacity, round @ 45° (right)		Ø4-3/4"	Ø6-1/4"
Capacity, rectangular @ 45° (right)		5-1/8" × 3-1/2"	6-1/4" × 4-3/8"
Blade speed @ 50 Hz	ft/min	131 / 262	131 / 262
Blade size	in	13/16 × 0.035 × 81	1-1/8 × 0.035 × 96-1/2
Motor power (3-phase)	HP	0.8 / 1.1	1 / 1.5
Drive		Gear	Gear
Packing size, body | stand	in	46 × 28 × 31 24 × 15 × 26	52 × 31 × 43 26 × 16 × 24
Net / gross weight	lb	467 / 540	560 / 633

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

BS-315G · BS-315GD · SWIVEL ON BOTH SIDES

METAL CUTTING BAND SAW

BS-315GD

Gear driven, two-speed motor

BS-315G

Gear driven, two-speed motor

- Hand switch control available
- Swivel on both sides
- Electric coolant system
- Hydraulic cylinder for controlled descent
- High-capacity band driven by two-speed motor
- Accident-prevention devices on the flywheel casing and on the blade
- Vertical rotation on bolt with adjustable tapered bearings, without backlash
- Band tensioning by electro-mechanical blade tensioner with microswitch

Model		BS-315G	BS-315GD
Capacity, round @ 90°		Ø9″	Ø9-⅞″
Capacity, rectangular @ 90°		12-½″ × 6-¾″	12-½″ × 7-½″
Capacity, round @ 60° (right)		Ø5-⅛″	Ø5-⅞″
Capacity, rectangular @ 60° (right)		5-⅛″ × 5-⅛″	5-⅛″ × 5-⅞″
Capacity, round @ 45° (left & right)		Ø8-¼″	Ø9″
Capacity, rectangular @ 45° (left & right)		8-¼″ × 6-¾″	8-¼″ × 7-½″
Blade speed @ 50 Hz	ft/min	131 / 262	131 / 262
Blade speed @ 60 Hz	ft/min	157 / 315	157 / 315
Blade size	in	1-⅛ × 0.035 × 111-¼	1-⅛ × 0.035 × 111-¼
Motor power	HP	1 / 1.5	1 / 1.5
Drive		Gear	Gear
Packing size, body | stand	in	64 × 34 × 38 28 × 22 × 24	64 × 34 × 42 28 × 22 × 24
Net / gross weight	lb	772 / 882	772 / 882

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-315GH · BS-315GF · LEFT & RIGHT SWIVEL 30°/45°/60°

METAL CUTTING BAND SAW

Fast angle stop



Left & right swivel 30° / 45° / 60°

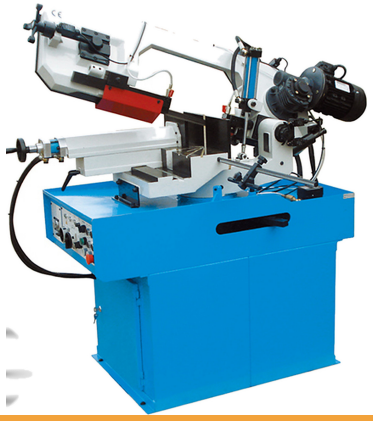

BS-315GH

Hydraulic descent, swivel on both sides

BS-315GF

10" capacity version

BS-315GF control panel

- Hydraulic cylinder for controlled descent
- High-capacity band driven by two-speed motor
- Accident-prevention devices on the flywheel casing and on the blade
- Vertical rotation on bolt with adjustable tapered bearings, without backlash
- Band tensioning by electro-mechanical blade tensioner with microswitch
- Swivel on both sides
- Electric coolant system

Model		BS-315GH	BS-315GF
Capacity, round @ 90°		Ø9"	Ø9-7/8"
Capacity, rectangular @ 90°		12-1/2" × 6-3/4"	12-1/2" × 7-1/2"
Capacity, round @ 60° (right)		Ø5-1/8"	Ø5-7/8"
Capacity, rectangular @ 60° (right)		5-1/8" × 4-1/8"	5-1/8" × 5-7/8"
Capacity, round @ 45° (left & right)		Ø8-1/4"	Ø9"
Capacity, rectangular @ 45° (left & right)		8-1/4" × 6-3/4"	8-1/4" × 7-1/2"
Blade speed @ 50 Hz	ft/min	131 / 262	131 / 262
Blade speed @ 60 Hz	ft/min	157 / 315	157 / 315
Blade size	in	1-1/8 × 0.035 × 111-1/4	1-1/8 × 0.035 × 111-1/4
Motor power	HP	1 / 1.5	1 / 1.5
Drive		Gear	Gear
Packing size	in	64 × 35 × 61	64 × 35 × 61
Net / gross weight	lb	882 / 1,135	882 / 1,135

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BS-315GH-JC · BS-460G-JC · SWIVEL-HEAD BAND SAWS

METAL CUTTING BAND SAW

BS-315GH-JC

- Compact and flexible finger-touch keys
- Electric coolant system
- Hydraulic cylinder for controlled descent
- High-capacity band driven by a two-speed motor

MODEL **BS-315GH-JC** Swivel-head band saw

Model		BS-315GH-JC
Max. cutting capacity		90°: Ø9" · 12-½" × 6-¾" 60° right: Ø5-⅛" · 5-⅛" × 4-⅛" 45° left & right: Ø8-¼" · 8-¼" × 6-¾"
Blade speed (50 Hz)	ft/min	131 / 262
Blade speed (60 Hz)	ft/min	157 / 315
Blade size	in	1-⅛ × 0.035 × 111-¼
Motor power	HP	1 / 1.5
Drive		Gear
Packing size	in	64 × 35 × 61
Net / gross weight	lb	882 / 1,135

Movable control panel with finger-touch keys

MODEL **BS-460G-JC** Movable control panel version

BS-460G-JC

- Movable control panel
- Swivels on both sides
- Hydraulic clamping vise
- Hydraulic cylinder for controlled descent
- Compact and flexible finger-touch keys
- Vertical rotation on a pivot bolt with adjustable tapered bearings, without backlash
- Blade tensioning by electro-mechanical blade tensioner with microswitch
- Variable blade speed by VFD drive
- Specifications: see the BS-460G / BS-460G-JC table on the following page

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

BS-460G · BS-460G-JC · SWIVELS ON BOTH SIDES

METAL CUTTING BAND SAW

Standard conveyor

Optional PLC control panel

MODEL **BS-460G** Swivels on both sides

- Swivels on both sides
- Hydraulic clamping vise
- Hydraulic cylinder for controlled descent
- High-capacity band driven by a two-speed motor
- Vertical rotation on a pivot bolt with adjustable tapered bearings, without backlash
- Blade tensioning by electro-mechanical blade tensioner with microswitch
- Optional: PLC control
- Optional: servo motor with variable speed

Model		BS-460G	BS-460G-JC
Max. cutting capacity		90°: Ø13″ · 18″ × 9-7/8″ 60° right: Ø8-1/8″ · 8-1/8″ × 9-7/8″ 45° left & right: Ø12″ · 12″ × 9-7/8″	90°: Ø13″ · 18″ × 9-7/8″ 60° right: Ø8-1/8″ · 8-1/8″ × 9-7/8″ 45° left & right: Ø12″ · 12″ × 9-7/8″
Blade speed (50 Hz)	ft/min	131 / 262	131 / 262
Blade speed (60 Hz)	ft/min	157 / 315	157 / 315
Blade size	in	1-1/8 × 0.035 × 156	1-1/8 × 0.035 × 156
Motor power	HP	2 / 3	2 / 3
Drive		Gear	Gear
Packing size	in	91 × 41 × 64	91 × 44 × 64
Net / gross weight	lb	1,984 / 2,337	1,984 / 2,337

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS300X370 · ROLLER FEEDING, AUTOMATIC CYCLE SAWING

AUTOMATIC METAL CUTTING BAND SAW

MODEL **BS300x370** Straight cutting with continuous roller feeding

- Designed for straight cutting
- Hydraulic vises are controlled automatically
- Continuous roller feeding enables automatic cycle sawing
- Digital display shows the cutting count in real time
- Quick-descent feed device for higher sawing efficiency
- Ideal for cutting batches of the same length

Control panel



Roller feeding

Model		BS300x370
Capacity, round		Ø11-¾"
Capacity, rectangular		11" × 14-½"
Blade speed @ 50 Hz	ft/min	0 – 308
Blade speed @ 60 Hz	ft/min	0 – 371
Blade size	in	1-⅛ × 0.035 × 150-½
Worktable height	in	28.7
Main motor power	HP	3
Feeding motor power	HP	0.3
Drive		Gear
Packing size	in	84 × 52 × 59
Net / gross weight	lb	1,764 / 2,094

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS300X370H · AUTOMATIC FEEDING AND CUTTING, MITER CUTTING 0°–60°

AUTOMATIC METAL CUTTING BAND SAW

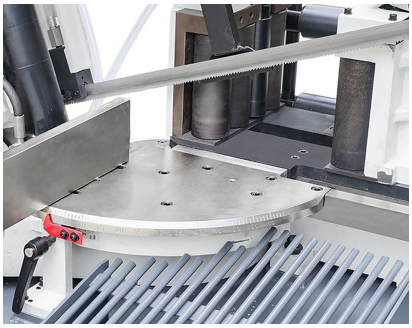

Cutting angle from 0° to 60°

MODEL **BS300x370H** PLC-controlled automatic feeding and cutting

- Automatic feeding and cutting
- Miter cutting from 0° to 60°
- Hydraulic vises are controlled automatically
- PLC control panel automatically adjusts the length to be cut
- Ideal for serial cuts in different lengths

Model		BS300x370H
Capacity, round @ 0°		Ø11-¾"
Capacity, rectangular @ 0°		14-½" × 11"
Capacity, round @ 30° (right)		Ø11"
Capacity, rectangular @ 30° (right)		11" × 11"
Capacity, round @ 45° (right)		Ø9"
Capacity, rectangular @ 45° (right)		9" × 9-⅞"
Capacity, round @ 60° (right)		Ø5-⅛"
Capacity, rectangular @ 60° (right)		5-⅛" × 5-⅞"
Blade speed @ 50 Hz	ft/min	0 – 308
Blade speed @ 60 Hz	ft/min	0 – 371
Blade size	in	1-⅛ × 0.035 × 150-½
Worktable height	in	28.7
Main motor power	HP	3
Feeding motor power	HP	0.3
Drive		Gear
Packing size	in	84 × 52 × 59
Net / gross weight	lb	2,072 / 2,403

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-460GB · SEMI-CNC WITH AUTOMATIC FEEDING

SEMI-CNC METAL CUTTING BAND SAW

BS-460GB semi CNC

MODEL **BS-460GB** Semi-CNC with automatic feeding and roller tables

Feeding & clamping

PLC control

- Automatic feeding & clamping
- PLC control
- Optional: servo motor with variable speed
- Feeding length can be set in metric or inch units
- Protective guard keeps the operator safe
- 3 m (9.8 ft) feeding and back platform
- Effective width of feeder stand: 18.1" (460 mm)
- Height of feeder stand: 33.5" (850 mm)
- Max. single feed length: 19.7" (500 mm)

Model		BS-460GB
Max. cutting capacity		90°: Ø13" · 18" × 9-7/8" 60° right: Ø8-1/8" · 8-1/8" × 9-7/8" 45° right: Ø12" · 12" × 9-7/8"
Blade speed (50 Hz)	ft/min	131 / 262
Blade speed (60 Hz)	ft/min	157 / 315
Blade size	in	1-3/8 × 0.043 × 156
Motor power	HP	2 / 3
Drive		Gear
Packing size	in	98 × 91 × 64
Net / gross weight	lb	3,351 / 3,649

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-500G · BS-500GT · CNC AUTOMATIC FEEDING AND CUTTING

CNC METAL CUTTING BAND SAW

MODEL **BS-500G** CNC automatic feeding and cutting, automatic rotary saw bow

- CNC automatic feeding and cutting
- PLC control
- Hydraulic clamping vise
- Automatic rotary saw bow
- Max. bow rotation: 45°
- Servo motor for variable blade speed
- Max. single feed distance: 19.7" (500 mm)

Model		BS-500G	BS-500GT
Max. cutting capacity		90°: Ø13-3/4" · 19-3/4" × 13-3/4" 45°: Ø13" · 13" × 13-3/4"	90°: Ø16-1/4" · 19-3/4" × 16-1/4" 45°: Ø13-1/4" · 10-1/2" × 16-1/4"
Blade speed	rpm	0 – 63	0 – 55
Blade size	in	1-3/8 × 0.043 × 164-1/2	1-3/8 × 0.043 × 179-1/4
Motor power	HP	5, servo motor	5, servo motor
Packing size	in	88 × 87 × 67	89 × 93 × 69
Net / gross weight	lb	5,952 / 6,393	6,129 / 6,614

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-650G · CNC AUTOMATIC FEEDING AND CUTTING

CNC METAL CUTTING BAND SAW

MODEL **BS-650G** CNC automatic feeding and cutting, swivel beam 30°, 45° & 90°

Auto feeding with shuttle clamping vise and linear scale indicator

FEATURES

- Swivel beam 30°, 45° & 90° by PLC programming
- Hydraulic box vise suitable for batch cutting
- Servo motor for variable speed with high torque
- Capacity: 25.6" × 13.8" (650 × 350 mm)
- Shuttle vise for precise automatic feeding
- Touch screen on swivel panel for comfortable operation

- CNC automatic feeding and cutting
- Hydraulic clamping vise
- Automatic rotary saw bow
- Servo motor for variable blade speed
- Max. automatic feed length: 25.6" (650 mm)

Model		BS-650G
Max. cutting capacity		90°: Ø18" · 25-½" × 13-¾" 60° right: Ø12-¼" · 12-¼" × 13-¾" 45° right: Ø18" · 18" × 13-¾"
Blade speed	rpm	23 – 95
Blade size	in	1-⅝ × 0.051 × 205-½
Motor power	HP	7.4, servo motor
Drive		Gear
Packing size	in	119 × 90 × 87
Net / gross weight	lb	5,357 / 6,019

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-650GA · MANUAL FEEDING, AUTOMATIC CUTTING

METAL CUTTING BAND SAW

Movable control panel

MODEL **BS-650GA** Swivels on both sides, variable blade speed

- Manual feeding
- Automatic cutting
- Hydraulic clamping vise
- Standard blade tension gauge
- Swivels on both sides
- DRO shows blade speed
- Frequency-controlled motor, variable blade speed

Model		BS-650GA
Capacity, round @ 90°		Ø18″
Capacity, rectangular @ 90°		25-½″ × 13-¾″
Capacity, round @ 60° (right)		Ø12-¼″
Capacity, rectangular @ 60° (right)		12-¼″ × 13-¾″
Capacity, round @ 45° (left & right)		Ø18″
Capacity, rectangular @ 45° (left & right)		18″ × 13-¾″
Blade speed	ft/min	0 – 312
Blade size	in	1-⅝ × 0.051 × 205-½
Motor power	HP	7.4
Drive		Gear
Packing size	in	116 × 58 × 83
Net / gross weight	lb	3,616 / 4,145

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

BS-850G · CNC AUTOMATIC FEEDING AND CUTTING

CNC METAL CUTTING BAND SAW

MODEL **BS-850G** CNC automatic feeding and cutting with automatic rotary saw bow

PLC control with finger touch screen

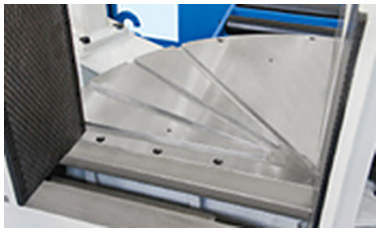

15°, 30°, 45° angle cutting

Automatic chip conveyor

- CNC automatic feeding and cutting
- PLC control
- Hydraulic clamping vise
- Automatic rotary saw bow
- Max. bow rotation: 45°
- Servo motor for variable blade speed
- Max. single feed distance: 23.6" (600 mm)
- Operation board position can be adjusted easily
- Linear scales guarantee precise feeding

Model		BS-850G
Max. cutting capacity		90°: Ø23-½" · 33-½" × 23-½" 45° right: Ø15-¾" · 15-¾" × 23-½"
Blade size	in	2-⅛ × 0.063 × 263-¼
Blade speed	ft/min	0 – 390
Motor power	HP	7.4, servo motor
Packing size (body)	in	140 × 83 × 105
Packing size (feeder)	in	70 × 68 × 59
Net / gross weight	lb	8,697 / 9,337

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

VS-300 · VS-400 · BUILT-IN BLADE WELDER

VERTICAL BAND SAW

Welder: blade cutting



Welder: blade welding

Welder: blade sanding

MODEL **VS-400** Variable-speed vertical band saw

- Performs many kinds of cutting such as bevelling, shaping, contour cutting and slicing
- Variable speed for cutting many materials: metal, plastic, wood, rubber, etc.
- Variable blade speed by programmable inverter
- Blade widths from 1/8" to 5/8" (3-16 mm) can be used
- Blade welding function on the machine
- Table tilts 45°
- Adjustable blade guard height
- Work light
- Table gauge available
- Servo motor optional

Model		VS-300	VS-400
Max. cutting height		7-1/4"	11-1/4"
Max. cutting width		12-1/4"	15-3/4"
Table size	in	19.7 × 15.7	21.7 × 23.6
Motor speed (50 Hz)	rpm	0 – 1500	0 – 1400
Blade speed (50 Hz)	ft/min	33 – 591	49 – 853
Blade length	in	111.6 – 114.8	133.5 – 136.5
Blade width		1/8" – 5/8"	1/8" – 5/8"
Table tilt		Right 45°, left 15°	Right 45°, left 15°
Main motor / grinder motor	HP	0.7 / 0.1	2 / 0.1
Electric welder	kVA	2.4	2.4
Packing size	in	38 × 26 × 69	43 × 31 × 79
Net / gross weight	lb	606 / 761	683 / 838

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

VS-500 · VS-585 · BUILT-IN BLADE WELDER

VERTICAL BAND SAW

Work table can be swivelled

Table gauge

Blade guard height adjustable

MODEL **VS-500** Variable-speed vertical band saw

- Performs many kinds of cutting such as bevelling, shaping, contour cutting and slicing
- Variable speed for cutting many materials: metal, plastic, wood, rubber, etc.
- Variable blade speed by programmable inverter
- Blade widths from 1/8" to 5/8" (3-16 mm) can be used (VS-585: 1/4" to 3/4", 6-19 mm)
- Built-in blade welder
- Table tilts 45°
- Work light
- Servo motor optional

Model		VS-500	VS-585
Max. cutting height		12-1/4"	13-1/4"
Max. cutting width		19-3/4"	23"
Table size	in	26 × 27.6	26 × 27.6
Motor speed (50 Hz)	rpm	0 – 1400	0 – 1400
Blade speed (50 Hz)	ft/min	49 – 1,076	49 – 1,076
Blade length	in	156.7 – 159.4	174.4 – 178
Blade width		1/8" – 5/8"	1/4" – 3/4"
Table tilt		Right 30°, left 15°	Right 30°, left 15°
Main motor / grinder motor	HP	2 / 0.1	2 / 0.1
Electric welder	kVA	2.4	2.4
Packing size	in	55 × 35 × 87	58 × 37 × 91
Net / gross weight	lb	1,067 / 1,208	1,224 / 1,411

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

CS-225 · CS-250 · CS-275 · HEAD SWIVELS 45° LEFT AND RIGHT

CIRCULAR SAW

CS-225

Bench model

CS-250 / CS-275

With stand

- Vise complete with anti-burr device
- 24 V low-voltage control with hold-to-run control knob
- Head swivels 45° right and left
- Reduction unit in oil bath

Model		CS-225	CS-250	CS-275
Max. blade diameter	in	8.9	9.8	10.8
Capacity, round @ 90°		Ø2-3/8"	Ø2-3/8"	Ø2-3/4"
Capacity, rectangular @ 90°		2" × 2"	3" × 1-3/4"	3-1/2" × 1-3/4"
Capacity, round @ 45°		Ø2"	Ø2-1/8"	Ø2-1/2"
Capacity, rectangular @ 45°		2" × 2"	2-1/8" × 1-3/4"	2-3/4" × 1-3/4"
Blade speed (50 Hz)	rpm	46	42	42
Vise opening	in	2.8	3.9	3.9
Motor power	HP	1	1.5	1.5
Drive		Gear	Gear	Gear
Packing size	in	28 × 20 × 24	34 × 23 × 30 (body) 31 × 19 × 13 (stand)	34 × 23 × 31 (body) 31 × 19 × 13 (stand)
Net / gross weight	lb	139 / 165	315 / 377	326 / 384

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

CS-315 · CS-350 · TWO BLADE SPEEDS, SWIVELLING SAW FRAME

CIRCULAR SAW

Double vise

MODEL **CS-315 / CS-350** With stand

- Easy manual pressing operation
- Quick-adjusting vise for angle cuts; the saw frame swivels
- Two blade speeds

Model		CS-315	CS-350
Max. blade diameter	in	12.4	13.8
Capacity, round @ 90°		Ø3-7/8"	Ø4-3/4"
Capacity, rectangular @ 90°		5-1/2" × 3-1/2"	5-1/2" × 3-7/8"
Capacity, round @ 45°		Ø3-1/2"	Ø4-1/8"
Capacity, rectangular @ 45°		3-7/8" × 3-1/2"	3-7/8" × 3-7/8"
Blade speed (50 Hz)	rpm	18 / 36	18 / 36
Vise opening	in	5.7	5.7
Motor power	HP	1 / 1.7 (three-phase) 1.5 (single-phase)	1 / 1.7 (three-phase) 1.5 (single-phase)
Drive		Gear	Gear
Packing size	in	39 × 24 × 37 (body) 31 × 24 × 20 (stand)	39 × 24 × 37 (body) 31 × 24 × 20 (stand)
Net / gross weight	lb	500 / 575	520 / 595

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

PDS-315H · AUTOMATIC CUTTING, HYDRAULIC CLAMPING

HYDRAULIC CIRCULAR SAW

MODEL **PDS-315H** Automatic cutting with hydraulic clamping and foot pedal

- Max. blade diameter: 12.4″ (315 mm)
- Saw frame swivels ±45°
- Equipped with coolant system
- Two blade speeds
- Double vise design
- Automatic cutting, hydraulic clamping

Model		PDS-315H
Max. blade diameter	in	12.4
Capacity, round pipe		45°: Ø3-1⁄8″ 90°: Ø3-1⁄2″
Capacity, rectangular pipe		45°: 2-3⁄8″ × 2-3⁄8″ 90°: 3-1⁄8″ × 3-1⁄8″
Motor power (two-speed)	HP	3 / 4
Blade speed	rpm	60 / 120
Main hydraulic cylinder travel	in	5.1
Main hydraulic cylinder max. pressure	psi	1,450
Hydraulic clamping cylinder travel	in	0.4
Hydraulic station motor	HP	1
Hydraulic station pressure	psi	440
Hydraulic station control		4-pole motor, 24 V DC control
Drive		Gear
Packing size	in	57 × 30 × 65
Net / gross weight	lb	1,014 / 1,146

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

PDS-400 · HEAVY DUTY, HEAD SWIVELS 60° RIGHT AND 45° LEFT

CIRCULAR SAW

MODEL **PDS-400** Heavy-duty circular saw with stand

- Heavy-duty construction
- Compact design, easy operation
- Max. blade diameter: 15.7″ (400 mm)
- Electrical power control
- Manual vise feeding
- Two blade speeds
- Head swivels right to 60°, left to 45°

Model		PDS-400
Max. blade diameter	in	15.7
Capacity, round pipe		90°: Ø4-3/4″ 45°: Ø4-1/2″ 60°: Ø3-3/4″
Capacity, rectangular pipe		90°: 4-3/8″ × 4-3/8″ 45°: 4-1/8″ × 4-1/8″ 60°: 3″ × 3″
Capacity, U-channel steel		90°: 5-7/8″ × 3″ 45°: 3-7/8″ × 2″ 60°: 3″ × 1-5/8″
Capacity, angle steel		90°: 4-1/2″ × 4-1/2″ 45°: 3-7/8″ × 3-7/8″ 60°: 2-3/4″ × 2-3/4″
Capacity, round bar		90°: Ø2-1/2″ 45°: Ø2-1/2″ 60°: Ø2-1/8″
Capacity, rectangular bar		90°: 5-7/8″ × 3″ 45°: 3-7/8″ × 2″ 60°: 2-3/4″ × 2″
Motor power (two-speed)	HP	3 / 3.8
Blade speed	rpm	20 / 40
Drive		Gear
Packing size	in	43 × 36 × 64
Net / gross weight	lb	798 / 977

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

QCS-400 · QCS-400A · PNEUMATIC CLAMPING, SWIVELLING BLADE

CIRCULAR SAW FOR ALUMINUM

QCS-400

Enclosed aluminum cutting saw, blade swivels ±45°

QCS-400A

Heavy-duty version, blade swivels 0°–180°



QCS-400: pneumatic clamping vise



QCS-400A: swivel table, pneumatic clamps and control panel

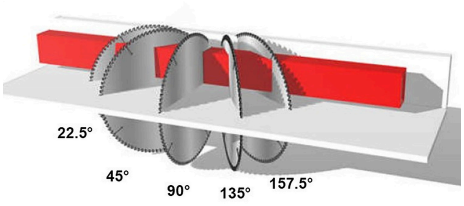

QCS-400A: blade swivel angles

- Blade swivels ±45° (QCS-400) or from 0° to 180° (QCS-400A)
- Fast pneumatic clamping vise
- Pneumatic cylinder for controlled descent
- Designed for professional cutting of aluminum alloy

Model		QCS-400	QCS-400A
Max. blade diameter	in	15.7	15.7
Capacity, round @ 90°		Ø4-1⁄8"	Ø4-1⁄8"
Capacity, rectangular @ 90°		7-7⁄8" × 3-1⁄8"	7-7⁄8" × 3-1⁄8"
Capacity, round @ 45° (left & right)		Ø4-1⁄8"	Ø4-1⁄8"
Capacity, rectangular @ 45° (left & right)		7-7⁄8" × 3-1⁄8"	7-7⁄8" × 3-1⁄8"
Blade speed (50 Hz)	rpm	2800	2800
Motor power	HP	1.5	1.5
Drive		Belt	Belt
Packing size	in	34 × 31 × 56	38 × 38 × 59
Net / gross weight	lb	287 / 441	556 / 717

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

QCS-500A · PNEUMATIC CLAMPING, BLADE SWIVELS 0°–180°

CIRCULAR SAW FOR ALUMINUM



Swivel table, pneumatic clamps and control panel

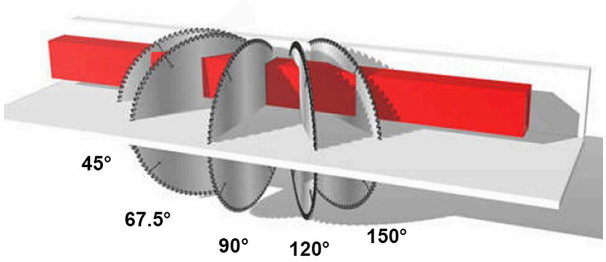

Blade swivel angles

MODEL **QCS-500A** Enclosed aluminum cutting saw

- Blade swivels from 0° to 180°
- Fast pneumatic clamping vise
- Pneumatic cylinder for controlled descent
- Designed for professional cutting of aluminum alloy

Model		QCS-500A
Max. blade diameter	in	19.7
Capacity, round @ 90°		Ø6-¾"
Capacity, rectangular @ 90°		10-¼" × 5-⅛"
Capacity, round @ 45° (left & right)		Ø6-¾"
Capacity, rectangular @ 45° (left & right)		9-½" × 3-⅞"
Blade speed (50 Hz)	rpm	2800
Motor power	HP	3
Drive		Belt
Packing size	in	42 × 42 × 65
Net / gross weight	lb	750 / 926

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SQ-40-1 ABRASIVE CUT-OFF MACHINE · TV-300 · TV-350 · TV-400

CUT-OFF SAW

SQ-40-1

Abrasive cut-off machine

- Used in construction, metalworking, petrochemical, machinery, metallurgy, and water and electrical installation
- Suitable for cutting round bar, special pipe and all kinds of angle steel and flat steel

TV-300 / TV-350 / TV-400

Cut-off saw with stand

- Vise complete with anti-burr device
- 24 V low-voltage control with hold-to-run control knob
- Abrasive cutting tool

SQ-40-1 ABRASIVE CUT-OFF MACHINE

Model		SQ-40-1
Rotation speed	rpm	2242
Wheel size	in	16 × 1/8 × 1 (1-1/4)
Motor power	HP	3
Max. capacity		Ø5-1/2"
Packing size	in	35 × 20 × 28
Net / gross weight	lb	198 / 220

TV-300 / TV-350 / TV-400 CUT-OFF SAWS

Model		TV-300	TV-350	TV-400
Max. blade diameter	in	11.8	13.8	15.7
Capacity, round @ 90°		Ø3-7/8"	Ø4-3/4"	Ø5-1/2"
Capacity, rectangular @ 90°		2-3/4" × 4-3/4"	3-1/8" × 4-3/4"	3-1/2" × 4-3/4"
Capacity, round @ 45°		Ø3-1/2"	Ø4-1/8"	Ø4-3/4"
Capacity, rectangular @ 45°		2-3/4" × 3-1/2"	3-1/2" × 3-7/8"	3-1/2" × 4-3/8"
Blade speed (50 Hz)	rpm	5400	4300	3200
Vise opening	in	7.5	7.5	8.7
Motor power	HP	5.4	5.4	7.4
Drive		Belt	Belt	Belt
Packing size	in	34 × 22 × 34 (body) 24 × 20 × 30 (stand)	34 × 25 × 36 (body) 24 × 20 × 30 (stand)	44 × 30 × 41 (body) 31 × 25 × 22 (stand)
Net / gross weight	lb	309 / 364	320 / 375	357 / 450

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

CHS-355 · TCT BLADE, CUTS METAL WITH MINIMAL HEAT AND BURRS

14″ CHOP SAW

MODEL **CHS-355** Rear view

MODEL **CHS-355** Heavy-duty cast aluminum base, quick-action vise

Vise with angle adjustment



Cutting channel steel

Cutting square tube

Cutting round tube

- Cuts metal with minimal heat and burrs
- Heavy-duty cast aluminum base
- Supplied with a 14″ mild steel cutting TCT blade (66 teeth)
- 3 HP (2.2 kW) / 15 A motor with high-torque gearbox
- Blade guard and chip deflection shield available
- Accessories: V-vise × 1, carbon brushes × 2, chip box × 1 (matching saw blades: see Cutting Saw Blades)

Model		CHS-355
Max. blade diameter		Ø14″
Max. mild steel plate thickness		1/2″
Max. stainless steel plate thickness		3/16″
Capacity, square tube		90°: □4-3/4″ 45°: □3-1/8″
Capacity, rectangular tube		90°: 3-3/4″ × 7-1/8″ 45°: 3-1/8″ × 4-3/8″
Capacity, round tube		90°: Ø5-1/8″ 45°: Ø4-1/8″
Capacity, wood		90°: 3-1/2″ × 7-1/4″ 45°: 2-1/2″ × 3-1/2″
Motor power, 50 Hz / 60 Hz version (1-phase)	HP	3 / 2.4
Motor current, 50 Hz / 60 Hz version	A	10 / 15
No-load speed	rpm	1450
Packing size	in	22 × 15 × 18
Net / gross weight	lb	55 / 62

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TCT CHOP SAW BLADES FOR CHS-355 · HSS COLD SAW BLADES FOR CS / PDS CIRCULAR SAWS

CUTTING SAW BLADES

Chop saw blade, 14" diameter

CHOP SAW BLADES FOR CHS-355

- TCT construction ensures maximum longevity and durability
- Hardened steel body minimizes vibration for smoother cutting
- Thin-kerf design allows accurate cuts and extends tool life

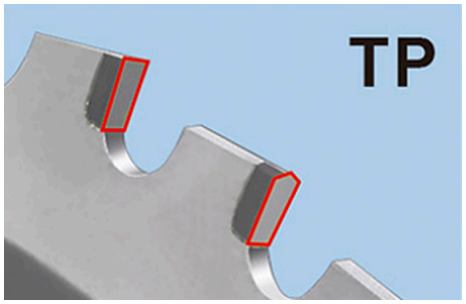

Tooth shape TP

Tooth shape BW

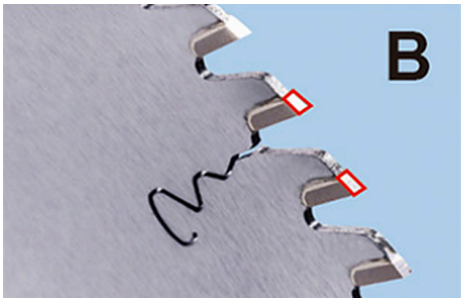

Tooth shape B

INCLUDED WITH EVERY NOVOTECH MACHINE

- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

TCT CHOP SAW BLADES FOR CHS-355 · HSS COLD SAW BLADES FOR CS / PDS CIRCULAR SAWS

CUTTING SAW BLADES (CONT.)

CHOP SAW BLADE

Model		Blade for CHS-355
Blade diameter		Ø14″
Kerf	in	0.094
Blade body thickness	in	0.079
Blade bore		Ø1″
Max. blade speed	rpm	1500

CHOP SAW BLADE SELECTION

Blade	Teeth	Tooth shape	Tip material	Cutting material
B355-01	66	TP	Cermet	Carbon steel
B355-02	72	TP	Cermet	Carbon steel
B355-03	80	TP	Cermet	Carbon steel
B355-04	90	TP	Cermet	Carbon steel
B355-05	100	TP	Cermet	Carbon steel
B355-06	80	TP	Carbide	Aluminum
B355-07	90	BW	Carbide	Brass, plastic, copper
B355-08	100	B	Carbide KK68	Stainless steel

HSS COLD SAW BLADES

- HSS cold saw blade made from M2 (DM05) tool steel
- Ideal for cutting metal tubing
- Smooth cut with minimum noise
- TiN coating prolongs service life
- Heat treated, hardness up to 65 HRC

TiN-coated HSS cold saw blade

BLADE FOR COLD SAW MODEL

Model		CS-225	CS-250	CS-275	CS-315	PDS-315H	CS-350	PDS-400
Blade diameter		Ø8-7/8″	Ø9-7/8″	Ø10-3/4″	Ø12-1/2″	Ø12-1/2″	Ø13-3/4″	Ø15-3/4″
Blade thickness	in	0.079	0.079	0.079	0.079	0.079	0.079	0.118
Arbor hole		Ø1-1/4″	Ø1-1/4″	Ø1-1/4″	Ø1-5/8″	Ø1-1/4″	Ø1-1/4″	Ø1-5/8″
Number of teeth		220	180	180	220	220	240	200

INCLUDED WITH EVERY NOVOTECH MACHINE

- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

RB365X3000D · STANDS AND SUPPORTS FOR SAWS

ROLLER CONVEYOR WITH DIGITAL LENGTH STOP

MODEL **RB365x3000D** Closed steel roller conveyor, 3 m

- Height adjustable and clampable
- Length stop with digital display
- Manual movement of the stop
- Stable closed steel roller conveyor

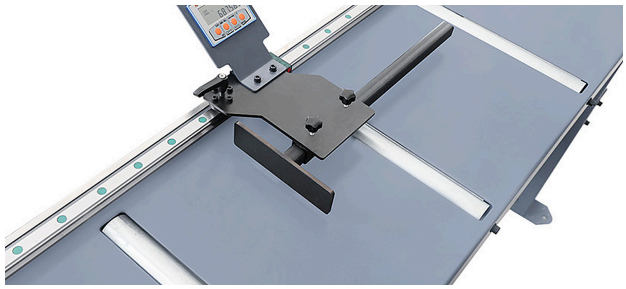

Manually movable length stop

Digital length display

Model		RB365x3000D
Effective length of support rack	FT	10 FT
Effective length of support rack	in	120.1
Effective width of support rack	in	14.4
Max. height	in	41.7
Min. height	in	29.9
Max. load capacity	lb	882
Dimensions (L×W×H)	in	126 × 26 × 38
Packing size	in	130 × 21 × 12
Net / gross weight	lb	254 / 370

INCLUDED WITH EVERY NOVOTECH MACHINE

- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

SRB-320X1000D · SRB-320X2000D · STANDS AND SUPPORTS FOR SAWS

ROLLER STAND WITH VERTICAL ROLLERS

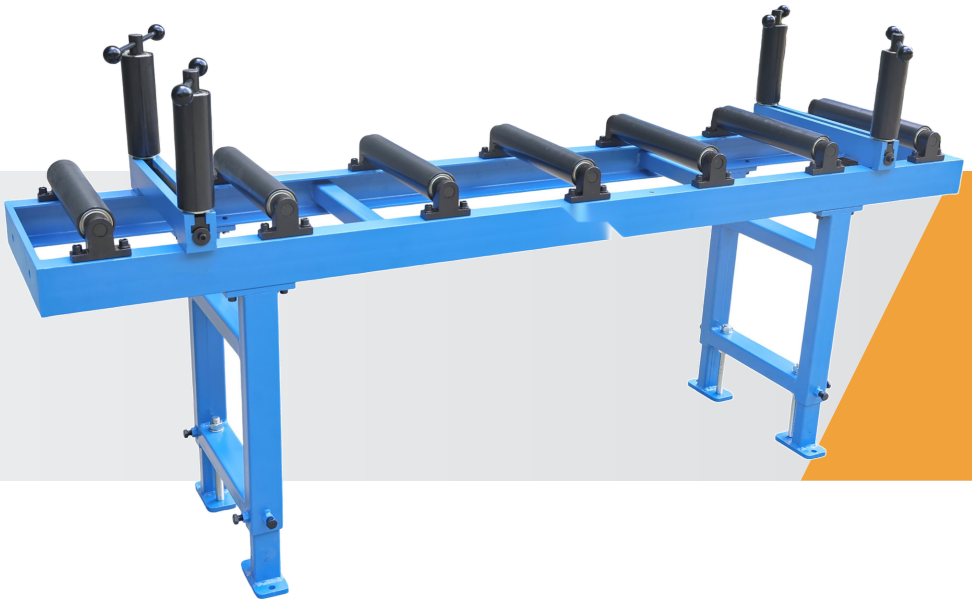

MODEL **SRB-320x2000D** Roller stand with adjustable vertical rollers

- Height adjustable
- Adjustable vertical rollers on both sides keep long material from tilting during cutting, for more accurate dimensions
- Single or multiple stands can be connected and extended to meet different requirements

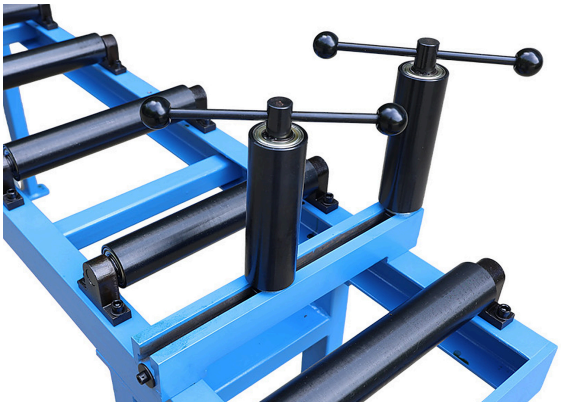

Adjustable vertical rollers

Model		SRB-320x1000D	SRB-320x2000D
Effective length of support rack	FT	3.3 FT	6.6 FT
Effective length of support rack	in	39.4	78.7
Effective width of support rack	in	12.6	12.6
Max. height	in	29.3	29.3
Min. height	in	25.8	25.8
Max. load capacity	lb	1,323	1,323
Packing size	in	43 × 21 × 16	82 × 21 × 16
Net / gross weight	lb	176 / 220	271 / 346

INCLUDED WITH EVERY NOVOTECH MACHINE

- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down – 0% Down Financing Available**
- **Installation and training available**

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga location.

PHONE
+1 647 526 5510

WEB & EMAIL
NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS
1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

Specifications subject to change without notice. Imperial values converted from manufacturer metric data and rounded. Photos may show optional equipment.