NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

COLD SAWS AND CUT-OFF SAWS

COLD SAWS 9 – 14" · PDS SEMI-AUTOMATIC AND HEAVY-DUTY SAWS · ABRASIVE CUT-OFF SAWS · ALUMINUM CUT-OFF SAWS · ROLLER STANDS AND CONVEYORS







China
MADE IN CHINA

6
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE SAWS

CONTENTS

COLD SAWS

CS cold saws, 9 – 14″ blade, cut Ø2-3/8 – 4-3/4″ CS-225 – CS-350 · 5 models 04

PDS-315H semi-automatic hydraulic cold saw, 12-1/2″ blade PDS-315H · 1 model 06

PDS-400 heavy-duty cold saw, 16″ blade PDS-400 · 1 model 07

ABRASIVE CUT-OFF SAWS

TV abrasive cut-off saws, 12 – 16″ wheel, and SQ-40-1 portable saw TV-300 – SQ-40-1 · 4 models 08

ROLLER STANDS, ROLLER CONVEYORS AND ROLLER TABLES

Roller stands, roller conveyors and measuring roller tables RV1100 – SRB-320×2000D · 9 models 10

ALUMINUM CUT-OFF SAWS

QCS-400 · QCS-500A aluminum cut-off saws, 16″ and 20″ blade, pneumatic clamping QCS-400 · QCS-400A · QCS-500A · 3 models 13

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE COLD SAWS AND CUT-OFF SAWS

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

SAWS FOR THE FABRICATION SHOP

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.

A cold saw cuts metal with a slow-turning, coolant-flooded blade and leaves a square, burr-free end that is cool to the touch: gear-driven manual cold saws, a semi-automatic hydraulic saw and a heavy-duty 16″ saw, abrasive cut-off saws, aluminum cut-off saws with pneumatic clamping, and the roller stands and conveyors that carry long bar to the saw.

CS-225 – CS-350 · 5 MODELS

CS COLD SAWS, 9 – 14" BLADE, CUT Ø2-3/8 – 4-3/4"



MODEL CS · CS-315 COLD SAW ON STAND WITH TWO-SPEED MOTOR AND DOUBLE VISE



CS-250 / CS-275 cold saw on cabinet stand, 10 – 11" blade



CS-225 bench cold saw, 9" blade, with double vise and length stop

Ø2-3/8 – 4-3/4" round

Gear-driven cold saws for clean, burr-free cuts in tube, bar and profiles. The CS-225, CS-250 and CS-275 run a 9 – 11" blade at 42 – 46 rpm through a gearbox in an oil bath, with a 24 V hold-to-run control and a vise with an anti-burr device, and swivel 45° left and right; the CS-315 and CS-350 on stands take 12-1/2 and 14" blades, cut Ø3-7/8 and 4-3/4" round, run at two speeds (18 / 36 rpm) and clamp in a quick-adjusting double vise.

STANDARD FEATURES

- Round capacity at 90°: Ø2-3/8" (CS-225, CS-250) to Ø4-3/4" (CS-350); rectangular to 5-1/2 × 3-7/8"
- Head swivels 45° left and right; angle cuts at 45° to Ø4-1/8"
- Gear drive; reduction unit in an oil bath (CS-225 – 275); two blade speeds (CS-315, 350)
- 24 V low-voltage hold-to-run control; vise with anti-burr device; double vise on the CS-315 and 350
- CS-315 / 350: 1 / 1.7 HP two-speed 3-phase or 1.5 HP single-phase motor

OPTIONAL EQUIPMENT

CS-225 · CS-250 · CS-275 — TECHNICAL SPECIFICATIONS

Model	CS-225	CS-250	CS-275
Blade diameter, max	**8.9" (225 mm)**	**9.8" (250 mm)**	**10.8" (275 mm)**
Round, 90°	**Ø2-3/8" (60 mm)**	**Ø2-3/8" (60 mm)**	**Ø2-3/4" (70 mm)**
Rectangular, 90°	1-15/16 × 1-15/16" (50 × 50 mm)	3 × 1-3/4" (75 × 45 mm)	3-1/2 × 1-3/4" (90 × 45 mm)
Round, 45°	Ø2" (52 mm)	Ø2-1/8" (55 mm)	Ø2-1/2" (65 mm)
Rectangular, 45°	1-15/16 × 1-15/16" (50 × 50 mm)	2-1/8 × 1-3/4" (55 × 45 mm)	2-3/4 × 1-3/4" (70 × 45 mm)
Blade speed rated at 50 Hz	**46 rpm**	**42 rpm**	**42 rpm**
Vise opening	2.8" (70 mm)	3.9" (100 mm)	3.9" (100 mm)
Motor	**1 HP (0.75 kW)**	**1.5 HP (1.1 kW)**	**1.5 HP (1.1 kW)**
Drive	Gear	Gear	Gear
Packing size L × W × H	28 × 20 × 24" (71 × 50 × 62 cm)	34 × 23 × 30" (86 × 58 × 77 cm) body + 31 × 19 × 13" (78 × 47 × 33 cm) stand	34 × 23 × 31" (86 × 58 × 78 cm) body + 31 × 19 × 13" (78 × 47 × 33 cm) stand
Weight	**139 lb (63 kg)**	**315 lb (143 kg)**	**326 lb (148 kg)**

TECHNICAL SPECIFICATIONS

CS COLD SAWS, 9 – 14" BLADE, CUT Ø2-3/8 – 4-3/4"

CS-315 · CS-350

Cold saws on stand, 12 – 14" blade, two speeds

Model	CS-315	CS-350
Blade diameter, max	**12.4" (315 mm)**	**13.8" (350 mm)**
Round, 90°	**Ø3-7/8" (100 mm)**	**Ø4-3/4" (120 mm)**
Rectangular, 90°	5-1/2 × 3-1/2" (140 × 90 mm)	5-1/2 × 3-7/8" (140 × 100 mm)
Round, 45°	Ø3-1/2" (90 mm)	Ø4-1/8" (105 mm)
Rectangular, 45°	3-7/8 × 3-1/2" (100 × 90 mm)	3-7/8 × 3-7/8" (100 × 100 mm)
Blade speed rated at 50 Hz	**18 / 36 rpm**	**18 / 36 rpm**
Vise opening	5.7" (145 mm)	5.7" (145 mm)
Motor	**1 / 1.7 HP (0.75 / 1.3 kW) two-speed, 3-phase · 1.5 HP (1.1 kW) 1-phase**	**1 / 1.7 HP (0.75 / 1.3 kW) two-speed, 3-phase · 1.5 HP (1.1 kW) 1-phase**
Drive	Gear	Gear
Packing size L × W × H	39 × 24 × 37" (98 × 62 × 93 cm) body + 31 × 24 × 20" (78 × 60 × 50 cm) stand	39 × 24 × 37" (98 × 62 × 95 cm) body + 31 × 24 × 20" (78 × 60 × 50 cm) stand
Weight	**500 lb (227 kg)**	**520 lb (236 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine. Speeds marked "rated at 50 Hz" are the manufacturer's 50 Hz figures — motors run about 20 % faster on 60 Hz power.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

PDS-315H · 1 MODEL

PDS-315H SEMI-AUTOMATIC HYDRAULIC COLD SAW, 12-1/2" BLADE



MODEL PDS-315H · PDS-315H SEMI-AUTOMATIC HYDRAULIC COLD SAW WITH COOLANT AND HYDRAULIC CLAMPING

Ø3-1/2" round

The semi-automatic cold saw: hydraulic clamping and a hydraulic feed cylinder make the cut — the operator loads the bar and presses start. A 12-1/2" blade at 60 or 120 rpm, a saw frame that swivels ±45°, a double vise, coolant and 24 V DC controls; Ø3-1/2" round and 3-1/8" square tube at 90°.

STANDARD FEATURES

- Ø3-1/2" (90 mm) round and 3-1/8 × 3-1/8" tube at 90°; Ø3-1/8" at 45°
- Automatic cutting cycle: hydraulic feed and hydraulic clamping
- Two-speed 3 / 4 HP motor, 60 / 120 rpm
- Saw frame swivels ±45°; double vise; coolant system

OPTIONAL EQUIPMENT

PDS-315H — TECHNICAL SPECIFICATIONS

Model	PDS-315H
Blade diameter, max	**12.4" (315 mm)**
Round pipe, 90° / 45°	**Ø3-1/2" (90 mm) / Ø3-1/8" (80 mm)**
Rectangular pipe, 90° / 45°	3-1/8 × 3-1/8" (80 × 80 mm) / 2-3/8 × 2-3/8" (60 × 60 mm)
Motor	**3 / 4 HP (2.2 / 3 kW), two-speed**
Blade speed rated at 50 Hz	**60 / 120 rpm**
Feed cylinder stroke	5.1" (130 mm), max. 1,450 psi (10 MPa)
Clamping cylinder stroke	0.4" (10 mm)
Hydraulic power unit	1 HP (750 W), 24 V DC control, 435 psi (3 MPa)
Drive	Gear
Packing size L × W × H	57 × 30 × 65" (146 × 75 × 166 cm)
Weight	**1,014 lb (460 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine. Speeds marked "rated at 50 Hz" are the manufacturer's 50 Hz figures — motors run about 20 % faster on 60 Hz power.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

PDS-400 · 1 MODEL

PDS-400 HEAVY-DUTY COLD SAW, 16" BLADE



MODEL PDS-400 · PDS-400 HEAVY-DUTY COLD SAW FOR 16" BLADES ON CABINET STAND

Ø4-3/4" round tube

The heavy-duty manual cold saw for structural sections: a 16" blade at 20 or 40 rpm on a compact cabinet stand, a head that swivels 60° right and 45° left, and capacities up to Ø4-3/4" round tube, 5-7/8 × 3" channel and 4-1/2 × 4-1/2" angle at 90°.

STANDARD FEATURES

- Ø4-3/4" round tube, 4-3/8" square tube, 5-7/8 × 3" channel and flat bar, 4-1/2" angle at 90°
- Miter cuts 45° left and 60° right
- Two-speed 3 / 3.75 HP motor, 20 / 40 rpm
- Electric power control; manual vise feed

OPTIONAL EQUIPMENT

PDS-400 — TECHNICAL SPECIFICATIONS

Model	PDS-400
Blade diameter, max	**15.7" (400 mm)**
Round pipe, 90° / 45° / 60°	**Ø4-3/4" (120 mm) / Ø4-1/2" (115 mm) / Ø3-3/4" (95 mm)**
Rectangular pipe, 90° / 45° / 60°	4-3/8 × 4-3/8" (110 × 110 mm) / 4-1/8 × 4-1/8" (105 × 105 mm) / 3 × 3" (75 × 75 mm)
Channel, 90° / 45° / 60°	5-7/8 × 3" (150 × 75 mm) / 3-7/8 × 1-15/16" (100 × 50 mm) / 3 × 1-9/16" (75 × 40 mm)
Angle, 90° / 45° / 60°	4-1/2 × 4-1/2" (115 × 115 mm) / 3-7/8 × 3-7/8" (100 × 100 mm) / 2-3/4 × 2-3/4" (70 × 70 mm)
Round bar, 90° / 45° / 60°	Ø2-1/2" (65 mm) / Ø2-1/2" (65 mm) / Ø2-1/8" (55 mm)
Flat bar, 90° / 45° / 60°	5-7/8 × 3" (150 × 75 mm) / 3-7/8 × 1-15/16" (100 × 50 mm) / 2-3/4 × 1-15/16" (70 × 50 mm)
Motor	**3 / 3.75 HP (2.2 / 2.8 kW), two-speed**
Blade speed rated at 50 Hz	**20 / 40 rpm**
Drive	Gear
Packing size L × W × H	43 × 36 × 64" (110 × 91 × 162 cm)
Weight	**798 lb (362 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine. Speeds marked "rated at 50 Hz" are the manufacturer's 50 Hz figures — motors run about 20 % faster on 60 Hz power.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

TV-300 – SQ-40-1 · 4 MODELS

TV ABRASIVE CUT-OFF SAWS, 12 – 16" WHEEL, AND SQ-40-1 PORTABLE SAW



MODEL TV · TV-300 / TV-350 / TV-400 ABRASIVE CUT-OFF SAW ON STAND



SQ-40-1 portable abrasive cut-off saw on wheels

Ø3-7/8 – 5-1/2" round

Abrasive cut-off saws on stands for fast square and miter cuts in tube, pipe, angle, flat and solid steel — construction, plumbing, electrical and petrochemical work: 12, 14 and 16" wheels on belt drives with 5.5 – 7.5 HP, a vise with an anti-burr device and a 24 V hold-to-run control. The SQ-40-1 is a portable 16" saw on wheels.

STANDARD FEATURES

- ✓ Ø3-7/8" (TV-300) to Ø5-1/2" (TV-400, SQ-40-1) round at 90°
- ✓ Miter cuts to 45°; vise opening 7.5 – 8.7"
- ✓ Belt drive; 5.5 – 7.5 HP; wheel speed 3,200 – 5,400 rpm
- ✓ 24 V low-voltage hold-to-run control; anti-burr vise

OPTIONAL EQUIPMENT

TV-300 · TV-350 · TV-400 — TECHNICAL SPECIFICATIONS

Model	TV-300	TV-350	TV-400
Wheel diameter, max	**11.8" (300 mm)**	**13.8" (350 mm)**	**15.7" (400 mm)**
Round, 90°	**Ø3-7/8" (100 mm)**	**Ø4-3/4" (120 mm)**	**Ø5-1/2" (140 mm)**
Rectangular, 90°	2-3/4 × 4-3/4" (70 × 120 mm)	3-1/8 × 4-3/4" (80 × 120 mm)	3-1/2 × 4-3/4" (90 × 120 mm)
Round, 45°	Ø3-1/2" (90 mm)	Ø4-1/8" (105 mm)	Ø4-3/4" (120 mm)
Rectangular, 45°	2-3/4 × 3-1/2" (70 × 90 mm)	3-1/2 × 3-7/8" (90 × 100 mm)	3-1/2 × 4-3/8" (90 × 110 mm)
Wheel speed rated at 50 Hz	**5,400 rpm**	**4,300 rpm**	**3,200 rpm**
Vise opening	7.5" (190 mm)	7.5" (190 mm)	8.7" (220 mm)
Motor	**5.5 HP (4 kW)**	**5.5 HP (4 kW)**	**7.5 HP (5.5 kW)**
Drive	Belt	Belt	Belt
Packing size L × W × H	34 × 22 × 34" (87 × 57 × 86 cm) body + 24 × 20 × 30" (60 × 50 × 77 cm) stand	34 × 25 × 36" (86 × 64 × 92 cm) body + 24 × 20 × 30" (60 × 50 × 77 cm) stand	44 × 30 × 41" (112 × 76 × 103 cm) body + 31 × 25 × 22" (80 × 64 × 57 cm) stand
Weight	**309 lb (140 kg)**	**320 lb (145 kg)**	**357 lb (162 kg)**

TECHNICAL SPECIFICATIONS

TV ABRASIVE CUT-OFF SAWS, 12 – 16" WHEEL, AND SQ-40-1 PORTABLE SAW

SQ-40-1

Portable abrasive cut-off saw, 16" wheel

Model	SQ-40-1
Wheel diameter, max	16" × 1/8" × 1" bore (405 × 3 × 25.4 / 32 mm)
Round, 90°	Ø5-1/2" (140 mm)
Wheel speed	2,242 rpm
Motor	3 HP (2.2 kW)
Packing size L × W × H	35 × 20 × 28" (90 × 52 × 70 cm)
Weight	198 lb (90 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine. Speeds marked "rated at 50 Hz" are the manufacturer's 50 Hz figures — motors run about 20 % faster on 60 Hz power.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Built in China to North American standards
- CSA-approved electrical panel
- 1-year warranty
- 7-day money-back guarantee
  in-stock machines only
- Spare parts & technical support
  readily available in Canada
- Order today with just 10% down
  0% down financing available
- Installation and training available

RV1100 – SRB-320×2000D · 9 MODELS

ROLLER STANDS, ROLLER CONVEYORS AND MEASURING ROLLER TABLES



MODEL ROLLER · RA785 ROLLER TABLE WITH MEASURING FEED SYSTEM



RB365×3000D roller conveyor with digital length stop



SRB-320×2000D roller stand with vertical side rollers

Stands, conveyors and roller tables

Material support for saws, shears, brakes and drills: V-roller and flat roller stands, a tripod stand, roller conveyors in 41″ sections with 79″ and 118″ extensions, the RB365×3000D — a 120″ roller conveyor on a closed steel frame with a length stop that reads out digitally — the SRB-320 roller stands, 39″ and 79″ long, with adjustable vertical side rollers that guide the bar, and the RA785 roller table with a measuring feed system that positions the bar to ±0.012″ at 40 – 140 in/min.

STANDARD FEATURES

- ✓ Height-adjustable stands 23 – 43″; loads to 728 lb
- ✓ Roller conveyors 1,323 – 1,543 lb; extensions of 79″, 118″ and more
- ✓ RB365×3000D: 120″ conveyor with a digital length stop, 882 lb
- ✓ SRB-320×1000D / 2000D: 39″ and 79″ stands with vertical side rollers, 1,323 lb
- ✓ RA785: 79″ roller table with measuring feed, ±0.012″ (0.3 mm)

OPTIONAL EQUIPMENT

ROLLER STANDS AND CONVEYORS — TECHNICAL SPECIFICATIONS

Model	RV1100	RB1100	RB1000	RB365	RB2000	RA785
Type	V-roller stand	Roller stand	Tripod roller stand	Roller conveyor, 41″ (1,040 mm) — 2,000 / 3,000 mm extensions	Roller conveyor	Roller table with measuring feed system, 79″ (2,000 mm)
Height	24.4 – 43.3″ (620 – 1,100 mm)	24.4 – 43.3″ (620 – 1,100 mm)	23 – 38.6″ (585 – 980 mm)	23.6 – 39.4″ (600 – 1,000 mm)	23 – 38.6″ (585 – 980 mm)	31.5 – 39.4″ (800 – 1,000 mm)
Roller width	8.9″ (225 mm)	13.8″ (350 mm)	—	14.4″ (365 mm)	—	18.1″ (460 mm), rollers Ø2″ (50 mm) at 11″ (280 mm)
Load, max	728 lb (330 kg)	661 lb (300 kg)	331 lb (150 kg)	1,323 lb (600 kg)	1,543 lb (700 kg)	336 lb/ft (500 kg/m)
Feed system	—	—	—	—	—	40 – 140 ipm, accuracy ±0.012″ (0.3 mm)
Weight	35 lb (16 kg)	35 lb (16 kg)	18 lb (8 kg)	76 lb (34.5 kg)	115 lb (52 kg)	320 lb (145 kg)

DETAILS, COMPONENTS AND OPTIONS

ROLLER STANDS, ROLLER CONVEYORS AND MEASURING ROLLER TABLES



RB365 roller conveyor



RV1100 V-roller stand



RB1100 roller stand



RB1000 roller stand with tripod base



Length stop with digital display

TECHNICAL SPECIFICATIONS

ROLLER STANDS, ROLLER CONVEYORS AND MEASURING ROLLER TABLES

RB365×3000D · SRB-320×1000D · SRB-320×2000D

Roller conveyor with digital length stop and roller stands with side rollers

Model	RB365×3000D	SRB-320×1000D	SRB-320×2000D
Type	**Roller conveyor 120" (3,050 mm) with digital length stop**	**Roller stand 39" (1,000 mm) with vertical side rollers**	**Roller stand 79" (2,000 mm) with vertical side rollers**
Height	**29.9 – 41.7" (760 – 1,060 mm)**	**25.8 – 29.3" (655 – 745 mm)**	**25.8 – 29.3" (655 – 745 mm)**
Roller width	14.4" (365 mm)	12.6" (320 mm)	12.6" (320 mm)
Load, max	**882 lb (400 kg)**	**1,323 lb (600 kg)**	**1,323 lb (600 kg)**
Feed system	Length stop moved by hand, with a digital readout; closed steel frame	—	—
Side rollers	—	Adjustable vertical side rollers guide the bar	Adjustable vertical side rollers guide the bar
Weight	**254 lb (115 kg)**	**176 lb (80 kg)**	**271 lb (123 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

QCS-400 · QCS-400A · QCS-500A · 3 MODELS

QCS-400 · QCS-500A ALUMINUM CUT-OFF SAWS, 16" AND 20" BLADE, PNEUMATIC CLAMPING



MODEL QCS · QCS-500A ALUMINUM CUT-OFF SAW WITH 20" BLADE AND PNEUMATIC CLAMPING



QCS-400A aluminum cut-off saw with pneumatic clamping and safety hood



QCS-400 aluminum cut-off saw with pneumatic clamping and guard

Profiles to 10-1/4 × 5-1/8"

Saws for aluminum profiles at 2,800 rpm with fast pneumatic clamping and a pneumatic cylinder that brings the blade down at a controlled speed: the QCS-400 and QCS-400A have a 16" blade that swivels 45° left and right for miter cuts in profiles up to 7-7/8 × 3-1/8"; the QCS-500A has a 20" blade on a head that swivels from 0 to 180° and a 3 HP motor, and cuts profiles up to 10-1/4 × 5-1/8" at 90° and 9-1/2 × 4" at 45°.

STANDARD FEATURES

- ✓ QCS-400 / 400A: 16" blade; Ø4-1/8" round, 7-7/8 × 3-1/8" (200 × 80 mm) profiles at 90° and 45°; 1.5 HP
- ✓ QCS-500A: 20" blade; Ø6-11/16" round; 10-1/4 × 5-1/8" at 90°, 9-1/2 × 4" at 45°; 3 HP
- ✓ Blade swivels ±45° (QCS-400) or 0 – 180° (QCS-500A)
- ✓ Pneumatic clamping vise; pneumatic feed cylinder; belt drive, 2,800 rpm


OPTIONAL EQUIPMENT

QCS-400 · QCS-400A — TECHNICAL SPECIFICATIONS

Model	QCS-400	QCS-400A
Blade diameter, max	**15.7" (400 mm)**	**15.7" (400 mm)**
Round, 90° and 45°	**Ø4-1/8" (105 mm)**	**Ø4-1/8" (105 mm)**
Rectangular, 90° and 45° left and right	**7-7/8 × 3-1/8" (200 × 80 mm)**	**7-7/8 × 3-1/8" (200 × 80 mm)**
Blade speed rated at 50 Hz	**2,800 rpm**	**2,800 rpm**
Motor	**1.5 HP (1.1 kW)**	**1.5 HP (1.1 kW)**
Drive	Belt	Belt
Packing size L × W × H	34 × 31 × 56" (86 × 78 × 141 cm)	38 × 38 × 59" (97 × 97 × 150 cm)
Weight	**287 lb (130 kg)**	**556 lb (252 kg)**

DETAILS, COMPONENTS AND OPTIONS

QCS-400 · QCS-500A ALUMINUM CUT-OFF SAWS, 16" AND 20" BLADE, PNEUMATIC CLAMPING

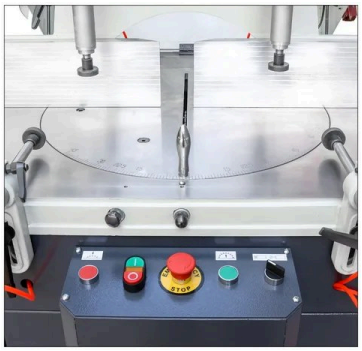

Pneumatic vise, swivel scale and control panel of the QCS-500A

TECHNICAL SPECIFICATIONS

QCS-400 · QCS-500A ALUMINUM CUT-OFF SAWS, 16" AND 20" BLADE, PNEUMATIC CLAMPING

QCS-500A

Aluminum cut-off saw with 20" blade swivelling 0 – 180°, pneumatic clamping and descent

Model	QCS-500A
Blade diameter, max	**19.7" (500 mm)**
Round, 90° and 45°	**Ø6-3/4" (170 mm)**
Rectangular, 90° and 45° left and right	**10-1/4 × 5-1/8" (260 × 130 mm) at 90°, 9-1/2 × 4" (240 × 100 mm) at 45°**
Blade speed	**2,800 rpm**
Motor	**3 HP (2.2 kW)**
Blade swivel	0 – 180°
Drive	Belt
Packing size L × W × H	42 × 42 × 65" (107 × 107 × 164 cm)
Weight	**750 lb (340 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine. Speeds marked "rated at 50 Hz" are the manufacturer's 50 Hz figures — motors run about 20 % faster on 60 Hz power.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.