NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026

NOVOTECH VALUE LINE · BUILT IN CHINA TO NORTH AMERICAN STANDARDS · SOLD & SERVICED IN CANADA BY NOVOTECH

HVAC AND SHEET METAL MACHINES

BEAD ROLLERS AND BEADING MACHINES · LOCK FORMERS AND ROLL FORMERS · CIRCLE CUTTERS AND FLANGING · CORNER NOTCHERS







China
MADE IN CHINA

9
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

VALUE-LINE HVAC AND SHEET METAL MACHINES

CONTENTS

BEADING MACHINES AND BEAD ROLLERS

ETB-12 · ETB-25 · ETB-40 beading machines, 18 – 8 ga ETB-12 · ETB-25 · ETB-40 · 3 models 04

RM24 · RM36 · RM42 motorized deep-throat bead rollers, 24 – 42″ RM24 – RM-42H · 6 models 05

POWER BEADING AND SLITTING MACHINES FOR ROUND DUCT

RM18E power beading machine and LQ15 slitting and bending machine RM18E · LQ15 · 2 models 06

LOCK FORMERS AND ROLL FORMERS

PF20G · PF16G Pittsburgh lock formers and AX20G roll former, 26 – 16 ga PF20G · PF16G · AX20G · 3 models 07

DIAMOND ROLLER FORMER

PIC50 diamond roller former, 20 ga × 50″ PIC50 · 1 model 10

CIRCLE SHEARS

MCS-1250E motorized circle shear, Ø8 – 49″, 10 ga MCS-1250E · 1 model 11

ECS10/10 motorized circle shear and flanging machine, 16 ga, Ø6 – 19-3/4″ discs ECS10/10 · 1 model 12

CORNER NOTCHERS

HNM-6 · HNM-6A hydraulic corner notchers, 1/4″ HNM-6 · HNM-6A · 2 models 13

PNM-130 · PNM-150 pneumatic corner notchers PNM-130 · PNM-150 · 2 models 14

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR VALUE-LINE HVAC AND SHEET METAL MACHINES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH VALUE LINE

MACHINES FOR THE HVAC AND SHEET-METAL SHOP

NovoTech's value line is our own brand: machines built in China to our specification by a maker that exports metalworking machinery to more than 70 countries, inspected before they ship and sold under NovoTech's name with a CSA-approved panel on every 3-phase machine, a 1-year warranty and parts and technical support from Mississauga, Ontario, Canada.

The machines that turn flat sheet into duct and fittings: bead rollers and beading machines that stiffen panels and roll the beads of round duct, lock formers and roll formers for the seams, circle cutters and flanging machines for discs and end caps, and corner notchers that cut the corners of panels and boxes before they are folded.

ETB-12 · ETB-25 · ETB-40 · 3 MODELS

ETB-12 · ETB-25 · ETB-40 BEADING MACHINES, 18 – 8 GA



MODEL ETB · ETB-25 BEADING MACHINE, 12 GA, WITH BRAKE MOTOR AND FOOT PEDAL



ETB-12 motorized beading machine with foot pedal

18 – 8 ga

Beading machines for stiffening beads, steps, flanges and offsets in sheet and in the ends of ducts and tanks: the ETB-12 with a self-braking motor and foot pedal for 18 ga with an 8″ throat; the ETB-25 and ETB-40 on welded steel frames with brake motors, foot pedals and adjustable idle rolls for 12 ga and 8 ga with 11 and 12″ throats. Four standard roll sets and eight extra profiles.

STANDARD FEATURES

- ✓ 18 ga (ETB-12), 12 ga (ETB-25), 8 ga (ETB-40) mild steel
- ✓ Throat 8 – 12″
- ✓ Brake motor and foot pedal; 1 – 3 HP
- ✓ 4 standard roll sets; 8 extra profiles to order

OPTIONAL EQUIPMENT

ETB-12 · ETB-25 · ETB-40 — TECHNICAL SPECIFICATIONS

Model	ETB-12	ETB-25	ETB-40
Capacity, mild steel	**18 ga (1.2 mm)**	**12 ga (2.5 mm)**	**8 ga (4 mm)**
Throat depth	**8″ (200 mm)**	**11″ (280 mm)**	**12″ (300 mm)**
Shaft length	5-1/2″ (140 mm)	4-3/4″ (120 mm)	6-1/2″ (165 mm)
Drive	**1 HP (0.75 kW), 32 rpm, foot pedal**	**2 HP (1.5 kW), 20 rpm, brake motor, foot pedal**	**3 HP (2.2 kW), 15.3 rpm, brake motor, foot pedal**
Rolls	4 standard sets; 8 extra profiles to order	4 standard sets; 8 extra profiles to order	4 standard sets; 8 extra profiles to order
Packing size L × W × H	43 × 19 × 58″ (110 × 48 × 148 cm)	58 × 23 × 53″ (147 × 58 × 135 cm)	65 × 23 × 55″ (165 × 58 × 140 cm)
Weight	**265 lb (120 kg)**	**518 lb (235 kg)**	**752 lb (341 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

RM24 – RM-42H · 6 MODELS

RM24 · RM36 · RM42 MOTORIZED DEEP-THROAT BEAD ROLLERS, 24 – 42″



MODEL RM · RM24 · RM36 · RM42 POWER-DRIVE BEAD ROLLER WITH VARIABLE-SPEED FOOT PEDAL



RM-24H · RM-36H · RM-42H high-throat variable-speed bead roller

24 – 42″ throat

Deep-throat bead rollers for auto body panels, floor pans, doors and HVAC panels: 20 ga steel and 18 ga aluminum with a 24, 36 or 42″ throat, a variable-speed motor, a foot pedal and forward / reverse. The H models have a 4″ high throat for formed panels and drive both shafts. Round, flat, step and spoiler bead rolls; the bead depth is adjustable.

STANDARD FEATURES

- ✓ 20 ga (1 mm) mild steel, 18 ga (1.2 mm) aluminum
- ✓ Throat 24″, 36″ or 42″; 4″ throat height on the H models
- ✓ Variable-speed motor, foot pedal, forward / reverse; both shafts driven (H)
- ✓ Rolls: round bead 1/8 – 1″, flat bead, step 1/16 – 1/4″, 45° step, spoiler 1-1/4″ radius

OPTIONAL EQUIPMENT

RM24 · RM36 · RM42 · RM-24H · RM-36H · RM-42H — TECHNICAL SPECIFICATIONS

Model	RM24	RM-24H	RM36	RM-36H	RM42	RM-42H
Capacity	20 ga (1 mm) mild steel, 18 ga (1.2 mm) aluminum	20 ga (1 mm) mild steel, 18 ga (1.2 mm) aluminum	20 ga (1 mm) mild steel, 18 ga (1.2 mm) aluminum	20 ga (1 mm) mild steel, 18 ga (1.2 mm) aluminum	20 ga (1 mm) mild steel, 18 ga (1.2 mm) aluminum	20 ga (1 mm) mild steel, 18 ga (1.2 mm) aluminum
Throat depth	24″ (610 mm)	24″ (610 mm)	36″ (910 mm)	36″ (910 mm)	42″ (1,067 mm)	42″ (1,067 mm)
Throat height	–	4″ (102 mm)	–	4″ (102 mm)	–	4″ (102 mm)
Drive	Variable-speed motor, foot pedal, forward / reverse	Variable-speed motor, foot pedal, both shafts driven	Variable-speed motor, foot pedal, forward / reverse	Variable-speed motor, foot pedal, both shafts driven	Variable-speed motor, foot pedal, forward / reverse	Variable-speed motor, foot pedal, both shafts driven
Packing size L × W × H	46 × 25 × 16″ (117 × 64 × 40 cm)	48 × 24 × 51″ (122 × 61 × 129 cm)	59 × 28 × 16″ (151 × 72 × 40 cm)	58 × 24 × 56″ (147 × 61 × 143 cm)	62 × 22 × 23″ (157 × 57 × 58 cm)	65 × 24 × 59″ (166 × 61 × 150 cm)
Weight	132 lb (60 kg)	146 lb (66 kg)	176 lb (80 kg)	185 lb (84 kg)	168 lb (76 kg)	205 lb (93 kg)

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

RM18E · LQ15 · 2 MODELS

RM18E POWER BEADING MACHINE AND LQ15 SLITTING AND BENDING MACHINE



MODEL DUCT · RM18E POWER BEADING MACHINE FOR ROUND DUCT



LQ15 power slitting and bending machine for duct

15 – 16 ga duct

Two powered machines for round duct: the RM18E puts single and offset beads on round duct — 15 ga (1.8 mm) with a 9-3/8″ throat, three standard roll sets and a foot pedal; the LQ15 slits 16 ga (1.5 mm) sheet up to 47″ wide and bends it for duct work.

STANDARD FEATURES

- ✓ RM18E: 15 ga (1.8 mm), 9-3/8″ (238 mm) throat, 3 standard roll sets (E1 – E3), 3 more to order, foot pedal
- ✓ LQ15: slits 16 ga (1.5 mm) sheet up to 47″ (1,200 mm) wide; 42 – 49 in/min
- ✓ 2 HP (1.5 kW) motors

OPTIONAL EQUIPMENT

RM18E · LQ15 — TECHNICAL SPECIFICATIONS

Model	RM18E	LQ15
Capacity, mild steel	**15 ga (1.8 mm)**	**16 ga (1.5 mm), slits sheet up to 47″ (1,200 mm) wide**
Throat depth	**9-3/8″ (238 mm)**	**4 – 24″ (100 – 600 mm); duct Ø15 – 30-3/4″ (382 – 782 mm)**
Rolls / speed	3 standard sets (single and offset beads); 3 extra sets to order	42 – 49 in/min (1,060 – 1,253 mm/min)
Motor	**2 HP (1.5 kW)**	**2 HP (1.5 kW)**
Packing size L × W × H	35 × 20 × 48″ (88 × 52 × 123 cm)	54 × 30 × 56″ (137 × 77 × 142 cm)
Weight	**304 lb (138 kg)**	**661 lb (300 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

PF20G · PF16G · AX20G · 3 MODELS

PF20G · PF16G PITTSBURGH LOCK FORMERS AND AX20G ROLL FORMER, 26 – 16 GA



MODEL LOCK · PF16G LOCK FORMER FOR PITTSBURGH LOCKS, DOUBLE SEAMS, DRIVE CLEATS AND Z SHAPES



PF20G lock former for Pittsburgh locks



AX20G auxiliary roll former with quick-change roll sets

26 – 16 ga mild steel

Pittsburgh machines for HVAC duct. The PF20G forms the Pittsburgh lock, the flange attachment and a right angle in 26 – 20 ga at 25 ft/min, with double seam and drive cleat rolls as options; the PF16G takes 25 – 16 ga and forms the Pittsburgh lock, flange attachment, right angle, double seam, drive cleat and Z shape as standard. The AX20G auxiliary roll former runs drive cleat, Acme double seam, button lock and a 6-in-1 set of flanges and standing seams at 40 ft/min — its hinged table top and square drive shafts change a complete roll set in under five minutes, without tools.


STANDARD FEATURES

- Pittsburgh lock uses about 1" of material; adjustable auto-guides
- All-steel forming head; hardened, ground shafts; case-hardened rolls with matching cut gears and needle bearings
- PF16G: six standard roll forms — Pittsburgh, flange attachment, right angle, double seam, drive cleat, Z shape
- AX20G: roll sets change without tools; quick jam release; roll sets at extra cost
- Single-phase or 3-phase motors: 1 HP (PF20G), 3 HP (PF16G), 4 HP (AX20G)

OPTIONAL EQUIPMENT

DETAILS, COMPONENTS AND OPTIONS

PF20G · PF16G PITTSBURGH LOCK FORMERS AND AX20G ROLL FORMER, 26 – 16 GA

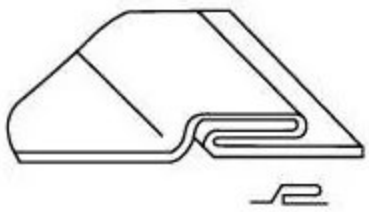

Pittsburgh lock formed on the lock former

TECHNICAL SPECIFICATIONS

PF20G · PF16G PITTSBURGH LOCK FORMERS AND AX20G ROLL FORMER, 26 – 16 GA

PF20G · PF16G · AX20G

Lock formers and auxiliary roll former for HVAC duct

Model	PF20G	PF16G	AX20G
Capacity, mild steel	**26 – 20 ga**	**25 – 16 ga**	**26 – 20 ga**
Standard roll forms	**Pittsburgh lock, flange attachment, right angle**	**Pittsburgh lock, flange attachment, right angle, double seam, drive cleat, Z shape**	**Roll sets to order: drive cleat, Acme double seam, female and male button lock, 6-in-1 set (1/4, 3/8, 1/2 and 5/8" right-angle flanges, 5/8" standing seam, 5/8" T-connect)**
Optional roll forms	Double seam, drive cleat	—	—
Speed	**25 ft/min**	**24 ft/min**	**40 ft/min**
Motor	**1 HP (0.75 kW), 1-phase or 3-phase**	**3 HP (2.2 kW), 1-phase or 3-phase**	**4 HP (3 kW), 1-phase or 3-phase**
Packing size L × W × H	41 × 22 × 53" (105 × 56 × 135 cm)	46 × 26 × 43" (118 × 65 × 109 cm)	62 × 32 × 47" (157 × 82 × 120 cm)
Weight	**353 lb (160 kg)**	**659 lb (299 kg)**	**573 lb (260 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Built in China to North American standards
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

PIC50 · 1 MODEL

PIC50 DIAMOND ROLLER FORMER, 20 GA × 50″



MODEL PIC50 · PIC50 ROLLER FORMER THAT EMBOSSES A DIAMOND PATTERN INTO SHEET



Diamond pattern embossed by the PIC50

20 ga × 50″

A motorized roller former that embosses a 2-3/4″ (70 mm) diamond pattern into 20 ga sheet up to 50″ wide — decorative panels for doors, cabinets, food trucks and restorations — on a welded frame with a 1 HP motor and 9 – 16 rpm adjustable speed.

STANDARD FEATURES

- ✓ 20 ga mild steel × 50″ (1,270 mm)
- ✓ 2-3/4 × 2-3/4″ (70 × 70 mm) diamonds
- ✓ 1 HP; 9 – 16 rpm adjustable

OPTIONAL EQUIPMENT

PIC50 — TECHNICAL SPECIFICATIONS

Model	PIC50
Capacity	**20 ga mild steel × 50″ (1,270 mm)**
Pattern	**Diamonds 2-3/4 × 2-3/4″ (70 × 70 mm)**
Speed	9 – 16 rpm, adjustable
Motor	**1 HP (750 W)**
Packing size L × W × H	63 × 55 × 53″ (161 × 140 × 134 cm)
Weight	**1,146 lb (520 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

MCS-1250E · 1 MODEL

MCS-1250E MOTORIZED CIRCLE SHEAR, Ø8 – 49", 10 GA



MODEL MCS-1250E · MCS-1250E MOTORIZED CIRCLE SHEAR WITH PNEUMATIC BLANK CLAMPING, PEDESTAL CONTROL AND FOOT PEDAL

Ø8 – 49" discs

A motorized circle shear on a solid cast-iron frame that cuts discs from Ø7-7/8 to 49-1/4" in 10 ga (3.5 mm) sheet: hardened, regrindable special-steel blades running in bronze bearings, a ball screw that sets the radius with an encoder readout, and pneumatic clamping of the blank.

STANDARD FEATURES

- Discs Ø7-7/8 – 49-1/4" (200 – 1,250 mm) in 10 ga (3.5 mm)
- 3 HP main motor and 1.5 HP feed motor
- Ball-screw radius setting with encoder readout
- Pneumatic blank clamping; regrindable blades in bronze bearings

OPTIONAL EQUIPMENT

MCS-1250E — TECHNICAL SPECIFICATIONS

Model	MCS-1250E
Sheet thickness, max	**10 ga (3.5 mm)**
Disc diameter	**Ø7-7/8 – 49-1/4" (200 – 1,250 mm)**
Motors	**3 HP (2.2 kW) main, 1.5 HP (1.1 kW) feed**
Packing size L × W × H	81 × 30 × 57" (207 × 75 × 146 cm)
Weight	**1,653 lb (750 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

ECS10/10 · 1 MODEL

ECS10/10 MOTORIZED CIRCLE SHEAR AND FLANGING MACHINE, 16 GA, Ø6 – 19-3/4" DISCS



MODEL ECS10/10 · ECS10/10 TWO-SPEED ELECTRIC CIRCLE SHEAR AND FLANGING MACHINE ON STAND, WITH PEDESTAL CONTROL AND FOOT PEDAL

Discs Ø6 – 19-3/4"

A circle shear that also flanges: the ECS10/10 cuts discs from Ø5-7/8 to 19-3/4" in 16 ga with a two-speed motor and a foot pedal, then turns a rim up to 5/16" high with the second roll set — ends for ducts, tanks, lights and dust collectors.

STANDARD FEATURES

- Discs Ø5-7/8 – 19-3/4" (150 – 500 mm) in 16 ga (1.5 mm)
- Flanging height to 5/16" (8 mm); two roll sets: cutting and flanging
- 1/2 / 3/4 HP (0.37 / 0.55 kW) two-speed motor, foot pedal
- Throat 19.7" (500 mm)

OPTIONAL EQUIPMENT

ECS10/10 — TECHNICAL SPECIFICATIONS

Model	ECS10/10
Sheet thickness, max	**16 ga (1.5 mm)**
Disc diameter	**Ø5-7/8 – 19-3/4" (150 – 500 mm)**
Throat depth	19.7" (500 mm)
Flanging height, max	5/16" (8 mm)
Drive	**1/2 / 3/4 HP (0.37 / 0.55 kW) two-speed motor, foot pedal**
Packing size L × W × H	59 × 22 × 63" (151 × 57 × 160 cm)
Weight	**364 lb (165 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

HNM-6 · HNM-6A · 2 MODELS

HNM-6 · HNM-6A HYDRAULIC CORNER NOTCHERS, 1/4"



MODEL HNM-6 · HNM-6 HYDRAULIC 90° CORNER NOTCHER WITH EMERGENCY-STOP PEDESTAL AND FOOT PEDAL



HNM-6A hydraulic adjustable-angle notcher, 30 – 135°, with control pedestal and foot pedal

1/4" plate

Hydraulic corner notchers for 1/4" plate: the HNM-6 cuts a fixed 90° notch 9.8 × 9.8" in 6.5 mm at 24 strokes a minute, with automatic blade clearance, a sheet hold-down and a chute that takes the drop away; the HNM-6A sets any angle from 30 to 135° by hand wheels, punches holes up to Ø1-9/16" and has gauges for locating the sheet.

STANDARD FEATURES

- 1/4" (6 – 6.5 mm) mild steel; 5.5 HP
- HNM-6: fixed 90°, 9.8 × 9.8" (250 × 250 mm) notch, 24 strokes/min
- HNM-6A: adjustable 30 – 135°, 7.9" (200 mm) blades, punching to Ø1-9/16" (40 mm)
- Automatic blade clearance; sheet hold-down

OPTIONAL EQUIPMENT

HNM-6 · HNM-6A — TECHNICAL SPECIFICATIONS

Model	HNM-6	HNM-6A
Capacity, mild steel	**1/4" (6.5 mm)**	**1/4" (6 mm)**
Notch length	**9.8 × 9.8" (250 × 250 mm)**	**7.9" (200 mm)**
Notch angle	**90° fixed**	**30 – 135° adjustable**
Strokes per minute	24	—
Punching	—	Up to Ø1-9/16" (40 mm)
Table size	31.9 × 29.5" (810 × 750 mm)	—
Motor	**5.5 HP (4 kW)**	**5.5 HP (4 kW)**
Hydraulics	1,740 psi (12 MPa), 9.2 US gal (35 L) tank	2,611 psi (18 MPa)
Packing size L × W × H	40 × 33 × 54" (101 × 85 × 137 cm)	47 × 41 × 56" (120 × 105 × 142 cm)
Weight	**1,389 lb (630 kg)**	**2,249 lb (1,020 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

PNM-130 · PNM-150 · 2 MODELS

PNM-130 · PNM-150 PNEUMATIC CORNER NOTCHERS



MODEL PNM · PNM-130 / PNM-150 PNEUMATIC 90° CORNER NOTCHER ON STAND WITH FOOT PEDAL

To 1/8", 90°

Free-standing notchers that run on shop air: 90° notches 5-1/8 × 5-1/8" in 1/8" mild steel (PNM-130) or 5-7/8" in 14 ga (PNM-150), a transparent blade guard that lets the operator line up scribed marks, adjustable stops and guides on both sides of the blade, a pressure regulator and water trap, a heavy cast-iron table and a roving foot pedal.

STANDARD FEATURES

- ✓ PNM-130: 1/8" (3 mm) × 5-1/8"; PNM-150: 14 ga (2 mm) × 5-7/8"
- ✓ Cast-iron table 23.6 × 18.1"
- ✓ Roving foot pedal; regulator and water trap
- ✓ Transparent blade guard; adjustable stops and guides

OPTIONAL EQUIPMENT

PNM-130 · PNM-150 — TECHNICAL SPECIFICATIONS

Model	PNM-130	PNM-150
Notch size	**5-1/8 × 5-1/8" (130 × 130 mm)**	**5-7/8 × 5-7/8" (150 × 150 mm)**
Capacity, mild steel	**1/8" (3 mm)**	**14 ga (2 mm)**
Table size	23.6 × 18.1" (600 × 460 mm), cast iron	23.6 × 18.1" (600 × 460 mm), cast iron
Operation	Shop air, roving foot pedal	Shop air, roving foot pedal
Weight	**414 lb (188 kg)**	**419 lb (190 kg)**

Metric values in brackets are the manufacturer's figures; thin sheet is given in gauge. Packing size is the shipping crate L × W × H and weight is the net weight of the machine.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.