NovoTech MACHINE TOOLS Inc.

PRODUCT CATALOGUE 2026


NOVOTECH PREMIUM LINE · MADE IN TURKEY · SOLD & SERVICED IN CANADA BY NOVOTECH

HORIZONTAL PRESS BRAKES

HP 10 – HP 150 NC HYDRAULIC HORIZONTAL PRESSES, 11 – 165 US TONS — BEND, PUNCH, SHEAR AND STRAIGHTEN FLAT BAR, PIPE, BAR AND BUSBAR





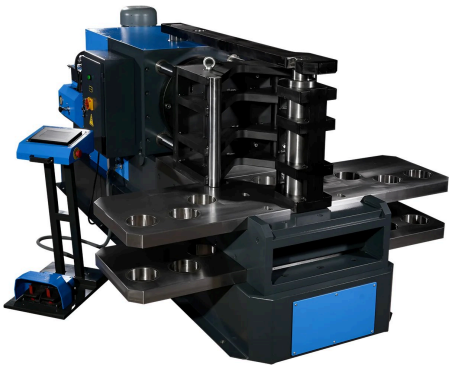

Turkey
MADE IN TURKEY

2
MACHINE FAMILIES

1-year
WARRANTY

Canada
PARTS & TECHNICAL SUPPORT

HORIZONTAL PRESS BRAKES

CONTENTS

NC HYDRAULIC HORIZONTAL PRESSES

HP 10 – HP 100 NC hydraulic horizontal presses, 11 – 110 US ton HP 10 · HP 20 · HP 40 · HP 60 · HP 80 · HP 100 · 6 models 04

HEAVY-DUTY HORIZONTAL PRESSES

HP 120 · HP 150 heavy-duty horizontal presses, 132 – 165 US ton HP 120 · HP 150 · 2 models 07

Specifications subject to change without notice. Imperial values are converted from the manufacturer's metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16); metric values in brackets are the manufacturer's nominal figures. Model numbers are manufacturer designations. Photos may show optional equipment.

ABOUT NOVOTECH

YOUR CANADIAN SOURCE FOR HORIZONTAL PRESS BRAKES

Sales, installation, parts and technical support across Canada.

NovoTech Machine Tools Inc. supplies metalworking and fabrication machinery to job shops, fabricators, maintenance departments and manufacturers across Canada from our base in Mississauga, Ontario, Canada. Every machine in this catalogue is sold and supported locally by NovoTech — with spare parts and technical support readily available in Canada.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey for NovoTech's premium line — with European hydraulics and controls
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

NOVOTECH PREMIUM LINE · MADE IN TURKEY

HORIZONTAL PRESSES WITH A TOOL FOR EVERY BEND

NovoTech's premium-line HP horizontal presses are built in Turkey to our specification. They bend, punch, shear, notch and straighten flat bar, pipe, solid bar and busbar with the part lying flat on the table — NC-controlled from 11 to 165 US tons, with a touch-screen recipe control, an optional servo back gauge and an extensive library of bending, punching, shearing, pipe and busbar tools; the HP 120 and HP 150 add a T-slot table and hardened support columns for straightening heavy sections.

NovoTech sells, installs and supports the HP presses in Canada from Mississauga, Ontario, Canada — tooling chosen for your parts, installation, operator training, a CSA-approved panel, a 1-year warranty and parts and technical support in Canada.

HP 10 · HP 20 · HP 40 · HP 60 · HP 80 · HP 100 · 6 MODELS

HP 10 – HP 100 NC HYDRAULIC HORIZONTAL PRESSES, 11 – 110 US TON



MODEL HP · NOVOTECH HP 10 NC HYDRAULIC HORIZONTAL PRESS WITH TOUCH-SCREEN CONTROL STAND AND FOOT PEDAL



NovoTech HP 80 hydraulic horizontal press with induction-hardened support pins, control stand and foot pedal



HP horizontal press with servo-driven NC back gauge, touch-screen control stand and foot pedal

11 – 110 US ton · flat bar to 11-13/16" × 15/16" · NC touch-screen with recipes

A horizontal press brake lays the press on its side: a hydraulic ram pushes the tool across a heavy steel table at bench height, so flat bar, angle, pipe, solid bar and busbar are bent, punched, sheared or straightened with the part lying flat in front of the operator. NovoTech's premium-line HP series runs from the 11-ton HP 10 for 5-7/8" × 1/4" flat bar to the 110-ton HP 100 for 11-13/16" × 15/16", every model with an NC touch-screen on a control stand — manual, automatic and recipe modes — a foot pedal, induction-hardened support pins and an ergonomic tool table for quick tool changes.

STANDARD FEATURES

- ✓ NC control stand with touch-screen: manual mode between set limits, automatic serial modes and recipe mode for multi-step parts
- ✓ Hydraulic speed and pressure adjustment; ram stroke 7.9" (HP 10, HP 20) or 11.8" (HP 40 – HP 100)
- ✓ Ergonomic tool table at bench height; easy tool change; induction-hardened support pins
- ✓ Easily adjustable back stop; foot pedal
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT


- + Automatic back gauge — servo-driven NC with pull-back, 3.3, 6.6 or 9.8 ft (1, 2 or 3 m) long, for series parts
- + Bending tools: Radius punch with v-die, press brake punch with multi-v die, bolt punch with multi-v die, narrow v-die, two-sided v-bending tool, spring-loaded u-bending tool
- + Pipe and bar tools: mandrel-less pipe bending tool, solid bar and thick-wall pipe bending tool, pipe end reduction and expansion tool, profile bending tool, round bar bending tool, pipe clamping tool
- + Notching, punching, shearing and straightening tools; busbar shearing, punching, bending and twisting tools
- + Custom dies made to your part
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

DETAILS, COMPONENTS AND OPTIONS


HP 10 – HP 100 NC HYDRAULIC HORIZONTAL PRESSES, 11 – 110 US TON



HP touch-screen in manual mode: the ram works between the minimum and maximum stroke set in mm

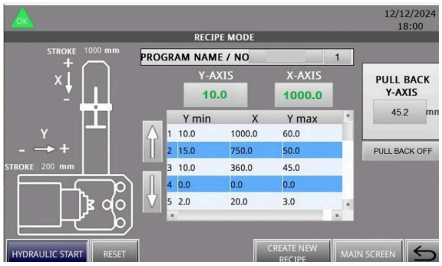


HP touch-screen in recipe mode: ram and back gauge positions for each step of a part

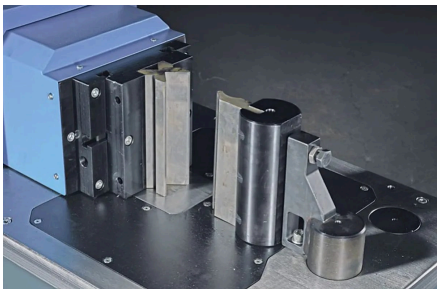


Press brake punch with multi-V die on the HP table




Mandrel-less pipe bending tool with a tube bent to an S

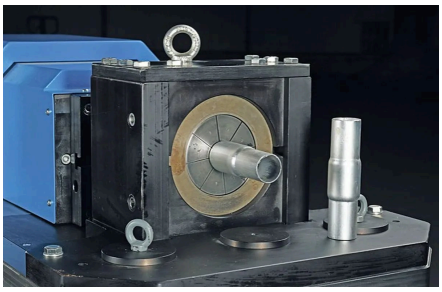

Pipe end reduction and expansion tool

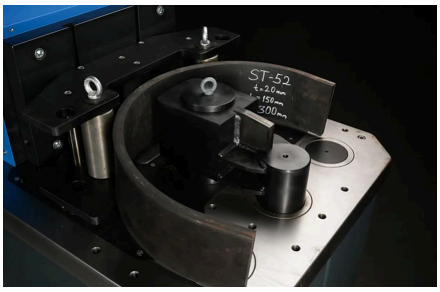


Wide-radius bending tool bending 13/16" (20 mm) plate

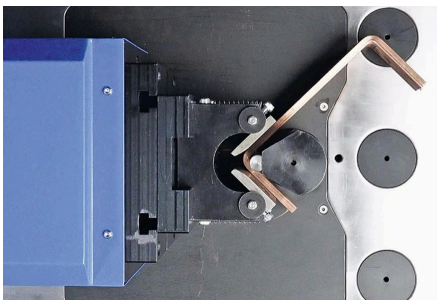

Busbar precision bending tool bending copper busbar



Flat bar, angle, channel, pipe and round bar parts bent on the HP

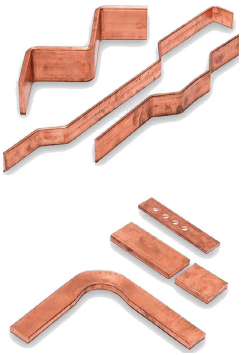

Copper busbars bent and punched on the HP

TECHNICAL SPECIFICATIONS

HP 10 – HP 100 NC HYDRAULIC HORIZONTAL PRESSES, 11 – 110 US TON

HP 10 – HP 100

NC hydraulic horizontal presses

Model	HP 10	HP 20	HP 40	HP 60	HP 80	HP 100
Max. force at 2,900 psi (200 bar)	**11 US ton (10 t)**	**22 US ton (20 t)**	**44 US ton (40 t)**	**55 US ton (50 t)**	**88 US ton (80 t)**	**110 US ton (100 t)**
Flat bar bending capacity width × thickness, mild steel	**5-7/8″ × 1/4″ (150 × 6 mm)**	**7-7/8″ × 3/8″ (200 × 10 mm)**	**9-7/8″ × 5/8″ (250 × 16 mm)**	**11-13/16″ × 5/8″ (300 × 16 mm)**	**11-13/16″ × 13/16″ (300 × 20 mm)**	**11-13/16″ × 15/16″ (300 × 24 mm)**
Maximum stroke	**7.9″ (200 mm)**	**7.9″ (200 mm)**	**11.8″ (300 mm)**	**11.8″ (300 mm)**	**11.8″ (300 mm)**	**11.8″ (300 mm)**
Tool height	5.9″ (150 mm)	7.9″ (200 mm)	9.8″ (250 mm)	11.8″ (300 mm)	11.8″ (300 mm)	11.8″ (300 mm)
Working / return speed	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)
Motor power	**1.5 HP (1.1 kW)**	**3 HP (2.2 kW)**	**5.4 HP (4 kW)**	**7.4 HP (5.5 kW)**	**10 HP (7.5 kW)**	**15 HP (11 kW)**
Dimensions L × W × H	35 × 18 × 46″ (900 × 450 × 1,160 mm)	47 × 22 × 48″ (1,200 × 550 × 1,230 mm)	51 × 24 × 51″ (1,300 × 600 × 1,300 mm)	51 × 24 × 55″ (1,300 × 600 × 1,400 mm)	63 × 33 × 63″ (1,600 × 850 × 1,600 mm)	63 × 33 × 67″ (1,600 × 850 × 1,700 mm)
Weight	**882 lb (400 kg)**	**1,411 lb (640 kg)**	**2,205 lb (1,000 kg)**	**3,748 lb (1,700 kg)**	**4,630 lb (2,100 kg)**	**5,401 lb (2,450 kg)**

Bending capacity is flat bar bent the hard way in mild steel with the standard V tooling; force is at the pressure given. Metric values in brackets are the manufacturer's figures; dimensions L × W × H, weight net.


Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE


- ✓ Made in Turkey for NovoTech's premium line — with European hydraulics and controls
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

HP 120 · HP 150 · 2 MODELS


HP 120 · HP 150 HEAVY-DUTY HORIZONTAL PRESSES, 132 – 165 US TON

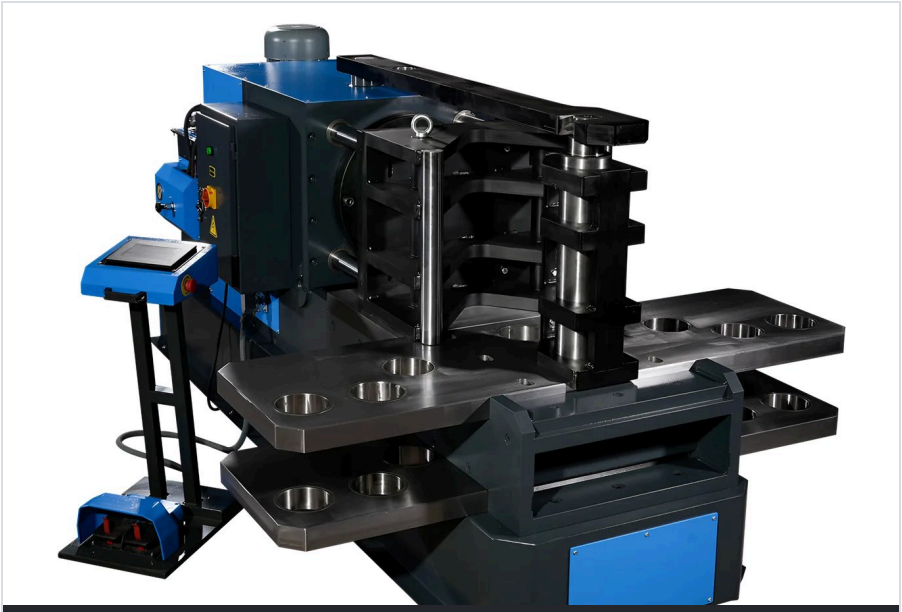

MODEL HP · NOVOTECH HP 120 / HP 150 HEAVY-DUTY HORIZONTAL PRESS WITH T-SLOT TABLE, SUPPORT COLUMNS AND CONTROL STAND

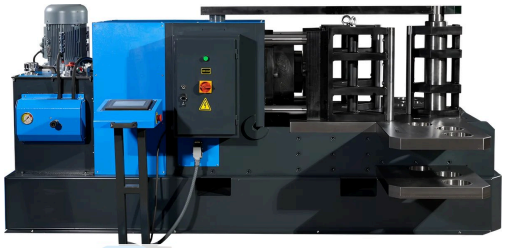

HP 120 / HP 150 from the side: hydraulic unit, control box, T-slot table and foot pedal

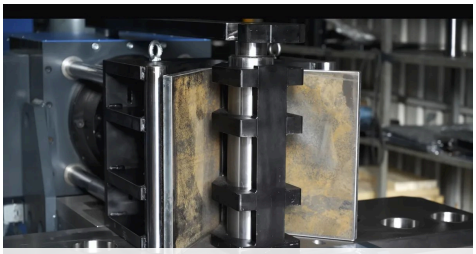

Straightening a plate between the hardened support columns of the HP 120 / HP 150

132 – 165 US ton · 19.7" stroke · flat bar to 19-11/16" × 1-9/16" · T-slot table

The heavy horizontal presses for straightening and bending big sections: 132 and 165 US tons on a 19.7" stroke, hardened Ø5-1/8" and Ø5-7/8" support columns between which shafts, beams and heavy bar are straightened, a T-slot clamping table with heat-treated support holes for tools and attachments, and an upper brace that keeps the frame from flexing. 19-11/16" × 1-9/16" flat bar on the HP 150; NC control stand and foot pedal as on the HP series, and dies designed and made for the job.

STANDARD FEATURES

- ✓ NC control unit with control stand and foot pedal; hydraulic speed and pressure adjustment
- ✓ Hardened support columns, Ø5-1/8" (HP 120) and Ø5-7/8" (HP 150), for straightening between columns
- ✓ Multiple heat-treated support holes for straightening and for mounting tools and attachments
- ✓ T-slot clamping table for securing tools and dies; upper support brace prevents flexing
- ✓ Robust steel body; high-profile ergonomic design for large and long workpieces
- ✓ CSA-approved electrical panel; 600 V 3-phase with transformer (208 / 240 / 480 V on request)

OPTIONAL EQUIPMENT

- + Custom die design and manufacturing for the job
- + Special requests and revisions on request
- + Custom voltage: 208 V, 240 V, 480 V or 600 V 3-phase

TECHNICAL SPECIFICATIONS

HP 120 · HP 150 HEAVY-DUTY HORIZONTAL PRESSES, 132 – 165 US TON

HP 120 · HP 150

Heavy-duty horizontal presses with T-slot table and support columns

Model	HP 120	HP 150
Max. force at 3,340 psi (230 bar)	**132 US ton (120 t)**	**165 US ton (150 t)**
Flat bar bending capacity width × thickness, mild steel	**19-11/16″ × 1-3/16″ (500 × 30 mm)**	**19-11/16″ × 1-9/16″ (500 × 40 mm)**
Maximum piston stroke	**19.7″ (500 mm)**	**19.7″ (500 mm)**
Tool height	19.7″ (500 mm)	19.7″ (500 mm)
Support column diameter	Ø5-1/8″ (130 mm)	Ø5-7/8″ (150 mm)
Working / return speed	0.39 in/s (10 mm/s)	0.39 in/s (10 mm/s)
Motor power	**7.4 HP (5.5 kW)**	**10 HP (7.5 kW)**
Dimensions L × W × H	109 × 69 × 50″ (2,760 × 1,750 × 1,275 mm)	117 × 69 × 58″ (2,960 × 1,750 × 1,475 mm)
Weight	**7,937 lb (3,600 kg)**	**9,480 lb (4,300 kg)**

Bending capacity is flat bar bent the hard way in mild steel with the standard V tooling; force is at the pressure given. Metric values in brackets are the manufacturer's figures; dimensions L × W × H, weight net.

Custom voltage available: 208 V, 240 V, 480 V or 600 V 3-phase.

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in Turkey for NovoTech's premium line — with European hydraulics and controls
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ 7-day money-back guarantee
  in-stock machines only
- ✓ Spare parts & technical support
  readily available in Canada
- ✓ Order today with just 10% down
  0% down financing available
- ✓ Installation and training available

LET'S FIND THE RIGHT MACHINE FOR YOUR SHOP.

Call or visit us for quotes, tooling, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON, Canada location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, Unit 26
Mississauga, ON L5T 2J5

NT NovoTech MACHINE TOOLS Inc.

Specifications subject to change without notice. Imperial values are converted from manufacturer metric data and rounded: thin sheet in gauge (ga), plate and capacities in common fractions (1/2, 1/4, 1/8, 1/16). Model numbers are manufacturer designations. Photos may show optional equipment. 7-day money-back guarantee on in-stock machines only; financing available.