SF3015H · FOURTH GENERATION · 12 – 30 KW

SF3015H HIGH POWER TECHNICAL SPECIFICATION

HIGH-POWER LASER CUTTING MACHINE · VERSATILE & EFFICIENT











10 × 5 ft	12 – 30 kW	656 ft/min	2.8 G
WORK AREA	RAYCUS FIBER LASER	MAXIMUM SPEED	MAXIMUM ACCELERATION

NovoTech Machine Tools Inc.
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

FULL TECHNICAL SPECIFICATION · SF3015H · 12 – 30 KW

CONTENTS

01 · Model 03
02 · Technical parameters 04
03 · Cutting parameters — stainless steel 05
03 · Cutting parameters — carbon steel 06
04 · Cutting parameters — brass, aluminum 07
05 · Cost-benefit analysis 08
06 · Advantages of laser cutting 09
07 · Configuration list 10
08 · Cutting samples 11
09 · Laser source 12
10 · Laser head 13
11 – 12 · Machine bed system 14
13 · Automatic gas distribution 16
14 · CNC system — FSCUT8000 17
15 · Nesting software — CypNest 18
16 · Training, packing and shipping, installation 19
17 · Metal forming customization service 20
18 · Five-star service 21

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**


SOLD & SERVICED IN CANADA

by NovoTech Machine Tools — Mississauga, ON

01 · MODEL · THE FOURTH GENERATION

VERSATILE & EFFICIENT

SF3015H high power laser cutting machine.

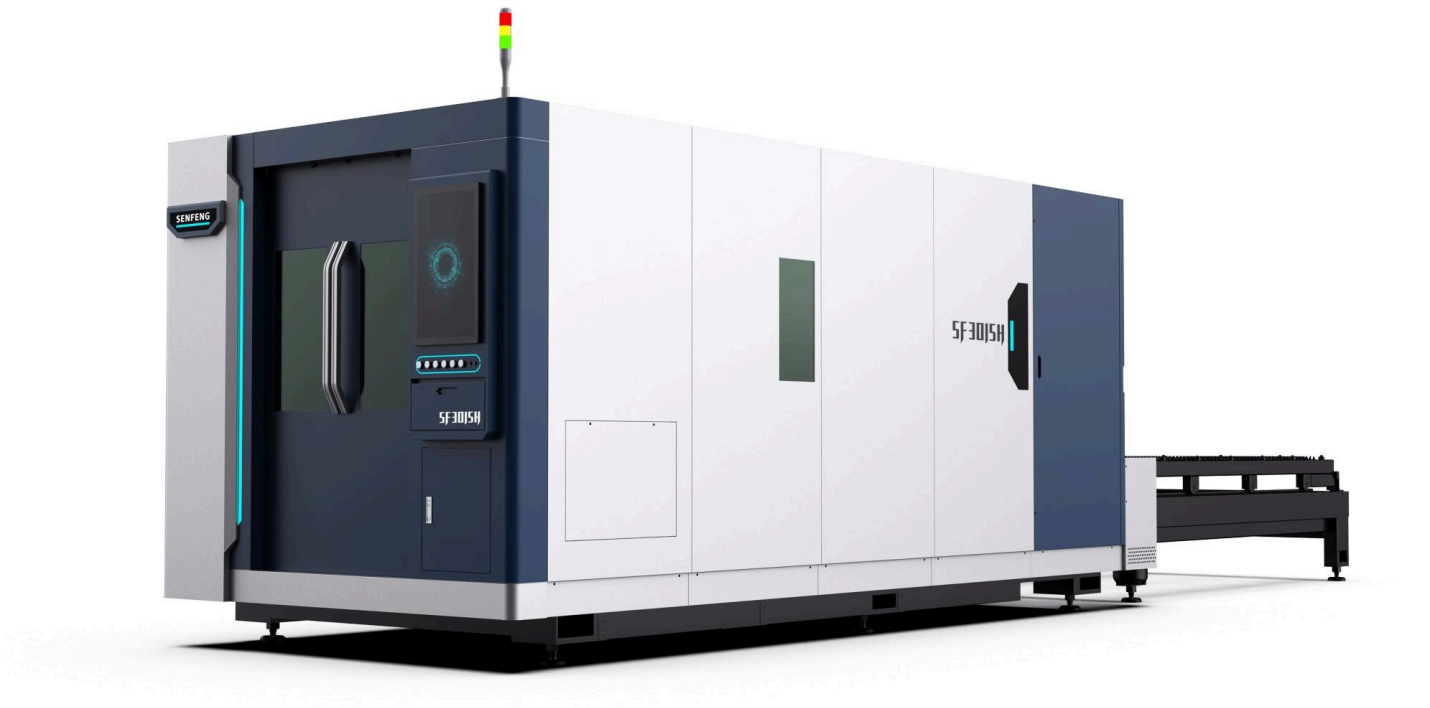

1 HEAVY-DUTY AND THERMALLY ISOLATED HOLLOW BED

2 LASER CUTTING PROCESS DATABASE

3 INTELLIGENT SURROUNDING SPIRAL NEGATIVE PRESSURE DUST REMOVAL

4 STORM CUTTING SYSTEM

※The picture is for reference only; the actual appearance and size prevail.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

02 · TECHNICAL PARAMETERS

TECHNICAL PARAMETERS · SF3015H

ITEMS	12 KW	15 KW	20 KW	30 KW
Work area (length × width)	10 × 5 ft (3,000 × 1,500 mm)			
X-axis travel	60.2″ (1,530 mm)			
Y-axis travel	120.1″ (3,050 mm)			
Z-axis travel	15.4″ (390 mm)			
X / Y-axis positioning accuracy	±0.002″ (±0.05 mm)			
X / Y-axis repeated positioning accuracy	±0.0008″ (±0.02 mm)			
Maximum speed	656 ft/min (200 m/min)			
Maximum acceleration	2.8 G			
Dimensions (length × width × height)	27.7 × 7.4 × 7.7 ft (8,440 × 2,270 × 2,340 mm)			
Maximum load of workbench	6,614 lb (3,000 kg)			
Total weight	13,735 lb (6,230 kg)	14,771 lb (6,700 kg)	14,925 lb (6,770 kg)	15,763 lb (7,150 kg)
Phase	Three-phase			
Rated voltage of power supply	380 V — in Canada: 208 / 240 / 480 / 600 V 3-phase 60 Hz through the transformer NovoTech supplies			
Frequency	50 Hz			
Power supply protection grade	IP54			

1. The accuracy of the workpiece depends to some extent on factors such as workpiece type, preparation, sheet size and position.

2. The technical parameters are subject to change without notice; the final technical parameters are subject to the order agreement.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CUTTING PARAMETERS · 1 OF 3

STAINLESS STEEL

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "O_2" marks a value cut with oxygen where the row's gas is N_2 / air.

Material	Thickness	12 kW	15 kW	20 kW	30 kW	Gas
STAINLESS STEEL	0.236" 6 mm	512 – 591 13 – 15	591 – 709 15 – 18	709 – 866 18 – 22	866 – 984 22 – 25	N_2 / air
	0.315" 8 mm	315 – 394 8 – 10	394 – 472 10 – 12	512 – 630 13 – 16	709 – 866 18 – 22	N_2 / air
	0.394" 10 mm	256 – 295 6.5 – 7.5	315 – 354 8 – 9	433 – 512 11 – 13	551 – 709 14 – 18	N_2 / air
	0.472" 12 mm	197 – 217 5 – 5.5	236 – 276 6 – 7	354 – 433 9 – 11	472 – 551 12 – 14	N_2 / air
	0.551" 14 mm	118 – 138 3 – 3.5	157 – 177 4 – 4.5	276 – 354 7 – 9	394 – 472 10 – 12	N_2 / air
	0.630" 16 mm	79 – 91 2 – 2.3	114 – 122 2.9 – 3.1	236 – 276 6 – 7	315 – 354 8 – 9	N_2 / air
	0.709" 18 mm	51 – 59 1.3 – 1.5	87 – 94 2.2 – 2.4	138 – 177 3.5 – 4.5	236 – 276 6 – 7	N_2 / air
	0.787" 20 mm	47 – 55 1.2 – 1.4	75 – 83 1.9 – 2.1	138 – 177 3.5 – 4.5	197 – 236 5 – 6	N_2 / air
	0.984" 25 mm	28 – 35 0.7 – 0.9	47 – 55 1.2 – 1.4	71 – 98 1.8 – 2.5	98 – 118 2.5 – 3	N_2 / air
	1.181" 30 mm	10 – 12 0.25 – 0.3	31 – 39 0.8 – 1	55 – 63 1.4 – 1.6	59 – 79 1.5 – 2	N_2 / air
	1.378" 35 mm	8 – 10 0.2 – 0.25	20 – 26 0.5 – 0.65	31 – 47 0.8 – 1.2	47 – 59 1.2 – 1.5	N_2 / air
	1.575" 40 mm	6 – 8 0.15 – 0.2	16 – 20 0.4 – 0.5	20 – 31 0.5 – 0.8	31 – 47 0.8 – 1.2	N_2 / air
	1.772" 45 mm	2 – 4 0.05 – 0.1	10 – 12 0.25 – 0.3	12 – 20 0.3 – 0.5	30 – 31 0.75 – 0.8	N_2 / air
	1.969" 50 mm	2 – 4 0.05 – 0.1	8 – 16 0.2 – 0.4	8 – 12 0.2 – 0.3	24 – 31 0.6 – 0.8	N_2 / air
	2.362" 60 mm			6 – 8 0.15 – 0.2	6 – 8 0.15 – 0.2	N_2 / air
	2.756" 70 mm			4 – 5 0.1 – 0.13	4 – 5 0.1 – 0.13	N_2 / air
	3.150" 80 mm				3 – 4 0.08 – 0.11	N_2 / air
	3.543" 90 mm				2 – 2 0.05 – 0.06	N_2 / air

Sample cutting only — full sheets cannot be processed at this power

1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.

2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CUTTING PARAMETERS · 2 OF 3

CARBON STEEL

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "O_2" marks a value cut with oxygen where the row's gas is N_2 / air.

Material	Thickness	12 kW	15 kW	20 kW	30 kW	Gas
CARBON STEEL	0.197" 5 mm	591 – 709 15 – 18	787 – 906 20 – 23	906 – 1,102 23 – 28	945 – 1,181 24 – 30	N_2 / air
	0.236" 6 mm	394 – 512 10 – 13	669 – 748 17 – 19	709 – 787 18 – 20	984 – 1,102 25 – 28	N_2 / air
	0.315" 8 mm	276 – 394 7 – 10	394 – 472 10 – 12	551 – 630 14 – 16	709 – 866 18 – 22	N_2 / air
	0.394" 10 mm	236 – 256 6 – 6.5	276 – 315 7 – 8	354 – 472 9 – 12	551 – 669 14 – 17	N_2 / air
	0.551" 14 mm	63 – 71 O_2 1.6 – 1.8	177 – 217 4.5 – 5.5	236 – 315 6 – 8	315 – 394 8 – 10	N_2 / air
	0.630" 16 mm	59 – 63 O_2 1.5 – 1.6	118 – 138 O_2 3 – 3.5	197 – 236 5 – 6	295 – 335 7.5 – 8.5	N_2 / air
	0.709" 18 mm	53 – 59 O_2 1.35 – 1.5	53 – 63 O_2 1.35 – 1.6	126 – 157 3.2 – 4	217 – 256 5.5 – 6.5	N_2 / air
	0.787" 20 mm	51 – 55 O_2 1.3 – 1.4	51 – 59 O_2 1.3 – 1.5	106 – 126 O_2 2.7 – 3.2	197 – 217 5 – 5.5	N_2 / air
	0.984" 25 mm	31 – 39 O_2 0.8 – 1	37 – 47 O_2 0.95 – 1.2	55 – 102 O_2 1.4 – 2.6	118 – 138 3 – 3.5	N_2 / air
	1.181" 30 mm	16 – 20 0.4 – 0.5	24 – 37 0.6 – 0.95	47 – 87 1.2 – 2.2	51 – 110 1.3 – 2.8	O_2
	1.378" 35 mm	12 – 16 0.3 – 0.4	20 – 24 0.5 – 0.6	35 – 71 0.9 – 1.8	39 – 79 1.0 – 2.0	O_2
	1.575" 40 mm	10 – 12 0.25 – 0.3	12 – 14 0.3 – 0.35	31 – 47 0.8 – 1.2	35 – 71 0.9 – 1.8	O_2
	1.969" 50 mm	7 0.18	8 – 10 0.2 – 0.25	12 – 28 0.3 – 0.7	31 – 47 0.8 – 1.2	O_2
	2.362" 60 mm		7 – 8 0.18 – 0.2	7 – 9 0.17 – 0.22	20 – 24 0.5 – 0.6	O_2
	2.756" 70 mm				8 – 12 0.2 – 0.3	O_2
	3.150" 80 mm				5 – 6 0.12 – 0.15	O_2

Sample cutting only — full sheets cannot be processed at this power

1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.

2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CUTTING PARAMETERS · 3 OF 3

BRASS · ALUMINUM

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "O_2" marks a value cut with oxygen where the row's gas is N_2 / air.

Material	Thickness	12 kW	15 kW	20 kW	30 kW	Gas
BRASS	0.197″ 5 mm	512 – 630 13 – 16	512 – 669 13 – 17	709 – 787 18 – 20	709 – 787 18 – 20	N_2 / air
	0.315″ 8 mm	236 – 315 6.0 – 8.0	236 – 335 6 – 8.5	354 – 433 9.0 – 11	394 – 591 10 – 15	N_2 / air
	0.394″ 10 mm	177 – 217 4.5 – 5.5	197 – 256 5 – 6.5	236 – 335 6.0 – 8.5	276 – 394 7.0 – 10	N_2 / air
	0.472″ 12 mm	71 – 79 1.8 – 2	79 – 87 2 – 2.2	157 – 236 4.0 – 6.0	157 – 276 4.0 – 7.0	N_2 / air
	0.551″ 14 mm	47 – 55 1.2 – 1.4	55 – 63 1.4 – 1.6	98 – 138 2.5 – 3.5	118 – 177 3.0 – 4.5	N_2 / air
	0.630″ 16 mm	31 – 39 0.8 – 1.0	47 – 51 1.2 – 1.3	79 – 118 2.0 – 3.0	59 – 98 1.5 – 2.5	N_2 / air
	0.787″ 20 mm	12 – 20 0.3 – 0.5	24 – 30 0.6 – 0.75	31 – 39 0.8 – 1.0	28 – 39 0.7 – 1.0	N_2 / air
	1.181″ 30 mm			20 – 24 0.5 – 0.6	16 – 24 0.4 – 0.6	N_2 / air
ALUMINUM	0.197″ 5 mm	591 – 669 15 – 17	591 – 787 15 – 20	827 – 945 21 – 24	787 – 945 20 – 24	N_2 / air
	0.315″ 8 mm	256 – 354 6.5 – 9.0	354 – 433 9.0 – 11	630 – 787 16 – 20	591 – 787 15 – 20	N_2 / air
	0.394″ 10 mm	197 – 236 5.0 – 6.0	236 – 315 6.0 – 8.0	551 – 630 14 – 16	315 – 512 8.0 – 13	N_2 / air
	0.630″ 16 mm	51 – 71 1.3 – 1.8	71 – 98 1.8 – 2.5	79 – 118 2.0 – 3.0	197 – 276 5.0 – 7.0	N_2 / air
	0.787″ 20 mm	31 – 47 0.8 – 1.2	31 – 59 0.8 – 1.5	59 – 87 1.5 – 2.2	79 – 138 2.0 – 3.5	N_2 / air
	1.181″ 30 mm	12 – 20 0.3 – 0.5	16 – 24 0.4 – 0.6	20 – 31 0.5 – 0.8	31 – 39 0.8 – 1.0	N_2 / air
	1.378″ 35 mm	10 – 12 0.25 – 0.3	12 – 16 0.3 – 0.4	16 – 24 0.4 – 0.6	24 – 28 0.6 – 0.7	N_2 / air
	1.575″ 40 mm	8 – 10 0.2 – 0.25	8 – 12 0.2 – 0.3	12 – 20 0.3 – 0.5	16 – 24 0.4 – 0.6	N_2 / air
	1.969″ 50 mm	4 – 6 0.1 – 0.15	8 – 10 0.2 – 0.25	6 – 8 0.15 – 0.2	12 – 16 0.3 – 0.4	N_2 / air
	2.362″ 60 mm			4 – 6 0.1 – 0.15	8 – 12 0.2 – 0.3	N_2 / air

Sample cutting only — full sheets cannot be processed at this power

1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.

2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

05 · COST-BENEFIT ANALYSIS

COST-BENEFIT ANALYSIS · SF3015H

If the cutting auxiliary gas is dried compressed air, the cost is the air compressor's electricity consumption + the machine tool's electricity consumption + consumables (protective lenses and nozzles).

Item		12 kW			15 kW			20 kW			30 kW		
		Air	O_2	N_2	Air	O_2	N_2	Air	O_2	N_2	Air	O_2	N_2
PEAK POWER CONSUMPTION	Laser source (kW)	32			45.5			57			90		
	Chiller (kW)	18			27			28			35		
	Air compressor (kW)	22	/	/	22	/	/	37	/	/	37	/	/
	Machine tool host (kW)	22	22	22	22	22	22	22	22	22	22	22	22
	Dust removal (kW)	3	3	3	3	3	3	3	3	3	3	3	3
Consumables and gas consumption (RMB/h)		0.5	4.5	60.5	0.5	4.5	60.5	0.5	4.5	60.5	0.5	4.5	60.5
Total power (kW)		97	75	75	119.5	97.5	97.5	147	110	110	187	150	150
Total power consumption (kWh per hour)		58.2	45	45	71.7	58.5	58.5	88.2	66	66	112.2	90	90
Total operating cost (RMB per hour, at 1 RMB/kWh)		58.7	49.5	105.5	72.2	63	119	88.7	70.5	126.5	112.7	94.5	150.5

1. The electricity and gas prices are Senfeng's reference values in China (RMB) and may vary from region to region.

2. The auxiliary gas consumption differs with plate thickness. The oxygen column takes 0.984" (25 mm) carbon steel as an example and the nitrogen column 0.039" (1 mm) stainless steel; the values are for reference only and subject to actual use.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

06 · ADVANTAGES OF LASER CUTTING

LASER CUTTING VS. PLASMA CUTTING · SF3015H

ITEMS	PLASMA CUTTING	LASER CUTTING	LASER CUTTING ADVANTAGES
Positioning accuracy	0.016" (0.4 mm) — especially a 33 ft (10 m) bed	0.0055" (0.14 mm) — especially a 33 ft (10 m) bed	**High precision**
Section taper	0.20" (5 mm) — especially 1.575" (40 mm) thick	0.016" (0.4 mm) — especially 1.575" (40 mm) thick, 20 kW and above	**No need for fine processing**
Kerf	0.16 – 0.24" (4 – 6.0 mm)	0.008 – 0.063" (0.2 – 1.6 mm)	**Saves 6 – 9% of material**
Bleed and co-edge	0.39" (10 mm)	0.12 – 0.16" (3 – 4 mm)	**Saves 6 – 9% of material**
Heat-affected zone	0.020 – 0.079" (0.5 – 2.0 mm)	0.004 – 0.016" (0.1 – 0.4 mm)	**Less heat absorption, less deformation**
Cutting effect	Average	Excellent, less slag	**No need for sanding**
Cutting speed	Average	Very fast	**High production efficiency**
Piercing	Can't cut small holes	Diameter-to-depth ratio of 10 – 20%	**Saves drilling and handling**
Working environment	Smoky	Clean	**Healthy and environmentally friendly**

INCLUDED WITH EVERY NOVOTECH MACHINE

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

07 · CONFIGURATION LIST

CONFIGURATION LIST · SF3015H

NO.	ITEM	QTY	BRAND
	LASER SOURCE		
1	Laser source	1	Raycus
	LASER CUTTING HEAD		
1	Laser cutting head	1	BOCI
	MACHINE TOOL · HOST		
1	Transmission system	4	Taiwan LAPPING / SENFENG
2	Machine tool and accessories	1	SENFENG
3	Machine bed burn-proof parts	1	Graphite (optional refractory bricks)
4	Reducer	3	Japan SHIMPO
5	Electrical and pneumatic systems	1	France SCHNEIDER · Japan SMC & Taiwan AirTAC
6	AC servo motor and driver	4	Japan Fuji Electric
7	Water chiller	1	HANLI
	CNC SYSTEM		
1	CNC system	1	FSCUT 8000

1. This is the optimal configuration verified by Senfeng. Changing the brand or configuration may cause irreversible effects.

2. Warranty: NovoTech's 1-year warranty on the entire machine (excluding consumables, force majeure natural disasters, wars and violations, human damage and other reasons).

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

08 · CUTTING SAMPLES

CUTTING SAMPLES · SF3015H

















09 · LASER DEVICE

SF3015H LASER SOURCE



RFL-C12000



RFL-C20000



RFL-C30000

12 – 30 kW optional

RAYCUS FIBER LASER SOURCES

1. Small core diameter (50 – 300 μm optional) and excellent beam quality
2. Efficient cutting
3. Power-saving: electro-optical conversion efficiency > 40%
4. Precise and controllable
5. Lightweight
6. Highly customizable
7. Smooth operation, safe and durable

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

10 · LASER HEAD

SF3015H LASER HEAD



12 – 15 kW



20 kW



30 kW

1. **Cutting head anti-collision design.** Customers can replace the anti-collision components themselves without replacing the cutting head, reducing the probability of returning it to the factory.
2. **Protective lens temperature monitoring.** If the lens is contaminated, the system immediately alarms and shuts down to avoid damage to the cutting head, lenses, etc.
3. **Real-time monitoring of the air pressure.** If the air is insufficient or the pressure too low or unstable, the system alarms immediately.
4. **Real-time detection of the stray-light value of the lower protective lens against explosion.** If the threshold is exceeded, it alarms in time.
5. **Pan-seal failure detection.** Real-time detection of the gas pressure in the lower 1 and lower 2 protective lens cavities ensures stable production.
6. **Process monitoring.** If a cut is not complete, the head automatically cuts back.
7. **Intelligent piercing.** Cutting starts immediately after the hole is penetrated, improving efficiency and protecting the machine tool.
8. **Intelligent retraction.** The sensor determines the retraction automatically to avoid cutting lumps and damage to the workpiece.
9. **Co-edge piercing monitoring.** When thermal deformation or misalignment of the plate is detected, the piercing procedure runs automatically, increasing the service life of the lens.

11 · MACHINE BED SYSTEM

SF3015H MACHINE BED SYSTEM

HEAVY-DUTY HEAT-ISOLATED HOLLOW BED

HIGHER PROCESSING EFFICIENCY

Technology — welding is followed by stress-relief annealing, secondary aging treatment and precision machining on a very large gantry milling machine, so the bed is stable and shock-resistant enough to withstand high acceleration.

Feature — the bed has no internal connections, which prevents heat transfer and loss of accuracy during cutting and ensures long-term use without deformation, improving its service life.





AVIATION-GRADE HIGH-STRENGTH ALUMINUM BEAM

STRONG STRUCTURAL STABILITY · STRONG IMPACT RESISTANCE

Technology — the beam is made of high-strength aviation-grade aluminum alloy and undergoes extrusion, quenching, heat aging treatment and precision machining. It has excellent rigidity and surface quality and is corrosion-resistant, lightweight, rigid and tough thanks to the properties of aluminum alloy.

Feature — the internal structure is optimized by finite element analysis for perfect dynamic performance during high-speed laser cutting, so various shapes are cut at high speed while accuracy is kept.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

12 · MACHINE BED SYSTEM

SF3015H MACHINE BED SYSTEM

INTELLIGENT SURROUNDING SPIRAL NEGATIVE PRESSURE DUST REMOVAL GREEN AND SMART

Core — the dust removal system divides the cutting area into sections and exhausts in a time-sharing, zonal and segmented manner according to the current cutting position.

Feature — it is also equipped with a sealed bottom structure to achieve smoke-free cutting.



PNEUMATIC SYSTEM PRECISE CONTROL

Core — the gas system is equipped with SMC and AirTAC control valves and proportional regulating valves from well-known brands, which control the pressure and flow of each gas electrically.

Feature — auxiliary cutting gases: O_2, N_2, compressed air, etc.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

13 · AUTOMATIC GAS DISTRIBUTION DEVICE

PRECISE GAS CONTROL



Automatic gas distribution device for the auxiliary gas

NITROGEN (300 PSI)
Adjustable between 15 and 435 psi (0.1 – 3 MPa)

OXYGEN
Adjustable between 7 and 131 psi (0.05 – 0.9 MPa)

COMPRESSED AIR
Adjustable between 15 and 435 psi (0.1 – 3 MPa)

Equipped with two different gases, nitrogen (air) and oxygen. Each gas circuit can be individually controlled for flow and pressure.

- The equipment software terminal selects the auxiliary gas automatically.
- The type and pressure of the auxiliary gas are set and selected automatically through the numerical control program, without manual operation.
- The actual pressure at the outlet of the cutting head is read and displayed on the panel instantly.

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

14 · NUMERICAL CONTROL SYSTEM

STORM CUTTING SYSTEM — FSCUT8000



CONVENIENT OPERATION AND EFFICIENT CUTTING

The FSCUT8000 high-end intelligent bus system is designed specifically for ultra-high-power laser cutting of 8 kW and above. It is stable, reliable, easy to deploy, simple to debug, safe to operate, well-featured and superior in performance. It supports modular, personalized, automated and digital solutions and is currently the most high-end bus laser cutting system on the market. It has a memory cache, a powerful cutting technology database and cutting parameters for various thicknesses and plate materials, for fast and efficient cutting.

- Native DXF, G-code and other drawing formats processed directly; high-speed reading, writing and processing of the LXDS and NRP files generated by CypNest.
- A cutting process parameter database allows real-time adjustment of the parameters during cutting for optimal cutting quality.
- Contactless piercing for thin sheets, lightning-fast piercing for thick plates, multi-stage piercing, slag removal, vibration suppression, closed-loop gas pressure control and fine process control by layer segmentation greatly improve the efficiency and stability of high-power cutting.
- Optimized rapid movement modes, with the “Leap Frog” function and automatic closing of the auxiliary gas during non-cutting moves.

15 · NUMERICAL CONTROL SYSTEM

NESTING SOFTWARE — CYPNEST



AUTOMATIC PROGRAMMING TO IMPROVE THE UTILIZATION RATE

The SF3015H CNC laser cutting machine is equipped with CypNest, a professional nesting software with automatic programming, nesting, layout, text processing and process configuration, maximizing sheet metal management and utilization. Its features:

- Lead-in, piercing, micro-joints, cutting sequence, optimized cutting path and optimized speed, etc.
- A fast, high-utilization nesting algorithm reduces material waste. No upper limit to the number of nested plates; automatic, manual and mixed manual + automatic nesting; automatic and manual nesting of special-shaped plates.
- Inter-part gap nesting, embedded nesting, symmetric-flip nesting, rotational nesting and avoidance of shape overlaps and collisions improve material utilization.
- Minimized tool travel, fast manual sorting options and several shared-edge toolpath modes for different scenarios.
- Co-edge segment cutting optimizes cutting efficiency and improves sheet utilization.
- Different cutting processes are applied automatically from user-defined material and thickness settings — compensation radius, piercing time, cutting power, lead-in method, micro-joints and bridging.
- Processing orders, quotation documents and other statistical reports; fully compatible with the HypCut / CypCut cutting processes.

16 · AFTER-SALE SERVICE

TRAINING · PACKAGING · INSTALLATION

PERSONNEL TRAINING TO IMPROVE PRODUCTION EFFICIENCY

01
BEFORE THE EQUIPMENT IS SHIPPED
The buyer can arrange 1 – 2 operators to Senfeng's factory or exhibition hall for a one-week training; the time is set by Senfeng's customer service department.

02
EQUIPMENT WARRANTY
The buyer can also send another 1 – 2 operators to Senfeng for free training.

03
TRAINING
Laser principle, equipment structure, process description, equipment maintenance, laser safety protection, operating procedures and simple troubleshooting.

04
REQUIREMENT
Trainees are mechanical, electrical or optical assistant engineers or engineers, who operate the machine after passing the assessment of equipment operation, laser principles, laser safety and maintenance.

PACKAGING AND TRANSPORTATION TO ENSURE THE EQUIPMENT QUALITY







01
PACKING
Standard packaging, suitable for long-distance road transport, moisture-proof, rust-proof and shock-proof, with the lifting center of gravity and lifting points marked for lifting the whole.

02
SHIPPING
Road transport within China: Senfeng is responsible for freight and insurance.

03
PACKING LIST AND CERTIFICATE
A detailed packing list and quality certificate are attached to each packing box, with the equipment instructions and all other documents. The packing list is outside the box and the certificate inside.

EQUIPMENT INSTALLATION PROFESSIONAL AND HIGH-QUALITY

01
EQUIPMENT INSTALLATION
The delivery place is the installation site of your company; NovoTech engineers, with Senfeng, install the equipment.

02
EQUIPMENT TEST
After installation, debugging ensures the normal function of the equipment.

03
ON-SITE TRAINING
Training on equipment maintenance, safety protection, operating procedures and simple troubleshooting at the customer's site for 7 days to ensure normal use.

04
ON-SITE ACCEPTANCE
The engineer leaves after the customer's on-site acceptance (the customer can veto).

17 · CUSTOMIZATION SERVICE

HONOUR · ENJOY · CUSTOMIZED



In the digital age, the intelligent transformation of the metal processing industry is imperative, and building a fully automatic factory is the only way to achieve it. Customized metal forming automation solutions become a top priority.

05
INTERNATIONAL PCT PATENTS

520
DOMESTIC TECHNOLOGY PATENTS

The core components — laser generator, laser processing head and laser numerical control system — have been developed by Senfeng and are widely used in cutting, welding, cladding and automation. Senfeng has built a whole industry chain integrating cutting, bending, welding, cladding and automation, covering laser cutting, welding, cladding and cleaning equipment, bending centers and flexible laser processing lines, widely used in power towers, construction machinery, shipbuilding, bridge formwork, aerospace and other industries. With these strengths, Jinan Senfeng Laser Technology helps enterprises shorten the production cycle and save manufacturing costs, for greater economic benefit in the competition.

CUSTOM STANDARDS

01
UNDERSTAND
Understand the customer's industry and specific production situation; identify problems and understand the customer's needs.

02
EXCHANGE
In-depth exchanges with the customer on site, and metal forming automation solutions customized to their pain points and needs.

03
DIFFER
Significantly different from competitors' models — the most suitable solution is formulated.

04
DELIVER
Following the customized plan, R&D and production from drawings to complete machines, controlling every procedure until the customer is satisfied.

18 · FIVE STAR SERVICE

5-STAR SERVICE IN QUICK RESPONSE



Jinan Senfeng Laser Technology adheres to the concept of "customer first" and provides high-quality global services with dedicated and professional quality. During the epidemic it did not back down and solved problems for customers in time, which won the favor and trust of customers at home and abroad.

EFFICIENT

- 24 hours a day, 7 days a week, 365 days a year to answer repair calls.
- Within 10 minutes a professional technical engineer replies; 1 hour to decide the maintenance plan; 1 working day to dispatch engineers.

PROFESSIONAL

- Exclusive customized service: a service plan for each customer's specific situation.
- Service engineer certification: every service engineer works with a certificate after strict training and assessment.
- FAQ training: an FAQ for each equipment model, with certified engineers training customers.
- Online one-to-one guidance: experienced senior engineers guide customers by telephone, video and other network channels.
- Once is good: the equipment is debugged correctly once, and similar problems are repaired once.

RELIABLE

- Pre-service: theory + practical operation training, self-diagnosis training for common faults, quick repair guidance for difficult faults, reminders of usage precautions.
- Regular service: regular maintenance reminders, regular door-to-door service, regular promotions.
- Value-added services: hardware and software upgrades, financial leasing and extended warranty.

NovoTech MACHINE TOOLS Inc.

LET'S FIND THE RIGHT FIBER LASER FOR YOUR SHOP.

Call or visit us for quotes, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON location.

PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada

INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**









Specifications subject to change without notice. Imperial values are converted from Senfeng's metric data and rounded: sheet thicknesses in decimal inches, cutting speeds in inches per minute. Model numbers are manufacturer designations. Photos may show optional equipment.