SF3015HM · TUBE AND PLATE LASER CUTTING MACHINE · 1.5 – 6 KW

# SF3015HM
# TECHNICAL SPECIFICATION

## TUBE AND PLATE LASER CUTTING MACHINE












| 10 × 5 ft | Ø0.8 – 8.7″ | 427 ft/min | 1 G |
|---|---|---|---|
| WORKING AREA | TUBE DIAMETER | MAXIMUM SPEED | MAXIMUM ACCELERATION |

**NovoTech Machine Tools Inc.**
1365 Mid-Way Blvd, 26, Mississauga, ON L5T 2J5, Canada
NovoTechMachineTools.com | info@NovoTechMachineTools.com | +1 647 526 5510

FULL TECHNICAL SPECIFICATION · SF3015HM · 1.5 – 6 KW

# CONTENTS

01 · Model ..... 03
02 · Technical parameters ..... 04
03 · Cutting parameters — stainless steel ..... 05
03 · Cutting parameters — carbon steel ..... 06
04 · Cutting parameters — brass, aluminum ..... 07
05 · Cost-benefit analysis ..... 08
06 · Configuration list ..... 09
07 · Laser source, laser head ..... 10
08 – 09 · Machine bed system ..... 11
10 · Auto gas distribution system ..... 13
11 · CNC system ..... 14
12 · Automated metal fabrication solutions ..... 15
13 · Personnel training, packaging and transportation ..... 16
14 · Installation and customization ..... 17
15 · Five-star fast service ..... 18
16 · Customer testimonials ..... 19

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

**SOLD & SERVICED IN CANADA**

by NovoTech Machine Tools — Mississauga, ON

01 · MODEL · TUBE & PLATE CUTTING

# SF3015HM

Medium power laser cutting machine.







Senfeng's campus in Jinan, China

**1 HIGH-STRENGTH MACHINE TOOL BED**

**2 AIRCRAFT-GRADE ALUMINUM BEAM**

**3 ONE MACHINE, DOUBLE THE FUNCTIONALITY, EFFICIENCY MULTIPLIED**

**4 AUTOMATIC FOLLOWING TECHNOLOGY**

**The image is for reference only; the appearance and dimensions are subject to the actual product from the factory.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

02 · TECHNICAL PARAMETERS

# TECHNICAL PARAMETERS · SF3015HM

| ITEM | 1.5 KW | 2 KW | 3 KW | 4 KW | 6 KW |
|---|---|---|---|---|---|
| **Working area (L × W)** | 120.1 × 60.2″ (3,050 × 1,530 mm) | | | | |
| **X-axis travel** | 60.2″ (1,530 mm) | | | | |
| **Y-axis travel** | 120.1″ (3,050 mm) | | | | |
| **Z-axis travel** | 13.0″ (330 mm) | | | | |
| **Tube length** | 1.6 – 19.7 ft (500 – 6,000 mm) | | | | |
| **Tube diameter** | Ø0.8 – 8.7″ (Ø20 – 220 mm) | | | | |
| **X / Y axis positioning accuracy** | ±0.002″ (±0.05 mm) | | | | |
| **X / Y axis repeated positioning accuracy** | ±0.0008″ (±0.02 mm) | | | | |
| **Maximum speed** | 427 ft/min (130 m/min) | | | | |
| **Maximum acceleration** | 1 G | | | | |
| **Dimensions (L × W × H)** | 30.5 × 11.4 × 7.2 ft (9,300 × 3,460 × 2,180 mm) | | | | |
| **Maximum load** | 2,425 lb (1,100 kg) | | | | |
| **Weight** | 15,653 lb (7,100 kg) | 15,675 lb (7,110 kg) | 15,719 lb (7,130 kg) | 15,851 lb (7,190 kg) | 15,851 lb (7,190 kg) |
| **Phase** | Three-phase | | | | |
| **Power supply rated voltage** | 380 V — in Canada: 208 / 240 / 480 / 600 V 3-phase 60 Hz through the transformer NovoTech supplies | | | | |
| **Frequency** | 50 Hz | | | | |
| **Overall power supply protection level** | IP54 | | | | |

*1. Workpiece accuracy depends on factors like type, pre-treatment, sheet size and position.*

*2. Technical parameters are subject to change without notice. Final parameters are based on the order agreement.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- ✓ Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- ✓ CSA-approved electrical panel
- ✓ 1-year warranty
- ✓ **7-day money-back guarantee** (in-stock machines only)
- ✓ Spare parts & technical support readily available in Canada
- ✓ **Order Today with Just 10% Down — 0% Down Financing Available**
- ✓ **Installation and training available**

CUTTING PARAMETERS · 1 OF 3

# STAINLESS STEEL

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "$O_2$" marks a value cut with oxygen where the row's gas is $N_2$ / air.

| Material | Thickness | 1.5 kW | 2 kW | 3 kW | 4 kW | 6 kW | Gas |
|---|---|---|---|---|---|---|---|
| STAINLESS STEEL | **0.039"** 1 mm | 906 – 1,181 23 – 30 | 1,181 – 1,378 30 – 35 | 1,181 – 1,772 30 – 45 | 1,575 – 1,969 40 – 50 | 1,772 – 2,165 45 – 55 | $N_2$ / air |
| | **0.079"** 2 mm | 276 – 472 7.0 – 12 | 394 – 591 10 – 15 | 787 – 984 20 – 25 | 984 – 1,181 25 – 30 | 1,181 – 1,378 30 – 35 | $N_2$ / air |
| | **0.118"** 3 mm | 177 – 217 4.5 – 5.5 | 197 – 256 5.0 – 6.5 | 315 – 394 8.0 – 10 | 354 – 512 9.0 – 13 | 709 – 866 18 – 22 | $N_2$ / air |
| | **0.157"** 4 mm | 79 – 98 2.0 – 2.5 | 157 – 197 4.0 – 5.0 | 197 – 236 5.0 – 6.0 | 276 – 366 7.0 – 9.3 | 394 – 551 10 – 14 | $N_2$ / air |
| | **0.197"** 5 mm | 55 – 79 1.4 – 2.0 | 79 – 91 2.0 – 2.3 | 118 – 142 3.0 – 3.6 | 157 – 177 4 – 4.5 | 315 – 394 8.0 – 10 | $N_2$ / air |
| | **0.236"** 6 mm | 39 – 47 1.0 – 1.2 | 59 – 79 1.5 – 2.0 | 79 – 118 2.0 – 3.0 | 138 – 177 3.5 – 4.5 | 169 – 197 4.3 – 5.0 | $N_2$ / air |
| | **0.315"** 8 mm | | 31 – 47 0.8 – 1.2 | 39 – 59 1.0 – 1.5 | 79 – 118 2.0 – 3.0 | 118 – 157 3.0 – 4.0 | $N_2$ / air |
| | **0.394"** 10 mm | | | 20 – 39 0.5 – 1.0 | 47 – 63 1.2 – 1.6 | 71 – 98 1.8 – 2.5 | $N_2$ / air |
| | **0.472"** 12 mm | | | 16 – 24 0.4 – 0.6 | 31 – 47 0.8 – 1.2 | 39 – 59 1.0 – 1.5 | $N_2$ / air |
| | **0.551"** 14 mm | | | | | 31 – 47 0.8 – 1.2 | $N_2$ / air |
| | **0.630"** 16 mm | | | | | 24 – 39 0.6 – 1.0 | $N_2$ / air |
| | **0.787"** 20 mm | | | | | 16 – 28 0.4 – 0.7 | air |

Sample cutting only — full sheets cannot be processed at this power

*1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.*

*2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.*

## INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CUTTING PARAMETERS · 2 OF 3

# CARBON STEEL

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "$O_2$" marks a value cut with oxygen where the row's gas is $N_2$ / air.

| Material | Thickness | 1.5 kW | 2 kW | 3 kW | 4 kW | 6 kW | Gas |
|---|---|---|---|---|---|---|---|
| CARBON STEEL | **0.039″**<br>1 mm | 906 – 1,024<br>23 – 26 | 984 – 1,378<br>25 – 35 | 1,181 – 1,575<br>30 – 40 | 1,378 – 1,772<br>35 – 45 | 1,575 – 1,772<br>40 – 45 | $N_2$ / air |
| | **0.079″**<br>2 mm | 165 – 256<br>4.2 – 6.5 | 394 – 591<br>10 – 15 | 591 – 787<br>15 – 20 | 591 – 787<br>15 – 20 | 787 – 1,102<br>20 – 28 | $N_2$ / air |
| | **0.118″**<br>3 mm | 118 – 177<br>3.0 – 4.5 | 138 – 217<br>3.5 – 5.5 | 138 – 177<br>3.5 – 4.5 | 276 – 354<br>7.0 – 9.0 | 472 – 669<br>12 – 17 | $N_2$ / air |
| | **0.157″**<br>4 mm | 91 – 118<br>2.3 – 3.0 | 118 – 126<br>3.0 – 3.2 | 118 – 138<br>3.0 – 3.5 | 118 – 157<br>3.0 – 4.0 | 315 – 394<br>8.0 – 10 | $N_2$ / air |
| | **0.236″**<br>6 mm | 67 – 98<br>1.7 – 2.5 | 79 – 106<br>2.0 – 2.7 | 98 – 138<br>2.5 – 3.5 | 79 – 118<br>2.0 – 3.0 | 98 – 130<br>2.5 – 3.3 | $O_2$ |
| | **0.315″**<br>8 mm | 47 – 63<br>1.2 – 1.6 | 51 – 67<br>1.3 – 1.7 | 71 – 91<br>1.8 – 2.3 | 79 – 118<br>2.0 – 3.0 | 91 – 118<br>2.3 – 3.0 | $O_2$ |
| | **0.394″**<br>10 mm | 39 – 47<br>1.0 – 1.2 | 39 – 63<br>1.0 – 1.6 | 55 – 71<br>1.4 – 1.8 | 79 – 98<br>2.0 – 2.5 | 79 – 98<br>2.0 – 2.5 | $O_2$ |
| | **0.472″**<br>12 mm | 31 – 39<br>0.8 – 1.0 | 31 – 47<br>0.8 – 1.2 | 39 – 55<br>1.0 – 1.4 | 59 – 79<br>1.5 – 2.0 | 71 – 87<br>1.8 – 2.2 | $O_2$ |
| | **0.551″**<br>14 mm | 24 – 28<br>0.6 – 0.7 | 31 – 39<br>0.8 – 1.0 | 31 – 39<br>0.8 – 1.0 | 39 – 59<br>1.0 – 1.5 | 55 – 67<br>1.4 – 1.7 | $O_2$ |
| | **0.630″**<br>16 mm | 20 – 24<br>0.5 – 0.6 | 28 – 39<br>0.7 – 1.0 | 28 – 43<br>0.7 – 1.1 | 28 – 47<br>0.7 – 1.2 | 39 – 63<br>1.0 – 1.6 | $O_2$ |
| | **0.787″**<br>20 mm | | | 20 – 28<br>0.5 – 0.7 | 24 – 31<br>0.6 – 0.8 | 24 – 47<br>0.6 – 1.2 | $O_2$ |
| | **0.984″**<br>25 mm | | | | 16 – 24<br>0.4 – 0.6 | 20 – 28<br>0.5 – 0.7 | $O_2$ |
| | **1.181″**<br>30 mm | | | | | 16 – 24<br>0.4 – 0.6 | $O_2$ |

Sample cutting only — full sheets cannot be processed at this power

*1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.*

*2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

CUTTING PARAMETERS · 3 OF 3

# BRASS · ALUMINUM

Cutting speed by laser source power in inches per minute; Senfeng's metres per minute below each value. "$O_2$" marks a value cut with oxygen where the row's gas is $N_2$ / air.

| Material | Thickness | 1.5 kW | 2 kW | 3 kW | 4 kW | 6 kW | Gas |
|---|---|---|---|---|---|---|---|
| BRASS | **0.039″**<br>1 mm | 591 – 787<br>15 – 20 | 591 – 984<br>15 – 25 | 984 – 1,181<br>25 – 30 | 1,181 – 1,378<br>30 – 35 | 1,575 – 1,772<br>40 – 45 | $N_2$ / air |
| | **0.079″**<br>2 mm | 189 – 236<br>4.8 – 6.0 | 315 – 433<br>8.0 – 11 | 472 – 669<br>12 – 17 | 591 – 709<br>15 – 18 | 787 – 984<br>20 – 25 | $N_2$ / air |
| | **0.118″**<br>3 mm | 59 – 79<br>1.5 – 2.0 | 118 – 177<br>3.0 – 4.5 | 197 – 236<br>5.0 – 6.0 | 315 – 394<br>8.0 – 10 | 472 – 591<br>12 – 15 | $N_2$ / air |
| | **0.197″**<br>5 mm | 20 – 28<br>0.5 – 0.7 | 51 – 67<br>1.3 – 1.7 | 71 – 98<br>1.8 – 2.5 | 118 – 157<br>3.0 – 4.0 | 197 – 236<br>5.0 – 6.0 | $N_2$ / air |
| | **0.236″**<br>6 mm | | 24 – 31<br>0.6 – 0.8 | 31 – 39<br>0.8 – 1.0 | 79 – 98<br>2.0 – 2.5 | 118 – 157<br>3.0 – 4.0 | $N_2$ / air |
| | **0.315″**<br>8 mm | | | | 31 – 47<br>0.8 – 1.2 | 59 – 98<br>1.5 – 2.5 | $N_2$ / air |
| | **0.394″**<br>10 mm | | | | | 39 – 59<br>1.0 – 1.5 | $N_2$ / air |
| | **0.472″**<br>12 mm | | | | | 31 – 39<br>0.8 – 1 | $N_2$ / air |
| ALUMINUM | **0.039″**<br>1 mm | 591 – 906<br>15 – 23 | 787 – 984<br>20 – 25 | 1,181 – 1,378<br>30 – 35 | 1,378 – 1,575<br>35 – 40 | 1,969 – 2,165<br>50 – 55 | $N_2$ / air |
| | **0.079″**<br>2 mm | 236 – 315<br>6.0 – 8.0 | 394 – 591<br>10 – 15 | 551 – 787<br>14 – 20 | 669 – 984<br>17 – 25 | 984 – 1,181<br>25 – 30 | $N_2$ / air |
| | **0.118″**<br>3 mm | 79 – 118<br>2.0 – 3.0 | 157 – 197<br>4.0 – 5.0 | 315 – 394<br>8.0 – 10 | 394 – 512<br>10 – 13 | 512 – 630<br>13 – 16 | $N_2$ / air |
| | **0.157″**<br>4 mm | 39 – 67<br>1.0 – 1.7 | 79 – 98<br>2.0 – 2.5 | 197 – 256<br>5.0 – 6.5 | 236 – 295<br>6.0 – 7.5 | 394 – 512<br>10 – 13 | $N_2$ / air |
| | **0.197″**<br>5 mm | 20 – 31<br>0.5 – 0.8 | 39 – 79<br>1.0 – 2.0 | 98 – 138<br>2.5 – 3.5 | 157 – 197<br>4.0 – 5.0 | 197 – 236<br>5.0 – 6.0 | $N_2$ / air |
| | **0.236″**<br>6 mm | | 24 – 39<br>0.6 – 1.0 | 47 – 59<br>1.2 – 1.5 | 98 – 138<br>2.5 – 3.5 | 118 – 157<br>3.0 – 4.0 | $N_2$ / air |
| | **0.315″**<br>8 mm | | | 28 – 51<br>0.7 – 1.3 | 39 – 79<br>1.0 – 2.0 | 79 – 118<br>2.0 – 3.0 | $N_2$ / air |
| | **0.394″**<br>10 mm | | | | 31 – 47<br>0.8 – 1.2 | 39 – 79<br>1.0 – 2.0 | $N_2$ / air |
| | **0.472″**<br>12 mm | | | | 16 – 24<br>0.4 – 0.6 | 28 – 47<br>0.7 – 1.2 | $N_2$ / air |
| | **0.551″**<br>14 mm | | | | | 20 – 39<br>0.5 – 1.0 | $N_2$ / air |
| | **0.630″**<br>16 mm | | | | | 16 – 24<br>0.4 – 0.6 | $N_2$ / air |

Sample cutting only — full sheets cannot be processed at this power

*1. Due to variations in material carbon content, the cutting parameters are for reference only; actual conditions prevail.*

*2. Shaded cells: full-sheet processing is not possible and only sample cutting is allowed.*

05 · COST-BENEFIT ANALYSIS

# COST-BENEFIT ANALYSIS · SF3015HM

If the cutting auxiliary gas is dried compressed air, the cost includes the air compressor's electricity, the machine's power consumption and the consumables (protective lenses, cutting nozzles).

| Item | | 1.5 kW | | | 2 kW | | | 3 kW | | | 4 kW | | | 6 kW | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Air | $O_2$ | $N_2$ | Air | $O_2$ | $N_2$ | Air | $O_2$ | $N_2$ | Air | $O_2$ | $N_2$ | Air | $O_2$ | $N_2$ |
| PEAK POWER CONSUMPTION | Laser source (kW) | 5 | | | 6 | | | 10 | | | 16 | | | 16 | | |
| | Chiller (kW) | 3 | | | 3 | | | 3 | | | 6 | | | 6 | | |
| | Air compressor (kW) | 15 | / | / | 15 | / | / | 15 | / | / | 15 | / | / | 15 | / | / |
| | Machine tool host (kW) | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 | 12 |
| | Dust removal (kW) | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Consumables and gas consumption (CNY/h) | | 0.5 | 4.5 | 60.5 | 0.5 | 4.5 | 60.5 | 0.5 | 4.5 | 60.5 | 0.5 | 4.5 | 60.5 | 0.5 | 4.5 | 60.5 |
| Total power (kW) | | 38 | 23 | 23 | 39 | 24 | 24 | 43 | 28 | 28 | 52 | 37 | 37 | 52 | 37 | 37 |
| Total power consumption (kWh per hour) | | 22.8 | 13.8 | 13.8 | 23.4 | 14.4 | 14.4 | 25.8 | 16.8 | 16.8 | 31.2 | 22.2 | 22.2 | 31.2 | 22.2 | 22.2 |
| Total operating cost (RMB per hour, at 1 RMB/kWh) | | 23.3 | 18.3 | 74.3 | 23.9 | 18.9 | 74.9 | 26.3 | 21.3 | 77.3 | 31.7 | 26.7 | 82.7 | 31.7 | 26.7 | 82.7 |

*1. The electricity and gas prices are Senfeng's reference values in China (RMB) and may vary by region.*

*2. Auxiliary gas consumption varies with plate thickness; the values are based on 0.630" (16 mm) carbon steel for oxygen and 0.039" (1 mm) stainless steel for nitrogen, for reference.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

06 · CONFIGURATION LIST

# CONFIGURATION LIST · SF3015HM

| NO. | ITEM | QTY | BRAND |
|---|---|---|---|
| | **LASER SOURCE** | | |
| 1 | Laser source | 1 | Max |
| | **LASER CUTTING HEAD** | | |
| 1 | Laser cutting head | 1 | Raytools |
| | **MACHINE TOOL & HOST** | | |
| 1 | Transmission system | 4 | SENFENG |
| 2 | Machine tool and accessory | 1 | SENFENG |
| 3 | Reducer | 3 | SHIMPO, Japan |
| 4 | Electrical and pneumatic systems | 1 | SCHNEIDER, France · AVENTICS, Germany |
| 5 | AC servo motor and driver | 4 | Fuji Electric, Japan |
| 6 | Water chiller | 1 | Hanli |
| | **CNC CUTTING SYSTEM** | | |
| 1 | CNC laser cutting system | 1 | FSCUT |

*1. This is Senfeng's optimized configuration. Changes in brand or configuration may cause irreversible effects.*

*2. The warranty period for the entire machine (excluding consumables, force majeure natural disasters, war, improper operation and human damage) is 1 year.*

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

07 · CORE COMPONENTS

# LASER SOURCE · LASER HEAD

## SF3015HM LASER SOURCE







1. High-power and high-quality laser output
2. Uniformly distributed beam energy
3. Excellent performance and strong processing ability
4. Compact structure and maintenance-free
5. Wide range of applications

## SF3015HM LASER HEAD




1.5 – 3 kW




4 – 6 kW

1. **Efficient cooling:** the collimating and focusing lenses have cooling structures, and the nozzle has a cooling airflow that protects the nozzle and the ceramic body and extends operating time.
2. **Fast focusing:** collimated focusing moves faster and over a larger adjustment range than traditional focusing.
3. **Multiple protective lenses:** four protective lenses reduce contamination when the fiber and the lower protective lenses are changed, extending the life of the collimating and focusing lenses.
4. **Optimized structure:** the integrated body is sealed; improved QBH, QD and G5 fiber interfaces fit more laser sources and prevent jamming from rust or water leaks.

08 · MACHINE BED SYSTEM

# SF3015HM MACHINE BED SYSTEM






## 1 · High-strength machine tool bed

- The high-strength machine bed is welded from high-quality steel plates and tubes.
- After welding it is stress-relief annealed, given a secondary aging treatment and precision-machined on a large milling machine, for structural stability and vibration resistance under high acceleration.
- The bed has no internal connections, which blocks heat transfer and keeps cutting heat from affecting the machining accuracy — long-term resistance to deformation and a longer service life.

## 2 · Aircraft-grade high-strength aluminum beam

- The beam is made of aerospace-grade high-strength aluminum alloy — extruded, quenched and aged — for rigidity, surface quality, corrosion resistance and light, durable construction.
- The internally optimized structure gives excellent dynamic performance at high speed, keeping the precision for cutting all shapes.






## 3 · Pneumatic system

- Control valves and proportional regulators from AVENTICS control the pressure and flow of each gas path electrically.
- Cutting auxiliary gases: $O_2$, $N_2$, compressed air and others.

## 4 · Plate and tube cutting in one machine

- The SF3015HM cuts both plate and tube, doubling efficiency.

09 · MACHINE BED SYSTEM

# SF3015HM MACHINE BED SYSTEM





## 5 · Intelligent spiral negative-pressure dust removal system

- Smart control of the exhaust vents from the cutting position, with timed, zoned and sectional ventilation.
- The U-shaped sealed base at the bottom keeps the cutting smoke-free.

## 6 · Modular Z-axis

- The Z axis is modular, with good sealing that prevents contamination and lowers the failure rate.
- Modular installation and replacement greatly reduce maintenance time and difficulty.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

10 · AUTO GAS DISTRIBUTION SYSTEM

# PRECISE CONTROL OF EACH GAS FLOW




The CNC laser cutting machine has two separate gas lines: nitrogen (air) and oxygen. Each gas line can be independently controlled for flow rate and pressure.

- The equipment software terminal has an automatic auxiliary gas selection feature.
- The type and pressure of the auxiliary gases are set and selected automatically through the CNC program — no manual operation.
- The actual gas pressure at the cutting head outlet is read and displayed on the panel in real time.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

11 · CNC SYSTEM

# SF3015HM CNC SYSTEM




Bus cutting system — quick operation & efficient cutting

This intelligent bus system is designed specifically for fiber laser cutting. It integrates motion control, laser source control and cutting gas control, offering stability, reliability, easy deployment, simple debugging, production safety and a rich set of features with excellent performance. It offers modular, customizable, automated and informational solutions. The system has memory buffering and a comprehensive cutting process database with optimized parameters for various materials and thicknesses, for fast operation and efficient cutting — ideal for sheet metal, kitchenware and lighting.

- Supported file formats: direct processing of DXF files and high-speed reading and writing of LXDS and NRP files generated by CypNest.
- A cutting database allows real-time adjustments during cutting for optimal processing quality.
- Multi-stage piercing, sharp-corner entry and centering significantly improve high-power cutting efficiency and stability.
- Optimized rapid travel modes, including the “LeapFrog” function.


**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

12 · AFTER-SALES SERVICE

# PROVIDING GLOBAL USERS WITH AUTOMATED METAL FABRICATION SOLUTIONS

Senfeng provides automated metal fabrication solutions globally, integrating cutting, bending, welding, cladding, automation and new energy. With core technologies in laser cutting, welding and cladding, the company also offers intelligent manufacturing systems such as flexible laser processing lines and panel benders. These solutions serve industries including automotive, construction, energy and petrochemicals, and are used in over 100 countries.

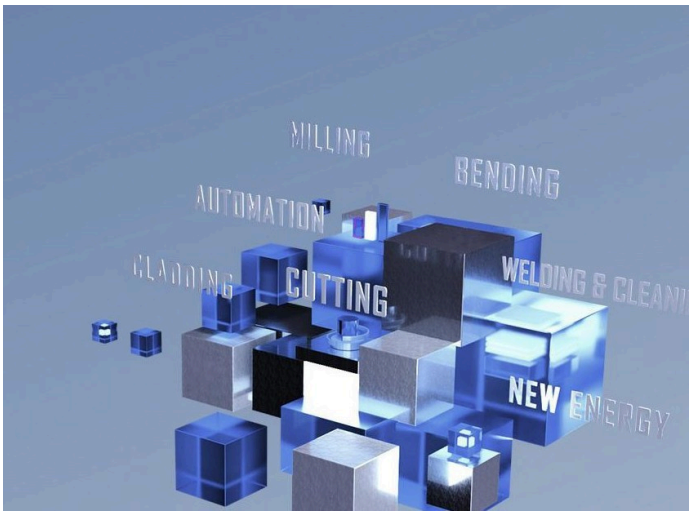


**03**
INTERNATIONAL PCT PATENTS

**577**
CHINESE TECHNOLOGY PATENTS

Senfeng has developed key components such as laser generators, processing heads, the Feng Cloud system and CNC systems, used in cutting, welding, cladding and automation. The company offers a complete industry chain, including laser cutting, welding, cladding and cleaning machines, bending centers and flexible production lines. These solutions are used in sectors such as power towers, construction machinery, shipbuilding, bridges and aerospace, helping businesses accelerate production and reduce costs for greater economic benefit.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**

13 · AFTER-SALES SERVICE

# TRAINING · PACKAGING · INSTALLATION

## TECHNICAL TRAINING TO ENHANCE CUSTOMER PRODUCTION EFFICIENCY

### 01
### BEFORE EQUIPMENT DELIVERY
The buyer can arrange for 1 – 2 operators to attend a one-week training at the Senfeng factory. The dates are confirmed with Senfeng's customer service department.

### 02
### DURING THE WARRANTY PERIOD
The buyer can apply for one more session of free training for 1 – 2 operators at Senfeng.

### 03
### TRAINING
Laser principles, equipment structure, process explanation, equipment maintenance, laser safety protection, operating procedures and basic troubleshooting.

### 04
### REQUIREMENT
Trainees must be mechanical, electrical or optical engineers and pass assessments on equipment operation, laser principles, safety and maintenance before starting work.

## PACKAGING & TRANSPORTATION TO ENSURE EQUIPMENT QUALITY










### 01
### PACKAGING
Standard packaging, suitable for long-distance transportation, moisture-proof, rust-proof and shock-resistant. Designed for full lifting, with marked lifting points and center of gravity.

### 02
### TRANSPORTATION
Domestic transportation within China is fully handled by Senfeng, including freight and insurance.

### 03
### PACKING LIST & CERTIFICATE
Each package includes a packing list and a certificate of conformity. The user manual and other documents are inside the box; the packing list is on the outside.

## INSTALLATION PROFESSIONAL AND HIGH-QUALITY

### 01
### INSTALLATION
NovoTech engineers, with Senfeng, install the equipment at the customer's site.

### 02
### EQUIPMENT DEBUGGING
After installation, the equipment is debugged for the customer's use.

### 03
### DOOR-TO-DOOR TRAINING
On-site training on equipment maintenance, safety, operating procedures and basic troubleshooting, with 7 days of guaranteed usage.

### 04
### ON-SITE ACCEPTANCE
After the steps above, the engineer leaves the site only after the customer's acceptance (the customer can veto).

14 · AFTER-SALES SERVICE

# PREMIUM CUSTOMIZATION


In the digital era, intelligent transformation in metal processing is essential. Building unmanned factories is key to upgrading, with customized automation solutions a top priority.



**01** · Senfeng understands the client's industry status and specific production processes, identifies issues and assesses their needs.




**02** · Through in-depth on-site communication, metal fabrication automation solutions are customized to the client's pain points and needs.

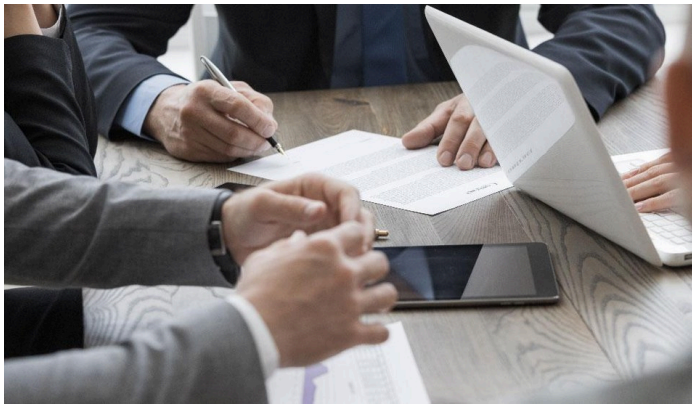

**03** · A tailored solution, different from competitors' standardized models.




**04** · A one-stop R&D and production service from design to final machine, with thorough quality checks until customer satisfaction and acceptance.

**INCLUDED WITH EVERY NOVOTECH MACHINE**

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**


15 · AFTER-SALES SERVICE

# FIVE-STAR FAST SERVICE




## EFFICIENT

- Senfeng's repair hotline is available 24/7.
- A professional engineer responds to customer inquiries within 10 minutes and provides a repair plan within 1 hour.

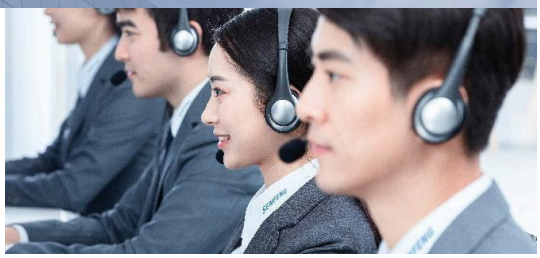

## PROFESSIONAL

- **Custom service:** service plans tailored to the customer's specific needs.
- **Service engineer certification:** each service engineer is rigorously trained and assessed before being certified to work.
- **Common issues training:** a manual of common issues for each equipment model, with certified engineers training customers.
- **Online guidance:** experienced senior engineers support customers by phone or video call.
- **Professional technical support:** the equipment is properly calibrated at the first installation, and similar issues are resolved in one go.







## COMPREHENSIVE

- **Pre-service:** theoretical and hands-on operation training, common fault self-diagnosis training, quick repair guidance and usage reminders.
- **Regular service:** regular maintenance reminders, on-site services and periodic promotional activities.
- **Value-added service:** equipment software and hardware upgrades, financing lease services and extended warranty services.



16 · AFTER-SALES SERVICE

# CUSTOMER TESTIMONIALS


Senfeng machines and customers around the world.










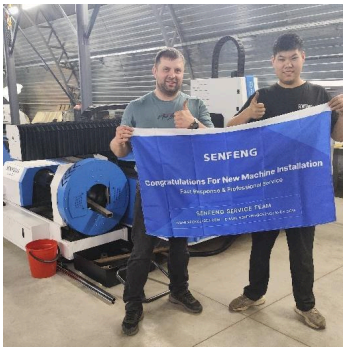






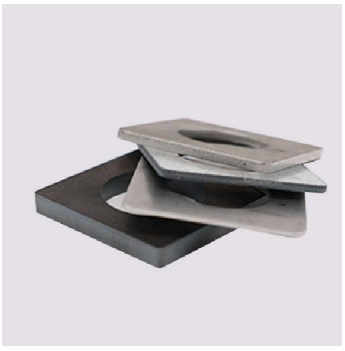



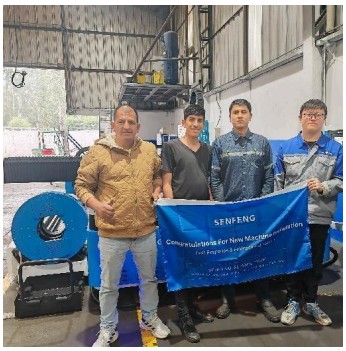

NovoTech MACHINE TOOLS Inc.

# LET'S FIND THE RIGHT FIBER LASER FOR YOUR SHOP.

Call or visit us for quotes, demonstrations, installation and service. In-stock machines ship fast from our Mississauga, ON location.


PHONE

+1 647 526 5510

WEB & EMAIL

NovoTechMachineTools.com
info@NovoTechMachineTools.com

ADDRESS

1365 Mid-Way Blvd, 26
Mississauga, ON L5T 2J5
Canada


## INCLUDED WITH EVERY NOVOTECH MACHINE

- Made in China by Senfeng Laser — CE, FDA and ETL certified and CSA approved
- CSA-approved electrical panel
- 1-year warranty
- **7-day money-back guarantee** (in-stock machines only)
- Spare parts & technical support readily available in Canada
- **Order Today with Just 10% Down — 0% Down Financing Available**
- **Installation and training available**










Specifications subject to change without notice. Imperial values are converted from Senfeng's metric data and rounded: sheet thicknesses in decimal inches, cutting speeds in inches per minute. Model numbers are manufacturer designations. Photos may show optional equipment.