

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

LTE/5G > UniFi 5G Max

North America Worldwide



UniFi 5G Max

U5G-Max-US




Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

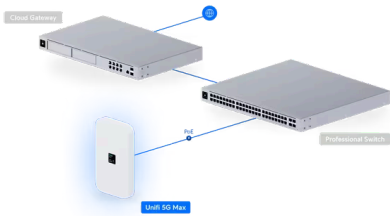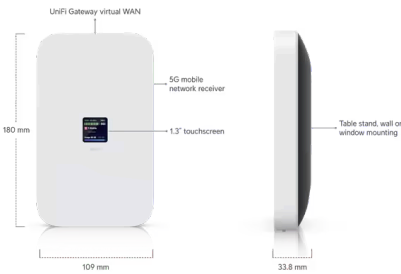

^ Overview

Dimensions

180 x 109 x 33.8 mm
(7.1 x 4.3 x 1.3")

Networking Interface

(1) 2.5 GbE RJ45 port
5G NR and LTE radio

SIM

(1) Nano SIM
(1) Nano-SIM or eSIM ⓘ

PoE Interface

(1) PoE input



Tamper Resistance	IK04
^ Mechanical	
Weight	Device: 410 g (14.5 oz)
	Stand: 215 g (7.6 oz)
	Wall mount: 7.6 g (0.3 oz)
	Window mount: 20 g (0.7 oz)
Enclosure Material	Polycarbonate, aluminum alloy
Mount Material	Polycarbonate, silicone rubber
^ Hardware	
Management	Ethernet
5G NR	
Category	5G NR
Frequency Bands	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n71, n75, n76, n77, n78, n79
Max. TX Power	HPUE power class 2: 26 dBm
4G LTE	
Frequency Bands	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71
Max. TX Power	HPUE power class 2: 25 dBm
3G UMTS	
Frequency Bands	B1, B2, B4, B5, B8, B19
Peak Data Speed	
5G NSA	Downlink 3.4 Gbps
	Uplink 560 Mbps ⓘ
5G SA	Downlink 1.8 Gbps
	Uplink 650 Mbps
4G LTE	Downlink 1.6 Gbps
	Uplink 210 Mbps
Antennas	



Max. Power Consumption	14.5W
Power Method	PoE
Display	1.3" touchscreen
Buttons	(1) Factory reset
Ambient Operating Temperature	0 to 40 °C (32 to 104 °F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	FCC, IC, CE, PTCRB, GCF, AT&T, T-Mobile, Verizon

^ **Software**

Application Requirements

UniFi Network	Version 10.0.162 and later i
---------------	--

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.