

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Aggregation > Aggregation



Aggregation

USW-Aggregation



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

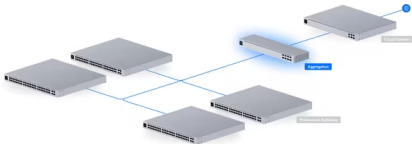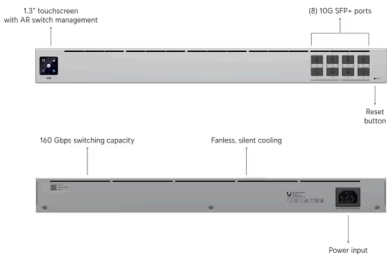

Overview

Dimensions

442 x 120 x 43.7 mm
(17.4 x 4.7 x 1.7")

Port Layout

10G SFP+

8
(10G/1G)

Form Factor

Rack mount (1U)

Performance

Switching Capacity

160 Gbps

Total Non-Blocking Throughput

80 Gbps

Supported VLANs	1,000
MAC Address Table Size	16,000
Packet Buffer Size	1.5 MB
Access Lists	
IPv4	128
MAC	128
^ Layer 2 Features	
LACP Port Aggregation	✓
STP & RSTP	✓
Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓

Loop Protection	✓
-----------------	---

Virtual Network Override	✓
--------------------------	---

^ Hardware

Max. Power Consumption	36W (Including SFP modules)
------------------------	-----------------------------

Power Method	Universal input, 100-240V AC, 50/60 Hz
--------------	--

Power Input Method	AC input
--------------------	----------

Power Supply	AC/DC, internal, 36W
--------------	----------------------

Supported Voltage Range	100-240V AC
-------------------------	-------------

Management	Ethernet AR
------------	----------------

Heat Dissipation	102 BTU/hr
------------------	------------

Weight	Without mounting brackets: 2.6 kg (5.8 lb) With mounting brackets: 2.7 kg (6 lb)
--------	---

Enclosure Material	SGCC steel
--------------------	------------

Mount Material	SGCC steel
----------------	------------

Supported Rack Depth	400~1200 mm (15.7-47.2")
----------------------	-----------------------------

LCM Display	1.3" touchscreen
-------------	------------------

ESD Protection	Air: ± 16kV, contact: ± 12kV
----------------	------------------------------

Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
-------------------------------	----------------------------

Ambient Operating Humidity	10 to 90% noncondensing
----------------------------	-------------------------

NDAA Compliant	✓
----------------	---

Certifications	CE, FCC, IC, Anatel: 04456-21-08356
----------------	-------------------------------------

^ Software

Application Requirements	
--------------------------	--

UniFi Network	Version 5.14.12 and later
---------------	---------------------------

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.