

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Bridging > Building Bridge



Building Bridge UBB



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

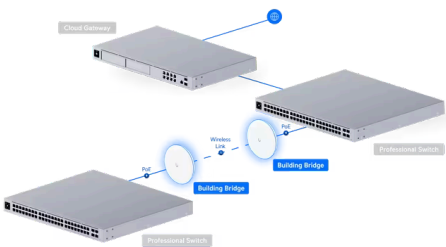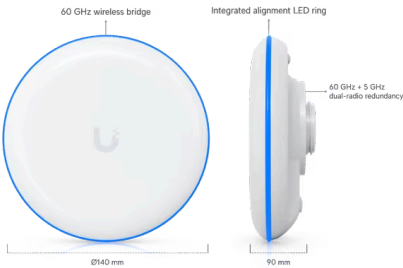

Overview

Dimensions	ø140 x 90 mm (ø5.5 x 3.5")
WiFi Standard	WiFi 5
Spatial Streams	2
Coverage Area	500 m (1,640 ft)
Mounting Locations	Wall, pole
Weatherproofing	IPX6
Power Method	PoE i

MIMO

5 GHz	2 x 2 (DL MU-MIMO)
-------	--------------------

Max. Data Rate

60 GHz	1.7 Gbps
--------	----------

5 GHz	866.6 Mbps (BW80)
-------	-------------------

Antenna Gain

60 GHz	17.2 dBi
--------	----------

5 GHz	10 dBi
-------	--------

2.4 GHz	2 dBi (BLE)
---------	-------------

Max. TX Power

60 GHz	19 dBm
--------	--------

5 GHz	25 dBm
-------	--------

Supported Data Rates

802.11ac (WiFi 5)	6.5 Mbps to 867 Mbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80)
-------------------	---

802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
---------	---

802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
---------	-----------------------------------

Wireless Security

Wireless Security	WPA2 AES
-------------------	----------

^ **Hardware**

Max. Power Consumption

Max. Power Consumption	11W
------------------------	-----

Includes PoE Adapter

Includes PoE Adapter	✓
----------------------	---

Supported Voltage Range

Supported Voltage Range	44-57V DC
-------------------------	-----------

Networking Interface

Networking Interface	(1) GbE RJ45 port
----------------------	-------------------

Weight

Weight	376 g (13.3 oz)
--------	-----------------

Operating Modes

Operating Modes	PtP
-----------------	-----

Wind Loading

Wind Loading	56 N at 200 km/h (12.6 lbf at 125 mph)
--------------	--

Channel Bandwidth	Main radio (60 GHz): 1,080/2,160 MHz Backup radio (5 GHz): HT 20/40 MHz, VHT 20/40/80 MHz
Enclosure Material	UV-resistant polycarbonate
Button	(1) Factory reset
LEDs	
System	R/G/B
Operating Frequency	Main radio (60 GHz): 57 - 66 GHz Backup radio (5 GHz): US/CA U-NII-1: 5150 - 5250 MHz U-NII-2A: 5250 - 5350 MHz U-NII-2C: 5470 - 5725 MHz U-NII-3: 5725 - 5850 MHz Worldwide 5150 - 5850 MHz
Bluetooth (MHz)	Worldwide: 2400 - 2483.5 MHz
Ambient Operating Temperature	-40 to 70° C (-40 to 158° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC

Stay in Touch

Email

Subscribe



