

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Bridging > Building Bridge XG




Building Bridge XG

UBB-XG

Datasheet

In The Box	Marketing Images	Accessories	Installation Guide
------------	------------------	-------------	--------------------

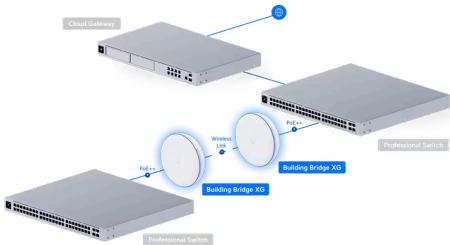

Overview

Dimensions	Ø191.8 x 59 mm (Ø7.6 x 2.3")
WiFi Standard	WiFi 5
Spatial Streams	2
Coverage Area	500 m (1,640 ft)
Mounting Locations	Wall, pole
Weatherproofing	IPX6
Power Method	PoE++ Passive PoE ⓘ

MIMO

5 GHz	2 x 2 (DL MU-MIMO)
-------	--------------------

Max. Data Rate

60 GHz	6 Gbps
--------	--------

5 GHz	866.6 Mbps (BW80)
-------	-------------------

Antenna Gain

60 GHz	21 dBi
--------	--------

5 GHz	14 dBi
-------	--------

2.4 GHz	2 dBi (BLE)
---------	-------------

Max. TX Power

60 GHz	16 dBm
--------	--------

5 GHz	23 dBm
-------	--------

Supported Data Rates

802.11ac (WiFi 5)	6.5 Mbps to 867 Mbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80)
-------------------	---

802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
---------	---

802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
---------	-----------------------------------

Wireless Security

WPA2 AES

^ **Hardware**

Max. Power Consumption

29W

Includes PoE Adapter

✓

Supported Voltage Range

48V DC ± 10%

Networking Interface

(1) GbE RJ45 port
(1) 1/10G SFP+ port

Weight

Device: 1.7 kg (3.8 lb)
With mount: 2.9 kg (6.3 lb)

Operating Modes

PtP

Wind Loading

56 N at 200 km/h (12.6 lbf at 125 mph)



Management	Ethernet Bluetooth
Channel Bandwidth	Main radio (60 GHz): 2160/4320 MHz Backup radio (5 GHz): VHT 20/40/80 MHz
Enclosure Material	Aluminum alloy, UV-resistant polycarbonate
Mount Material	Stainless steel
Button	(1) Factory reset
LEDs	
System	R/G/B
Operating Frequency	Main radio (60 GHz): 57 - 66 GHz Backup radio (5 GHz): US/CA U-NII-1: 5150 - 5250 MHz U-NII-2A: 5250 - 5350 MHz U-NII-2C: 5470 - 5725 MHz U-NII-3: 5725 - 5850 MHz Worldwide 5150 - 5850 MHz
Bluetooth (MHz)	Worldwide: 2400 - 2483.5 MHz
Ambient Operating Temperature	-40 to 55° C (-40 to 131° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, Terragraph

Stay in Touch

Subscribe





© 2026 Ubiquiti, Inc. All rights reserved.