

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Compact > Cloud Gateway Fiber



Cloud Gateway Fiber

UCG-Fiber



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

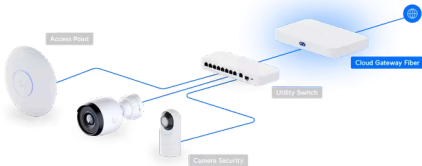

Overview

Dimensions

212.8 x 127.6 x 30 mm
(8.4 x 5 x 1.2")

UniFi Application Suite

- Network *i*

Protect *i*

Access *i*

Talk *i*

Connect *i*
- ✓

✓

✓

✓

✓

Managed Cameras	(15) HD (8) 2K (5) 4K
Managed Access Hubs ⓘ	50
Simultaneous Users Connected	500+
Max. WAN Port Count	6
Default WAN Ports	(1) 10G SFP+ (1) 10 GbE RJ45
Port Layout	
2.5 GbE RJ45	4 (2.5G/1G/100M/10M)
10 GbE RJ45	1 (10G/2.5G/1G)
10G SFP+	2 (10G/1G)
IDS/IPS Throughput	5 Gbps
Form Factor	Compact desktop
^ Security	
Stateful Firewall	✓
Application-Aware Layer 7 Firewall	✓
DPI & Traffic Identification	✓
Zone-Based Firewall Advanced Filtering (Regions, Domains, Apps)	✓
Content Filtering	✓
Intrusion Prevention (IPS/IDS)	✓
Ad Blocking	✓
IDS/IPS Signatures	55,000+ with CyberSecure
VLAN/Subnet-based Traffic Segmentation	✓

License-Free SD-WAN	✓
Site-to-Site VPN	
Site Magic	✓
IPsec	✓
OpenVPN	✓
VPN Server	
Identity Endpoint One-Click VPN	✓
Teleport Zero-Configuration VPN	✓
WireGuard	✓
OpenVPN	✓
L2TP	✓
VPN Client	
OpenVPN	✓
WireGuard	✓
^ Networking	
Multi-WAN Load Balancing	✓
Dynamic Routing	
OSPF	✓
BGP	✓
Advanced QoS	✓
Multicast DNS (mDNS)	✓
Advanced NAT (SNAT / DNAT / Masquerade / NAT Pooling / 1-to-1 NAT)	✓
Integrated RADIUS Server	✓
RADIUS over TLS (RadSec)	✓

Internet Quality and Outage Reporting	✓
MAC Address Table Size	4,000
Virtual Network Override	✓
All Traffic Flows	✓
^ Hardware	
NVR Storage	Selectable NVMe SSD up to 2 TB ①
PoE Budget	30W
Voltage Range PoE Mode	50-57V
Max. Power Consumption	29.4W (Excluding PoE output)
Power Method	DC jack (54V DC/1.1A)
Power Supply	54V DC/1.1A (Adapter included)
Supported Voltage Range	100-240V AC
Heat Dissipation	100 BTU/hr (Excluding PoE Output)
Processor	Quad-core ARM® Cortex®-A73 at 2.2 GHz
System Memory	3 GB
Weight	Without SSD: 675 g (1.5 lb) With SSD: 734 g (1.6 lb)
Enclosure Material	Polycarbonate
LCM Display	0.96" status display
Management	Ethernet Bluetooth
LEDs	
Ethernet	✓
SFP+	✓
Button	(1) Factory reset

Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC, SRRC, Anatel: 04395-25-08356

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.