

UniFi   UISP   Branding

Q

Search UniFi products

Cloud Gateways   Switching   WiFi   Physical Security   Door Access   Integrations   Access

Bridging > [Device Bridge Pro Sector](#)



# Device Bridge Pro Sector



UDB-Pro-Sector

Datasheet

In The Box

Marketing Images

Installation Guide

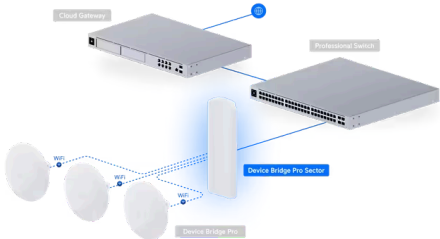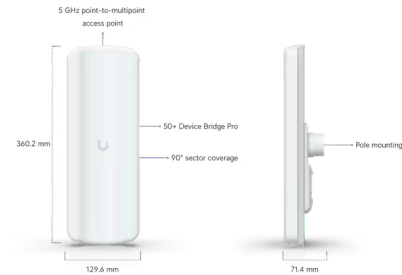

^ Overview

|                    |                                                |
|--------------------|------------------------------------------------|
| Dimensions         | 360.9 x 129.6 x 71.4 mm<br>(14.2 x 5.1 x 2.8") |
| WiFi Standard      | WiFi 5                                         |
| Spatial Streams    | 2                                              |
| Coverage Area      | 5 km (3.1 mi)                                  |
| Mounting Locations | Pole                                           |
| Weatherproofing    | IPX6                                           |

## ^ Performance

### MIMO

5 GHz 2 x 2

### Max. Data Rate

5 GHz 400 Mbps (BW40)

### Antenna Gain

5 GHz 17 dBi

### Max. TX Power

5 GHz 25 dBm

### Max. Conducted TX Power

25 dBm (Combined)

### Supported Data Rates

802.11ac (WiFi 5) 6.5 Mbps to 400 Mbps (MCS0 - MCS9 NSS1/2, VHT 20/40)

802.11n 6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)

802.11a 6, 9, 12, 18, 24, 36, 48, 54 Mbps

### Wireless Security

WPA2 AES

## ^ Hardware

### Max. Power Consumption

6W

### Supported Voltage Range

42.5-57V DC

### Networking Interface

(1) GbE RJ45 port

### Antennas

Internal

### Management

Ethernet  
WiFi

### Channel Bandwidth

20/40 MHz

### Wind Loading

128.2N at 200 km/h

### Weight

Device: 782 g (1.7 lb)  
With mount: 835 g (1.8 lb)



|                               |                                                                                                                                                                                                                                               |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mount Material                | UV-stabilized polycarbonate, stainless steel                                                                                                                                                                                                  |
| Pole Mount Diameter           | 0.9—2.4" (24—60 mm)                                                                                                                                                                                                                           |
| Button                        | (1) Factory reset                                                                                                                                                                                                                             |
| LEDs                          |                                                                                                                                                                                                                                               |
| System                        | Power, Ethernet                                                                                                                                                                                                                               |
| NDAA Compliant                | ✓                                                                                                                                                                                                                                             |
| Certifications                | CE, FCC, IC, Anatel: 05978-25-08356                                                                                                                                                                                                           |
| Operating Frequency           | US/CA:<br>U-NII-1 5150 - 5250 MHz<br>U-NII-2A 5250 - 5350 MHz<br>U-NII-2C 5470 - 5725 MHz<br>U-NII-3 5725 - 5850 MHz<br><br>Worldwide:<br>5150 - 5875 MHz  |
| Ambient Operating Temperature | -40 to 60° C (-40 to 140° F)                                                                                                                                                                                                                  |
| Ambient Operating Humidity    | 5 to 95% noncondensing                                                                                                                                                                                                                        |

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.