

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Enterprise > Enterprise Campus 24 PoE



Enterprise Campus 24 PoE

ECS-24-PoE


Datasheet

In The Box


Marketing Images

Accessories

Installation Guide

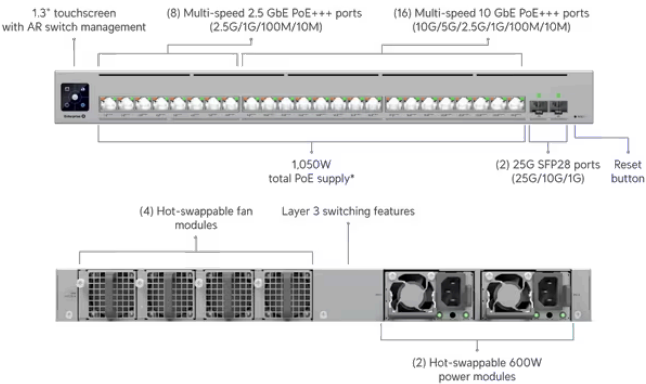

*With (2) 600W power modules in Shared Mode, Total available PoE is 450W in Redundant Mode. 1,200W power modules are sold separately.

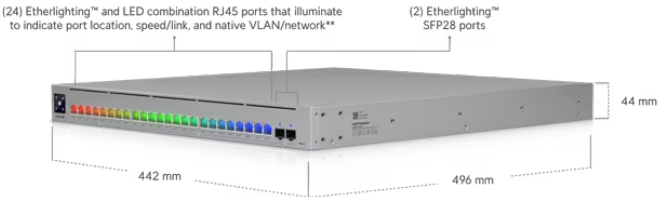

**Pair with UniFi Etherlighting Patch Cables for optimal brightness.

Overview

Dimensions

442.4 x 43.7 x 496 mm
(17.4 x 1.7 x 19.5")

Port Layout

2.5 GbE RJ45

8 (All PoE+++)
(2.5G/1G/100M/10M) ⓘ

10 GbE RJ45

16 (All PoE+++)
(10G/5G/2.5G/1G/100M/10M) ⓘ

Max. PoE Output	Up to PoE+++ ⓘ 100-240V AC Shared Mode: 1,050W with (2) 600W modules 100-240V AC Redundant Mode: 450W with (2) 600W modules
Total PoE Availability	200-240V AC Shared Mode: 2,250W with (2) 1,200W modules 100-120V AC Shared Mode: 1,850W with (2) 1,200W modules 200-240V AC Redundant Mode: 1,050W with (2) 1,200W modules 100-120V AC Redundant Mode: 850W with (2) 1,200W modules ⓘ
Redundancy	(2) Hot-Swappable PSUs (4) Hot-Swappable Fans
Layer 3	✓
Form Factor	Rack Mount (1U, Full-Depth) ⓘ
Etherlighting™	✓
^ Performance	
Switching Capacity	460 Gbps
Total Non-Blocking Throughput	230 Gbps
Forwarding Rate	342 Mpps
Supported VLANs	1,000
MAC Address Table Size	32,000
IPv4 Static Routes	512
Packet Buffer Size	8 MB
Access Lists	
IPv4	256
MAC	256
^ Layer 3 Features	
DHCP Server (Local Networks)	✓
DHCP Relay	✓

Static Routing (Local Networks)	✓
---------------------------------	---

^ **Layer 2 Features**

LACP Port Aggregation	✓
-----------------------	---

STP & RSTP	✓
------------	---

QoS (DSCP)	✓
------------	---

Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓
--	---

Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
--	---

IGMP Snooping	✓
---------------	---

802.1X Control	✓
----------------	---

MAC-Based ACLs & Device Isolation	✓
-----------------------------------	---

DHCP Snooping & Guarding	✓
--------------------------	---

Egress Rate Limit	✓
-------------------	---

Flow Control	✓
--------------	---

Storm Control	✓
---------------	---

Multicast & Broadcast Rate Limiting	✓
-------------------------------------	---

MAC Address Blocking	✓
----------------------	---

IP-Based ACLs & Network Isolation	✓
-----------------------------------	---

MAC-Based Port Restriction	✓
----------------------------	---

Port Isolation	✓
----------------	---

Port Mirroring	✓
----------------	---

Jumbo Frames	✓
--------------	---

LLDP-MED	✓
----------	---

Voice VLAN	✓
------------	---

Loop Protection	✓
-----------------	---

^ Hardware

PoE Ports

PoE+++ 24

Max. PoE Wattage per Port by PSE

PoE 15.4W

PoE+ 30W

PoE++ 60W

PoE+++ 90W

Max. Power Consumption 150W (Excluding PoE Output)
2,400W (Including PoE Output)

Power Method (2) Universal input, 100–240V AC, 50/60 Hz

Power Input Method (2) AC input, Hot-swappable power modules

Power Supply (2) Hot-swappable AC/DC 600W power modules

Supported Voltage Range 100–240V AC

Management Ethernet
AR

Heat Dissipation 512 BTU/hr (Excluding PoE Output)

Weight Without mounting brackets: 9.46 kg (20.9 lb)
With mounting brackets: 9.56 kg (21.1 lb)

Enclosure Material SGCC steel

Supported Rack Depth 482.6 mm (19") four-post racks
Posts depths ranging from 650 to 1,000 mm (25.6–39.4")

LCM Display 1.3" touchscreen

Fan Method (4) hot-swappable fan modules ⓘ

ESD Protection Air: ± 30kV, contact: ± 30kV

Ambient Operating Temperature -5 to 40° C (23 to 104° F)

Ambient Operating Humidity 10 to 90% noncondensing



Ethernet	✓
SFP28	✓
LEDs	
Ethernet	✓
System	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 06181-25-08356
^ Software	
Application Requirements	
UniFi Network	Version 9.0.114 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.