

UniFi UISP Branding

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Enterprise > Enterprise Campus 48 PoE



Enterprise Campus 48 PoE

ECS-48-PoE


Datasheet

In The Box


Marketing Images

Accessories

Installation Guide

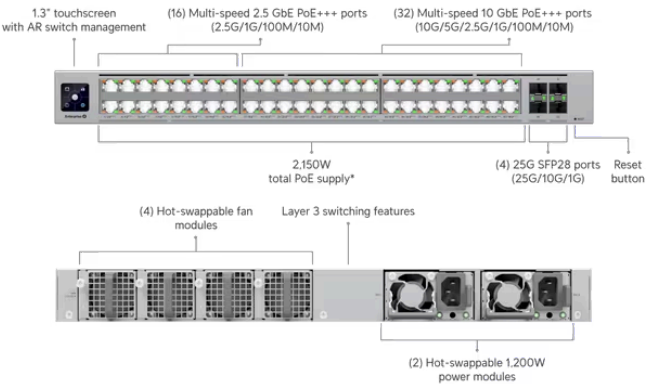

*With 200-240V AC in Shared Mode, Total available PoE is 1,750W with 100-120V AC in Shared Mode and 950W/750W in Redundant Mode with 200-240V/100-120V AC.

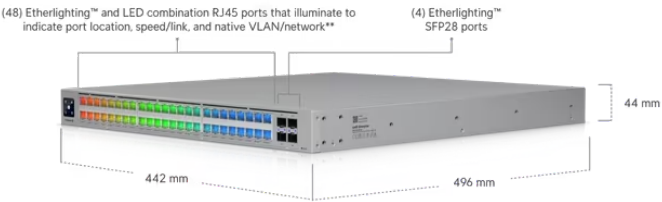

**Pair with UniFi Etherlighting Patch Cables for optimal brightness.

Overview

Dimensions

442.4 x 43.7 x 496 mm
(17.4 x 1.7 x 19.5")

Port Layout

2.5 GbE RJ45

16 (All PoE+++)
(2.5G/1G/100M/10M) ⓘ

10 GbE RJ45

32 (All PoE+++)
(10G/5G/2.5G/1G/100M/10M) ⓘ

Max. PoE Output	Up to PoE+++ ⓘ
Total PoE Availability	200-240V AC Shared Mode: 2,150W 100-120V AC Shared Mode: 1,750W 200-240V AC Redundant Mode: 950W 100-120V AC Redundant Mode: 750W
Redundancy	(2) Hot-Swappable PSUs (4) Hot-Swappable Fans
Layer 3	✓
Form Factor	Rack Mount (1U, Full-Depth) ⓘ
Etherlighting™	✓

^ Performance

Switching Capacity	920 Gbps
Total Non-Blocking Throughput	460 Gbps
Forwarding Rate	684 Mpps
Supported VLANs	1,000
MAC Address Table Size	32,000
IPv4 Static Routes	512
Packet Buffer Size	8 MB

Access Lists

IPv4	256
MAC	256

^ Layer 3 Features

DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓

^ Layer 2 Features



STP & RSTP	✓
QoS (DSCP)	✓
Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓
Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓
^ Hardware	
PoE Ports	
PoE+++	48


PoE	15.4W
PoE+	30W
PoE++	60W
PoE+++	90W
Max. Power Consumption	250W (Excluding PoE Output) 2,400W (Including PoE Output)
Power Method	(2) Universal input, 100-240V AC, 50/60 Hz
Power Input Method	(2) AC input, Hot-swappable power modules
Power Supply	(2) Hot-swappable AC/DC 1,200W power modules
Supported Voltage Range	100-240V AC
Management	Ethernet AR
Heat Dissipation	785 BTU/hr (Excluding PoE Output)
Weight	Without mounting brackets: 9.46 kg (20.9 lb) With mounting brackets: 9.56 kg (21.1 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	482.6 mm (19") four-post racks Posts depths ranging from 650 to 1,000 mm (25.6-39.4")
LCM Display	1.3" touchscreen
Fan Method	(4) hot-swappable fan modules ⓘ
ESD Protection	Air: ± 30kV, contact: ± 19kV
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP28	✓
LEDs	

System	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 06181-25-08356
^ Software	
Application Requirements	
UniFi Network	Version 9.0.114 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.