

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Utility > Flex 2.5G PoE



Flex 2.5G PoE

USW-Flex-2.5G-8-PoE



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

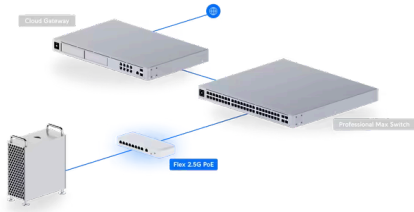

Overview

Dimensions

212.9 x 99.4 x 33.5 mm
(8.4 x 3.9 x 1.3")

Port Layout

2.5 GbE RJ45

8 (All PoE++)
(2.5G/1G/100M/10M)

10 GbE RJ45

1 (PoE+++)
(10G/5G/2.5G/1G/100M) ⓘ

10G SFP+

1
(10G/1G) ⓘ

Max. PoE Output

Up to PoE++



Total PoE Availability	PoE+ input: 16W 210W AC adapter input: 196W
Form Factor	Compact Desktop, wall, DIN, magnetic ⓘ
^ Performance	
Switching Capacity	60 Gbps
Total Non-Blocking Throughput	30 Gbps
Forwarding Rate	45 Mpps
Supported VLANs	256
MAC Address Table Size	4,000
^ Layer 2 Features	
STP & RSTP	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
Loop Protection	✓
^ Hardware	
PoE Ports	
PoE++	8
Max. PoE Wattage per Port by PSE	
PoE	15.4W
PoE+	32W
PoE++	64W

210W (Including PoE Output)

Power Method (1) AC/DC adapter (Excluded)
(1) PoE+++ ⓘ

Power Input Method DC Input
PoE

Supported Voltage Range 50-57V DC/PoE

Management Ethernet

Weight 567 g (20 oz)

Enclosure Material Polycarbonate

Mount Material Polycarbonate

Ambient Operating Temperature -20 to 45° C (-4 to 113° F)

Ambient Operating Humidity 10 to 90% noncondensing

NDAA Compliant ✓

Certifications CE, FCC, IC

^ **Software**

Application Requirements

UniFi Network Version 9.0.114 and later

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)