

UniFi UISP Branding

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Accessories

Utility > Flex Utility




Flex Utility
USW-Flex-Utility

Datasheet

In The Box

Marketing Images

Accessories

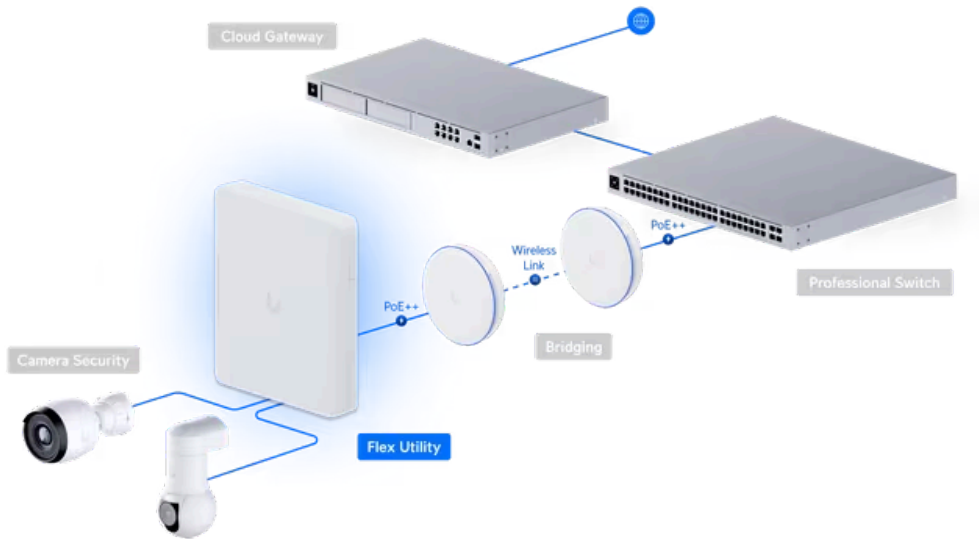

Overview

Dimensions

Enclosure: 249 x 218 x 60 mm (9.8 x 8.6 x 2.4")
Adapter: 118.5 x 63 x 34.7 mm (4.7 x 2.5 x 1.4")

Weight

Enclosure: 740 g (1.6 lb)
Adapter: 206 g (7.3 oz)



Rated Voltage	100-240V AC
4-pair Powering	Pins 1, 2, 4, 5 (+) and 3, 6, 7, 8 (-)
Input Current	1.5A Max.
Efficiency	86+%
Output Ripple	200mVpp
Line Regulation	≤1%
Load Regulation	≤3%
Power Supply	AC/DC
Surge Protection	4kV difference and Common mode
Ambient Storage Temperature	-30 to 70° C (-22 to 158° F)
Ambient Operating Temperature	-20 to 60° C (-4 to 140° F)
Ambient Operating Humidity	5 to 90%, noncondensing
NDAA Compliant	✓
Certifications	CE, FCC, IC

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.