

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

LTE/5G > [LTE Backup](#)





LTE Backup U-LTE

Datasheet

Marketing Images

Installation Guide

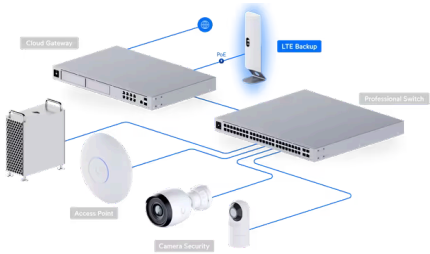

Mechanical

Dimensions	66 x 202.12 x 32.2 mm (2.6 x 8 x 1.3")
Weight	Without mount: 200 g (7.1 oz) With mount: 316 g (11.2 oz)

Hardware

Networking interface	(2) GbE RJ45 ports LTE category 4 radio
----------------------	--

SIM	nano-SIM
LTE bands	B2, B4, B5, B12
MIMO	2 x 2 LTE Category 4
Operating frequency	2400 - 2483.5 MHz
Power method	PoE+ (Pairs 1, 2+; 3, 6-; Pairs 4, 5+; 7, 8-)
Max power consumption	8.5W
Power supply	UniFi PoE Switch
Supported voltage range	44-57V DC
External antenna	(1) LTE antenna with RP-SMA female connector
LCM display	1.54" screen
Mounting	Wall mount or foot stand (Included)
Ambient operating temperature	-10 to 50° C (14 to 122° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	FCC, IC, PTCRB, AT&T

Software

Management application	UniFi Network: Version 6.5.55 and later
------------------------	---

Stay in Touch

Email

Subscribe



