

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Professional Max & XG > Pro HD 24



Pro HD 24

USW-Pro-HD-24




Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

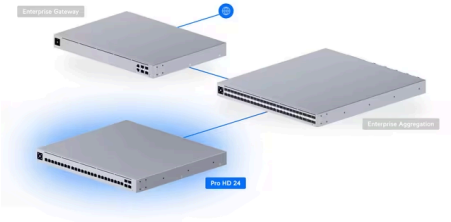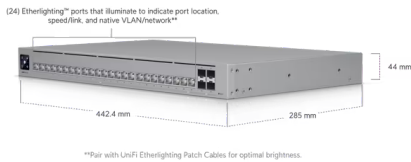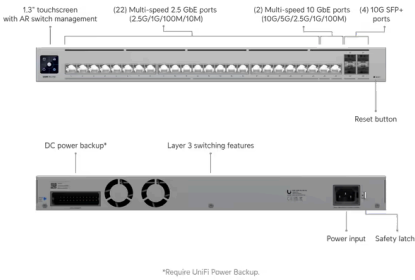

Overview

Dimensions

442 x 285 x 44 mm
(17.4 x 11.2 x 1.7")

Port Layout	
2.5 GbE RJ45	22 (2.5G/1G/100M/10M)
10 GbE RJ45	2 (10G/5G/2.5G/1G/100M)
10G SFP+	4 (10G/1G)

Layer 3	✓
Form Factor	Rack mount (1U)
Etherlighting™	✓
^ Performance	
Switching Capacity	230 Gbps
Total Non-Blocking Throughput	115 Gbps
Forwarding Rate	171.12 Mpps
Supported VLANs	1,000
MAC Address Table Size	32,000
IPv4 Static Routes	256
Packet Buffer Size	2 MB
Access Lists	
IPv4	128
MAC	128
^ Layer 3 Features	
DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓
^ Layer 2 Features	
LACP Port Aggregation	✓
STP & RSTP	✓
QoS (DSCP)	✓
Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓

IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓

^ **Hardware**

Max. Power Consumption	60W
Power Method	(1) Universal input, 100-240V AC, 50/60 Hz (1) USP RPS DC input
Power Input Method	AC input
Power Supply	AC/DC, internal, 60W
Supported Voltage Range	100-240V AC

Heat Dissipation	205 BTU/hr
Weight	Without mounting brackets: 4.2 kg (9.2 lb) With mounting brackets: 4.3 kg (9.4 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	400~1200 mm (15.7-47.2")
LCM Display	1.3" touchscreen
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP+	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 03853-25-08356

^ **Software**

Application Requirements

UniFi Network	Version 9.0.114 and later
---------------	---------------------------

Stay in Touch

Subscribe



