

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Professional Max & XG > [Pro Max 24 PoE](#)



Pro Max 24 PoE

USW-Pro-Max-24-PoE



Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

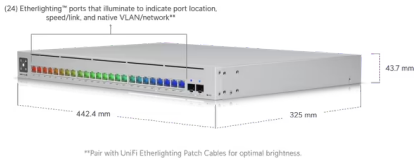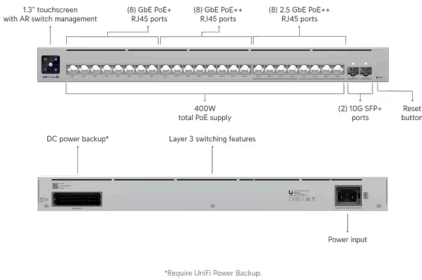

Overview

Dimensions

442 x 325 x 44 mm
(17.4 x 12.8 x 1.7")

Port Layout

1 GbE RJ45

16 (8 PoE+; 8 PoE++)
(1G/100M/10M)

2.5 GbE RJ45

8 (All PoE++)
(2.5G/1G/100M/10M)

10G SFP+

2
(10G/1G)

Total PoE Availability	400W
Redundancy	DC Power Backup ⓘ
Layer 3	✓
Form Factor	Rack mount (1U)
Etherlighting™	✓
^ Performance	
Switching Capacity	112 Gbps
Total Non-Blocking Throughput	56 Gbps
Forwarding Rate	83 Mpps
Supported VLANs	1,000
MAC Address Table Size	16,000
IPv4 Static Routes	256
Packet Buffer Size	1.5 MB
Access Lists	
IPv4	128
MAC	128
^ Layer 3 Features	
DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓
^ Layer 2 Features	
LACP Port Aggregation	✓
STP & RSTP	✓
QoS (DSCP)	✓

Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓

^ **Hardware**

PoE Ports

PoE+	8
PoE++	16

Max. PoE Wattage per Port by PSE

PoE	15.4W
-----	-------

PoE++	60W
Max. Power Consumption	50W (Excluding PoE Output) 450W (Including PoE Output)
Power Method	(1) Universal input, 100-240V AC, 50/60 Hz (1) USP RPS DC input
Power Input Method	AC input
Power Supply	AC/DC, internal, 550W
Supported Voltage Range	100-240V AC
Management	Ethernet AR
Heat Dissipation	119 BTU/hr (Excluding PoE Output)
Weight	Without mounting brackets: 5.1 kg (11.3 lb) With mounting brackets: 5.2 kg (11.5 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	400~1200 mm (15.7-47.2")
LCM Display	1.3" touchscreen
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP+	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 06374-24-08356
^ Software	
Application Requirements	
UniFi Network	Version 8.0.24 and later



Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.