

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Professional Max & XG > [Pro XG 10 PoE](#)



Pro XG 10 PoE

USW-Pro-XG-10-PoE




Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

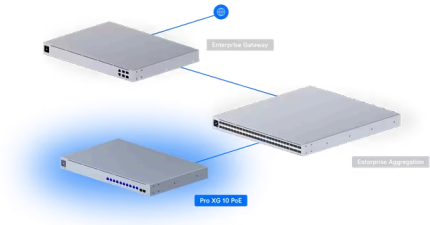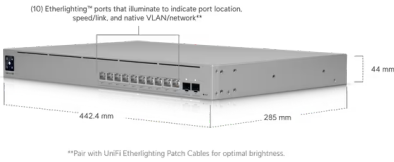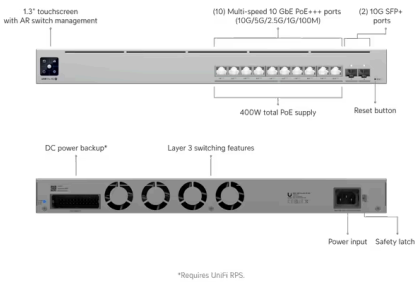

^ Overview

Dimensions

442.4 x 285 x 44 mm
(17.4 x 11.2 x 1.7")

Port Layout

10 GbE RJ45

10 (All PoE+++)
(10G/5G/2.5G/1G/100M)

10G SFP+

2
(10G/1G)

Max. PoE Output

Up to PoE+++ ⓘ

Total PoE Availability

400W

Layer 3	✓
Form Factor	Rack mount (1U)
Etherlighting™	✓
^ Performance	
Switching Capacity	240 Gbps
Total Non-Blocking Throughput	120 Gbps
Forwarding Rate	179 Mpps
Supported VLANs	1,000
MAC Address Table Size	32,000
IPv4 Static Routes	256
Packet Buffer Size	2 MB
Access Lists	
IPv4	128
MAC	128
^ Layer 3 Features	
DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓
^ Layer 2 Features	
LACP Port Aggregation	✓
STP & RSTP	✓
QoS (DSCP)	✓
Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓

IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓
DHCP Snooping & Guarding	✓
Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓

^ **Hardware**

PoE Ports

PoE+++	10
--------	----

Max. PoE Wattage per Port by PSE

PoE	15.4W
PoE+	30W
PoE++	60W

Max. Power Consumption	65W (Excluding PoE output) 520W (Including PoE output)
Power Method	(1) Universal input, 100-240V AC, 50/60 Hz (1) USP RPS DC input
Power Input Method	AC input
Power Supply	AC/DC, internal, 550W
Supported Voltage Range	100-240V AC
Management	Ethernet AR
Weight	Without mounting brackets: 4.6 kg (10.14 lb) With mounting brackets: 4.7 kg (10.36 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	400~1200 mm (15.7-47.2")
LCM Display	1.3" touchscreen
ESD Protection	Air: ± 30kV, contact: ± 30kV
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
Ethernet	✓
SFP+	✓
LEDs	
RPS	✓
System	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 05660-25-08356

^ Software



UniFi Network

Version 9.1.120 and later

Stay in Touch

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.