

UniFi   UISP   Branding

Q

Search UniFi products

Cloud Gateways   Switching   WiFi   Physical Security   Door Access   Integrations   Access

Utility > Pro XG 8 PoE



Pro XG 8 PoE  
USW-Pro-XG-8-PoE




Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

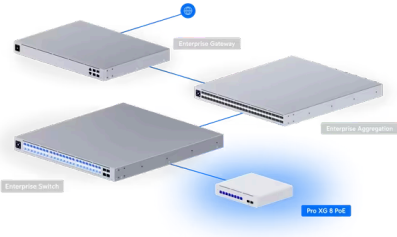

Overview

|                        |                                                 |
|------------------------|-------------------------------------------------|
| Dimensions             | 210.4 x 173.8 x 43.7 mm<br>(8.28 x 6.84 x 1.7") |
| Port Layout            |                                                 |
| 10 GbE RJ45            | 8 (All PoE++)<br>(10G/5G/2.5G/1G/100M)          |
| 10G SFP+               | 2<br>(10G/1G)                                   |
| Max. PoE Output        | Up to PoE++                                     |
| Total PoE Availability | 155W                                            |

|                                                                          |                       |
|--------------------------------------------------------------------------|-----------------------|
| Form Factor                                                              | Compact desktop, wall |
| Etherlighting™                                                           | ✓                     |
| ^ <b>Performance</b>                                                     |                       |
| Switching Capacity                                                       | 200 Gbps              |
| Total Non-Blocking Throughput                                            | 100 Gbps              |
| Forwarding Rate                                                          | 149 Mpps              |
| Supported VLANs                                                          | 1,000                 |
| MAC Address Table Size                                                   | 32,000                |
| IPv4 Static Routes                                                       | 256                   |
| Packet Buffer Size                                                       | 2 MB                  |
| Access Lists                                                             |                       |
| IPv4                                                                     | 128                   |
| MAC                                                                      | 128                   |
| ^ <b>Layer 3 Features</b>                                                |                       |
| DHCP Server (Local Networks)                                             | ✓                     |
| DHCP Relay                                                               | ✓                     |
| Inter-VLAN Routing (Local Networks)                                      | ✓                     |
| Static Routing (Local Networks)                                          | ✓                     |
| ^ <b>Layer 2 Features</b>                                                |                       |
| LACP Port Aggregation                                                    | ✓                     |
| STP & RSTP                                                               | ✓                     |
| QoS (DSCP)                                                               | ✓                     |
| Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron) | ✓                     |
| Advanced IGMP Configuration (Querier, Fast Leave, Router Port)           | ✓                     |

|                                     |                                                           |
|-------------------------------------|-----------------------------------------------------------|
| 802.1X Control                      | ✓                                                         |
| MAC-Based ACLs & Device Isolation   | ✓                                                         |
| DHCP Snooping & Guarding            | ✓                                                         |
| Egress Rate Limit                   | ✓                                                         |
| Flow Control                        | ✓                                                         |
| Storm Control                       | ✓                                                         |
| Multicast & Broadcast Rate Limiting | ✓                                                         |
| MAC Address Blocking                | ✓                                                         |
| IP-Based ACLs & Network Isolation   | ✓                                                         |
| MAC-Based Port Restriction          | ✓                                                         |
| Port Isolation                      | ✓                                                         |
| Port Mirroring                      | ✓                                                         |
| Jumbo Frames                        | ✓                                                         |
| LLDP-MED                            | ✓                                                         |
| Voice VLAN                          | ✓                                                         |
| Loop Protection                     | ✓                                                         |
| Virtual Network Override            | ✓                                                         |
| ^ <b>Hardware</b>                   |                                                           |
| PoE Ports                           |                                                           |
| PoE++                               | 8                                                         |
| Max. PoE Wattage per Port by PSE    |                                                           |
| PoE                                 | 15.4W                                                     |
| PoE+                                | 30W                                                       |
| PoE++                               | 60W                                                       |
| Max. Power Consumption              | 61W (Excluding PoE output)<br>210W (Including PoE output) |



|                               |                                     |
|-------------------------------|-------------------------------------|
| Power Input Method            | DC input                            |
| Power Supply                  | AC/DC, external, 210W               |
| Supported Voltage Range       | 50-57V DC                           |
| Management                    | Ethernet                            |
| Weight                        | 1.6 kg (3.5 lb)                     |
| Enclosure Material            | SGCC steel                          |
| Mount Material                | Polycarbonate                       |
| ESD Protection                | Air: ± 30kV, contact: ± 30kV        |
| Ambient Operating Temperature | -5 to 45° C (23 to 113° F)          |
| Ambient Operating Humidity    | 10 to 90% noncondensing             |
| Etherlighting™                |                                     |
| Ethernet                      | ✓                                   |
| SFP+                          | ✓                                   |
| LEDs                          |                                     |
| System                        | ✓                                   |
| NDAA Compliant                | ✓                                   |
| Certifications                | CE, FCC, IC, Anatel: 04322-25-08356 |
| ^ <b>Software</b>             |                                     |
| Application Requirements      |                                     |
| UniFi Network                 | Version 9.0.114 and later           |

Stay in Touch

Email

Subscribe



© 2026 Ubiquiti, Inc. All rights reserved.