

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Aggregation > Pro XG Aggregation



Pro XG Aggregation
USW-Pro-XG-Aggregation




Datasheet

In The Box

Marketing Images

Accessories

Installation Guide

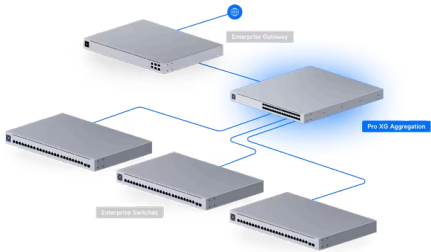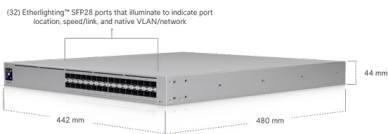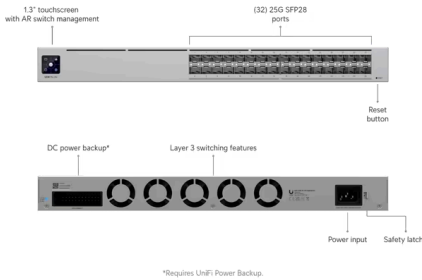

Overview

Dimensions

442.4 x 43.7 x 480 mm
(17.4 x 1.7 x 18.9")

Port Layout

25G SFP28

32
(25G/10G/1G)

Redundancy

DC Power Backup ⓘ

Layer 3

✓

Form Factor

Rack Mount (1U)

^ Performance

Switching Capacity	1.6 Tbps
Total Non-Blocking Throughput	800 Gbps
Forwarding Rate	1.2 Bpps
Supported VLANs	1,000
MAC Address Table Size	32,000
IPv4 Static Routes	512
Packet Buffer Size	8 MB
Access Lists	
IPv4	256
MAC	256

^ Layer 3 Features

DHCP Server (Local Networks)	✓
DHCP Relay	✓
Inter-VLAN Routing (Local Networks)	✓
Static Routing (Local Networks)	✓

^ Layer 2 Features

LACP Port Aggregation	✓
STP & RSTP	✓
Pro AV Profiles (Play, Dante, Q-SYS, NDI, SDVoE, Shure, AES67, Crestron)	✓
Advanced IGMP Configuration (Querier, Fast Leave, Router Port)	✓
IGMP Snooping	✓
802.1X Control	✓
MAC-Based ACLs & Device Isolation	✓

Egress Rate Limit	✓
Flow Control	✓
Storm Control	✓
Multicast & Broadcast Rate Limiting	✓
MAC Address Blocking	✓
IP-Based ACLs & Network Isolation	✓
MAC-Based Port Restriction	✓
Port Isolation	✓
Port Mirroring	✓
Jumbo Frames	✓
LLDP-MED	✓
Voice VLAN	✓
Loop Protection	✓
Virtual Network Override	✓
^ Hardware	
Max. Power Consumption	200W
Power Method	(1) Universal input, 100-240V AC, 50/60 Hz (1) USP RPS DC input
Power Input Method	AC input
Power Supply	AC/DC, internal, 200W
Supported Voltage Range	100-240V AC
Management	Ethernet AR
Heat Dissipation	682 BTU/hr
Weight	Without mounting bracket: 7.1 kg (15.7 lbs) With mounting bracket: 7.2 kg (15.9 lbs)
Enclosure Material	SGCC steel

Supported Rack Depth	482.6 mm (19") four-post racks Posts depths ranging from 600 to 1,066 mm (23.6-42")
LCM Display	1.3" touchscreen
ESD Protection	Air: ± 12kV, contact: ± 8kV
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)
Ambient Operating Humidity	10 to 90% noncondensing
Etherlighting™	
SFP28	✓
LEDs	
RPS	✓
NDAA Compliant	✓
Certifications	CE, FCC, IC, Anatel: 05977-25-08356

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.