

UniFi UISP Branding

Q

Search UniFi products

Cloud Gateways Switching WiFi Physical Security Door Access Integrations Access

Power Tech > [UPS 2U Pro](#)

[North America](#) [Worldwide](#)





UPS 2U Pro
UPS-2U-Pro-US

Datasheet

In The Box

Marketing Images

Installation Guide

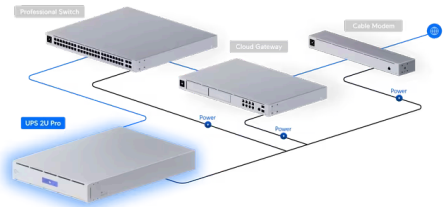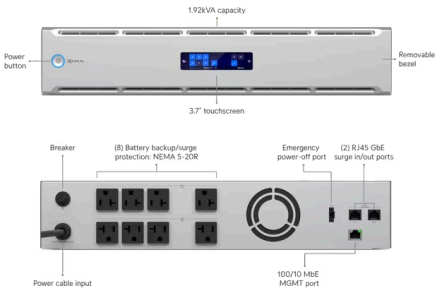

^ Mechanical

Dimensions	442.4 x 87.4 x 630 mm (17.4 x 3.4 x 24.8")
Weight	32 kg (70.5 lb)
Enclosure Material	Galvanized steel
Form Factor	Rack mount (2U)
Weatherproofing	IP20

Management	Ethernet
Networking Interface	(1) 100/10 MbE port for network connection (2) GbE ports for surge in/out
Power	(1) OVC II AC in: NEMA 5-20P (8) Battery backup/surge protection: NEMA 5-20R ⓘ
Capacity	1920VA/1920W
Type	Line interactive
Input Voltage Range	89-145V AC
Power Method	(1) TN system, 120V AC, 16A Max., 50/60 Hz
Nominal Input Voltage	120V AC
Output Voltage	120V AC
Nominal Output Voltage	120V AC
Frequency Range	AC mode: 50/60 Hz $\pm$ 5 Hz (Auto sensing) Battery mode: 60 Hz $\pm$ 1 Hz
AC Voltage Regulation	$\pm$ 1.5% (Battery mode)
Transfer Time	6 ms typical; 10 ms max. (Battery mode)
Wave Form	Pure sine wave (Battery mode)
Battery Type	(1) Lead Acid 72V, 10Ah
Runtime	Full load: 9 min Half load: 22 min
Battery Charging Time	8 hours recovery to 90% capacity
Overload at On-Line Mode	103-120% 5 min go to fault 120-150% 10 sec go to fault 150% 1 sec go to fault
Overload at Battery Mode	103-120% 1 min go to fault 120-150% 10 sec go to fault 150% 0.5 sec go to fault
Short Circuit Protection at On-Line Mode	Breaker, 250V AC, 20A
Emergency Power Off (EPO)	✓

Buttons	(1) Power (1) Factory reset (1) Circuit breaker
LEDs	
Status	Off: device not turned on Flashing white: initializing / factory default Steady white: waiting for adoption Steady blue: device adoption and working Flashing blue: battery mode Alternating white/blue: firmware upgrading Rapid flashing blue: locate Steady red: warning Flashing red: low battery
Ethernet	✓
Operating Altitude	3,000 m (1.9 mi)
Operating Environment	Pollution Degree 2
Ambient Storage Temperature	-15 to 50° C (5 to 122° F)
Ambient Operating Temperature	0 to 40° C (32 to 104° F)
Ambient Operating Humidity	0 to 95% noncondensing
NDAA Compliant	✓
Certifications	FCC, IC, UL 1778, CSA C22.2 No. 107.3
^ Software	
Application Requirements	
Mobile Apps	iOS™: Version 10.36.1 and later Android™: Version 10.39.3 and later
UniFi Network	Version 10.5.67 and later

Stay in Touch



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2026 Ubiquiti, Inc. All rights reserved.